

52 49

**HUMBERTO RUBIO & CIA.
ABOGADOS**

Carrera 7 No. 74-64 Oficina 506
Teléfonos 3 13 24 08 - 313 24 10 - 313 24 23 - 313 17 59
Fax: (571) 313 16 47 - 313 23 67
Email: rubiolaw@unete.com
Apartado Aéreo 21848
Santafé de Bogotá, D.C. Colombia.

Señores

**SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO
DIVISIÓN DE NUEVAS CREACIONES**

E. S. D.

SUPERINDUSTRIA Y COMERCIO
Radicación : 00003985 0000031
Fecha (ARD): 2000-04-04 15:02:44
Trámite : 002 PATENTES D 1 REGISTRO/ 329 COMPLETEN
Dependencia: 2020 DIVISION DE NUEVAS CREACIONES
Folios: 117

Ref Expediente No.
Patente de Invención.

**00-008905
DERIVADO POLISACARIDO
MICROFIBRILAR
HERCULES INCORPORATED**

Titular:

DESTINO: 09

Humberto RUBIO CAMACHO, mayor de edad, vecino de Santafé de Bogotá D.C., identificado con la cédula de ciudadanía número 17'192.062 de Bogotá, abogado en ejercicio portador de la Tarjeta Profesional No. 50.007 expedida por el Consejo Superior de la Judicatura, en carácter de apoderado de la Sociedad **HERCULES INCORPORATED**, me permito anexar:

- 1.- Copia de la solicitud No. 09/248,246 del 10 de Febrero de 1999, expedida por la Oficina de Patentes y Marcas de los **ESTADOS UNIDOS DE AMERICA**, con su debida traducción al Ingles y al Español, con la cual se basa la prioridad reivindicada, todo de conformidad con el Artículo 4 del Convenio de Paris y concepto del 5 de Enero de 1999, de la Superintendencia de Industria y Comercio.

Agradezco la atención que se dignen prestar al presente.

Atentamente,


**HUMBERTO RUBIO CAMACHO
C.C. 17'192.062 de Bogotá
T.P. 50.007 Consejo Superior
de la Judicatura
COD. 4134**

50-2
55

TRADUCCIÓN DE UN DOCUMENTO ESCRITO EN INGLES, HOY 4 DE ABRIL DEL 2000 EN LA CIUDAD DE SANTAFE DE BOGOTÁ D.C., REPÚBLICA DE COLOMBIA.

NOTA DEL TRADUCTOR: DE LOS DOCUMENTOS QUE SE TRADUCEN A CONTINUACIÓN FORMA PARTE DE UN PAQUETE DE DOCUMENTOS PERTINENTES A UNA PATENTE SOLICITADA EN ESTADOS UNIDOS DE AMÉRICA, TODOS LOS CITADOS DOCUMENTOS ESTÁN UNIDOS MEDIANTE UN GANCHO.

LOS ESTADOS UNIDOS DE AMÉRICA

A TODOS A QUIENES ESTE DOCUMENTO LES INTERESE:

EL DEPARTAMENTO DE COMERCIO DE LOS ESTADOS UNIDOS DE AMÉRICA Oficina de Marcas y Patentes de los Estados Unidos.

Febrero 17 del 2000

CERTIFICA QUE LO ANEXO AQUÍ ES UNA COPIA VERDADERA DE LOS ARCHIVOS DE LA OFICINA DE PATENTES Y MARCAS DE LOS ESTADOS UNIDOS DE AMÉRICA DE AQUELLOS PAPELES DE LA SOLICITUD DE PATENTE IDENTIFICADA ABAJO Y QUE CUMPLEN LOS REQUERIMIENTOS PARA CONCEDERLE UNA FECHA DE PRESENTACIÓN BAJO 35 USC 111.

SOLICITUD NUMERO 09/248.246
FECHA PRESENTACIÓN: Febrero 10, 1999

Mediante la autoridad otorgada por
EL COMISIONADO DE PATENTES Y MARCAS

(fdo)
N. WILLIAMS
Funcionario Certificador

NOTA DEL TRADUCTOR: EN LA PARTE INFERIOR IZQUIERDA DEL DOCUMENTO HAY UN SELLO DORADO Y EN ALTO RELIEVE DE LA OFICINA DE MARCAS Y PATENTES DE LOS ESTADOS UNIDOS DE AMÉRICA.

51-3
SA

REIVINDICACIONES

1. Un derivado de polisacárido microfibrilar, derivado para comprender sustitutos que proporcionen una funcionalidad electrostática y, en donde dicha funcionalidad electrostática comprende una carga aniónica.
2. El derivado de polisacárido microfibrilar de la reivindicación 1, en donde los polisacáridos en dicho derivado polisacárido microfibrilar comprenden por lo menos uno de celulosa, hemicelulosa, quitina, quitosan, goma de guar, pectina, alginato, agar, xantan, fécula, amilosa, amilopectina, alternan, gelan, mutan, textran, pululan, fructan, goma de algarroba, carragenan, glucógeno, glicosaminoglicano, mureína, polisacáridos capsulares bacteriales y derivados de éstos.
3. El derivado de polisacárido microfibrilar de la reivindicación 2, en donde el polisacárido es por lo menos uno de celulosa, quitina, quitosan, pectina, agar, fécula, carragenan y los derivados de éstos.
4. El derivado de polisacárido microfibrilar de la reivindicación 3, que comprende celulosa microfibrilar derivada.
5. El derivado de polisacárido microfibrilar de la reivindicación 4 en donde la celulosa se obtiene al menos entre: uno de pulpas químicas, pulpas mecánicas, pulpas mecánicas térmicas, pulpas mecánicas químicas térmicas, fibras recicladas, impresos, algodón, hollejos de soya, hollejos de alverjas, hollejos de maíz, fibra de lino, cáñamo, yute, ramina, variedad de cáñamo, cáñamo de Manila, cáñamo sizal, bagazo, maíz, trigo, bambú, velonia, bacterias, algas, hongos, celulosa microcristalina, vegetales y frutas.
6. El derivado de polisacárido microfibrilar de la reivindicación 5, en donde dicha celulosa se obtiene al menos de uno entre: pulpa de madera blanqueada opcionalmente, purificada, producida de sulfito, de papel Kraft, o de procesos de

52A
55

pulpa de papel Kraft pre- hidrolizado; pelusas de algodón purificado, frutas y vegetales.

7. La celulosa microfibrilar derivada de la reivindicación 4, que comprende al menos uno entre: celulosa hidroxietilo, celulosa etilohidroxietilo, celulosa carboximetilo, celulosa carboximetilohidroxietilo, celulosa hidroxipropilohidroxietilo, celulosa metilo, celulosa metilohidroxipropilo, celulosa metilohidroxietilo, celulosa carboximetilometilo, celulosa carboximetilo modificada hidrofóticamente, celulosa hidroxietilo modificada hidrofóticamente, celulosa hidroxipropilo modificada hidrofóticamente, celulosa etilohidroxietilo modificada hidrofóticamente, celulosa carboximetilohidroxietilo modificada hidrofóticamente, celulosa hidroxipropilohidroxietilo modificada hidrofóticamente, celulosa metilo modificada hidrofóticamente, celulosa metilohidroxipropilo modificada hidrofóticamente, celulosa metilohidroxietilo modificada hidrofóticamente, celulosa carboximetilometilo modificada hidrofóticamente, nitrocelulosa, acetato de celulosa, sulfato de celulosa, sulfato de vinilo celulosa, fosfato celulosa y fosfonato celulosa.
8. La celulosa microfibrilar derivada de la reivindicación 4 en donde la celulosa microfibrilar derivada forma un gel en todo el rango de concentración de entre cerca de 0.01% y cerca de 100% en agua.
9. La celulosa microfibrilar derivada de la reivindicación 8, en donde dicha celulosa microfibrilar forma un gel en todo el rango de concentración de entre cerca de 0.01% y cerca de 50% en agua.
10. La celulosa microfibrilar derivada de la reivindicación 4, en donde dicha celulosa microfibrilar forma un gel con por lo menos un punto en el rango de concentración de entre cerca de 0.05% hasta cerca de 0.99% en agua.

56
53

11. El derivado de polisacárido microfibrilar de la reivindicación 1, que además comprende un solvente, en donde dicho derivado de polisacárido microfibrilar es substancialmente insoluble en dicho solvente.
12. El derivado de polisacárido microfibrilar de la reivindicación 11, en donde dicho solvente es agua, alcohol o aceite.
13. El derivado de polisacárido microfibrilar de la reivindicación 12, en donde dicho solvente es agua.
14. El derivado de polisacárido microfibrilar de la reivindicación 13, en donde dicho derivado de polisacárido microfibrilar se deriva para comprender sustitutos que proporcionan funcionalidad electrostática.
15. El derivado de polisacárido microfibrilar de la reivindicación 12, en donde dicho derivado de polisacárido microfibrilar es celulosa microfibrilar derivada que tiene un grado de substitución menor a cerca de 0.5.
16. El derivado de polisacárido microfibrilar de la reivindicación 15, en donde dicho grado de substitución es menor a 0.35.
17. El derivado polisacárido microfibrilar de la reivindicación 16, en donde dicho grado de substitución es menor a 0.2.
18. El derivado polisacárido microfibrilar de la reivindicación 17, en donde dicho grado de substitución es menor a 0.18.
19. El derivado polisacárido microfibrilar de la reivindicación 18, en donde dicho grado de substitución es menor a 0.1.
20. El derivado polisacárido microfibrilar de la reivindicación 15, en donde dicho grado de substitución está entre cerca de 0.02 y cerca de 0.5.

54 6
57

21. El derivado polisacárido microfibrilar de la reivindicación 20, en donde dicho grado de sustitución está entre cerca de 0.05 y 0.2.
22. El derivado polisacárido microfibrilar de la reivindicación 1, derivado para comprender sustitutos que proporcionan funcionalidad electrostática en forma de carga aniónica en donde el grado de sustitución que representan los sustitutos que proveen funcionalidad electrostática en forma de carga aniónica es por lo menos 0.02.
23. El derivado polisacárido microfibrilar de la reivindicación 1, en donde dicha carga aniónica se suministra por carboxil, sulfato, sulfonato, fosfonato o grupos de fosfonato o combinaciones de éstos.
24. El derivado polisacárido microfibrilar de la reivindicación 14, en donde dicha funcionalidad electrostática se proporciona por la carga aniónica y catiónica.
25. La celulosa microfibrilar derivada de la reivindicación 24, en donde dicha funcionalidad electrostática se proporciona por sustitutos que contienen carga aniónica y catiónica en el mismo sustituto.
26. La celulosa microfibrilar derivada de la reivindicación 24, en donde dicha funcionalidad electrostática se proporciona por los sustitutos que tienen carga aniónica y por sustitutos que tienen carga catiónica.
27. El derivado polisacárido microfibrilar de la reivindicación 13, en donde dicho derivado polisacárido microfibrilar se deriva para comprender sustitutos que proporcionan funcionalidad estérica.
28. El derivado polisacárido microfibrilar de la reivindicación 27, con una sustitución molar de menos de cerca de 3.0.

55 7 8

29. El derivado polisacárido microfibrilar de la reivindicación 28, con una substitución molar de menos de cerca de 1.5.
30. El derivado polisacárido microfibrilar de la reivindicación 29, con una substitución molar de menos de cerca de 1.0.
31. El derivado polisacárido microfibrilar de la reivindicación 30, con una substitución molar de menos de cerca de 0.5.
32. El derivado polisacárido microfibrilar de la reivindicación 28, con una substitución molar de cerca de 0.5 y 3.0.
33. El derivado polisacárido microfibrilar de la reivindicación 27, en donde dichos sustitutos comprenden por lo menos uno de grupos de hidroxietilo, grupos hidroxipropilo, grupos metilo; grupos etilo; cadena recta o ramificada de alquilo, alquenilo, o grupos alquinilo que tienen cerca de 4 a cerca de 30 carbonos; arilo, arilalquilo, arilalquenilo, cíclico e hidrocarburos herterocíclicos que tienen cerca de 4 a cerca de 30 carbonos o combinaciones de éstos.
34. El derivado polisacárido microfibrilar de la reivindicación 33, además en donde dicho derivado polisacárido microfibrilar es una celulosa microfibrilar derivada.
35. La celulosa microfibrilar derivada de la reivindicación 34, en donde dicho derivado comprende por lo menos una celulosa carboximetilo.
36. La celulosa microfibrilar derivada de la reivindicación 34 con un grado de substitución de menos de cerca de 0.35.
37. La celulosa microfibrilar derivada de la reivindicación 36 con un grado de substitución de menos de cerca de 2.0.
38. La celulosa microfibrilar derivada de la reivindicación 37 con un grado de substitución de cerca de 0.02 y cerca de 0.2.

56 8
59

39. La celulosa microfibrilar derivada de la reivindicación 38 con un grado de sustitución de cerca de 0.10 y cerca de 0.2.
40. El derivado polisacárido microfibrilar de la reivindicación 4, en donde dicha celulosa microfibrilar derivada forma un gel a una concentración menor de cerca de 1% en agua.
41. Celulosa carboxietilo microfibrilar con un grado de sustitución de entre cerca de 0.10 y cerca de 0.20
42. Una composición comestible de materia que comprende un derivado de polisacárido microfibrilar derivado para comprender sustitutos que proporcionan funcionalidad estérica y electrostática, en donde dicha funcionalidad electrostática es proporcionada por carga aniónica.
43. La composición comestible de materia de la reivindicación 42 en la forma de una mayonesa sin grasa, con grasa reducida o libre de grasa.
44. La composición comestible de materia de la reivindicación 42 en la forma de un aderezo de ensalada.
45. La composición comestible de materia de la reivindicación 44 comprendiendo además un ingrediente activo farmacéuticamente.
46. La composición comestible de la reivindicación 45, en donde dicho derivado de polisacárido microfibrilar por lo menos parcialmente proporciona la liberación controlada, sostenida o retardada de dicho ingrediente activo farmacéuticamente.
47. Una composición no comestible de materia comprendiendo un derivado de polisacárido microfibrilar derivado para comprender sustitutos que proporcionen funcionalidad electrostática y/o estérica, en donde dicha funcionalidad electrostática se proporciona por una carga aniónica.

578
60

48. La composición no comestible de materia de la reivindicación 47, en la forma de un producto para el cuidado de las heridas.
49. La composición no comestible de materia de la reivindicación 48, en donde dicho producto para el cuidado de las heridas es un vendaje para herida.
50. La composición no comestible de materia de la reivindicación 48, en donde dicho producto para cuidado de las heridas es un anillo de ostomia.
51. La composición no comestible de materia de la reivindicación 47 en forma de una loción o crema para el cuidado de la piel.
52. La composición no comestible de materia de la reivindicación 47 en la forma de una loción o crema protectora contra el sol.
53. La composición no comestible de materia de la reivindicación 47, en la forma de una composición de cuidado oral.
54. La composición no comestible de la materia de la reivindicación 53 en donde dicha composición oral es una pasta dental.
55. La composición no comestible de materia de la reivindicación 47, comprendiendo además un fertilizante, un herbicida, un fungicida o pesticida.
56. La composición no comestible de materia de la reivindicación 55, en donde dicho derivado de polisacárido microfibrilar por lo menos parcialmente proporciona una liberación controlada, sostenida o demorada de dicho fertilizante, herbicida o pesticida.
57. La composición no comestible de materia de la reivindicación 47, en la forma de un fluido de perforación.
58. Una composición de papel que comprende un derivado de celulosa microfibrilar derivado para comprender grupos que proporcionen funcionalidad electrostática y/o

5810
61

estérica, además donde dicha funcionalidad electrostática comprenda la presencia de carga aniónica.

59. La composición de papel de la reivindicación 58, en donde dicho derivado de celulosa microfibrilar es celulosa carboximetilo microfibrilar.
60. Un método para producir un derivado polisacárido microfibrilar, dicho método comprendiendo al menos uno entre los siguientes:
- a) un paso de derivación para tratar un polisacárido microfibrilar para obtener un derivado de polisacárido microfibrilar;
 - b) un paso microfibrilizador para tratar un derivado de polisacárido no microfibrilar para producir un derivado de polisacárido microfibrilar; o,
 - c) microfibrilización y derivación de un polisacárido no microfibrilar sustancialmente, en forma simultánea.

En donde dicho derivado de polisacárido microfibrilar se deriva para comprender sustitutos que proporcionen funcionalidad electrostática y/o estérica, además en donde dicha funcionalidad electrostática sea suministrada por carga aniónica.

61. El método de la reivindicación 60, en donde el polisacárido sea por lo menos uno de entre celulosa, hemicelulosa, quitina, quitosan, goma de guar, pectina, alginato, agar, xantan, fécula, amilosa, amilopectina, alternan, gelan, mutan, dextran, pululan, fructan, goma de algarroba, carragenan, glicógeno, glicosaminoglicano, mureína, polisacáridos capsulares bacteriales y derivados de éstos.
62. El método de la reivindicación 61, en donde dicho polisacárido es por lo menos una celulosa, quitina, quitosan, pectina, agar, fécula, carragenan y los derivados de éstos.
63. El método de la reivindicación 62 en donde el polisacárido es celulosa y dicho derivado de polisacárido microfibrilar se deriva en celulosa microfibrilar.

59 # 62

64. El método de la reivindicación 63, en donde dicha celulosa se obtiene de por lo menos uno entre pulpas químicas, pulpas mecánicas, pulpas mecánicas térmicas, pulpas mecánicas térmicas químicas; fibras recicladas, impresos, algodón, hollejos de soya, hollejos de alverja, hollejos de maíz, fibra de lino, cáñamo, yute, ramina, variedad de cáñamo, cáñamo de Manila, cáñamo sizal, bagazo, maíz, trigo, bambú, velonia, bacterias, algas, hongos, celulosa micro-cristalina, vegetales y frutas.
65. El método de la reivindicación 64, en donde dicha celulosa se obtiene por lo menos de una pulpa de madera blanqueada opcionalmente, purificada producida de sulfito, papel Kraft o procesos de pulpado de papel Kraft prehidrolizado; de hilas de algodón purificado; frutas y vegetales.
66. El método de la reivindicación 60, que comprende los pasos de:
 - a) la derivación de la celulosa con ácido monocloroacético o una sal de éste bajo condiciones alcalinas para producir celulosa carboximetilo;
 - b) colocar en suspensión la celulosa carboximetilo en agua para formar una suspensión; y
 - c) homogeneizar dicha suspensión para producir celulosa carboximetilo microfibrilada.
67. El método de la reivindicación 60, en donde dicho paso de derivación comprende el contacto de un polisacárido no microfibrilado con un agente para sudor.
68. El método de la reivindicación 67 además en donde dicho contacto tiene lugar bajo condiciones alcalinas.
69. El método de la reivindicación 68, en donde dicho agente para sudor es un reagente aniónico.
70. El método de la reivindicación 69, en donde el polisacárido es celulosa.

60 ~~12~~
63

71. El método de la reivindicación 70, además en donde dichas condiciones alcalinas comprenden el contacto de la celulosa con el reagente aniónico mencionado en la presencia de un reagente alcalino que es por lo menos uno de entre hidróxido de sodio, óxido o hidróxido de un metal álcali o de un metal ferroso álcali, un silicato álcali, un aluminato álcali, un carbonato álcali, un amino, un hidróxido de amonio, hidróxido de tetrametilo amonio o las combinaciones de éstos.
72. El método de la reivindicación 60, en donde dicho paso de derivación tiene lugar en altos sólidos.
73. El método de la reivindicación 60, en donde dicha carga aniónica comprende la presencia de carboxilo, sulfato, sulfonato, fosfonato o grupos fosfatos o combinaciones de éstos.
74. El método de la reivindicación 73, en donde dicho paso de derivación comprende la carboximetilización de la celulosa.
75. El método de la reivindicación 63, en donde dicha celulosa microfibrilar derivada comprende por lo menos uno entre: celulosa hidroxietilo, celulosa etilohidroxietilo, celulosa carboximetilo, celulosa carboximetilohidroxietilo, celulosa hidroxipropilohidroxietilo, celulosa metilo, celulosa metilohidroxipropilo, celulosa metilohidroxietilo, celulosa carboximetilometilo, celulosa carboximetilo modificada hidrofóbicamente, celulosa hidroxietilo modificada hidrofóbicamente, celulosa hidroxipropilo modificada hidrofóbicamente, celulosa etilohidroxietilo modificada hidrofóbicamente, celulosa carboximetilohidroxietilo modificada hidrofóbicamente, celulosa hidroxipropilohidroxietilo modificada hidrofóbicamente, celulosa metilo modificada hidrofóbicamente, celulosa metilohidroxipropilo modificada hidrofóbicamente, celulosa metilohidroxietilo modificada hidrofóbicamente,

celulosa carboximetilometilo modificada hidrofóbicamente, nitrocelulosa, acetato de celulosa, sulfato de celulosa, sulfato de vinilo de celulosa, fosfato celulosa y fosfonato celulosa.

76. El método de la reivindicación 60 en donde dicho paso de microfibrilización comprende la aplicación de energía a dicho polisacárido bajo condiciones suficientes para producir polisacárido microfibrilar.
77. El método de la reivindicación 76, además comprendiendo un derivado no polisacárido antes de dicho paso de microfibrilización.
78. El método de la reivindicación 76, comprendiendo la aplicación de por lo menos una homogeneización, bombeo, mezcla, calor, explosión de vapor, ciclo de presurización-despresurización, impacto, pulverización ultrasonido, explosión de microondas y molienda de dicho polisacárido no microfibrilar.
79. El método de la reivindicación 78, comprendiendo la presión que tiene dicho polisacárido no microfibrilar por medio de un homogenizador bajo suficientes condiciones para producir polisacárido microfibrilador.
80. El método de la reivindicación 79, en donde dichas condiciones comprenden el paso de dicho polisacárido no microfibrilar por una presión diferencial de por lo menos cerca de 3.000 psi.
81. El método de la reivindicación 80, además comprendiendo el paso de dicho polisacárido no microfibrilar por dicho homogeneizador por lo menos 3 veces.
82. El método de la reivindicación 60, en donde dicho derivado de polisacárido microfibrilar forma un gel en todo el rango de la concentración de cerca de 0.01% a cerca de 100% en agua.

62/A
65

83. El método de la reivindicación 82, en donde dicho derivado de polisacárido microfibrilar forma un gel en todo el rango de la concentración de cerca de 0.01% y cerca de 50% en agua.
84. El método de la reivindicación 60, en donde dicho derivado de polisacárido microfibrilar forma un gel por lo menos en un punto en el rango de concentración de cerca de 0.05% a cerca de 0.99% en agua.
85. El método de la reivindicación 84, en donde dicho derivado de polisacárido microfibrilar forma un gel a una concentración de cerca de 0.9% en agua.
86. El método de la reivindicación 60, en donde dicho derivado de polisacárido microfibrilar es sustancialmente insoluble en el solvente de uso.
87. El método de la reivindicación 86, en donde el solvente de uso es agua.
88. El método de la reivindicación 87, en donde dicho derivado de polisacárido microfibrilar es derivado para comprender sustitutos que proporcionen funcionalidad electrostática.
89. El método de la reivindicación 88, en donde dicho derivado de polisacárido microfibrilar es celulosa microfibrilar derivada con un grado de sustitución de menos de cerca de 0.5.
90. El método de la reivindicación 89, en donde dicho grado de sustitución es menor a cerca de 0.35.
91. El método de la reivindicación 90, en donde dicho grado de sustitución es menor a cerca de 0.2.
92. El método de la reivindicación 91, en donde dicho grado de sustitución es menor a cerca de 0.18.

63¹⁸
66

93. El método de la reivindicación 92, en donde dicho grado de sustitución es menor a cerca de 0.1.
94. El método de la reivindicación 89, en donde dicha celulosa microfibrilar derivada tiene un grado de sustitución entre cerca de 0.02 y cerca de 0.5.
95. el método de la reivindicación 94, en donde dicho grado de sustitución está entre cerca de 0.5 y cerca de 0.2.
96. El método de la reivindicación 86, en donde dicho derivado de polisacárido microfibrilar es derivado para comprender un sustituto estérico.
97. El método de la reivindicación 96, además en donde dicho derivado de polisacárido microfibrilar se deriva para comprender sustitutos que proporciones funcionalidad electrostática.
98. El método de la reivindicación 96, en donde dicho derivado de polisacárido microfibrilar tiene una sustitución molar menor a cerca de 3.0.
99. El método de la reivindicación 98, en donde dicho derivado de polisacárido microfibrilar tiene una sustitución molar menor a cerca de 1.5.
100. El método de la reivindicación 99, en donde dicho derivado de polisacárido microfibrilar tiene una sustitución molar menor a cerca de 1.0.
101. El método de la reivindicación 100, en donde dicho derivado de polisacárido microfibrilar tiene una sustitución molar menor a cerca de 0.5.
102. El método de la reivindicación 98 en donde dicha sustitución molar está entre cerca de 0.5 y 3.0.
103. El método de la reivindicación 63, en donde dicha celulosa microfibrilar derivada es una celulosa carboximetilo.

64-~~65~~
67

104. El método de la reivindicación 103, en donde dicha celulosa carboximetilo tiene un grado de sustitución menor a 0.35.
105. El método de la reivindicación 104 en donde dicho grado de sustitución es menor a cerca de 2.0.
106. El método de la reivindicación 105 en donde dicho grado de sustitución está entre cerca de 0.02 y cerca de 2.0.
107. El método de la reivindicación 106, en donde dicho grado de sustitución está entre cerca de 0.1 y cerca de 0.2.
108. Derivado de polisacárido microfibrilar producido por el método de la reivindicación 60.
109. Derivado de la celulosa microfibrilar producido por el método de la reivindicación 63.
110. la celulosa microfibrilar derivada de la reivindicación 63, derivada para comprender sustitutos que proporcionan funcionalidad estérica.
111. la celulosa microfibrilar derivada de la reivindicación 110, en donde dichos sustitutos comprenden por lo menos uno de los grupos hidroxietilo; grupos hidroxipropilo; grupos metilo, grupos etilo; grupos alifáticos en cadena recta o ramificada que tienen desde cerca de 4 a cerca de 30 carbonos; o las combinaciones de éstos.
112. la celulosa microfibrilar derivada de la reivindicación 109, derivada para comprender sustitutos que proporcionen funcionalidad electrostática por carga aniónica.

65 17
68

113. la celulosa microfibrilar derivada de la reivindicación 112, en donde dicha carga aniónica comprende la presencia de carboxilo, sulfato, sulfonato, fosfonato o grupos de fosfato o combinaciones de éstos.
114. la celulosa microfibrilar derivada de la reivindicación 113, en donde dicha carga aniónica comprende la presencia de los grupos carboxilo.
115. la celulosa microfibrilar derivada de la reivindicación 112, en donde dicha funcionalidad electrostática es proporcionada por la carga aniónica y catiónica.
116. la celulosa microfibrilar derivada de la reivindicación 115, en donde dicha funcionalidad electrostática es proporcionada por sustitutos que contienen carga aniónica y catiónica en el mismo sustituto.
117. la celulosa microfibrilar derivada de la reivindicación 115, en donde dicha funcionalidad electrostática es proporcionada por sustitutos que tienen carga aniónica y por sustitutos que tienen carga catiónica.
118. un método para modificar las propiedades reológicas de una composición de materia, dicho método comprende el paso de la incorporación de dicha composición de materia de derivado de polisacárido microfibrilar que se deriva para comprender sustitutos que proporcionan funcionalidad electrostática y/o estérica en donde dicha funcionalidad electrostática es proporcionada por carga aniónica.
119. El método de la reivindicación 118, en donde dicha composición comprende un líquido.
120. El método de la reivindicación 119, en donde dicho líquido es agua.
121. El método de la reivindicación 120, que comprende el uso de dicho polisacárido microfibrilar en una cantidad efectiva para proporcionar control de equilibrio y/o control de corrosión.

66 18 69

122. El método de la reivindicación 118, en donde dicho derivado de polisacárido microfibrilar es celulosa microfibrilar derivada.
123. El método de la reivindicación 119, en donde dicha propiedad reológica es de por lo menos uno entre viscosidad, estabilidad de suspensión, gel insensible a la temperatura, gelación de esquilo reversible, estrés de rendimiento y retención de líquido.
124. El método de la reivindicación 118, en donde dicha composición de materia es una alimento, un producto farmacéutico, neutraceutico o para cuidado personal, una fibra, un papel, una pintura, un recubrimiento o una composición de construcción.
125. El método de la reivindicación 124, en donde dicha composición de materia es un producto de cuidado oral.
126. El método de la reivindicación 124, en donde dicha composición de materia es una crema o loción para aplicación epidérmica.
127. El método de la reivindicación 124, en donde dicha composición de materia es una crema humectante, una crema o loción anti-arrugas para la noche o un protector solar crema o loción.
128. El método de la reivindicación 124, en donde dicha composición de materia es un alimento para esparcir.
129. El método de la reivindicación 128 en donde dicho alimento para esparcir es un alimento para esparcir bajo en grasa, graso o libre de grasa.
130. El método de la reivindicación 129, en donde dicho alimento para esparcir es una mayonesa grasa, libre de grasa o baja en grasa.
131. El método de la reivindicación 124, en donde dicha composición de materia es un fluido de perforación.

6719
20

132. un método para mejorar las propiedades físicas y/o mecánicas de una composición de recubrimiento, incorporando en dicha composición de recubrimiento una cantidad efectiva de un derivado de polisacárido microfibrilar derivado para comprender sustitutos que proporcionen funcionalidad electrostática y/o estérica, en donde dicha funcionalidad electrostática se proporcione por carga aniónica.
133. El método de la reivindicación 132, en donde dichas propiedades físicas y/o mecánicas incluyen por lo menos uno entre: formación de película, apalancamiento, resistencia, fuerza, durabilidad, dispersión, difusión, flote y salpicadura
134. Un método para mejorar por lo menos uno entre encolado, fuerza, control de equilibrio, drenaje, desagüe, retención, clarificación, formación, absorbencia, formación de película, formación de membrana y complexión de polielectrolito durante la fabricación del papel, dicho método que comprende el paso de usar una celulosa microfibrilar derivada durante dicha fabricación, en donde dicha celulosa microfibrilar derivada se deriva por sustitutos electrostáticos y/o estéricos además en donde dichos sustitutos electrostáticos comprenden la presencia de una carga aniónica o de una carga aniónica y catiónica.
135. El método de la reivindicación 134, en donde dicha celulosa microfibrilar derivada se utiliza como una ayuda para drenar y/o un agente encolador.
136. El método de la reivindicación 134, en donde dicha celulosa microfibrilar derivada es celulosa carboximetilo microfibrilar.
137. El método de la reivindicación 136, que comprende el uso de dicha celulosa carboximetilo microfibrilar en una máquina para hacer papel para aumentar la tasa de drenaje y/o del desagüe durante la fabricación del papel.

60 20
71

138. El método de la reivindicación 137, además en donde dicha celulosa carboximetilo microfibrilar se utiliza en la presencia de por lo menos uno de entre poliacrilamidos catiónicos, cloruro de amonio polidialimetilo amonio cloruro, fécula catiónica, derivados de celulosa que contengan amonio o sustitutos mono-di-o trialquilo de amonio; derivados de goma de guar que contengan sustitutos de amonio o di o tri alquilo; resinas formadas por la reacción de los aminos y/o poliaminos con epiclorohidrín y combinaciones de éstos.
139. El método de la reivindicación 137, en donde dicha celulosa carboximetilo microfibrilar se usa en la presencia de por lo menos una sal de aluminio; sales de aluminio hidrolizadas parcialmente o hidrolizadas; complejos de sales de aluminio hidrolizadas parcialmente o hidrolizadas con especies orgánicas o inorgánicas y combinaciones de éstos.
140. El método de la reivindicación 137 en donde además en dicha celulosa carboximetilo microfibrilar se usa en la presencia de por lo menos un polímero de óxido de etileno, etileno amino, alilamino, o vinilo-amino por lo menos un copolímero o terpolímero de óxido de etileno, etileno-amino, alilamino o vinilo-amino o combinaciones de éstos.
141. El método de la reivindicación 136, que comprende el uso de dicha celulosa carboximetilo microfibrilar en una máquina para hacer papel para retención de partículas dispersas orgánicas o inorgánicas en una hoja de papel durante su fabricación.
142. El método de la reivindicación 141, en donde dichas partículas dispersas comprenden por lo menos una de finas pulpas, llenadores, agentes encoladores,

69 ~~21~~
78

pigmentos, arcillas, materiales particulados orgánicos residuales, materiales particulados inorgánicos residuales y combinaciones de éstos.

143. El método de la reivindicación 141, además en donde dicha celulosa carboximetil microfibrilar se usa en la presencia de por lo menos una de poliacrilamidos catiónicos; polidialdimetil cloruro de amonio, fécula catiónica; derivados de celulosa que contienen sustitutos de amonio o mono-di o trialquilo amonio, derivados de goma guar que contengan sustitutos de amonio mono-di o trialquilo amonio, resinas formadas por la reacción de aminos y/o poliaminos con epiclorohidrino y combinaciones de éstos.
144. El método de la reivindicación 141, además en donde dicha celulosa carboximetil microfibrilar se usa en la presencia de por lo menos una de sales de aluminio hidrolizadas o parcialmente hidrolizadas; complejos de sales de aluminio hidrolizadas parcialmente o hidrolizadas con especies orgánicas inorgánicas o combinaciones de éstos.
145. El método de la reivindicación 141, en donde en dicha celulosa carboximetil microfibrilar se usa en la presencia de por lo menos un polímero de óxido de etileno, etilenamino, alilamino o vinilamino con por lo menos un copolímero o terpolímero de óxido de etileno, etilenaminos, alilamino o vinilamino y combinaciones de éstos.
146. El método de la reivindicación 136, que comprende el uso de dicha celulosa carboximetil microfibrilar en una máquina de hacer papel para mejorar la uniformidad de la formación de una hoja de papel durante su manufactura.
147. El método de la reivindicación 146, además en donde dicha celulosa carboximetil microfibrilar se usa en la presencia de por lo menos uno de poliacrilamidos catiónicos, polidialildimetil amonio cloruro, fécula catiónica; derivados de celulosa

70 22
73

que contengan amonio o sustitutos de amonio mono di o trialquilo; derivados de goma guar que contengan amonio o sustitutos de amonio trialquilo o diomolalquilo; resinas formadas por la reacción de aminos y/o poliaminos con epiclorohidrino y combinaciones de éstos.

148. El método de la reivindicación 146, además en donde dicha celulosa carboximetilo microfibrilar se usa en la presencia de por lo menos una de sales de aluminio, sales de aluminio hidrolizadas parcialmente o hidrolizadas; complejos de sales de aluminio hidrolizadas parcialmente o hidrolizadas con especies orgánicas o inorgánicas; y combinaciones de éstas.
149. El método de la reivindicación 146, además en donde dicha celulosa carboximetilo microfibrilar se usa en la presencia de por lo menos polímero de óxido de etileno, etilenamina, alilamina o vinilamina; por lo menos un copolímero o terpolímero de óxido de etileno, etilenamino, alilamino o vinilamino y combinaciones de éstos.
150. El método de la reivindicación 136, que comprende el uso de dicha celulosa carboximetilo microfibrilar en una máquina para hacer papel para mejorar la fuerza de una hoja de papel producida en una máquina de papel.
151. El método de la reivindicación 150, además que comprende el uso de dicha celulosa carboximetilo microfibrilar se usa en la presencia de por lo menos uno de poliacrilamidos catiónicos; polidialidimetilo amonio cloruro; fécula catiónica; derivados de celulosa que contengan amonio o sustitutos de amonio di-mono-di o trialquilo; derivados de goma guar que contengan amonio o sustitutos de amonio mono-di-o trialquilo; resinas formadas por la reacción de aminos y/o poliaminos con epiclorohidrino y combinaciones de éstos.

71 23
74

152. El método de la reivindicación 150, además en donde dicha celulosa carboximetilo microfibrilar se usa en la presencia de por lo menos una de sales de aluminio hidrolizado o parcialmente hidrolizado; complejos de sales de aluminio hidrolizado parcialmente o hidrolizadas con especies orgánicas o inorgánicas y combinaciones de éstos.
153. El método de la reivindicación 150, además en donde dicha celulosa carboximetilo microfibrilar se usa en la presencia de por lo menos un polímero de óxido de etileno, etilenamino, alilamino, o vinilamino; por lo menos un copolímero o terpolímero de óxido de etileno, etilenamino, alilamino o vinilamino y combinaciones de éstos.
154. un método para mejorar la estabilidad de una emulsión, dispersión o sistema de espuma, dicho método comprendiendo el paso de incluir en el sistema, un derivado polisacárido microfibrilar derivado por sustitutos electrostáticos y/o estéricos, además, en donde dichos sustitutos electrostáticos comprenden la presencia de carga aniónica.
155. El método de la reivindicación 154 en donde dicho derivado de polisacárido microfibrilar se agrega al sistema.
156. El método de la reivindicación 155, en donde dicho sistema comprende en emulsión, además en donde dicha emulsión se produce por el proceso de una formulación de emulsión.
157. El método de la reivindicación 156, además en donde dicho derivado de polisacárido microfibrilar se agrega antes de la finalización del proceso de dicha formulación de emulsión.
158. El método de la reivindicación 156, en donde un polisacárido no microfibrilar se agrega antes de la finalización del proceso de dicha formulación de emulsión y

72²⁴
75

dicha formulación de emulsión se procesa bajo condiciones suficientes para microfibrilar dicho polisacárido no microfibrilar.

159. El método de la reivindicación 158, además en donde dicho polisacárido microfibrilar o no microfibrilar únicamente parcialmente es un no derivado o un derivado sólo parcialmente y dicha formulación de emulsión es además procesada bajo condiciones suficientes para derivar dicho polisacárido no derivado o para completar la derivación de dicho polisacárido derivado sólo parcialmente, respectivamente.
160. El método de la reivindicación 156, en donde un polisacárido no dedrivado o derivado sólo parcialmente se agrega antes de la finalización del proceso de dicha formulación de emulsión y la formulación de emulsión se procesa bajo condiciones suficientes para derivar dicho polisacárido no derivado o para completar la derivación de dicho polisacárido derivado sólo parcialmente respectivamente.
161. El método de la reivindicación 160, además en donde dicho polisacárido derivado sólo parcialmente o no derivado no está microfibrilado o sólo parcialmente microfibrilado, y dicha formulación de emulsión es además procesada bajo condiciones suficientes para microfibrilar dicho polisacárido no derivado o para finalizar la microfibrilación de dicho polisacárido derivado sólo parcialmente, respectivamente.
162. El método de la reivindicación 155, en donde dicho sistema es una emulsión de agua en aceite o de aceite en agua.
163. el sistema producido por el método de la reivindicación 154
164. Un sistema que comprende una emulsión, dispersión o espuma que contenga un derivado de polisacárido microfibrilar, en donde dicho derivado de polisacárido

7328
76

microfibrilar se deriva para comprender sustitutos que proporcionen funcionalidad electrostática y/o estérica además en donde dicha funcionalidad electrostática se proporcione por carga aniónica.

165. Un complejo polielectrolito que comprenda un derivado de polisacárido microfibrilar que comprenda sustitutos que proporcionen funcionalidad electrostática y/o estérica en donde dicha funcionalidad electrostática comprenda carga aniónica.

7A 26
77

Patente


Csh et al.1

POLISACARIDO MICROFIBRILAR DERIVADO

RESUMEN DE LA REVELACION

Un método para producir polisacárido microfibrilar derivado que incluye más no está limitado a celulosa, derivada por fuerzas electrostáticos y/o estéricas, en donde las fuerzas electrostáticas se proporcionan por carga aniónica o por una combinación de carga aniónica y catiónica estabilizando y/o microfibrilando un material polisacárido de inicio. Un método para modificar las propiedades reológicas de una composición de materia usando polisacárido microfibrilar derivado. Método para mejorar los recubrimientos, la fabricación de papel y la estabilidad de las emulsiones, dispersiones y espumas usando un polisacárido microfibrilar derivado. Composiciones que incluyen polisacáridos microfibrilares derivados incluyendo composiciones de papel, composiciones comestibles, composiciones para esparcir no comestibles y emulsiones, dispersiones y espumas.

PA 210082

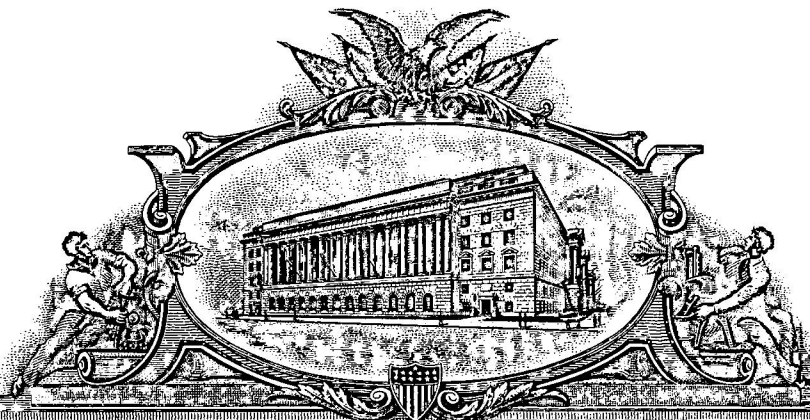

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

February 17, 2000

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 09/248,246 ✓

FILING DATE: February 10, 1999



By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS


N. WILLIAMS

Certifying Officer

A 7628
79

PATENT APPLICATION TRANSMITTAL LETTER
(Large Entity)

Docket No.
Cash, et al. Case 1

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

Mary Jean Cash, et al.

For: Derivatized Microfibrillar Polysaccharide

Enclosed are:

- ☒ Certificate of Mailing with Express Mail Mailing Label No. **EI 863755163**
☒ Nine sheets of drawings.
☐ A certified copy of a _____ application.
☒ Declaration ☐ Signed. ☒ Unsigned.
☒ Power of Attorney
☐ Information Disclosure Statement
☐ Preliminary Amendment
☐ Other:


1c519 U.S. PRO
09/248246
02/10/99

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	165	- 20 =	145	x \$22.00	\$3,190.00
Indep. Claims	11	- 3 =	8	x \$82.00	\$656.00
Multiple Dependent Claims (check if applicable) ☐					\$0.00
BASIC FEE					\$790.00
TOTAL FILING FEE					\$4,636.00

- ☐ A check in the amount of _____ to cover the filing fee is enclosed.
☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 08-1800 as described below. A duplicate copy of this sheet is enclosed.
☒ Charge the amount of \$4,636.00 as filing fee.
☐ Credit any overpayment.
☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: February 10, 1999


James A. Cairns
Reg. No. 32,557

cc:

29
7780

DERIVATIZED MICROFIBRILLAR POLYSACCHARIDE

FIELD OF THE INVENTION

The present invention relates to derivatized microfibrillar polysaccharide. More specifically, the present invention relates to microfibrillar polysaccharide stabilized by steric
5 and/or electrostatic forces, where the electrostatic forces are provided by anionic charge, or by a combination of both anionic and cationic charge.

BACKGROUND OF THE INVENTION

Polysaccharides are often found in nature in forms having fibrous morphology.

Polysaccharides which are not found in nature in fibrous form can often be transformed into
10 fibrous morphologies using fiber spinning techniques. Whether the fibrous morphology is of natural or artificial origin, the polysaccharide will often be present such that the fibers can be reduced to fibrillar and microfibrillar sub-morphologies through the application of energy.

Fibrillar and microfibrillar cellulose obtained in this manner have been considered for use in applications, including use as additives to aqueous-based systems in order to affect
15 rheological properties, such as viscosity. The use level of these materials in aqueous systems is often on the order of about 2% by weight, below which these materials have a tendency to poorly occupy volume, and to exhibit gross inhomogeneities in distribution.

Microfibrillated cellulose and its manufacture are discussed in U.S. Patent Nos.
4,500,546; 4,487,634; 4,483,743; 4,481,077; 4,481,076; 4,464,287; 4,452,722; 4,452,721;
20 4,378,381; 4,374,702; and 4,341,807, the disclosures of which are hereby incorporated by reference thereto. These documents, in part, purport to describe microfibrillated cellulose in stable, homogenous suspensions, characterized as useful in end use products including foods, cosmetics, pharmaceuticals, paints, and drilling muds.

Cellulose nanofibrils are characterized in WO 98/02486 (PCT/FR97/01290), WO
25 98/02487 (PCT/FR97/01291), and WO 98/02499 (PCT/FR97/01297), the disclosures of which are hereby incorporated by reference. Nanofibrils are characterized as having diameters in the range of about 2 to about 10 nanometers.

EP 845495 discusses cationic cellulose particulate which is characterized as insoluble, positively charged, and used in water treatment, specifically to treat water in a paper
30 manufacturing plant. In paper making this cationic particulate is said to remove anionic trash from the water. The particles are obtained by milling, which is stated to reduce particle size uniformly such that particles are typically round as described by a length/diameter ratio of

60722-94346

80
7081

approximately 1. Particle size is stated to be 0.001 mm (i.e., 1 μ m), and preferably 0.01 mm (10 μ m)

EP 859011 ("EP '011") is directed to a process for obtaining cationic cellulose microfibrils or their soluble derivatives. The process is described as including making a cationic cellulose derivative and processing the derivative through a high pressure homogenizer to form transparent gels. The product can be dehydrated and rehydrated. Viscosity measurements are reported on the product at a concentration of 2% in water. EP '011 indicates that the degree of substitution ("DS") of the cellulose can range from 0.1 to 0.7, with a DS of between 0.2 and 0.7, 0.3 and 0.6, and 0.5 and 0.6 characterized as representing increasing orders of preference. The examples show cellulose with a DS ranging from a low of 0.24 up to 0.72. Gelling is reported to occur above a microfibril concentration of 10 g/L, or above 1%, in water. EP '011 defines gelling as occurring when $G' > G''$, where G' is the dynamic storage modulus and G'' is the dynamic loss modulus.

Microfibrillated chitosan is reported to form uniplanar, oriented sheets upon drying by H. Yokata, J. Polymer Sci., Part C: Polymer Letters, 24:423-425 (1986). This article mentions that at a level of 4% chitosan in water, a gel is formed having a viscosity of 26,600 cps (Brookfield, 20° C, rotor #7, 10rpm). The microfibrillated chitosan is made by homogenization of commercial chitosan flakes in a Gaulin homogenizer. The commercial chitosan is deacetylated using sodium hydroxide.

JP 59 [1984]-84938 discusses a method for producing a chitosan suspension. Commercial chitosan separated and purified from crabs and lobsters is pulverized to pieces having maximum length of about 1-2 mm. The pieces are then suspended in water at up to 15% chitosan, and are run in multiple passes through a high pressure homogenizer at between 3,000 and 8,000 psi.

It would be desirable to obtain microfibrillar polysaccharides whose viscosity-affecting properties are achieved without the presence of cationic functionalities, at least in part because of the general lack of suitability of cationic materials for use in foods. It would also be desirable to obtain microfibrillar polysaccharides that are capable of forming a gel at concentrations of 1% or less, thereby providing economy and ease of formulation, while still providing necessary rheological behavior and homogeneity of distribution.

In addition, there is a continuing need in industry to improve the stability of commercial emulsions, such as paper sizing emulsions. At present, one method for stabilizing such

1560720-91284261

7982

emulsions is the addition of charged materials, such as cationic starches, which may be added in amounts equal to 10-20% by weight of the size component. Interaction with anionic components, such as sulfonates, can also improve stability. However, emulsion failure still takes place in such emulsions, either through density-driven separation, also referred to as creaming, or through gellation. It would accordingly be desirable to develop a material that could be added to emulsions to provide long-term stability.

SUMMARY OF THE INVENTION

The present invention is directed to derivatized microfibrillar polysaccharide, methods for its production, and applications for its use. The derivatized microfibrillar polysaccharides is derivatized to contain substituents that provide electrostatic and/or steric functionality; where electrostatic functionality is present, it includes, but is not necessarily limited to, the presence of anionic charge.

Polysaccharides suitable for use in the present invention include cellulose, hemicellulose, chitin, chitosan, guar gum, pectin, alginate, agar, xanthan, starch, amylose, amylopectin, alternan, gellan, mutan, dextran, pullulan, fructan, locust bean gum, carrageenan, glycogen, glycosaminoglycans, murein, bacterial capsular polysaccharides, and derivatives thereof. Mixtures of these may be employed. Preferred polysaccharides are cellulose, chitin, chitosan, pectin, agar, starch, carrageenan, and derivatives thereof, used singly or in combination, with cellulose being most preferred. The cellulose may be obtained from any available source, including, by way of example only, chemical pulps, mechanical pulps, thermal mechanical pulps, chemical-thermal mechanical pulps, recycled fibers, newsprint, cotton, soybean hulls, pea hulls, corn hulls, flax, hemp, jute, ramie, kenaf, manila hemp, sisal hemp, bagasse, corn, wheat, bamboo, velonia, bacteria, algae, fungi, microcrystalline cellulose, vegetables, and fruits. Preferred sources of cellulose include purified, optionally bleached wood pulps produced from sulfite, kraft, or prehydrolyzed kraft pulping processes; purified cotton linters; fruits; and vegetables.

The derivatized microfibrillar polysaccharides that may be obtained using cellulose include, but are not limited to, hydroxyethyl cellulose, ethylhydroxyethyl cellulose, carboxymethylcellulose, carboxymethylhydroxyethyl cellulose, hydroxypropylhydroxyethyl cellulose, methyl cellulose, methylhydroxypropyl cellulose, methylhydroxyethyl cellulose, carboxymethylmethyl cellulose, hydrophobically modified carboxymethylcellulose, hydrophobically modified hydroxyethyl cellulose, hydrophobically modified hydroxypropyl

32
83

Docket Case No.: Cash, et al. Case 1

DERIVATIZED MICROFIBRILLAR POLYSACCHARIDE

Patent Application enclosed, including nine pages of drawings and an UNSIGNED Declaration and Power of Attorney

JCairns

660720-91284260

EXPRESS MAIL MAILING NO. <u>EI 863755/63</u>
DATE OF DEPOSIT <u>2/10/99</u>
HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED WITH THE U.S. POSTAL SERVICE "EXPRESS MAIL" POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO THE COMM. OF PATENTS & TRADEMARKS, WASHINGTON, D.C. 20231
<u>WILLIAM J DUGAN</u> TYPED/PRINTED NAME OF PERSON MAILING PAPER OR FEE
<u>[Signature]</u> SIGNATURE OF PERSON

33
8684

cellulose, hydrophobically modified ethylhydroxyethyl cellulose, hydrophobically modified carboxymethylhydroxyethyl cellulose, hydrophobically modified hydroxypropylhydroxyethyl cellulose, hydrophobically modified methyl cellulose, hydrophobically modified methylhydroxypropyl cellulose, hydrophobically modified methylhydroxyethyl cellulose, hydrophobically modified carboxymethylmethyl cellulose, nitrocellulose, cellulose acetate, cellulose sulfate, cellulose vinyl sulfate, cellulose phosphate, and cellulose phosphonate.

The derivatized microfibrillar cellulose of the present invention may form a gel in water throughout the concentration range of between about 0.01 % and about 100%, or throughout the concentration range of between about 0.01 % and about 50 % in water, or at at least one point in the concentration range of from about 0.05 % up to about 0.99% in water. In an alternative embodiment, the derivatized microfibrillar cellulose of the present invention forms a gel in water at a concentration of about 0.95%.

The derivatized microfibrillar polysaccharide may be used in the presence of a solvent, in which it is substantially insoluble. Examples of solvents include water, alcohol, and oil.

In the case of derivatization with groups that provide electrostatic functionality, the derivatized microfibrillar polysaccharides of the present invention may have a degree of substitution of less than about 0.5, less than about 0.35, less than about 0.2, less than about 0.18, or less than about 0.1. A preferred range for the degree of substitution is between about 0.02 and about 0.5, with a range of between about 0.05 and about 0.2 being more preferred.

When the derivatized microfibrillar polysaccharide is derivatized to comprise substituents that provide electrostatic functionality in the form of anionic charge, the degree of substitution representing those substituents which provide electrostatic functionality in the form of anionic charge is preferably least about 0.05. Anionic charge may be provided, for example, by carboxyl, sulfate, sulfonate, phosphonate, or phosphate groups, or combinations thereof. Where cationic charge is also present, both charges may be provided by the same groups or substituent (i.e., the substituent may be amphoteric or zwitterionic); or, the derivatized microfibrillar polysaccharide may be derivatized to contain both substituents that contain anionic charge and substituents that contain cationic charge. In addition, the derivatized microfibrillar polysaccharides of the present invention may be obtained by blending two or more separate derivatized microfibrillar polysaccharides, where at least one has been derivatized to provide anionic charge, and at least one other has been derivatized to provide anionic charge, cationic charge, or both.

34
02/85

When the derivatized microfibrillar polysaccharide of the present invention is derivatized to contain substituents that provide steric functionality, the derivatized microfibrillar polysaccharides may have a molar substitution of less than about 3.0, or of less than about 1.5, or of less than about 1.0, or of less than about 0.5. The range of molar substitution may be from about 0.5 to about 3.0. Steric functionality may be provided, by way of non-limiting example, by hydroxyethyl groups, hydroxypropyl groups, methyl groups, ethyl groups; straight- or branched-chain alkyl, alkenyl, or alkynyl groups having from about 4 to about 30 carbons; and/or aryl, arylalkyl, arylalkenyl, cyclic, and herterocyclic hydrocarbons having from about 4 to about 30 carbons.

10 In a preferred embodiment the derivatized microfibrillar polysaccharide contains carboxymethylcellulose, and has a degree of substitution of less than about 0.35, or of less than about 2.0. The range of degree of substitution may be from about 0.02 to about 0.2, with a range of from about 0.10 to about 0.2 being preferred.

The derivatized microfibrillar cellulose of the present invention may form a gel at a concentration of less than about 1% in water.

15 In a further embodiment, the present invention is directed to a comestible composition of matter containing the derivatized microfibrillar polysaccharide of the present invention. The comestible composition of matter may, by way of non-limiting example, be a low fat, reduced fat, or fat-free food spread, such as a mayonnaise, or a salad dressing. Alternatively, 20 the comestible composition may contain a pharmaceutically active ingredient. The derivatized microfibrillar polysaccharide may be used to provide or improve a controlled, sustained, or delayed release of a component of the comestible composition, including in particular a pharmaceutically active ingredient.

25 In yet another embodiment, the derivatized microfibrillar polysaccharides of the present invention may be used in non-comestible, spreadable compositions of matter, such as skin care lotions or creams, or sunscreen lotions or creams.

The present invention is further directed to a paper composition containing the derivatized microfibrillar cellulose, and particularly, though not exclusively, microfibrillar carboxymethylcellulose.

30 The derivatized microfibrillar polysaccharide may be produced by using a derivatizing step to treat a microfibrillar polysaccharide to obtain the derivatized microfibrillar polysaccharide. Alternatively, a derivatized polysaccharide may be microfibrillated to

660420-9434266

35
0386

produce the derivatized microfibrillar polysaccharide. In another method, the steps of microfibrillation and derivatization may take place at substantially the same time. In a preferred embodiment, cellulose is first derivatized with monochloroacetic acid or a salt thereof under alkaline conditions to produce carboxymethylcellulose; the

5 carboxymethylcellulose is suspended in water; and the resulting suspension is homogenized to produce microfibrillated carboxymethylcellulose.

The derivatizing step may include contacting a non-microfibrillar polysaccharide with a swelling agent, such as an anionic reagent, and may take place under alkaline conditions. These alkaline conditions may include contacting the cellulose with the anionic reagent in the

10 presence of an alkaline reagent which is sodium hydroxide, an oxide or hydroxide of an alkali metal or alkaline earth metal, an alkali silicate, an alkali aluminate, an alkali carbonate, an amine, ammonium hydroxide, tetramethyl ammonium hydroxide, or combinations thereof. The derivatization may take place at high solids.

Microfibrillation may be accomplished by applying energy to a non-microfibrillar

15 polysaccharide under conditions sufficient to produce microfibrillar polysaccharide. The non-microfibrillar may optionally be enzyme-treated before microfibrillizing. More specifically, microfibrillation may be accomplished using homogenization, pumping, mixing, heat, steam explosion, pressurization-depressurization cycle, impact, grinding, ultrasound, microwave explosion, milling, and combinations of these. In a preferred embodiment the

20 non-microfibrillar polysaccharide is passed through a homogenizer under conditions sufficient to produce microfibrillar cellulose; those conditions may include a pressure differential of at least about 3,000 psi, and passing the non-microfibrillar polysaccharide through the homogenizer at least three times.

The method should be conducted to yield a derivatized microfibrillar polysaccharide

25 that is substantially insoluble in the solvent of use. Water is a preferred solvent of use, but other solvents, including but not limited to alcohols and oils, are contemplated for various applications.

The present invention extends to derivatized microfibrillar polysaccharide produced by the above methods.

30 In an alternative embodiment the present invention is directed to a method of modifying the rheological properties of a liquid composition of matter by incorporating the derivatized microfibrillar polysaccharides of the present invention into the liquid composition of matter.

660720 sheet 660720

36
04/87

This may be accomplished by incorporating the derivatized microfibrillar polysaccharide into a water-containing system, where it may be used, for example, to provide scale control and/or corrosion control. The rheological properties which may be modified by the derivatized microfibrillar polysaccharide include viscosity, suspension stability, gel insensitivity to temperature, shear reversible gelation, yield stress, and liquid retention.

Liquid compositions which may be rheologically modified include, as non-limiting examples, foods, pharmaceuticals, nutraceuticals, personal care products, fibers, papers, paints, coatings, and construction compositions. These include oral care products; creams or lotions for epidermal application (such as moisturizing, night, anti-age, or sunscreen creams or lotions); food spreads, including reduced fat, low fat, or fat free food spreads (such as mayonnaises); and drilling fluids.

The present invention further extends to a method of improving the physical and/or mechanical properties of a coating composition by incorporating, into the coating composition, an effective amount of the derivatized microfibrillar polysaccharide. The physical and/or mechanical properties that may be improved in this manner include film forming, leveling, sag resistance, strength, durability, dispersion, flooding, floating, and spatter.

The present invention has particular utility in the field of paper manufacture and treatment. For example, derivatized microfibrillar cellulose may be used to improve one or more of sizing, strength, scale control, drainage, dewatering, retention, clarification, formation, adsorbency, film formation, membrane formation, and polyelectrolyte complexation during paper manufacture. As a particular example, the derivatized microfibrillar cellulose may be used as a drainage aid and/or as a sizing agent. A polyelectrolyte complex containing the derivatized microfibrillar polysaccharide is also within the scope of the present invention.

Microfibrillated carboxymethylcellulose is a particularly preferred embodiment for use in paper applications. During the process of paper manufacture, the derivatized microfibrillar cellulose may be used, by way of further example, in a papermaking machine to increase the rate of drainage and/or dewatering during paper manufacture; for retention of organic and/or inorganic dispersed particles in a sheet of paper during its manufacture; to improve the uniformity of formation of a sheet of paper during its manufacture; and to improve the strength of a sheet of paper. The derivatized microfibrillar cellulose may be used in

05 37 28

combination with any of the additives and performance enhancers conventionally used in paper manufacture, including cationic polyacrylamides; polydiallyldimethyl-ammonium chloride; cationic starch; derivatives of cellulose containing ammonium or mono-, di-, or trialkyl ammonium substituents; derivatives of guar gum containing ammonium or mono-, di-, or trialkyl ammonium substituents; resins formed by the reaction of amines and/or polyamines with epichlorohydrin; aluminum salts; hydrolyzed or partially hydrolyzed aluminum salts; complexes of hydrolyzed or partially hydrolyzed aluminum salts with organic or inorganic species; at least one polymer of ethylene oxide, ethyleneimine, allylamine, or vinylamine; and, at least one copolymer or terpolymer of ethylene oxide, ethyleneimine, allylamine, or vinylamine; and combinations thereof. In the context of retention of organic and/or inorganic dispersed particles, the particles so retained may include one or more of pulp fines, fillers, sizing agents, pigments, clays, detrimental organic particulate materials, and detrimental inorganic particulate materials.

In another embodiment, the stability of an emulsion, dispersion, or foam system may be improved by including, in the system, the derivatized microfibrillar polysaccharide of the present invention. The derivatized microfibrillar polysaccharide may be added to an existing system; added to a formulation which will be processed into such a system; or added during processing of such a formulation. Where addition takes place before completion of processing of a formulation into an emulsion, dispersion, or foam system, the processing conditions used to form the emulsion, dispersion, or foam may be used to produce the derivatized microfibrillar polysaccharide as well. Thus, a derivatized non-microfibrillated polysaccharide (where "non-microfibrillated" includes an incompletely microfibrillated polysaccharide) may be added to a formulation prior to completion of processing, and subsequent processing may then be conducted in a manner that will microfibrillate the polysaccharide. Alternatively, a microfibrillated polysaccharide may be added to the formulation, with subsequent processing conducted so as to derivatize the microfibrillated polysaccharide. In another variation, both derivatization and microfibrillation may take place during processing. Systems which may be treated in this manner include water-in-oil and oil-in-water emulsions.

The present invention also extends to emulsion, dispersion, and foam systems produced by the above methods; and, to emulsion, dispersion, or foam systems that contain the derivatized microfibrillar polysaccharide of the present invention.

38
88

BRIEF DESCRIPTION OF THE FIGURES

Figure 1 shows the dynamic mechanical spectra of Example 7, Sample 1.

Figure 2 shows the dynamic mechanical spectra of Example 7, Sample 2.

Figure 3 shows the dynamic mechanical spectra of Example 7, Sample 3.

5 Figure 4 shows the dynamic mechanical spectra of Example 7, Sample 4.

Figure 5 shows the dynamic mechanical spectra of Example 7, Sample 5.

Figure 6 shows the dynamic mechanical spectra of Example 13, Sample 1.

Figure 7 shows the dynamic mechanical spectra of Example 13, Sample 2.

Figure 8 shows the dynamic mechanical spectra of Example 13, Sample 3.

10 Figure 9 is a transmission electron micrograph of a sample microfibrillar carboxymethylcellulose prepared as in example 3 below, with a degree of substitution of about 0.17, negative stained with urinal acetate, at a magnification of 10,000X.

DETAILED DESCRIPTION OF THE INVENTION

5 The present invention comprises derivatized microfibrillar polysaccharide. Suitable polysaccharides for use in the present invention include, without limitation, cellulose, hemicellulose, chitin, chitosan, guar gum, pectin, alginate, agar, xanthan, starch, amylose, amylopectin, alternan, gellan, mutan, dextran, pullulan, fructan, locust bean gum, carrageenan, glycogen, glycosaminoglycans, murein, bacterial capsular polysaccharides, and derivatives thereof, with cellulose being preferred. The polysaccharide may be used as is, or
20 spinning may be used to generate or improve fibrous structure.

Cellulose is a preferred polysaccharide for use in the present invention. Sources of cellulose for use in this invention include the following: (a) wood fibers, such as from chemical pulps, mechanical pulps, thermal mechanical pulps, chemical-thermal mechanical pulps, recycled fibers, newsprint; (b) seed fibers, such as from cotton; (c) seed hull fiber, such
25 as from soybean hulls, pea hulls, corn hulls; (d) bast fibers, such as from flax, hemp, jute, ramie, kenaf; (e) leaf fibers, such as from manila hemp, sisal hemp; (f) stalk or straw fibers, such as from bagasse, corn, wheat; (g) grass fibers, such as from bamboo; (h) cellulose fibers from algae, such as velonia; (i) bacteria or fungi; and (j) parenchymal cells, such as from vegetables and fruits, and in particular sugar beets, and citrus fruits such as lemons, limes,
30 oranges, grapefruits. Microcrystalline forms of these cellulose materials may also be used. Preferred cellulose sources are (1) purified, optionally bleached, wood pulps produced from sulfite, kraft (sulfate), or prehydrolyzed kraft pulping processes, (2) purified cotton linters,

00739
80

and (3) fruits and vegetables, in particular sugar beets and citrus fruits. The source of the cellulose is not limiting, and any source may be used, including synthetic cellulose or cellulose analogs.

Cellulose is found in nature in several hierarchical levels of organization and orientation.

5 Cellulose fibers comprise a layered secondary wall structure within which macrofibrils are arranged. Macrofibrils comprise multiple microfibrils which further comprise cellulose molecules arranged in crystalline and amorphous regions. Cellulose microfibrils range in diameter from about 5 to about 100 nanometers for different species of plant, and are most typically in the range of from about 25 to about 35 nanometers in diameter. The microfibrils are
10 present in bundles which run in parallel within a matrix of amorphous hemicelluloses (specifically xyloglucans), pectinic polysaccharides, lignins, and hydroxyproline rich glycoproteins (includes extensin). Microfibrils are spaced approximately 3-4 nm apart with the space occupied by the matrix compounds listed above. The specific arrangement and location of the matrix materials and how they interact with the cellulose microfibrils is not yet fully
15 known.

For purposes of the present invention polysaccharide microfibrils refer to small diameter, high length-to-diameter ratio substructures which are comparable in dimensions to those of cellulose microfibrils occurring in nature. By way of non-limiting example, polysaccharide microfibrils may have diameters in the range of about 20 to about 100
20 nanometers, combined with lengths providing high aspect ratios, such as in excess of 100, in excess of 500, or in excess of 1,000. While the present specification and claims refer to microfibrils and microfibrillation, the scope of the present invention also includes nanofibrils (cellulosic or otherwise), and the rheology modification, stabilization, and other properties that may be obtained with microfibrils by practicing the present invention may also be
25 obtained using nanofibrils, either alone or in combination with microfibrils.

In nature many polysaccharides are not present in microfibril arrangements, however, by using fiber spinning techniques it is possible to manufacture fibers from these polysaccharides. In one embodiment of this invention it is contemplated that fibers spun from polysaccharides can be derivatized and microfibrillated into fibrous structures having
30 dimensions on the order of those found naturally in cellulose. Further background on the structure, functions, and biogenesis of native cellulose may be found in Haigler, C.H.,

00739-031099

8840
9T

Cellular Chemistry and Its Applications, Nevell, pp. 30-83 (1985), the entirety of which is hereby incorporated by reference.

The derivatized microfibrillar polysaccharide of the present invention is characterized by being in microfibrillar form, and by the presence of substituents that provide steric and/or electrostatic functionality. The amount of substituent present may be quantified by the degree of substitution, or DS, in the case of some anionic and cationic substituents, and by the molar substitution, or MS, in the case of steric substituents. The degree of substitution, which will vary with the molecular weight of the polysaccharide, is the average number of substituted hydroxyl groups per anhydrosaccharide unit, while the molar substitution is the average number of substituent groups added per anhydrosaccharide unit. The DS and MS determine the solubility of the derivatized polysaccharide, and may be readily adjusted to obtain a derivatized polysaccharide that is substantially insoluble in the environment of use, whether aqueous or non-aqueous. While the environment of use will frequently be aqueous, the derivatized microfibrillar polysaccharides of the present invention have utility in applications having other solvents or liquid carriers, such as paints, coating, lacquers, oil-rich foods, inks (including but not limited to ink-jet inks), personal care products, cosmetics, and water-in-oil emulsions.

Any suitable method may be used to obtain the derivatized microfibrillar polysaccharide. In particular, the steps of microfibrillation and derivatization to impart steric and/or electrostatic functionality to the polysaccharide may be carried out separately or combined to arrive at the end result. Therefore, a non-microfibrillar polysaccharide starting material may either be derivatized with anionic groups, with both anionic and cationic groups, or with a blend or mixture of anionic groups and cationic groups, and then microfibrillated, or may first be microfibrillated and then derivatized. Alternatively, if the starting material is microfibrillar polysaccharide, only the derivatizing step would be necessary, whereas if the starting material is a polysaccharide that has already been properly derivatized with anionic or both anionic and cationic groups, only the microfibrillation step is required.

The degree of substitution (for electrostatic derivatization), and/or of molar substitution (for steric derivatization), of the polysaccharide should be sufficiently low so that the derivatized microfibrillar polysaccharide will be substantially insoluble in the solvent or carrier that is present in the intended environment of use. In many applications the solvent or

5

10

15

25

30

9042
93

process whereby the substituents become sufficiently associated with the polysaccharide to provide the rheological and other benefits of the present invention, and may include, for example, adsorption. Finally, references to the combination of both anionic and cationic charge on the polysaccharide include the use of substituents that contain both types of charge (i.e., amphoteric and/or zwitterionic substituents); the combined use of substituents which individually contain only anionic or only cationic charge, resulting in derivatized polysaccharide with a distribution of substituents that includes both anionic groups and cationic groups; and, blending of two or more derivatized polysaccharides where at least one derivatized polysaccharide includes at least anionic substituents and at least one other derivatized polysaccharide includes at least cationic substituents, resulting in a blend that contains both anionically derivatized polysaccharide and cationically derivatized polysaccharide. However, "derivatized" does not include the naturally-occurring, de minimis presence of groups that would only provide the steric and/or electrostatic functionality required by the present invention at concentrations higher than those found in nature. For example, naturally-occurring cellulose may contain very low levels of anionic charge, which may still be present after microfibrillation. However, such microfibrillated cellulose is not "derivatized" as that term is used in the present application, both because its degree of substitution has not been changed from its natural state, and because the amount of charge present in such microfibrillated cellulose would not provide the benefits of the present invention.

The sequence of steps used to arrive at the derivatized microfibrillar polysaccharide of the present invention is not critical. Therefore, the starting material used to make the derivatized microfibrillar polysaccharide may be in microfibrillar or non-microfibrillar form. Similarly, the starting material may already be derivatized with steric and/or electrostatic substituents, or not. If the starting material is non-microfibrillar polysaccharide, substituents may be placed on the polysaccharide followed by microfibrillation, or the microfibrillation may be carried out first, followed by the placement of the substituents onto the resulting microfibrils. It is also acceptable to process polysaccharide into fibrils, place the substituents on the fibrils, and then further process the fibrils into microfibrils. Similarly, any non-microfibrillar form of polysaccharide which already contains such substituents may be processed into microfibrillar form. Moreover, derivatization and microfibrillation may be carried out simultaneously.

9143
94

It will be understood that most, if not all, polysaccharides will contain some quantity of both microfibrillar and non-microfibrillar structure both before and after processing, and that the ratio between the two structures may range from polysaccharide that is substantially completely microfibrillar, to polysaccharide that is substantially completely non-

5 microfibrillar. As used herein, the terms "microfibrillar", "microfibrillated", and the like include polysaccharides that are substantially completely microfibrillated, and those which may be substantially microfibrillated while containing minor but significant amounts of non-microfibrillar structure, provided the polysaccharide is sufficiently microfibrillated to confer the benefits afforded by the present invention.

10 Processes which minimize the energy needed to produce microfibrils from non-microfibrillar starting material, and/or which reduce the amount of water extracted during the process or at its end, are preferred. In this regard, it should be noted that while the derivatized microfibrillar polysaccharide of the present invention can be made by derivatizing a microfibrillated polysaccharide, the microfibrillation process generally requires less energy,

15 and/or is more efficient, if the polysaccharide has already been derivatized. Without being bound by theory, this may be because the presence of the steric and/or electrostatic functionalities on the polysaccharide 'loosens' the structure of fibril bundles.

The ability to use less energy not only offers cost savings, but results in less breakage of the polysaccharide microfibrils. Therefore, microfibrillating a polysaccharide that has

20 already been derivatized may result in a derivatized microfibrillar polysaccharide with relatively longer microfibrils as compared to effecting derivatization after microfibrillation. This is particularly significant because the energy required for microfibrillation can be significantly reduced by amounts of derivatization which are below the level that would render the resulting derivatized microfibrillar polysaccharide freely soluble in water. For

25 example, derivatization of cellulose resulting in a DS on the order of 0.1 or 0.2 will 'loosen' the fibril bundles in cellulose enough to permit microfibrillation using conventional shearing devices such as a homogenizer, impingement mixer, or ultrasonicator. These low DS cellulose microfibrils have diameters on the order of 50 nanometers combined with lengths of up to 500 microns, resulting in aspect ratios in excess of 1,000. While the low DS allows

30 microfibrillation, it is too low to allow the resulting material to be fully soluble in the solvent or carrier of use at the concentrations of interest. Without being bound by theory, the presence of insoluble regions in the fibers may explain the data showing maximum gel

60720" sheet 50

9244
85

formation at low DS's. These gels may be strengthened by weak association of the more hydrophobic unsubstituted regions.

The stabilization or derivatization is accomplished by the generation or placement of substituents onto the fibril and/or microfibril. It appears that the substituents become associated predominantly with the surface regions of the fibrils or microfibrils. Regardless of the precise mechanism, in functional terms microfibril-microfibril contact is inhibited by steric and/or electrostatic mechanisms or forces. The presence of the substituents also causes the microfibrils to occupy more volume than when they are not derivatized, possibly due to inhibition of contact along at least part of the length of the microfibrils. Rheological performance of the resulting derivatized microfibrillar polysaccharide is enhanced at low concentration since volume is better occupied and the materials are distributed more homogeneously.

With regard to use of steric force, steric functionality or stabilization is provided by the formation of a protective barrier or sheath around a particle (such as a cellulose fibril or microfibril) to prevent flocculation. For example, it may be achieved by a material, such as a polymer, being physically adsorbed on the surface of the particle, thereby preventing two particles from coming closer than a distance that is twice the sum of the radius of the particle and the thickness of the adsorbed layer. As two particles approach and the distance between them approaches the distance noted above, the adsorbed layers on two particles interact. This interaction, which as noted may be a polymer-polymer interaction, results in forces, such as osmotic and/or entropic forces, that repel the particles. This prevents flocculation of the two particles, providing stabilization. Because steric forces are generally provided by the size and/or configuration of the substituent, a substituent used to provide the polysaccharide with steric functionality or stabilization may be neutral, anionic, cationic, amphiphilic, amphoteric, and/or zwitterionic.

Without being bound by theory, the surfaces of the derivatized microfibrils appear to have some areas free of the substituents such that some limited interaction between microfibrils still takes place. Limited interaction may even be necessary to facilitate network formation, and may be a cause of the rheological attributes of interest such as yield stress, shear reversible gelation, and insensitivity of the modulus to temperature. It also appears that the length/diameter ratio, or aspect ratio, of the fibrils and microfibrils also contributes to the performance of the materials of the present invention.

93 45 86

Any suitable process may be used to generate or place the substituents on the polysaccharide. For convenience, the possible processes will generally be referred to collectively as "derivatization" herein; however, within the context of this invention, derivatization is used to mean any process which results in a polysaccharide (including fibrillar and microfibrillar polysaccharide) having the substituents sufficiently associated with the polysaccharide to provide the desired benefit(s), and includes not only chemical reactions resulting in covalent bonding, but also physical adsorption. In addition, the present application will refer both to "derivatization" and to "stabilization". Chemically, both terms refer to the same type of process, namely, the placement or generation of substituents on the cellulosic substrate. Functionally, "derivatization" is generally the broader term, as "stabilization" implies a functionality which is usually observed primarily or exclusively when the polysaccharide is in microfibrillar form.

Possible derivatization processes include any synthetic method(s) which may be used to associate the substituents with the polysaccharide. More generally, the stabilization or derivatization step may use any process or combination of processes which promote or cause the placement or generation of the substituents. For example, the conditions for treating non-microfibrillar polysaccharide should generally include both alkalinity and swelling of the polysaccharide, in order to make the surface of the fibrils more accessible to the placement or generation of the substituents. Alkalinity and swelling may be provided by separate agents, or the same agent may both provide alkalinity and cause swelling of the polysaccharide. In particular, alkaline agents often serve multiple purposes, in that they may catalyze the reaction between the polysaccharide and the substituent, optionally de-protonate the derivative, and swell open the polysaccharide structure to allow access of the reagents to carry out the derivatization.

Specific chemical methods which may be used to achieve the present invention include but are not limited to generation of anionic groups (such as carboxyl, sulfate, sulfonate, phosphonate, and/or phosphate); generation of both anionic and cationic groups (such as quaternary amine and/or amine); and generation of steric groups, on or near the surface of the particulate polysaccharide. Alkaline conditions are preferably obtained by using sodium hydroxide. Any material that functions as a solvent for the polysaccharide of choice may be used, and alternative alkaline agents include alkali metal or alkaline earth metal oxides or hydroxides; alkali silicates; alkali aluminates; alkali carbonates; amines, including aliphatic

94 46
97

hydrocarbon amines, especially tertiary amines; ammonium hydroxide; tetramethyl ammonium hydroxide; lithium chloride; N-methyl morpholine N-oxide; and the like. In addition to catalytic amounts of alkaline agent, swelling agents may be added to increase access for derivatization. Interfibrillar and intercrystalline swelling agents are preferred, particularly swelling agents used at levels which give interfibrillar swelling, such as sodium hydroxide at an appropriately low concentration.

These derivatization reactions, if carried out on the original fibrous polysaccharide structure, may require specific conditions to maximize the efficiency of location of the derivatization onto the surface of the polysaccharide. For example, in the case of cellulose from wood pulp the concentration of the swelling agent used appears to have an effect on the performance of the final cellulose. In particular, in using sodium hydroxide it has been determined that the level of the sodium hydroxide can have a significant effect on the rheological performance.

It is preferred that derivatization of these fibrous polysaccharides be performed in a manner which limits the formation of microfibrils which are soluble in the intended end use composition, as these may not contribute significantly to the desired rheological performance.

This typically limits the degree of derivatization which can be made where derivatization at higher levels would make the polysaccharide soluble in the end use composition. Specific limits may be readily determined based on the application in question, but as a matter of general guidance it is preferred that the degree of substitution (DS) be below about 0.5, or below about 0.35, or below about 0.2, or below about 0.18, or below about 0.1.

The derivatization may be carried out in any suitable manner, including but not limited to suspension in water; in organic solvent, either alone or in mixtures with water; in solution; and in high solids, either with water alone or with water and a minor amount of organic solvent. (For purposes of the present disclosure, "high solids" refers to a polysaccharide content of greater than about 25%.

Optional derivatizations or functionalities which may also be placed on the polysaccharide include but are not limited to short chain aliphatic and other hydrophobic-type substitutions; oligomeric and polymeric substitutions; uncharged substitutions, as for example short chain ethylene and propylene glycols; other associative-type functionality; surfactant-like functionality; methyl; ethyl; propyl; and combinations of these. These substitutions are optional in that they may not be intended for stabilization of the polysaccharide, and will

9547
98

instead provide additional functionality such as surface activity, emulsification power, adsorption characteristics, and the like.

5 The method for processing a non-microfibrillar form of polysaccharide into the microfibrillar form may be carried out either before or after the derivatization reaction. The preferred method involves the use of a homogenizer on a dilute suspension of the non-microfibrillar polysaccharide in an aqueous medium. The aqueous medium optionally may have additives such as swelling agents, in particular interfibrillar and/or intercrystalline swelling agents, for example sodium hydroxide, to aid in improving the ease of microfibril generation. A more preferred method of microfibrillation involves the use of mechanical
10 energy on an aqueous suspension of derivatized polysaccharide which has not been dried. Other microfibrillation processes include, by way of non-limiting example, use of an impingement mixer; heat; steam explosion; pressurization-depressurization cycle; freeze-thaw cycle; impact; grinding (such as a disc grinder); pumping; mixing; ultrasound; microwave explosion; and milling. Combinations of these may also be used, such as milling followed by
15 homogenization. Essentially any method of reducing particle size may be used, but methods for reducing particle size while preserving a high aspect ratio in the polysaccharide are preferred. As described previously, the degree of substitution of the polysaccharide also affects the ease of processing the polysaccharide to microfibrillar form.

20 The process to generate the particulate may either be run by the consumer in the final application such that the particulate is generated in situ, or be run as described above in aqueous media, the material dehydrated, and the resulting particulate dried. The dried particulate of this invention, hereafter referred to as the ready-to-gel or RTG form, can be rehydrated readily in polar solvents to obtain the desired rheological attributes. Dehydration can be accomplished by displacing water with less polar solvents and drying, and can be
25 accelerated by protonation or shielding of charged groups if they are present.

In terms of general properties, applications where the derivatized microfibrillar polysaccharide of the present invention have particular utility include those where the desired rheological attributes include at least one of yield stress, shear reversible gelation, and a modulus which is insensitive to temperature. The ability to provide the rheological attributes
30 described herein also makes it possible to provide stabilization of mixtures of liquids and solids having different densities; gel-like properties, including mouth feel; pumpable gels; stabilization at elevated temperatures; and, control of hydration and diffusion.

60720 9547 98

9648
99

In terms of more specific applications or fields of use, the utility of the present derivatized microfibrillar polysaccharides includes, without limitation, foods, personal care products, household products, pharmaceuticals, nutraceuticals, paper manufacture and treatment, coating compositions, water treatment, drilling fluids, agriculture, construction, and spill control and/or recovery.

In food applications, the derivatized microfibrillar polysaccharides of the present invention may be useful as rheology modifiers; as stabilizers, such as by inhibiting creaming or settling in suspensions; and as non-digestable dietary fiber. They may also be used to control ice crystal growth during, for example, ice cream manufacture and storage.

In personal care products, the derivatized microfibrillar polysaccharides may be used to stabilize emulsions, dispersions, suspensions, and foams, and may find use in creams, lotions, gels, and pastes, including those intended for epidermal application. Representative but not exhaustive examples include sunscreens; moisturizing or anti-aging creams and lotions; cleaning soaps or gels; antiperspirants and deodorants, including those in stick, pump spray, aerosol, and roll-on form; fragrance releasing gels; lipsticks, lip glosses, and liquid makeup products; oral care products, including toothpastes, tooth polishing and whitening agents, and denture care products such as cleaners and adhesives, and further including use in sorbitol, sorbitol-water mixtures, and glycerol-water mixtures; products where controlled, sustained, or delayed release of an ingredient would be desirable; wound care products, such as ointments (including anesthetic, antiseptic, and antibiotic ointments), dressings, and products such as ostomy rings where good liquid retention is desirable; and absorbent products, such as diapers. The present invention may have particular utility, not only in personal care products but in other applications, with products dispersed by a pumping action. The shear-reversible gelation exhibited by the derivatized microfibrillar polysaccharide is well suited for pump dispensing, and may be advantageously combined with its ability to stabilize emulsions, dispersions, and foams to improve the uniform delivery of product.

In the area of household products, the rheological properties of the present derivatized microfibrillar polysaccharides, and their ability to stabilize emulsions, dispersions, and foams, provide utility in areas such as detergents, shampoos, cleaners, and air fresheners. Specific examples include, without limitation, laundry products (including detergents, pre-spotting cleaners, and fabric treatment compositions, such as softeners); rug and upholstery shampoos; toilet bowl cleaners (particularly those dispensed in liquid or gel form); air

1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 2684 2685 2686 2687 2688 2689 2690 2691 2692 2693 2694 2695 2696 2697 2698 2699 2700 2701 2702 2703 2704 2705 2706 2707 2708 2709 2710 2711 2712 2713 2714 2715 2716 2717 2718 2719 2720 2721 2722 2723 2724 2725 2726 2727 2728 2

5

10

15

20

30

98-20
101

additives that increase the rate at which water is removed from a paper slurry on a paper machine. These additives increase machine capacity, and hence profitability, by allowing faster sheet formation. Anionically charged microfibrillar cellulosic derivatives are capable of greatly increasing drainage, either alone or in combination
5 with other charged polymers.

The derivatized microfibrillar cellulose of the present invention may also be used in coated papers, where cellulose derivatives may be used to control the rheology of the color coating and to provide water retention, thereby controlling the amount of liquid that permeates into the base sheet.

10 In coating compositions, such as paints and inks, the derivatized microfibrillar polysaccharides can provide rheology modification, improving properties such as spatter, leveling, sag resistance, flooding, and floating, and may have particular utility in gel paints. They may also improve pigment dispersion and/or stabilization, and function as charge control or flow control agents, including in inks, such as ink jet inks.

15 In the area of water treatment, the derivatized microfibrillar polysaccharides of the present invention can provide scale control, that is, inhibiting the formation and/or growth of inorganic deposits in aqueous systems; clarification; flocculation; sedimentation; coagulation; charge delivery; and softening.

In drilling fluids, the present derivatized microfibrillar polysaccharides can provide
20 rheology modification, reduce or prevent fluid loss, and improve secondary oil recovery.

In agricultural applications, the derivatized microfibrillar polysaccharides of the present invention can be used in soil treatment, and may provide moisture retention, erosion resistance, frost resistance, and controlled, sustained, or delayed release of agricultural materials such as fertilizers, pesticides, fungicides, and herbicides. They may also be used for
25 crop protection, such as to minimize or prevent frost damage.

In construction, the derivatized microfibrillar polysaccharides can be used in dry wall muds, caulks, water-soluble adhesives, and board manufacture.

In other areas, the derivatized microfibrillar polysaccharides can be used for control and cleanup of liquid spills, as absorbents for oil; in general, as stabilizers for emulsions,
30 dispersions, and foams (including but not limited to oil-in-water and water-in-oil emulsions); and for emulsification. Stability of commercial emulsions, such as paper size emulsions, is a recurring issue in industry. Current commercial emulsions include those which generally

60720-948420

99 51
102

consist of an oil, waxy, or rosin phase dispersed in water. These dispersions are generally stabilized by the addition of charged materials such as cationic starches, sodium lignin sulfonate, and aluminum sulfate. Such materials are generally added in amounts equal to about 10-20% by weight of the size component. The resulting dispersions are typically 0.2 to

5 2 micron particles, thought to be stabilized by charge repulsion, for example, with the positively charged starches on particle surfaces repelling each other.

One cause of emulsion failure is density-driven separation. This can be limited by increasing viscosity, or internal structure within the fluid. For example, an emulsion which maintains a viscosity of less than about 20 centipoise throughout a standard aging test might
10 have its viscosity increased initially by as much as 100 centipoise through addition of a viscosifier to the formulation, and still be within acceptable commercial viscosity, provided that the viscosity did not then increase over time to exceed acceptable limits.

One method to accomplish this result would be to use a viscosifying agent that does not cause a substantial increase in viscosity when first added to an emulsion formulation, but
15 which does provide an increase in viscosity during normal processing of the emulsion formulation to produce the emulsion. This can be accomplished by including, as an additive to the emulsion formulation, polysaccharide that has been derivatized as described herein but not yet microfibrillated. When the emulsion formulation is then subjected to energy, typically high shear, during the processing used to turn the emulsion formulation into an
20 emulsion, the shear will also microfibrillate the derivatized polysaccharide, resulting in the derivatized microfibrillar polysaccharide of the present invention, which will be present as part of the emulsion. The gel produced by the derivatized microfibrillar polysaccharide will then thin under shear stress but re-form when shear stops. Moreover, the insolubility of such low DS/MS polysaccharide may cause it to concentrate at the oil/water interface of oil-and-
25 water emulsions, rather than the aqueous bulk phase, which may be desirable.

Effectively the same result may be achieved by adding the derivatized microfibrillar polysaccharide of the present invention to an emulsion formulation, or to the final emulsion, or at any point during production of the emulsion. Further variations would include introducing derivatized polysaccharide that is only partially microfibrillated into the
30 emulsion-making process at a point where subsequent processing would provide sufficient energy to complete the microfibrillation. It may also be possible to accomplish some or all of the derivatization as part of the emulsion production process; for example, the emulsion

60720-54231260

10082
103

formulation may include a charged species that will adsorb onto the polysaccharide microfibrils, or such a species may be added during processing of the emulsion formulation, separately or in combination with the polysaccharide. Therefore, the derivatized microfibrillar polysaccharides of the present invention may serve as stabilizing additives to emulsions, with several process routes being available to accomplish this end result.

While the choice of method may cause some variation in the properties of the resulting emulsion, the basic benefit of improved emulsion stability should be achieved by any procedure which has, as its final result, the presence of the derivatized microfibrillar polysaccharide of the present invention in the final emulsion. Commercially, it may be desirable to supply customers with derivatized, non-microfibrillated polysaccharide as a powder which, when added to a formulation and subjected to high shear or other appropriate forms of energy, will microfibrillate and yield the derivatized microfibrillar polysaccharide of the present invention.

This improved emulsion stability may enable use of emulsion formulations which would not perform satisfactorily in the absence of the derivatized microfibrillar polysaccharide. Other benefits may include improved retention in paper, improved drainage of water from paper systems due to association of pulp and filler fines with the retained microfibrils, and resistance to emulsion breakage in the presence of high salt concentrations.

The subject electrostatically derivatized materials of this invention have also been discovered to provide rheology to aqueous systems over a wide pH range (namely from about 2.5 to 10 or higher) and ionic strength. This insensitivity to pH and ionic strength facilitates use in areas where low pH and high salt conditions exist, such as in personal care creams and lotions, food products, and the like.

In addition to the above, the derivatized microfibrillar polysaccharides of the present invention represent a vehicle for providing charge, whether anionic, cationic, or both, to a given environment. This may, as a representative example, have utility in water treatment, where charged particles are used to flocculate particulates and other contaminants.

The following examples indicate various possible methods for making and using the derivatized microfibrillar cellulose of present invention. These examples are merely illustrative, and are not to be construed as limiting the present invention to particular compounds, processes, conditions, or applications. Throughout this description, "gelling" is defined to occur when $G' > G''$, where G' is the dynamic storage modulus and G'' is the

10/83
104

dynamic loss modulus. This is the functional definition used in EP '011; for general background, see Ferry, J.D., Viscoelastic Properties of Polymers, John E. Wiley & Sons, NY, 1980.

Example 1 (Comparative): Microfibrillated, Non-Derivatized Cellulose.

- 5 The following three components were weighed into a one gallon jar at the following wt% levels:

	<u>Weight</u>	<u>Weight%</u>	<u>Dry Wt. Basis</u>	
	Bleached sulfate wood pulp (5.2% moisture) (Wayerhauser Company)	74.82g	2.11	2.00
10	Germaben® II biocide (Sutton Laboratories, New Jersey)	17.50g	0.49	0.49
	Deionized (DI) water	3445.58g	97.39	97.50

- 15 The cellulose quickly settled to the bottom of the jar when there was no agitation of the slurry. The jar was shaken to disperse the solids. The slurry was then processed in a dual stage Gaulin Model 15MR homogenizer. The secondary stage was set at about 1000psi and the primary stage was adjusted so that the total pressure was about 8000psi. The slurry was processed for a total of 3.5 hours. The resulting slurry had a much thicker consistency and the cellulose remained suspended. When this suspension was diluted to 1.0% solids in DI water, the resulting suspension was a viscous slurry which did not exhibit gel properties. Over time
- 20 the 1% suspension settled, leaving free water on the surface.

Example 2: Preparation and Microfibrillation of Carboxymethylcellulose I (CMC I).

- 25 Isopropanol (IPA) and DI water were charged to a nitrogen sparged, jacketed resin kettle equipped with an air driven stirrer, stainless steel agitator, two pressure equalizing addition funnels, a reflux condenser, nitrogen inlet, vacuum line and thermocouple. Sulfate wood pulp (approximately 400 μ m length) was added to the reactor and the mixture slurry was agitated for 10 minutes, after which the mixture was nitrogen sparged for 1 hour while cooling the slurry temperature to 15° C. The reactor was inerted. Aqueous 50% NaOH was slowly added to the reactor while maintaining the mixture slurry's temperature at about 15° C. The slurry was agitated for 1 hour after completion of caustic addition. Aqueous
- 30 monochloroacetic acid (80% MCA) was slowly added to the reactor by funnel while maintaining reaction slurry temperature at about 15°C. After MCA addition, the reaction slurry was heated to 70° C and held for 1.5 hours. The reaction slurry was cooled below 30° C and glacial acetic acid was added to the reactor. The reaction mixture was then aspirator

1028A
105

vacuum filtered with a sintered glass funnel and a rubber dam. The wetcake was slurried in 565g of 80% methanol for 15 minutes using an air driven stirrer and a grounded stainless steel beaker and then aspirator vacuum filtered with a sintered glass funnel and a rubber dam.

This was repeated two more times. The wetcake obtained from the previous three washes

- 5 was slurried in 1000g of pure methanol using an air driven stirrer and a grounded stainless steel beaker for 15 minutes to dehydrate and then aspirator vacuum filtered with a sintered glass funnel and rubber dam. The final wetcake was dried in a Lab-Line fluidized bed dryer (model number 23852) for 35 minutes (air-dry for 5 minutes, heat-dry at 50° C for 10 minutes, and heat-dry at 70° C for an additional 20 minutes) The carboxymethylcellulose
- 10 (CMC) product was ground using a Retsch Grinding Mill (model 2M1) with a 1mm screen. (Although the examples herein show washing of the product, the need for, or amount of, washing will depend on the intended application.)

Table 1: CMC I Recipes

(all weights in grams)

Sample #	Cellulose Length	Wt. Cellulose (dry wt. Basis)	Wt. IPA	Wt. H ₂ O	Wt. 50% NaOH (aq)	Wt. 80% MCA (aq)	Wt. Glacial Acetic Acid	DS
1	~400 µm	61.36	729	73.6	60	11.8	32.2	0.16
2	~400 µm	61.36	729	73.6	60	11.8	32.2	0.18

15

Preparation of CMC slurry: An 800 g 1% CMC slurry was made from each Sample in Table 1 using the following materials:

	<u>Weight</u>	<u>Weight%</u>
CMC	8.00 grams	1.0 ± 0.06%
Germaben ® II biocide	4.00 grams	0.5%
<u>Deionized water</u>	<u>788.00 grams</u>	<u>98.5 ± 0.06%</u>
Total	800.00 grams	

20

The container was closed and shaken to wet and disperse the CMC solids. The solids will settle if left standing, so the container was shaken just prior to pouring the slurry into the

25 homogenizer.

Homogenization of CMC slurries: The suspension was processed in the homogenizer equipped with an agitated feed pot as follows: the homogenizer was turned on before the

10385
106

slurry was loaded. An 800 gram slurry was processed for about 20 minutes at about 3000 psi by recycling the discharged stream from the homogenizer to the feed pot. Pressure was monitored and appropriate adjustments made to the primary stage handwheel to keep the total pressure at about 3000 psi. After the processing was completed, the discharge tube was
5 redirected so that the sample was collected and stored in a capped jar.

Rheological testing of microfibrillated CMC I: Each microfibrillated CMC sample prepared in Example 2 was then tested for rheological properties. Data was collected on a Bohlin CS Rheometer (Bohlin Instruments, Cranbury, New Jersey). Dynamic mechanical properties were measured including the dynamic storage modulus, the dynamic loss modulus,
10 complex viscosity, and yield stress.

Rheometer Test Conditions

Temperature Sweep: Measuring System: PP 40; 25° C - 65° C; Shear Stress: automatic; Frequency: 1 Hz; Temperature Ramp Rate: 5° C/60 seconds; Measurement Interval: 20 seconds; Gap: 1 mm.

Yield Stress Test: Measuring System: CP 4/40; Stress: 6.0E-02 - 1.0E+02; Sweep Time: 60.0 seconds; Number of Steps: 30; Temperature: Manual (25° C); No of measurements: 1; Measurement Interval: 5 seconds.

Stress Sweep Test: Measuring System: PP 40; Temperature: Manual (25 °C); Number of Measurements: 1; Gap: 1 mm; Measurement Interval: 5 seconds; Frequency: 1 Hz.

Table 2: Rheology of Microfibrillated CMC I

Sample #	Cellulose Length	DS of CMC I	Yield Stress (Pa)	G' @ 5.75 Pa (Pa)
1	~400 µm	0.16	8.08	256
2	~400 µm	0.18	Not Tested	192

A copy of the dynamic mechanical spectra (obtained by the stress sweep test) of Sample 1 is given in Figure 1.

Example 3: Preparation and Microfibrillation of Carboxymethylcellulose II (CMC II).

Isopropanol (IPA) and DI water were charged to a nitrogen sparged, jacketed resin kettle equipped with an air driven stirrer, stainless steel agitator, two pressure equalizing addition funnels, a reflux condenser, nitrogen inlet, vacuum line and thermocouple. Sulfate wood pulp (approximately 400 µm length) was added to the reactor, the mixture slurry was
25

1045
107

agitated for 10 minutes, after which the mixture was nitrogen sparged for 1 hour while cooling the slurry temperature to 15° C. The reactor was inerted. Aqueous 50% NaOH was slowly added to the reactor maintaining the mixture slurry's temperature at about 15° C. The slurry was agitated for 1 hour after completion of caustic addition. Aqueous

- 5 monochloroacetic acid (80% MCA) was slowly added to the reactor by funnel while maintaining reaction slurry temperature at about 15°C. After MCA addition, the reaction slurry was heated to about 70° C and held for 1.5 hours. The reaction slurry was cooled down to below 30° C and then aspirator vacuum filtered with a sintered glass funnel and a rubber dam. The wetcake was slurried in 565g of 80% methanol for 15 minutes using an air driven
- 10 stirrer and a grounded stainless steel beaker and then aspirator vacuum filtered with a sintered glass funnel and a rubber dam. This was repeated two more times. The wetcake obtained from the previous three washes was slurried in 1000g of pure methanol using an air driven stirrer and a grounded stainless steel beaker for 15 minutes to dehydrate and then aspirator vacuum filtered with a sintered glass funnel and rubber dam. The final wetcake was dried in
- 15 a Lab-Line fluidized bed dryer (model number 23852) for 35 minutes (air-dry for 5 minutes, heat-dry at 50° C for 10 minutes, and heat-dry at 70° C for an additional 20 minutes). The carboxymethylcellulose (CMC) product was ground using a Retsch Grinding Mill (model 2M1) with a 1mm screen.

Table 3: CMC II Recipes

(all weights in grams)

Sample #	Cellulose Length	Wt Cellulose (dry wt. basis)	Wt. IPA	Wt. H ₂ O	Wt. 50% NaOH (aq)	Wt. 80% MCA (aq)	DS
1	~400 µm	77.11	937.5	141.64	12.50	8.63	0.04
2	~400 µm	61.69	750	113.32	10.00	6.90	0.06
3	~400 µm	77.11	937.5	141.64	25.00	17.25	0.13
4	~400 µm	61.91	750	113.09	20.00	13.95	0.15
5	~400 µm	61.30	750	113.71	20.00	13.86	0.16
6	~400 µm	61.91	750	113.09	20.00	13.79	0.17
7	~400 µm	61.43	750	113.58	23.60	16.27	0.19
8	~400 µm	61.62	750	109.38	28.00	19.32	0.23

10587
108

Sample #	Cellulose Length	Wt Cellulose (dry wt. basis)	Wt. IPA	Wt. H ₂ O	Wt. 50% NaOH (aq)	Wt. 80% MCA (aq)	DS
9	~400 μ m	61.88	750	108.12	30.00	20.70	0.28
10	~400 μ m	61.43	750	106.08	35.00	24.15	0.31
11	~400 μ m	61.43	750	108.58	30.00	20.70	0.34
12	~200 μ m	62.60	750	116.41	12.00	8.28	0.10
13	~200 μ m	62.60	750	112.91	19.00	13.11	0.17

Slurry preparation and homogenizer processing were performed as in example 2.

Rheological testing was performed as described in example 2.

Table 4: Rheology of Microfibrillated CMC II

Sample #	Cellulose Length	DS of CMC I	Yield Stress (Pa)	G' @ 5.75 Pa (Pa)	G' @ 25 °C/50 °C (Pa)
1	~400 μ m	0.04	Not Tested	125	145/168
2	~400 μ m	0.06	Not Tested	139	161/160
3	~400 μ m	0.13	18.0	467	508/493
4	~400 μ m	0.15	Not Tested	467	441/429
5	~400 μ m	0.16	18.1	474	436/450
6	~400 μ m	0.17	34.7	436	452/462
7	~400 μ m	0.19	28.1	306	331/352
8	~400 μ m	0.23	21.4	148	137/145
9	~400 μ m	0.28	18.0	114	Not Tested
10	~400 μ m	0.31	14.7	12.9	12.3/12.6
11	~400 μ m	0.34	11.4	19	23.4/24.9
12	~200 μ m	0.10	8.08	339	Not Tested
13	~200 μ m	0.17	16.1	354	Not Tested

5

A copy of the dynamic mechanical spectra (obtained by the stress sweep test) of Sample 3 is given in Figure 2.

10658
105

Example 4: Preparation and Microfibrillation of Carboxymethylcellulose III (CMC III).

Isopropanol and DI water were charged to a nitrogen sparged, jacketed resin kettle equipped with an air driven stirrer, stainless steel agitator, two pressure equalizing addition funnels, a reflux condenser, nitrogen inlet, vacuum line and thermocouple. Sulfate wood pulp (approximately 400 μm length) was added to the reactor, the mixture slurry was agitated for 10 minutes, after which the mixture was nitrogen sparged for 1 hour while cooling the slurry temperature to about 15° C. The reactor was inerted. Aqueous NaOH (50% NaOH) was slowly added to the reactor maintaining the mixture slurry's temperature at about 15 ° C. The slurry was agitated for 1 hour after completion of caustic addition. Aqueous sodium monochloroacetate was prepared by mixing 80% MCA, 50% aqueous NaOH and DI water. This solution was slowly added to the reactor by addition funnel while maintaining reaction slurry temperature at about 15° C. After MCA addition, the reaction slurry was heated to about 70° C and held for 1.5 hours. The reaction slurry was cooled down to below 30° C and then aspirator vacuum filtered with a sintered glass funnel and a rubber dam. The wetcake was slurried in 565g of 80% methanol for 15 minutes using an air driven stirrer and a grounded stainless steel beaker and then aspirator vacuum filtered with a sintered glass funnel and a rubber dam. This was repeated two more times. The wetcake obtained from the previous three washes was slurried in 1000g of pure methanol using an air driven stirrer and a grounded stainless steel beaker for 15 minutes to dehydrate and then aspirator vacuum filtered with a sintered glass funnel and rubber dam. The final wetcake was broken into small particles using a rubber spatula and then dried in the fluidized bed dryer for 35 minutes. (Air-dry for 5 minutes, heat-dry at 50 ° C for 10 minutes and heat-dry at 70° C for an additional 20 minutes) The product was ground using the Retsch mill with a 1mm screen.

Table 5: CMC III Recipes

(all weights in grams)

Sample #	Cellulose Length	Wt Cellulose (dry wt. basis)	Wt. IPA	Wt. H ₂ O	Wt. 50% NaOH (aq)	NaMCA Solution			DS
						80% MCA	50% NaOH	H ₂ O	
1	~400 μm	61.88	750	117.12	6.39	8.28	5.61	3.0	0.06
2	~400 μm	61.88	750	114.32	9.38	12.14	8.22	5.0	0.12
3	~400 μm	61.62	750	113.38	12.58	16.27	11.02	10.0	0.16

10-289
10

Sample #	Cellulose Length	Wt Cellulose (dry wt. basis)	Wt. IPA	Wt. H ₂ O	Wt. 50% NaOH (aq)	NaMCA Solution			DS
						80% MCA	50% NaOH	H ₂ O	
4	~400 μ m	61.62	750	108.38	15.98	20.70	14.02	10.0	0.24
5	~400 μ m	61.62	750	105.88	18.64	24.15	16.36	10.0	0.29
6	~400 μ m	61.88	750	102.47	21.31	27.60	18.69	10.0	0.31
7	~200 μ m	62.60	750	116.41	6.39	8.28	5.61	10.0	0.08
8	~200 μ m	62.60	750	112.91	10.12	13.11	8.88	10.0	0.16
9	~200 μ m	62.60	750	110.61	12.57	16.28	11.03	10.0	0.21
10	~200 μ m	62.60	750	117.12	15.67	20.30	13.75	10.0	0.26

Slurry preparation and homogenizer processing were performed as in example 2 except for Sample #7, which was processed for 30 minutes. Rheological testing was performed as described in example 2.

5

Table 6: Rheology of Microfibrillated CMC III

Sample #	Cellulose Length	DS of CMC III	Yield Stress (Pa)	G' @ 5.75 Pa (Pa)	G' @ 25°C/50°C (Pa)
1	~400 μ m	0.06	14.7	281	316/310
2	~400 μ m	0.12	51.4	568	520/586
3	~400 μ m	0.16	28.1	564	607/649
4	~400 μ m	0.24	18.1	457	414/474
5	~400 μ m	0.29	21.4	298	292/303
6	~400 μ m	0.31	44.7	288	Not Tested
7	~200 μ m	0.08	4.70	238	Not Tested
8	~200 μ m	0.16	29.5	483	Not Tested
9	~200 μ m	0.21	18.1	339	Not Tested
10	~200 μ m	0.26	21.4	288	Not Tested

¹ 30 minute homogenizer processing time.

A copy of the dynamic mechanical spectra (obtained by the stress sweep test) of Sample 3 is given in Figure 3.

660720-94284260

10860
##

Example 5: CMC Preparation with Water Washing of Wetcake.

Isopropanol and DI water were charged to a nitrogen sparged, jacketed resin kettle equipped with an air driven stirrer, stainless steel agitator, two pressure equalizing addition funnels, a reflux condenser, nitrogen inlet, vacuum line and thermocouple. Sulfate wood pulp (approximately 400 μ m length) was added to the reactor, the mixture slurry was agitated for 10 minutes, after which the mixture was nitrogen sparged for 1 hour while cooling the slurry temperature to 15° C. The reactor was inerted. Aqueous NaOH (50% NaOH) was slowly added to the reactor maintaining the mixture slurry's temperature at about 15° C. The slurry was agitated for 1 hour after completion of caustic addition. Aqueous sodium monochloroacetate was prepared by mixing 80% MCA, 50% aqueous NaOH and DI water. This solution was slowly added to the reactor by addition funnel while maintaining reaction slurry temperature at about 15° C. After MCA addition, the reaction slurry was heated to about 70° C and held for 1.5 hours. The reaction slurry was cooled down to below 30° C and then aspirator vacuum filtered with a sintered glass funnel and a rubber dam. The wetcake was slurried in 650g of DI water for 15 minutes using an air driven stirrer and a grounded stainless steel beaker and then aspirator vacuum filtered with a sintered glass funnel and a rubber dam. This was repeated one additional time. The wetcake obtained from the previous two washes was slurried in 1000g DI water using an air driven stirrer and a grounded stainless steel beaker for 15 minutes and then aspirator vacuum filtered with a sintered glass funnel and rubber dam. The final wetcake was dried in the fluidized bed dryer for 35 minutes (air-dry for 5 minutes, heat-dry at 50° C for 10 minutes and heat-dry at 70° C for an additional 20 minutes). The product was ground using the Retsch mill with a 1mm screen.

Table 7: Water Washed CMC Recipes

(all weights in grams)

Sample #	Wt Cellulose (dry wt. Basis)	Wt. IPA	Wt. H ₂ O	Wt. 50% NaOH (aq)	NaMCA Solution			DS
					80% MCA	50% NaOH	H ₂ O	
1	61.88	750	110.5	10.12	13.11	8.88	10.0	0.10
2	60.06	750	110.5	10.12	13.11	8.88	10.0	0.13

Slurry preparation, homogenizer processing, and rheological testing were performed as described in example 2.

1096x
#12

Table 8 Rheology of Water Washed CMC Samples

Sample	DS of CMC	Yield Stress (Pa)	G' @ 5.75 Pa (Pa)
1	0.10	37.4	724
2	0.13	34.7	855

A copy of the dynamic mechanical spectra (obtained by the stress sweep test) of Sample 2 is given in Figure 4.

Example 6: High Solids Reactions.

- 5 Sulfate wood pulp (about 200 μ m length) was charged to an Abbey Ribbon Blender (model 0 RM, Paul O. Abbe, Inc., Little Falls, New Jersey) equipped with a spray nozzle. The reactor was sealed and the system was inerted with nitrogen under slow agitation. Agitation was increased to approximately 125 rpm and a solution of 50% aqueous NaOH and DI water was sprayed into the reactor. The mixture was mixed for one hour at ambient
- 10 temperature. An aqueous solution of sodium monochloroacetate (NaMCA) was sprayed into the reactor and the reactor temperature was increased to 75° C and held for 2 hours. Glacial acetic acid was sprayed into the reactor and the reactor was cooled to approximately 30° C. The product was slurried in 3 liters of water for 15 minutes and filtered using a rubber dam. This slurry/filtration process was repeated three additional times. The final filter cake was
- 15 dried in the fluidized bed dryer and ground in the Retsch mill using a 1 mm screen.

Table 9: High Solids Recipes

(all weights in grams)

Sample	Wt. Cellulose (dry wt. Basis)	Wt. H ₂ O	Wt. 50% NaOH (aq)	Wt. NaMCA (NaMCA/H ₂ O)	Acetic Acid	DS
1	500	93	62.8	105/128.3	0	0.10
2	180	64.8	43.2	45.3/55.4	8.6	0.17

- Slurry preparation: As in Example 2, except that Sample #2 (DS = 0.17) was worked up as a
- 20 10% solids slurry in water. This slurry was then mixed with more water and Germaben® II to make the new slurry which was processed in the homogenizer.

660720-91234250

110 62
113

	<u>Weight</u>	<u>Weight%</u>
10% CMC slurry	80.07 grams	10.00%
Germaben® II biocide	4.01 grams	0.50%
<u>Deionized water</u>	<u>716.88 grams</u>	<u>89.50%</u>
5 Total	800.96 grams	

Since the final slurry is 10% by weight of a 10% CMC slurry, the actual CMC level is the normal 1% by weight. Homogenization was performed as in Example 2 except that Sample #1 was processed for 25 minutes, and rheological testing was performed as in example 2.

Table 10: Rheology of High Solids Samples

Sample	DS of CMC	Yield Stress (Pa)	G' @ 5.75 Pa (Pa)
1	0.10	18.1	248
2	0.17	31.4	427

A copy of the dynamic mechanical spectra (obtained by the stress sweep test) of Sample 2 is given in Figure 5.

Example 7: Preparation of Ready-to-Gel Microfibrillated CMC.

Gels were made as described in the slurry preparation and homogenization processing steps in Example 2 using CMC II as made in example 3 (DS about 0.16). The gels were then processed as follows (the following description pertains to Sample #1 in Table 11, and a similar procedure was used for all of the other samples):

Approximately 2800 ml of isopropyl alcohol was added to a grounded 12 quart stainless steel (SS) beaker. The IPA was stirred at the top speed of an overhead stirrer driven by house air. A SS cowls blade on a SS shaft was used to stir the IPA. about 1400 grams of 1% CMC II gel was slowly added to the stirring IPA. The material ratio was 2 ml IPA/1 gram gel. It took about 5 minutes to add the gel to the IPA. The beaker was covered with plastic film and the slurry was stirred for ten minutes.

When ten minutes had passed, the slurry was filtered through a synthetic straining cloth. The slurry was filtered using gravity. The slurry was covered with plastic film during the filtration to reduce IPA evaporation. Occasionally the gel on the cloth was stirred with a plastic spatula to help speed filtration. When it appeared that the filtration had gone about as far as it could, the wet cake was transferred back to the 12 quart SS beaker.

111 63
H4

Approximately 2800 ml of fresh IPA was added to the beaker and the slurry was again stirred for ten more minutes with the cowls blade/air stirrer. The slurry was then filtered on a 20 cm Büchner funnel with #415 VWR filter paper. The wet cake was transferred to a glass crystallization dish. The dish and wet cake were placed into an 80° C oven under vacuum overnight for drying. The sample was dried to constant weight. The solids were ground in a Waring Blender.

The dehydrated gels were examined by rehydration as follows: a premix of DI water and Germaben® II was prepared.

		<u>Weight</u>	<u>Weight%</u>
10	Deionized water	788.00 grams	99.49%
	Germaben® II biocide	4.00 grams	0.51%

The water/Germaben® II solution was then weighed into a small Waring blender cup along with the Ready-to-gel dry CMC according to the recipes in Table 11. The blender cup was covered and the sample was mixed until it appeared to be homogeneous. The resulting gel was transferred to a glass jar. It was then shaken on a vortex mixer.

Rheological testing was performed as described in example 2.

Table 11: Rheology of RTG CMC

Sample	Wt. % water/Germaben® II	Wt% RTG CMC	Yield Stress (Pa)	G' @ 5.75 Pa (Pa)
1	99.75	0.25	2.4	5.61
2	99.5	0.50	10.7	68.6
3	99.0	1.00	25.7	328
4	98.5	1.50	51.0	731
5	98.0	2.00	95.3	1400

A copy of the dynamic mechanical spectra (obtained by the stress sweep test) of Sample 1 through 5 are given in Figures 6 through 10, respectively.

Example 8A: Acid Process for Preparation of Ready-to-Gel Microfibrillar CMC.

A gel as prepared in example 3 was acidified using HCl to adjust the pH to about 2.7. The gel was centrifuged to remove about 60% of the water. The concentrated gel was then converted to RTG form by mixing with IPA equivalent to 2 times the weight of the gel,

11264
HS

followed by filtration on a Büchner funnel and a second mix with another 2 times weight of IPA. The wet cake was dried in a vacuum oven.

The dried solids were rehydrated at 1% in water/Germaben® II biocide. A small amount of baking soda was added and the sample was mixed on the blender. Viscosity rose gradually with stirring and the sample became gel-like. The pH was about 6.9.

Rheological testing was performed as described in example 2. G' @ 5.75 Pa: 226 Pa, Yield Stress: 17.4 Pa. A copy of the dynamic mechanical spectra (obtained by the stress sweep test) is given in Figure 11.

Example 8B: Acid Process for Preparation of Ready-to-Gel Microfibrillar CMC.

A second batch of gel as made in example 3 had its pH adjusted to about 2.7 with concentrated HCl. The sample was centrifuged and about 62% of the water was removed. About 97g of concentrated gel was slurried with 150 ml IPA. The pH was adjusted to 7.0 during the stirring of the slurry by addition of a small amount of baking soda. The slurry was filtered on a Büchner funnel, and half of the wet cake (Sample A) was weighed into a crystallization dish for drying. For Sample B, the other half of the wet cake was reslurried in about 75 ml IPA. This wet cake was filtered on a Büchner funnel and was pressed with rubber dam to remove as much IPA as possible. Both wet cakes were dried to constant weight under vacuum, and the solids were ground up in a Waring blender.

Sample A was mixed with water for a total solids level of 1%, and gelled quickly. The pH was about 5.8. Sample B gelled quickly when stirred in water at a solids level of 1%.

Rheological testing was performed as described in example 2.

Sample A: G' @ 5.75 Pa: 471 Pa, Yield Stress: 34.0 Pa. A copy of the dynamic mechanical spectra (obtained by the stress sweep test) is given in Figure 12.

Sample B: G' @ 5.75 Pa: 403 Pa, Yield Stress: 35.7 Pa. A copy of the dynamic mechanical spectra (obtained by the stress sweep test) is given in Figure 13.

Example 9: Derivatization of Microfibrillar Cellulose.

Isopropanol (602.8g) and DI water (86.4g) were charged to a nitrogen sparged, jacketed resin kettle equipped with an air driven stirrer, stainless steel agitator, two pressure equalizing addition funnels, a reflux condenser, nitrogen inlet, vacuum line and thermocouple.

Microfibrillated cellulose of Example 1 was vacuum filtered with a sintered glass funnel and a rubber dam. The wetcake was slurried in 565g of 80% isopropanol (IPA) for 15 minutes using an air driven stirrer and a grounded stainless steel beaker and then aspirator vacuum

000000-000000

113⁹⁵
+16

filtered with a sintered glass funnel and a rubber dam. This was repeated two more times. The wetcake obtained from the previous three washes was slurried in 1000g of pure IPA using an air driven stirrer and a grounded stainless steel beaker for 15 minutes to dehydrate and then aspirator vacuum filtered with a sintered glass funnel and rubber dam. The resulting wet cake, comprised of 36g microfibrillated cellulose, 228g IPA, and 36g DI water was added to the reactor, the mixture slurry was agitated for 10 minutes, after which the mixture was nitrogen sparged for 1 hour while cooling the slurry temperature to 15° C. The reactor was inerted. Aqueous 50% NaOH (10.52g) was slowly added to the reactor maintaining the mixture slurry's temperature at about 15° C. The slurry was agitated for 1 hour after completion of caustic addition. Aqueous monochloroacetic acid (7.26g of 80% aq MCA) was slowly added to the reactor by funnel while maintaining reaction slurry temperature at about 15° C. After MCA addition, the reaction slurry was heated to about 70° C and held for 1.5 hours. The reaction slurry was cooled down to below 30° C and then aspirator vacuum filtered with a sintered glass funnel and a rubber dam. The wetcake was slurried in 565g of 80% methanol for 15 minutes using an air driven stirrer and a grounded stainless steel beaker and then aspirator vacuum filtered with a sintered glass funnel and a rubber dam. This was repeated two more times. The wetcake obtained from the previous three washes was slurried in 1000g of pure methanol using an air driven stirrer and a grounded stainless steel beaker for 15 minutes to dehydrate and then aspirator vacuum filtered with a sintered glass funnel and rubber dam. The final wetcake was dried in the fluidized bed dryer for 35 minutes (air-dry for 5 minutes, heat-dry at 50° C for 10 minutes and heat-dry at 70° C for an additional 20 minutes). The product was ground using the Retsch mill with a 1mm screen. DS of the resulting material was 0.14.

A 1% aqueous suspension of the product was mixed in a Waring blender for 15 minutes. This produced a viscous suspension which did not settle with time.

Slurry preparation: Same as in example 2. Homogenization was performed as in example 2, except where otherwise stated, and rheological testing was performed as in example 2.

Yield Stress: 5.75 Pa, G' @ 5.75 Pa: 363 Pa. A copy of the dynamic mechanical spectra (obtained by the stress sweep test) is given in Figure 14.

Example 10: Alternative Cellulose.

CMC was produced as in example 3 using the cellulose source and recipe in Table 12.

660722-9-28-2000

11466
117

Table 12: Alternative Cellulose Recipe

(all weights in grams)

Sample	Cellulose Source	Wt Cellulose (dry wt. basis)	Wt. IPA	Wt. H ₂ O	Wt. 50% NaOH (aq)	Wt. 80% MCA (aq)	DS
1	Avicel® pH-101NF (-90)	62.01	750	113.49	19.00	13.11	0.16
2	Solka® Flocc (1)	61.23	750	114.27	19.00	13.11	0.19
3	CTMP (2)	54.5	750	121	19.00	13.11	0.22

(1) Solka Flocc (grade 300 FCC) obtained from Fiber Sales & Development Corp., Urbana, Ohio.

(2) Bleached CTMP (Chemical Thermomechanical Pulp) Fluff obtained from SCA Graphic Sundsvall AB, Timra, Sweden

Slurry preparation of the Solka Flocc sample (Sample 2) was prepared as in Example 2.

Homogenizer processing was performed as in Example 2, and rheological testing was performed as in Example 2.

Table 13: Rheology

Sample	Cellulose Source	DS of CMC	Yield Stress ¹ (Pa)	G' @ 5.75 Pa (Pa)
2	Solka Flocc	0.19	22.4	141

¹ From yield stress test/ from stress sweep test.

A copy of the dynamic mechanical spectra of sample 2 is given in Figure 15.

Example 11: Microfibrillation of CMC with Impingement Mixer.

The samples used were 0.5%, 1.0% and 1.5% suspensions of low DS CMC prepared as in Example 3. Each slurry weighed a total of 100 grams. No Germaben® II biocide was used in the samples processed in the impingement mixer. The slurries were prepared by weighing the components into four ounce glass jars. The jars were capped and shaken to wet and disperse the CMC solids.

	Sample #1 (0.5%)	Sample #2 (1.0%)	Sample #3 (1.5%)
CMC	0.50 grams	1.0 grams	1.5 grams
DI water	99.5 grams	99.0 grams	98.5 grams

115.67
+18

A Microfluidics Corporation Model M110 Series impingement mixer was flushed with DI water prior to use. The pressure was adjusted to the desired setting as the water was pumped. The impingement mixer was run such that the DI water was pumped until it was just at the bottom of the charge funnel. A heating bath used to control the temperature of the

5 impingement mixer piping was set at 50° C.

The sample jar was shaken again just before charging the sample funnel. The sample was charged into the funnel. An electric overhead stirrer was in the sample funnel. This was turned on to help keep the CMC homogeneously suspended. After the first pass, the stirrer is not needed. The sample was pumped through the microfluidizer and out into a collection jar.

10 The material initially collected which contains the initial DI residue was discarded. Processing was then continued until the entire sample had been processed for 1 pass through the equipment.

The 0.5% solids gel was processed at 6000 psi for 4 passes. The 1.0% solids gel was processed under the same conditions. The 1.5% solids gel was processed at 6000 psi for just 3

15 passes.

Table 14: Rheology of Impingement Mixer Microfibrillated CMC

Sample	Cellulose Length	DS of CMC	Yield Stress (Pa)	G' @ 5.75 Pa (Pa)	G' @ 25°C/50°C (Pa)
1	~400 µm (0.5% solids gel)	0.17	4.82	79.3	97/109
2	~400 µm (1.0% solids gel)	0.17	Not Tested	270	222/242
3	~400 µm (1.5% solids gel)	0.17	Not Tested	522	363/434

A copy of the dynamic mechanical spectra (obtained by the stress sweep test) of Samples 1 through 3 are given in Figures 16 through 18.

20 **Example 12: Microfibrillated Hydrophobically Modified Carboxymethyl Cellulose (HMCMC)**

Tert-butyl alcohol (TBA, 750 g) and Hercules CMC 7H (DS of about 0.7, 100 g) were charged to a nitrogen sparged, jacketed resin kettle equipped with an air driven stirrer, stainless steel agitator, two pressure equalizing addition funnels, a reflux condenser, nitrogen

25 inlet, vacuum line and thermocouple. The mixture was nitrogen sparged for 1 hour at 25 E C. Aqueous NaOH (54 g of 7.5% NaOH) was slowly added to the reactor maintaining the

660720-374260

116 88
719

mixture slurry's temperature at about 25° C. The slurry cooled to about 15E C and was agitated for 1 hour at about 15E C. A 50% solution of cetyl glycidal ether (40 g of solution) was slowly added to the reactor by addition funnel while maintaining reaction slurry temperature at about 15° C. The reaction slurry was heated to about 80° C and held for 3.25 hours. The reaction slurry was cooled down to about 50° C and 9 g of 70% nitric acid was added. The mixture was cooled to about 30E C and then aspirator vacuum filtered with a sintered glass funnel and a rubber dam. The wetcake was slurried in 1000 g of 85% acetone for 15 minutes using an air driven stirrer and a grounded stainless steel beaker and then aspirator vacuum filtered with a sintered glass funnel and a rubber dam. This was repeated two additional times. The wetcake obtained from the previous three washes was slurried in 1000g of 100% acetone using an air driven stirrer and a grounded stainless steel beaker for 15 minutes and then aspirator vacuum filtered with a sintered glass funnel and rubber dam. The final wetcake was dried in the fluidized bed dryer for 35 minutes. (Air-dry for 5 minutes, heat-dry at 50° C for 10 minutes and heat-dry at 70° C for an additional 20 minutes) The product was ground using the Retsch mill with a 1mm screen. The cetyl content of the resulting product was # 0.03 wt.%.

Slurry preparation, homogenizer processing, and rheological testing were performed as described in example 2. $G' @ 5.75 \text{ Pa}$: 319 Pa, Yield Stress: 14 Pa. A copy of the dynamic mechanical spectra (obtained by the stress sweep test) is given in Figure 19.

While the use of hydrophobically modified derivatized microfibrillar cellulose has been demonstrated herein by a particular example, for purposes of the present invention a derivatized microfibrillar cellulose may be hydrophobically modified by carbon groups having from about 4 to about 30 carbons.

Example 13: Microfibrillated Hydroxyethylcellulose (HEC).

Sulfate wood pulp, tert-butyl alcohol (TBA), acetone, isopropanol (IPA) and DI water were charged to a nitrogen sparged, agitated Chemco reactor (3 pint reactor, Chemco, Tulsa, OK). The reactor was inerted with nitrogen and the reaction slurry temperature was adjusted to 20E C. Aqueous NaOH (50% NaOH) was added to the reactor and the mixture was agitated for 45 minutes at 20 E C. Ethylene oxide (EO) was charged to the reactor over a period of about 5 minutes, maintaining the reaction slurry at 20E C. After EO addition, the reaction slurry was heated to 50E C and maintained at 50E C with agitation for about 45 minutes. The reaction slurry was then heated to about 90E C and maintained at 90E C with

117 69
x20

agitation for 30 minutes. The reaction slurry was cooled to about 50E C and 70% nitric acid was added. The reaction slurry was cooled to below 30E C and then aspirator vacuum filtered with a sintered glass funnel and a rubber dam. The wetcake was slurried in 600g of 80% acetone for 15 minutes using an air driven stirrer and a grounded stainless steel beaker and then aspirator vacuum filtered with a sintered glass funnel and a rubber dam. This was repeated two additional times. The wetcake obtained from the previous three washes was slurried in 600g of 100% acetone water using an air driven stirrer and a grounded stainless steel beaker for 15 minutes and then aspirator vacuum filtered with a sintered glass funnel and rubber dam. The final wetcake was dried in the fluidized bed dryer for 35 minutes (air-dry for 5 minutes, heat-dry at 50° C for 10 minutes and heat-dry at 70° C for an additional 20 minutes). The product was ground using the Retsch mill with a 1mm screen.

Table 15:HEC Recipes

(all weights in grams)

Sample #	Cellulose	TBA	IPA	Acetone	H ₂ O	50% NaOH	EO	70% Nitric Acid	MS
1	46.0	517.8	8.6	7.9	63.5	13.0	16.1	14.6	0.7
2	49.77	517.8	8.6	7.9	59.73	12.7	10.6	14.6	0.8
3	49.77	517.8	8.6	7.9	59.73	13.0	19.5	14.6	1.3

Slurry preparation and homogenizer processing were performed as in example 2, except that fewer passes were required to process to a gel.

Table 16: Rheology of Microfibrillated HEC

Sample	MS of HEC	Yield Stress (Pa)	G' @ 5.75 Pa (Pa)
1	0.7	1.66	43.6
2	0.8	3.65	10.3
3	1.3	2.98	2.96

A copy of the dynamic mechanical spectra (obtained by the stress sweep test) of Samples 1 through 3 are given in Figures 20 through 22.

Drainage Aids in Paper Manufacture: the following examples demonstrate the effectiveness of derivatized microfibrillar polysaccharide as a drainage-improvement aid.

11870
121

Drainage measurements were performed on a Canadian Standard Freeness (CSF) tester, using a bleached kraft pulp consisting of 70% hardwood and 30% softwood. All freeness testing was performed in hard water having a pH of 7.95-8.05, alkalinity of 50 ppm (as calcium carbonate), and hardness of 100 ppm (as calcium carbonate) using TAPPI method T 227 om-92. A pulp consistency of 0.3% was used. Higher CSF values indicate better (faster) drainage.

The following results were obtained using RTG microfibrillated CMC prepared in example 7, which has a degree of substitution of about 0.17 charge group per anhydroglucose unit. All loadings are calculated as percent of additive (dry basis) relative to pulp.

10 **Example 14: RTG CMC Sample Material Alone.**

	% RTG	
	CMC Material	
	(based on pulp)	CSF
	0	210
15	0.025	274
	0.050	285
	0.100	315
	0.200	317

20 **Example 15: RTG CMC Sample Material and Hercules Reten® 1232 (R-1232).**

		CSF VALUES	
	% RTG Material	0.1%	0.2%
	(based on pulp)	R-1232	R-1232
	0	380	462
	0.1	485	591
25	0.2	526	608
	0.4	587	637
	0.6	572	671

30 **Example 16: RTG CMC Sample Material and Hercules Kymene® 557H resin (K-557H).**

A constant 2:1 ratio of K-557H to material was employed. (Kymene is a registered trademark of Hercules Incorporated.) Two different starting pulps were used, one with a relatively high freeness, and one relatively low.

119 9/22

	% RTG Material (based on pulp)	% K-557H	Pulp 1 CSF	Pulp 2 CSF
	0	0	184	413
	0.1	0.2	281	531
5	0.2	0.4	321	565
	0.4	0.8	382	574

Example 17: RTG CMC Material and Hercules Kymene 450 resin (K-450).

A constant 2:1 ratio of K-450 to sample material was employed. Two different starting pulps were used, one with a relatively high freeness, and one relatively low.

	% RTG Material (based on pulp)	% K-450	Pulp 1 CSF	Pulp 2 CSF
	0	0	184	413
	0.1	0.2	285	536
	0.2	0.4	335	546
10	0.4	0.8	357	562

As with ordinary CMC, the sample material extends the wet and dry strength activity of additives such as Hercules Kymene 557H or Kymene 450 resin. Thus an advantage of the use of the sample material is the provision of a combined wet strength/dry strength/drainage/retention aid.

20 **Use in paper sizing compositions:** the following examples relate to use CMC II as made in example 3 having a DS of about 0.15 in connection with compositions used in paper sizing.
Example 18.

A 600 ml beaker was used to combine 66.0 grams of Precis® 787 ketene dimer (available from Hercules Incorporated, Wilmington, Delaware; Precis is a registered trademark of Hercules Incorporated), 1.5g of CMC II (as made in example 3, DS about 0.15), and 232.5 grams of DI water. The pre-mix was dispersed by stirring for two minutes using a Tekmar Ultra-turax SD45 rotor-stator high shear mixer (Tekmar Company, Cincinnati, Ohio) at a power setting of 50. This pre-mix was then quickly poured into the feed chamber of the impingement mixer. With mechanical stirring at about 250 RPM, premix was passed through the impingement mixer with its pressure set at 5000 psi. The emulsion was collected and a second pass was made. The second pass product was collected in a clean jar, a stir bar was added, the jar was capped, and then cooled in a 5 to 15°C water bath.

17072
X23

Example 19.

Same as Example 18, using 66.0 g Precis ketene dimer, 1.5g of the sample material, 66.0g of 50% aluminum sulfate ($18\text{H}_2\text{O}$) solution in water, and 166.5 g DI water.

Example 20.

- 5 Same as Example 18, using 66.0 g Precis ketene dimer; 1.5g of the sample material; 132.0g of a solution containing 25% (wt) aluminum sulfate ($18\text{H}_2\text{O}$), deionized water, and sufficient alkalinity to raise the pH to 4.0; and 100.5 g DI water.

Example 21.

- 10 Same as Example 18, using 66.0 g Precis ketene dimer; 75.0g of a 2% solution of CMC 7M (DS of 0.7) (Hercules Incorporated, Wilmington DE) in deionized water; and 132.0g of a solution containing 25% (wt) aluminum sulfate ($18\text{H}_2\text{O}$), deionized water, and sufficient alkalinity to raise the pH to 4.0; and 27.0 g DI water.

Example 22.

- 15 3.0g of CMC II (as made in example 3, DS about 0.15) were dispersed in 465g DI water for 5 minutes using the high shear mixer at a power setting of 50, then given three passes through the impingement mixer at 5000 psi. As in Example 18, 66.0 g Precis ketene dimer were combined with 234.0 g of the sample material in DI water gel, stirred using the high shear mixer at a power setting of 50, then given two passes through the impingement mixer at 5000 psi and cooled.

20 **Example 23.**

4.0g of CMC II (as made in example 3, DS about 0.15) was dispersed in 400g DI water for 5 minutes using the high shear mixer at a power setting of 50, then given three passes through the Microfluidizer at 5000 psi to give a gel.

- 25 In an 8 ounce wide mouth jar, 176.0 grams of Precis 787 ketene dimer and 224.0 grams of DI water were combined. The pre-mix was sheared in the high shear mixer for 5 minutes at a power setting of 50, then quickly poured into the feed chamber of the impingement mixer. With mechanical stirring at about 250 RPM, the premix was passed twice through the impingement mixer set at 5000 psi

- 30 150.0 g of the gel made above was combined with 150.0 g Precis ketene dimer 44% emulsion, and stirred 5 minutes using the high shear mixer at a power setting of 50.

660723-0109260

121 73
124

Example 24.

In an 8 ounce wide mouth jar, 66.0 grams of Precis 787 ketene dimer, 1.5g of pre-sheared, solvent exchange dried material as made in Example 7 (DS of about 0.16), and 232.5 grams of DI water were combined. The pre-mix was sheared in the high shear mixer for 5 minutes at a power setting of 50, then quickly poured into the feed chamber of the impingement mixer. With mechanical stirring at about 250 RPM, the premix was passed through the impingement mixer at 5000 psi. The emulsion was collected and a second pass was made. The second pass product was collected in a clean jar, a stir bar was added, and the jar was capped and cooled in a 5 to 15°C water bath.

10 The following pages provide testing results for the sample emulsions using TAPPI Standard Method T560:

660720-94234260

Table 17: Surface Sizing of Example 18 through Example 24 Size Emulsions
(formulation weight in grams)

Example #	18	19 ¹	20	21	(Pre-shear)		
					(MF gel)	(MF gel)	(RTG)
Precis 787	66.00	66.00	66.00	66.00	66.00	66.00	66.00
Microfibrillated CMC	1.50	1.50	1.50		1.50	1.50	1.50
50% Alum		66.00					
25% Alum pH 4.0			132.00	132.00			
2% CMC 7M				75.00			
DI Water	232.50	166.50	100.50	27.00	232.50	232.50	232.50
Total	300.0	300.0	300.0	300.0	300.0	300.0	300.0
Rotor-stator Shearing	2 min.@ 50	2 min.@ 50	2 min.@ 50	2 min.@ 50	2 min.@ 50	2 min.@ 50	5 min.@ 50
Impingement Mixer Shearing	2X @ 5kpsi	2X @ 5kpsi	2X @ 5kpsi	2X @ 5kpsi	2X @ 5kpsi		2X @ 5kpsi
Rotor-stator Gel Shearing					5 min.@ 50	5 min.@ 50	
Impingement Mixer Gel Shearing					3X @ 5kpsi	3X @ 5kpsi	


¹Examples 19 and 23 gave emulsions which broke overnight and were not suitable for surface sizing the next day. The failure of Example 19 is most likely due to low pH resulting from the presence of the 50% alum, and can be corrected by raising the pH of the alum. Without being bound by any particular theory, it is known that aluminum can appear in a polymeric form, and so may form a co-acervate, at higher pH. In general, the pH of the alum, poly-aluminum chloride, or other aluminum salts should preferably be as near as possible to the pKa of the derivatized microfibrillar cellulose. Thus, in Example 18 the addition of low pH 50% alum solution gave an emulsion with poor stability, while similar recipes in Examples 18 and 20, made without alum or with alum whose pH had been raised to pH 4.0, gave good emulsions. In Example 23, adding the microfibrillated gel without a second impingement mixer shearing as in Example 22 gave an emulsion which was not stable overnight, and thus could not be size tested the next day.

Handwritten signature/initials

123⁷⁸
+28

The emulsions from Examples 18, 20, 21, 23, and 24 were then tested in sizing compositions, and the results are shown in Chart 1. The procedure used to obtain this data was as follows: all samples were made with 5% (wt.) D-150 starch (Grain Processing Corp., Muscatine, IA). Five pieces of paper and a wet pick-up sheet for each run were size pressed using a wet nip size press. Each sheet was dry pressed with a drum dryer at 220 °F ± 5 °F for 20 seconds. The weight of wet the pick-up sheet was determined before and after the size press to give wet pick-up percent. Hercules Size Testing (HST) was performed on each paper sheet (5 per run) utilizing TAPPI procedure T560.

Chart 1

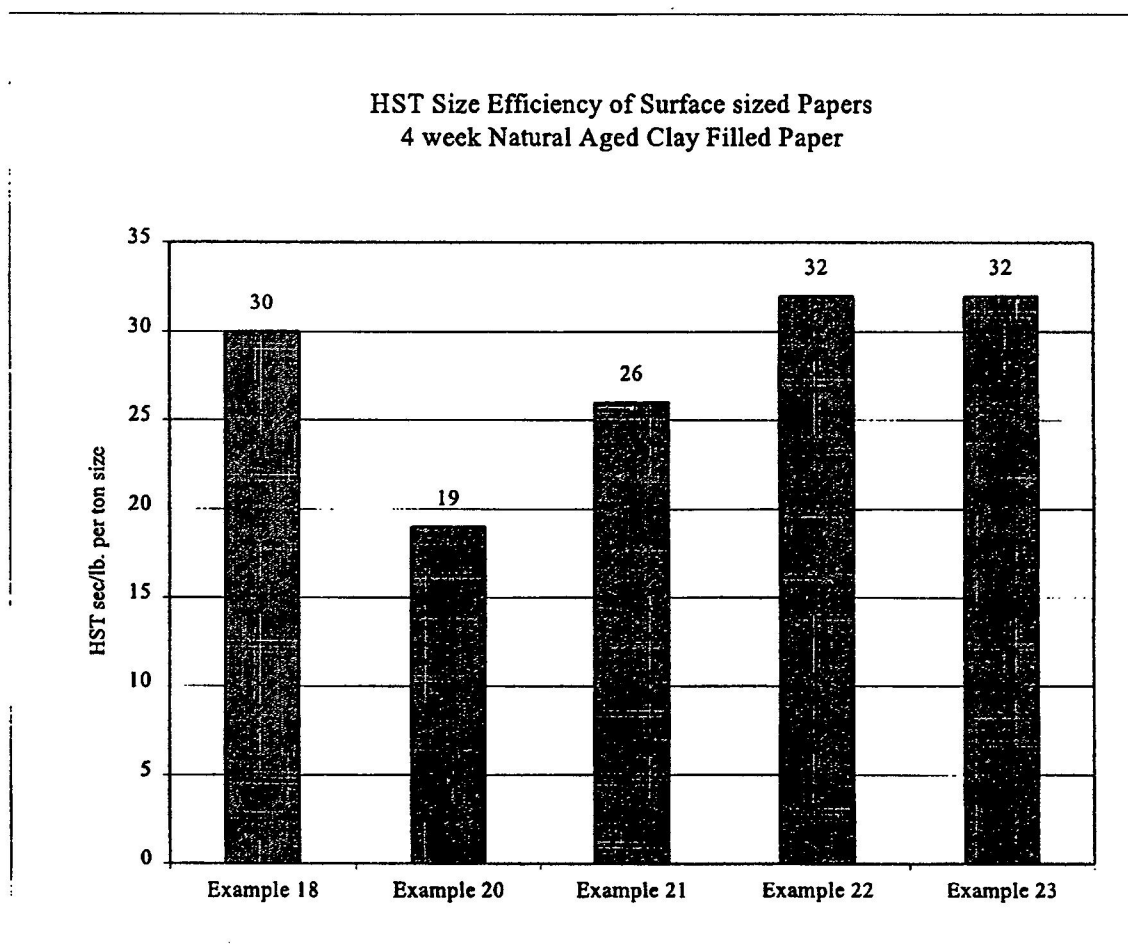

10

Examples 25 - 27.

A series of emulsions was made using Aquapel® 364 sizing agent rather than Precis ketene dimer as the size, with the formulations shown in Table 18. In each case the sample

12476
+27

was sonicated on a Branson 350 Ultrasonicator at a power setting of 6. Samples of fine paper were made on a continuous Fourdrinier-type machine, using the emulsions and sizing tested after 100 hours natural aging using a standard HST ink resistance test (TAPPI Method T-530) using a 1% formic acid ink. Chart 2 shows the HST sizing results, which show the samples to be at least as good as or better than three commercial controls using Hercon® paper sizing agent.

Table 18

	Example 25	Example 26	Example 27
Aquapel 364 (1)	10	10	10
Carrageenan 2% (2)	50		
CMC II (prepared in Example 3, DS about 0.15)		1	
Ambergum® CMC 2% (3)			50
pH 4 Alum	20	20	20
Reten® 203 20% (4)	5	5	5
Biocide AMA 415	0.02	0.02	0.02
Water	14.98	63.98	14.98

(1) Aquapel 364 Ketene Dimer sizing agent - Hercules Incorporated

(2) Carrageenan - GenuGel® Carrageenan Type LC-5, Hercules Incorporated

(3) Ambergum - Type 99-3021, Hercules Incorporated


(4) Reten 203 - Cationic resin, Hercules Incorporated

(Ambergum, Aquapel, Hercon, Genugel, and Reten are registered trademarks of Hercules Incorporated)

12577
128

Chart 2

AKD Emulsions in Unfilled Fine Paper
0.06% Size (wt) based on pulp, 4 day Natural Aged

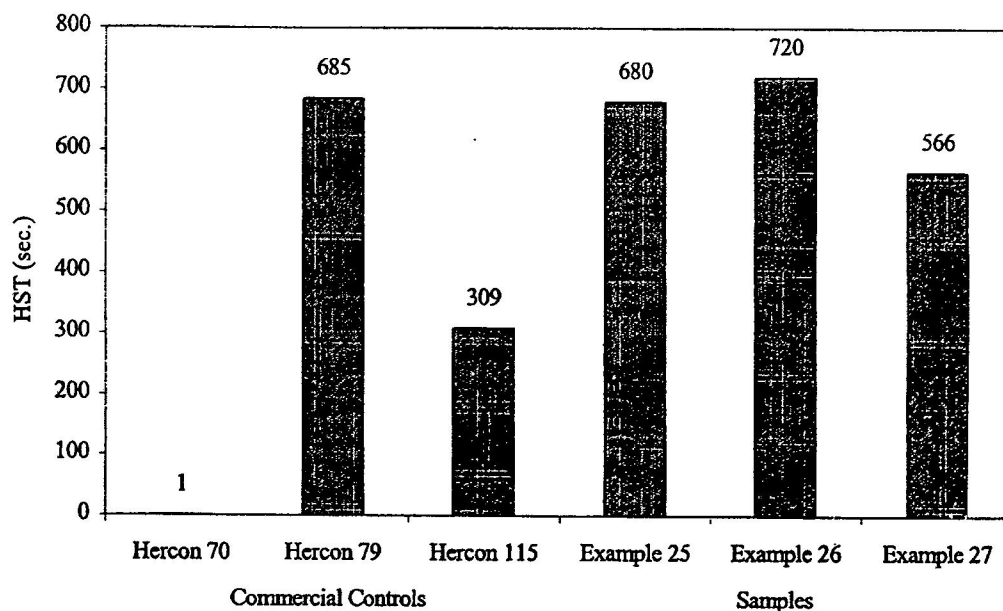

Papermaking

The paper used in the sizing examples was made at pH 7 from a 75:25 blend of hardwood and softwood pulps beaten to a Canadian standard freeness of 525 and formed into sheets having a basis weight of 65.1 g/m². Hercon 70, Hercon 79, and Hercon 115 sizing agents were all added at 0.06%, based on the pulp (corresponding to 1.2 pounds per ton). Laboratory water was used, having a hardness of 50 ppm, an alkalinity of 25 ppm, and a pH of 8.1 - 8.4.

Use in food and personal care compositions: the following examples relate to the use or derivatized microfibrillar polysaccharides in food and personal care products.

Example 28: use as fat replacer, viscosifier in food applications.

Fat Free Mayonnaise Model System

Ingredients (wt. %)	1	2	3
RTG Microfibrillated CMC	0.8		
Microfibrillated CMC		0.8	
water	76.2	76.2	77.0
starch (Pureflo)*	4.0	4.0	4.0
maltodextrin	10.0	10.0	10.0

Ingredients (wt. %)	1	2	3
salt	2.0	2.0	2.0
vinegar (12% acetic acid)	4.0	4.0	4.0
egg yolk	3.0	3.0	3.0
viscosity (cps)	42000	45000	6000

Procedure 1: RTG Microfibrillated CMC prepared in example 7 above (DS about 0.16)

Procedure 2: to a 1% microfibrillated CMC gel as made in example 3 above (DS about 0.16) the balance of the water was added. Starch and maltodextrin were then added with agitation. The mixture was heated to 80° - 90° C followed by cooling to 15° - 20° C. Egg yolk then vinegar were added. The product was then mixed by means of a colloid mill. The texture of this product is then evaluated after 24 hours.

25 Evaluation: viscosity was measured with a Brookfield (Model DV-II+), 20° C, helipath, 5 rpm spindle C, program S93.

The appearance of the product containing either RTG Microfibrillated CMC or Microfibrillated CMC is that of a gel that holds its shape for a period of time when cut and does not synerese. When a portion of the product is lifted with a spoon or spatula, it does not appear to have stringiness or excessive tackiness; the texture is described as short. These are subjective textural features similar to that of reduced fat spoonable dressings and mayonnaises.

12789
130

Example 29: use in personal care products.

Moisturizing Lotion

Phase	Ingredient	Wt %
A	DI water	81.85
	Hydrophobe Modified Hydroxyethyl Cellulose (Natrosol® Plus 330, Hercules Incorporated)	0.24
	Glycerin	2.00
	Disodium ethylene diamine tetraacetic acid	0.05
B	Petrolatum	5.00
	Mineral Oil	3.00
	Glycol Stearate	2.00
	Isostearyl Benzoate	2.00
	Paraffin	2.00
	Dimethicone	0.50
	RTG microfibrillar CMC as in example 7 (DS about 0.16)	0.36
C	Germaben® II (preservative)	1.00

Procedure: the Part A ingredients were combined, mixed until the water-soluble polymer dissolved, and heated to 60-65 °C. All Part B ingredients were combined except the microfibrillar CMC, and heated to 60-65 °C until homogeneous. The RTG microfibrillar CMC was then dispersed into part B, and part B was added to part A with vigorous agitation, which was continued until the mixture was smooth and homogeneous. It was then cooled to 30 °C, and part C was added.

12080
131

Properties

pH.....5.7

Viscosity* (cP) at 25 °C.....16,600

Appearance.....Milky-white emulsion

5 Stability.....> 5 weeks at 50 °C

*Complex viscosity in the linear viscoelastic regime was measured with a Bohlin controlled stress rheometer.

This example demonstrates the ability of the RTG CMC material to stabilize an oil in water emulsion, performing a role typically performed by surfactant/cosurfactant network

10 forming systems.

Night Cream

Phase	Ingredient	Wt %
A	DI water	78.3
	Glycerin	2.00
	Germaben® II (preservative)	0.50
	Hydrophobically Modified Hydroxyethyl Cellulose (Natrosol® Plus 330, Hercules Incorporated)	0.72
B	Avocado Oil	4.00
	Isostearyl Isostearate	4.00
	Octyl Stearate	3.00
	Isopropyl Myristate	3.00
	Propylene Glycol Isostearate	4.00
	RTG Microfibrillar CMC as in example 7 (DS about 0.16)	0.48

Procedure: the ingredients for part A were combined and mixed until the water-soluble polymer dissolved. The ingredients for part B were then combined, and part B was added to

650720-97284260

1298/32

part A with vigorous agitation, which was continued until the mixture was smooth and homogeneous.

Properties

pH.....6.0
 5 Viscosity* (cP) at 25 °C.....30,200
 Appearance.....Creamy white emulsion
 Stability.....> 5 weeks at 50 °C

*Complex viscosity in the linear viscoelastic regime was measured with the Bohlin rheometer.

10 This example demonstrates the ability of the RTG CMC material to stabilize an oil in water emulsion, performing a role typically performed by surfactant/cosurfactant network-forming systems. The RTG CMC also is processed at room temperature, while typical surfactant/cosurfactant systems require heat.

Alpha-Hydroxy Acid Anti-Age Cream

Phase	Ingredient	Wt %
A	DI water	71.9
	Glycerin	5.4
B	Cetyl Alcohol	3.2
	Glyceryl Stearate and PEG-100 Stearate (Arlacel 165, ICI)	4.8
	Stearic Acid	1.6
	Isopropyl Palmitate	4.8
	Mineral Oil and Lanolin Alcohol (Amerchol L-101, Amerchol)	4.8
	Dimethicone	1.6
	RTG Microfibrillar CMC as made in example 7 (DS about 0.16)	0.6

6607.20-974260

13082
133

Phase	Ingredient	Wt %
C	Lactic Acid (88%)	0.3
	Germaben® II (preservative)	1.0

(As used herein, "anti-age" refers to that category of epidermal lotions and creams intended to contribute to a more youthful appearance by the user, such as by the reduction or removal of wrinkles.) Procedure: The ingredients for part A were combined and heated to 75 °C. The part B ingredients, except RTG microfibrillar CMC, were then combined and heated to 75 °C until homogeneous. The RTG microfibrillar CMC was then dispersed into part B. Part B was next added to part A until the mixture became smooth and homogeneous. The mixture was then cooled to 40 °C, and part C was added. This composition was formulated at pH 3.5-4.0, and stabilized with microfibrillar CMC rather than with typical xanthan, clay mixtures.

Properties

pH.....3.7

Viscosity* (cP) at 25 °C.....932,000

Appearance.....Glossy white, stiff cream

Stability.....> 5 weeks at 50 °C

*Complex viscosity in the linear viscoelastic regime was measured with the Bohlin rheometer.

This example demonstrates the ability of the RTG CMC material to stabilize an oil in water emulsion at low pH.

High SPF Organic Sunscreen Cream

Phase	Ingredient	Wt %
A	DI water	63.9
B	Cetearyl Alcohol and Cetearyl Phosphate (Crodafos CES, Croda)	6.6
C	Benzophenone-3	5.0
	Octyl methoxycinnamate	7.5
	Octyl Salicylate	5.0

131 83
+34

Phase	Ingredient	Wt %
C	Menthyl Anthranilate	5.0
	Octyl Stearate	5.0
D	RTG Microfibrillar CMC as in example 7 (DS about 0.16)	0.3
E	NaOH, 18%	0.6
F	Butylated hydroxytoluene	0.1
	Germaben® II (preservative)	1.0

Procedure: The ingredients for part A and part B were combined and heated to 70 °C. Part C was then added separately, mixing after addition of each part C ingredient. Part D was then added with vigorous agitation, which was continued until the mixture became smooth and homogeneous. Part E was then added, the mixture was cooled to 45 °C, and part F was added.

Properties

pH.....5.9

Viscosity* (cP) at 25 °C.....613,000

Appearance.....Light, off-white cream

Stability.....> 5 weeks at 50 °C

*Complex viscosity in the linear viscoelastic regime was measured with the Bohlin rheometer.

This example demonstrates use of microfibrillated CMC with organic sunscreen.

Formulation of a TiO₂ Based Sunscreen Lotion

Phase	Ingredient	Wt %
A	DI water	67.2
	Disodium ethylene diamine tetraacetic acid	0.1
	Propylene Glycol	5.0
B	C ₁₂₋₁₅ Alkyl Benzoate	3.0

1328A
135

Phase	Ingredient	Wt %
B	Butyl Stearate	3.0
	Myristyl Myristate	4.0
	Sorbitan Oleate	0.1
	RTG Microfibrillar CMC as in example 7 (DS about 0.16)	0.6
C	Germaben® II (preservative)	1.0
D	Titanium Dioxide	6.0
	Octyl Palmitate	9.0
	Polyglyceryl-10 decaoleate	1.0

Procedure: the ingredients for part A were combined and heated to 50 °C. All of the part B ingredients, except microfibrillar CMC, were combined and heated to 60-65 °C until homogeneous. The microfibrillar CMC was then dispersed into part B, which was then added to part A with vigorous agitation, and agitation was continued until the mixture was smooth and homogeneous. The ingredients for part D were combined and mixed well. Part C was added to the AB emulsion; then, with moderate agitation, part D was slowly added to the emulsion and cooled to 30 °C.

Properties

pH.....7.1
 Viscosity* (cP) at 25 °C.....33,900
 Appearance.....Glossy, white emulsion gel
 Stability.....> 5 weeks at 50 °C

*Complex viscosity in the linear viscoelastic regime was measured with the Bohlin rheometer.

- 15 This example demonstrates use of microfibrillated CMC with inorganic sunscreen. The present invention has of necessity been discussed herein by reference to certain specific methods and materials. The enumeration of these methods and materials was merely illustrative, and in no way constitutes any limitation on the scope of the present invention. It is to be expected that those skilled in the art may discern and practice variations of or

660720-97337260

13385
136

alternatives to the specific teachings provided herein, without departing from the scope of the present invention.

The present invention has of necessity been discussed herein by reference to certain specific methods and materials. The enumeration of these methods and materials was merely
5 illustrative, and in no way constitutes any limitation on the scope of the present invention. It is to be expected that those skilled in the art may discern and practice variations of or alternatives to the specific teachings provided herein, without departing from the scope of the present invention.

660720-94284260

13486
137

WHAT I/WE CLAIM IS:

1. A derivatized microfibrillar polysaccharide, derivatized to comprise substituents that provide electrostatic and/or steric functionality, wherein said electrostatic functionality comprises anionic charge.
- 5 2. The derivatized microfibrillar polysaccharide of claim 1, wherein the polysaccharide in said derivatized microfibrillar polysaccharide comprises at least one of cellulose, hemicellulose, chitin, chitosan, guar gum, pectin, alginate, agar, xanthan, starch, amylose, amylopectin, alternan, gellan, mutan, dextran, pullulan, fructan, locust bean gum, carrageenan, glycogen, glycosaminoglycans, murein, bacterial capsular polysaccharides, and derivatives thereof.
- 10 3. The derivatized microfibrillar polysaccharide of claim 2, wherein said polysaccharide is at least one of cellulose, chitin, chitosan, pectin, agar, starch, carrageenan, and derivatives thereof.
- 15 4. The derivatized microfibrillar polysaccharide of claim 3, comprising derivatized microfibrillar cellulose.
- 20 5. The derivatized microfibrillar polysaccharide of claim 4, wherein said cellulose is obtained from at least one of chemical pulps, mechanical pulps, thermal mechanical pulps, chemical-thermal mechanical pulps, recycled fibers, newsprint, cotton, soybean hulls, pea hulls, corn hulls, flax, hemp, jute, ramie, kenaf, manila hemp, sisal hemp, bagasse, corn, wheat, bamboo, velonia, bacteria, algae, fungi, microcrystalline cellulose, vegetables, and fruits.
- 25 6. The derivatized microfibrillar polysaccharide of claim 5, wherein said cellulose is obtained from at least one of purified, optionally bleached wood pulps produced from sulfite, kraft, or prehydrolyzed kraft pulping processes; purified cotton linters; fruits; and vegetables.
- 30 7. The derivatized microfibrillar cellulose of claim 4, comprising at least one of hydroxyethyl cellulose, ethylhydroxyethyl cellulose, carboxymethylcellulose, carboxymethylhydroxyethyl cellulose, hydroxypropylhydroxyethyl cellulose, methyl cellulose, methylhydroxypropyl cellulose, methylhydroxyethyl cellulose, carboxymethylmethyl cellulose, hydrophobically modified carboxymethylcellulose, hydrophobically modified hydroxyethyl cellulose, hydrophobically modified hydroxypropyl cellulose, hydrophobically modified ethylhydroxyethyl cellulose,

600720-948460

135 87
138

- hydrophobically modified carboxymethylhydroxyethyl cellulose, hydrophobically modified hydroxypropylhydroxyethyl cellulose, hydrophobically modified methyl cellulose, hydrophobically modified methylhydroxypropyl cellulose, hydrophobically modified methylhydroxyethyl cellulose, hydrophobically modified
- 5 carboxymethylmethyl cellulose, nitrocellulose, cellulose acetate, cellulose sulfate, cellulose vinyl sulfate, cellulose phosphate, and cellulose phosphonate.
8. The derivatized microfibrillar cellulose of claim 4, wherein said derivatized microfibrillar cellulose forms a gel throughout the concentration range of between about 0.01 % and about 100% in water.
- 10 9. The derivatized microfibrillar cellulose of claim 8, wherein said derivatized microfibrillar cellulose forms a gel throughout the concentration range of between about 0.01 % and about 50 % in water.
10. The derivatized microfibrillar cellulose of claim 4, wherein said derivatized microfibrillar cellulose forms a gel at at least one point in the concentration range of
- 15 from about 0.05 % up to about 0.99% in water.
11. The derivatized microfibrillar polysaccharide of claim 1, further comprising a solvent, wherein said derivatized microfibrillar polysaccharide is substantially insoluble in said solvent.
12. The derivatized microfibrillar polysaccharide of claim 11, wherein said solvent is
- 20 water, alcohol, or oil.
13. The derivatized microfibrillar polysaccharide of claim 12, wherein said solvent is water.
14. The derivatized microfibrillar polysaccharide of claim 13, wherein said derivatized microfibrillar polysaccharide is derivatized to comprise substituents that provide
- 25 electrostatic functionality.
15. The derivatized microfibrillar polysaccharide of claim 1, wherein said derivatized microfibrillar polysaccharide is derivatized microfibrillar cellulose having a degree of substitution of less than about 0.5.
16. The derivatized microfibrillar polysaccharide of claim 15, wherein said degree of
- 30 substitution is less than about 0.35.
17. The derivatized microfibrillar polysaccharide of claim 16, wherein said degree of substitution is less than about 0.2.

607223 3144260

136-88
139

18. The derivatized microfibrillar polysaccharide of claim 17, wherein said degree of substitution is less than about 0.18.
19. The derivatized microfibrillar polysaccharide of claim 18, wherein said degree of substitution is less than about 0.1.
- 5 20. The derivatized microfibrillar polysaccharide of claim 15, wherein said degree of substitution is between about 0.02 and about 0.5.
21. The derivatized microfibrillar polysaccharide of claim 20, wherein said degree of substitution is between about 0.05 and about 0.2.
22. The derivatized microfibrillar polysaccharide of claim 1, derivatized to comprise
10 substituents that provide electrostatic functionality in the form of anionic charge, wherein the degree of substitution representing substituents that provide electrostatic functionality in the form of anionic charge is at least about 0.02.
23. The derivatized microfibrillar polysaccharide of claim 1, wherein said anionic charge
15 is provided by carboxyl, sulfate, sulfonate, phosphonate, or phosphate groups, or combinations thereof.
24. The derivatized microfibrillar polysaccharide of claim 14, wherein said electrostatic functionality is provided by both anionic and cationic charge.
25. The derivatized microfibrillar cellulose of claim 24, wherein said electrostatic
20 functionality is provided by substituents that contain both anionic and cationic charge in the same substituent.
26. The derivatized microfibrillar cellulose of claim 24, wherein said electrostatic functionality is provided both by substituents having anionic charge and by substituents having cationic charge.
27. The derivatized microfibrillar polysaccharide of claim 13, wherein said derivatized
25 microfibrillar polysaccharide is derivatized to comprise substituents that provide steric functionality.
28. The derivatized microfibrillar polysaccharide of claim 27, having a molar substitution of less than about 3.0.
29. The derivatized microfibrillar polysaccharide of claim 28, wherein said molar
30 substitution is less than about 1.5.
30. The derivatized microfibrillar polysaccharide of claim 29, wherein said molar substitution is less than about 1.0.

660720 94284260

137 89
140

31. The derivatized microfibrillar polysaccharide of claim 30, wherein said molar substitution is less than about 0.5.
32. The derivatized microfibrillar polysaccharide of claim 28, wherein said molar substitution is between about 0.5 and 3.0.
- 5 33. The derivatized microfibrillar polysaccharide of claim 27, wherein said substituents comprise at least one of hydroxyethyl groups; hydroxypropyl groups; methyl groups; ethyl groups; straight- or branched-chain alkyl, alkenyl, or alkynyl groups having from about 4 to about 30 carbons; aryl, arylalkyl, arylalkenyl, cyclic, and herterocyclic hydrocarbons having from about 4 to about 30 carbons; or combinations thereof.
- 10 34. The derivatized microfibrillar polysaccharide of claim 33, further wherein said derivatized microfibrillar polysaccharide is a derivatized microfibrillar cellulose.
35. The derivatized microfibrillar cellulose of claim 4, comprising carboxymethylcellulose.
- 15 36. The derivatized microfibrillar cellulose of claim 34, having a degree of substitution of less than about 0.35.
37. The derivatized microfibrillar cellulose of claim 36, wherein said degree of substitution is less than about 2.0.
38. The derivatized microfibrillar cellulose of claim 37, wherein said degree of substitution is between about 0.02 and about 0.2.
- 20 39. The derivatized microfibrillar cellulose of claim 38, wherein said degree of substitution is between about 0.10 and about 0.2.
40. The derivatized microfibrillar polysaccharide of claim 4, wherein said derivatized microfibrillar cellulose forms a gel at a concentration of less than about 1% in water.
- 25 41. Microfibrillar carboxymethylcellulose having a degree of substitution of between about 0.10 and about 0.20.
42. A comestible composition of matter comprising derivatized microfibrillar polysaccharide derivatized to comprise substituents that provide electrostatic and/or steric functionality, wherein said electrostatic functionality is provided by anionic charge.
- 30 43. The comestible composition of matter of claim 42, in the form of a low fat, reduced fat, or fat-free mayonnaise.

13890
LAT

- 507-23-50
44. The comestible composition of matter of claim 42, in the form of a salad dressing.
45. The comestible composition of matter of claim 42, further comprising a pharmaceutically active ingredient.
- 5 46. The comestible composition of claim 45, wherein said derivatized microfibrillar polysaccharide at least partially provides controlled, sustained, or delayed release of said pharmaceutically active ingredient.
47. A non-comestible composition of matter comprising derivatized microfibrillar polysaccharide derivatized to comprise substituents that provide electrostatic and/or steric functionality, wherein said electrostatic functionality is provided by anionic charge.
- 10 48. The non-comestible composition of matter of claim 47, in the form of a wound care product.
49. The non-comestible composition of matter of claim 48, wherein said wound care product is a wound dressing.
- 15 50. The non-comestible composition of matter of claim 48, wherein said wound care product is an ostomy ring.
51. The non-comestible composition of matter of claim 47, in the form of a skin care lotion or cream.
52. The non-comestible composition of matter of claim 47, in the form of a sunscreen lotion or cream.
- 20 53. The non-comestible composition of matter of claim 47, in the form of an oral care composition.
54. The non-comestible composition of matter of claim 53, wherein said oral care product is a toothpaste.
- 25 55. The non-comestible composition of matter of claim 47, further comprising a fertilizer, herbicide, fungicide, or pesticide.
56. The non-comestible composition of matter of claim 55, wherein said derivatized microfibrillar polysaccharide at least partially provides controlled, sustained, or delayed release of said fertilizer, herbicide, or pesticide.
- 30 57. The non-comestible composition of matter of claim 47, in the form of a drilling fluid.

139-91
142

58. A paper composition comprising derivatized microfibrillar cellulose derivatized to comprise groups that provide electrostatic and/or steric functionality, further wherein said electrostatic functionality comprises the presence of anionic charge.
59. The paper composition of claim 58, wherein said derivatized microfibrillar cellulose is microfibrillar carboxymethylcellulose.
60. A method for producing derivatized microfibrillar polysaccharide, said method comprising at least one of the following:
- a) a derivatizing step of treating a microfibrillar polysaccharide to obtain a derivatized microfibrillar polysaccharide;
 - b) a microfibrillizing step of treating a derivatized non-microfibrillar polysaccharide to produce a derivatized microfibrillar polysaccharide; or,
 - c) microfibrillizing and derivatizing a non-microfibrillar polysaccharide substantially simultaneously,
- wherein said derivatized microfibrillar polysaccharide is derivatized to comprise substituents that provide electrostatic and/or steric functionality, further wherein said electrostatic functionality is provided by anionic charge.
61. The method of claim 60, wherein the polysaccharide is at least one of cellulose, hemicellulose, chitin, chitosan, guar gum, pectin, alginate, agar, xanthan, starch, amylose, amylopectin, alternan, gellan, mutan, dextran, pullulan, fructan, locust bean gum, carrageenan, glycogen, glycosaminoglycans, murein, bacterial capsular polysaccharides, and derivatives thereof.
62. The method of claim 61, wherein said polysaccharide is at least one of cellulose, chitin, chitosan, pectin, agar, starch, carrageenan, and derivatives thereof.
63. The method of claim 62, wherein the polysaccharide is cellulose and said derivatized microfibrillar polysaccharide is derivatized microfibrillar cellulose.
64. The method of claim 63, wherein said cellulose is obtained from at least one of chemical pulps, mechanical pulps, thermal mechanical pulps, chemical-thermal mechanical pulps, recycled fibers, newsprint, cotton, soybean hulls, pea hulls, corn hulls, flax, hemp, jute, ramie, kenaf, manila hemp, sisal hemp, bagasse, corn, wheat, bamboo, velonia, bacteria, algae, fungi, microcrystalline cellulose, vegetables, and fruits.

14092
743

65. The method of claim 64, wherein said cellulose is obtained from at least one of purified, optionally bleached wood pulps produced from sulfite, kraft, or prehydrolyzed kraft pulping processes; purified cotton linters; fruits; and vegetables.
66. The method of claim 60, comprising the steps of:
- 5 a) derivatizing cellulose with monochloroacetic acid or a salt thereof under alkaline conditions to produce carboxymethylcellulose;
- b) suspending the carboxymethylcellulose in water to form a suspension; and
- c) homogenizing said suspension to produce microfibrillated carboxymethylcellulose.
- 10 67. The method of claim 60, wherein said derivatizing step comprises contacting a non-microfibrillar polysaccharide with a swelling agent.
68. The method of claim 67, further wherein said contacting takes place under alkaline conditions.
69. The method of claim 68, wherein said swelling agent is an anionic reagent.
- 15 70. The method of claim 69, wherein the polysaccharide is cellulose.
71. The method of claim 70, further wherein said alkaline conditions comprise contacting the cellulose with said anionic reagent in the presence of an alkaline reagent which is at least one of sodium hydroxide, an oxide or hydroxide of an alkali metal or alkaline earth metal, an alkali silicate, an alkali aluminate, an alkali carbonate, an amine, ammonium hydroxide, tetramethyl ammonium hydroxide, or combinations thereof.
- 20 72. The method of claim 60, wherein said derivatizing step takes place at high solids.
73. The method of claim 60, wherein said anionic charge comprises the presence of carboxyl, sulfate, sulfonate, phosphonate, or phosphate groups, or combinations thereof.
- 25 74. The method of claim 73, wherein said derivatizing step comprises carboxymethylation of the cellulose.
75. The method of claim 63, wherein said derivatized microfibrillar cellulose comprises at least one of hydroxyethyl cellulose, ethylhydroxyethyl cellulose, carboxymethylcellulose, carboxymethylhydroxyethyl cellulose,
- 30 hydroxypropylhydroxyethyl cellulose, methyl cellulose, methylhydroxypropyl cellulose, methylhydroxyethyl cellulose, carboxymethylmethyl cellulose, hydrophobically modified carboxymethylcellulose, hydrophobically modified

660720-942660

141-93
144

hydroxyethyl cellulose, hydrophobically modified hydroxypropyl cellulose,
hydrophobically modified ethylhydroxyethyl cellulose, hydrophobically modified
carboxymethylhydroxyethyl cellulose, hydrophobically modified
hydroxypropylhydroxyethyl cellulose, hydrophobically modified methyl cellulose,
5 hydrophobically modified methylhydroxypropyl cellulose, hydrophobically modified
methylhydroxyethyl cellulose, hydrophobically modified carboxymethylmethyl
cellulose, nitrocellulose, cellulose acetate, cellulose sulfate, cellulose vinyl sulfate,
cellulose phosphate, and cellulose phosphonate.

- 10 76. The method of claim 60, wherein said microfibrillizing step comprises applying
energy to said polysaccharide under conditions sufficient to produce microfibrillar
polysaccharide.
77. The method of claim 76, further comprising enzyme-treating said non-microfibrillar
polysaccharide prior to said microfibrillizing step
- 15 78. The method of claim 76, comprising applying at least one of homogenization,
pumping, mixing, heat, steam explosion, pressurization-depressurization cycle,
impact, grinding, ultrasound, microwave explosion, and milling to said non-
microfibrillar polysaccharide.
- 20 79. The method of claim 78, comprising passing said non-microfibrillar polysaccharide
through a homogenizer under conditions sufficient to produce microfibrillar
polysaccharide.
80. The method of claim 79, wherein said conditions comprise passing said non-
microfibrillar polysaccharide through a pressure differential of at least about 3,000
psi.
- 25 81. The method of claim 80, further comprising passing said non-microfibrillar
polysaccharide through said homogenizer at least three times.
82. The method of claim 60, wherein said derivatized microfibrillar polysaccharide forms
a gel throughout a concentration range of from about 0.01 % to about 100% in water.
- 30 83. The method of claim 82, wherein said derivatized microfibrillar polysaccharide forms
a gel throughout a concentration range of between about 0.01 % and about 50 % in
water.

600720-01-0000

5
10
15
20
25
30

84. The method of claim 60, wherein said derivatized microfibrillar polysaccharide forms a gel at at least one point in the concentration range of from about 0.05 % to about 0.99% in water.
85. The method of claim 84, wherein said derivatized microfibrillar polysaccharide forms a gel at a concentration of about 0.9% in water.
86. The method of claim 60, wherein said derivatized microfibrillar polysaccharide is substantially insoluble in the solvent of use.
87. The method of claim 86, wherein the solvent of use is water.
88. The method of claim 87, wherein said derivatized microfibrillar polysaccharide is derivatized to comprise substituents that provide electrostatic functionality.
89. The method of claim 88, wherein said derivatized microfibrillar polysaccharide is derivatized microfibrillar cellulose having a degree of substitution of less than about 0.5.
90. The method of claim 89, wherein said degree of substitution is less than about 0.35.
91. The method of claim 90, wherein said degree of substitution is less than about 0.2.
92. The method of claim 91, wherein said degree of substitution is less than about 0.18.
93. The method of claim 92, wherein said degree of substitution is less than about 0.1.
94. The method of claim 89, wherein said derivatized microfibrillar cellulose has a degree of substitution of between about 0.02 and about 0.5.
95. The method of claim 94, wherein said degree of substitution is between about 0.05 and about 0.2.
96. The method of claim 86, wherein said derivatized microfibrillar polysaccharide is derivatized to comprise a steric substituent.
97. The method of claim 96, further wherein said derivatized microfibrillar polysaccharide is derivatized to comprise substituents that provide electrostatic functionality.
98. The method of claim 96, wherein said derivatized microfibrillar polysaccharide has a molar substitution of less than about 3.0.
99. The method of claim 98, wherein said molar substitution is less than about 1.5.
100. The method of claim 99, wherein said molar substitution is less than about 1.0.
101. The method of claim 100, wherein said molar substitution is less than about 0.5.
102. The method of claim 98, wherein said molar substitution is between about 0.5 and 3.0.

143-95
746

103. The method of claim 63, wherein said derivatized microfibrillar cellulose is a carboxymethylcellulose.
104. The method of claim 103, wherein said carboxymethylcellulose has a degree of substitution of less than about 0.35.
- 5 105. The method of claim 104, wherein said degree of substitution is less than about 2.0.
106. The method of claim 105, wherein said degree of substitution is between about 0.02 and about 2.0.
107. The method of claim 106, wherein said degree of substitution is between about 0.1 and about 0.2.
- 10 108. Derivatized microfibrillar polysaccharide produced by the method of claim 60.
109. Derivatized microfibrillar cellulose produced by the method of claim 63.
110. The derivatized microfibrillar cellulose of claim 63, derivatized to comprise substituents that provide steric functionality.
111. The derivatized microfibrillar cellulose of claim 110, wherein said substituents
15 comprise at least one of hydroxyethyl groups; hydroxypropyl groups; methyl groups; ethyl groups; straight- or branched-chain aliphatic groups having from about 4 to about 30 carbons; or combinations thereof.
112. The derivatized microfibrillar cellulose of claim 109, derivatized to comprise substituents that provide electrostatic functionality by anionic charge.
- 20 113. The derivatized microfibrillar cellulose of claim 112, wherein said anionic charge comprises the presence of carboxyl, sulfate, sulfonate, phosphonate, or phosphate groups, or combinations thereof.
114. The derivatized microfibrillar cellulose of claim 113, wherein said anionic charge comprises the presence of carboxyl groups.
- 25 115. The derivatized microfibrillar cellulose of claim 112, wherein said electrostatic functionality is provided by both anionic and cationic charge.
116. The derivatized microfibrillar cellulose of claim 115, wherein said electrostatic functionality is provided by substituents that contain both anionic and cationic charge in the same substituent.
- 30 117. The derivatized microfibrillar cellulose of claim 115, wherein said electrostatic functionality is provided both by substituents having anionic charge and by substituents having cationic charge.

60444-0109

14796
147

118. A method of modifying the rheological properties of a composition of matter, said method comprising the step of incorporating, into said composition of matter, derivatized microfibrillar polysaccharide that is derivatized to comprise substituents that provide electrostatic and/or steric functionality, wherein said electrostatic
- 5 functionality is provided by anionic charge.
119. The method of claim 118, wherein said composition comprises a liquid.
120. The method of claim 119, wherein said liquid is water.
121. The method of claim 120, comprising using said derivatized microfibrillar polysaccharide in an amount effective to provide scale control and/or corrosion
- 10 control.
122. The method of claim 118, wherein said derivatized microfibrillar polysaccharide is derivatized microfibrillar cellulose.
123. The method of claim 119, wherein said rheological properties are at least one of viscosity, suspension stability, gel insensitivity to temperature, shear reversible
- 15 gelation, yield stress, and liquid retention.
124. The method of claim 118, wherein said composition of matter is a food, pharmaceutical, nutraceutical, personal care, fiber, paper, paint, coating, or construction composition.
125. The method of claim 124, wherein said composition of matter is an oral care product.
- 20 126. The method of claim 124, wherein said composition of matter is a cream or lotion for epidermal application.
127. The method of claim 124, wherein said composition of matter is moisturizing, night, anti-age, or sunscreen cream or lotion.
128. The method of claim 124, wherein said composition of matter is a food spread.
- 25 129. The method of claim 128, wherein said food spread is a reduced fat, low fat, or fat free food spread.
130. The method of claim 129, wherein said food spread is a reduced fat, low fat, or fat free mayonnaise.
131. The method of claim 124, wherein said composition of matter is a drilling fluid.
- 30 132. A method of improving the physical and/or mechanical properties of a coating composition by incorporating, into said coating composition, an effective amount of a derivatized microfibrillar polysaccharide derivatized to comprise substituents that

660720-34284260

195 97
148

provide electrostatic and/or steric functionality, wherein said electrostatic functionality is provided by anionic charge.

- 5
133. The method of claim 132, wherein said physical and/or mechanical properties include at least one of film forming, leveling, sag resistance, strength, durability, dispersion, flooding, floating, and spatter.
- 10
134. A method of improving at least one of sizing, strength, scale control, drainage, dewatering, retention, clarification, formation, adsorbency, film formation, membrane formation, and polyelectrolyte complexation during paper manufacture, said method comprising the step of using a derivatized microfibrillar cellulose during said manufacture, wherein said derivatized microfibrillar cellulose is derivatized by electrostatic and/or steric substituents, further wherein said electrostatic substituents comprise the presence of either anionic charge or both anionic and cationic charge.
- 15
135. The method of claim 134, wherein said derivatized microfibrillar cellulose is used as a drainage aid and/or as a sizing agent.
- 20
136. The method of claim 134, wherein said derivatized microfibrillar cellulose is microfibrillated carboxymethylcellulose.
- 25
137. The method of claim 136, comprising using said microfibrillated carboxymethylcellulose in a papermaking machine to increase the rate of drainage and/or dewatering during paper manufacture.
- 30
138. The method of claim 137, further wherein said microfibrillated carboxymethylcellulose is used in the presence of at least one of: cationic polyacrylamides; polydiallyldimethyl-ammonium chloride; cationic starch; derivatives of cellulose containing ammonium or mono-, di-, or trialkyl ammonium substituents; derivatives of guar gum containing ammonium or mono-, di-, or trialkyl ammonium substituents; resins formed by the reaction of amines and/or polyamines with epichlorohydrin; and combinations thereof.
139. The method of claim 137, further wherein said microfibrillated carboxymethylcellulose is used in the presence of at least one of: aluminum salts; hydrolyzed or partially hydrolyzed aluminum salts; complexes of hydrolyzed or partially hydrolyzed aluminum salts with organic or inorganic species; and combinations thereof.

600120-94237260

146⁹⁸
tag

140. The method of claim 137, further wherein said microfibrillated carboxymethylcellulose is used in the presence of: at least one polymer of ethylene oxide, ethyleneimine, allylamine, or vinylamine; at least one copolymer or terpolymer of ethylene oxide, ethyleneimine, allylamine, or vinylamine; and combinations thereof.
141. The method of claim 136, comprising using said microfibrillated carboxymethylcellulose in a papermaking machine for retention of organic and/or inorganic dispersed particles in a sheet of paper during its manufacture
142. The method of claim 141, wherein said dispersed particles comprise at least one of pulp fines, fillers, sizing agents, pigments, clays, detrimental organic particulate materials, detrimental inorganic particulate materials, and combinations thereof.
143. The method of claim 141, further wherein said microfibrillated carboxymethylcellulose is used in the presence of at least one of: cationic polyacrylamides; polydiallyldimethyl-ammonium chloride; cationic starch; derivatives of cellulose containing ammonium or mono-, di-, or trialkyl ammonium substituents; derivatives of guar gum containing ammonium or mono-, di-, or trialkyl ammonium substituents; resins formed by the reaction of amines and/or polyamines with epichlorohydrin; and combinations thereof.
144. The method of claim 141, further wherein said microfibrillated carboxymethylcellulose is used in the presence of at least one of: aluminum salts; hydrolyzed or partially hydrolyzed aluminum salts; complexes of hydrolyzed or partially hydrolyzed aluminum salts with organic or inorganic species; and combinations thereof.
145. The method of claim 141, further wherein said microfibrillated carboxymethylcellulose is used in the presence of: at least one polymer of ethylene oxide, ethyleneimine, allylamine, or vinylamine; at least one copolymer or terpolymer of ethylene oxide, ethyleneimine, allylamine, or vinylamine; and combinations thereof.
146. The method of claim 136, comprising using said microfibrillated carboxymethylcellulose in a papermaking machine to improve the uniformity of formation of a sheet of paper during its manufacture.

660720: sheet260

147/89
150

147. The method of claim 146, further wherein said microfibrillated carboxymethylcellulose is used in the presence of at least one of: cationic polyacrylamides; polydiallyldimethyl-ammonium chloride; cationic starch; derivatives of cellulose containing ammonium or mono-, di-, or trialkyl ammonium substituents; derivatives of guar gum containing ammonium or mono-, di-, or trialkyl ammonium substituents; resins formed by the reaction of amines and/or polyamines with epichlorohydrin; and combinations thereof.
148. The method of claim 146, further wherein said microfibrillated carboxymethylcellulose is used in the presence of at least one of: aluminum salts; hydrolyzed or partially hydrolyzed aluminum salts; complexes of hydrolyzed or partially hydrolyzed aluminum salts with organic or inorganic species; and combinations thereof.
149. The method of claim 146, further wherein said microfibrillated carboxymethylcellulose is used in the presence of: at least one polymer of ethylene oxide, ethyleneimine, allylamine, or vinylamine; at least one copolymer or terpolymer of ethylene oxide, ethyleneimine, allylamine, or vinylamine; and combinations thereof.
150. The method of claim 136, comprising using said microfibrillated carboxymethylcellulose in a papermaking machine to improve the strength of a sheet of paper produced on a papermachine.
151. The method of claim 150, further wherein said microfibrillated carboxymethylcellulose is used in the presence of at least one of: cationic polyacrylamides; polydiallyldimethyl-ammonium chloride; cationic starch; derivatives of cellulose containing ammonium or mono-, di-, or trialkyl ammonium substituents; derivatives of guar gum containing ammonium or mono-, di-, or trialkyl ammonium substituents; resins formed by the reaction of amines and/or polyamines with epichlorohydrin; and combinations thereof.
152. The method of claim 150, further wherein said microfibrillated carboxymethylcellulose is used in the presence of at least one of: aluminum salts; hydrolyzed or partially hydrolyzed aluminum salts; complexes of hydrolyzed or partially hydrolyzed aluminum salts with organic or inorganic species; and combinations thereof.

600720 94284260

148-100
151

- 5 153. The method of claim 150, further wherein said microfibrillated carboxymethylcellulose is used in the presence of: at least one polymer of ethylene oxide, ethyleneimine, allylamine, or vinylamine; at least one copolymer or terpolymer of ethylene oxide, ethyleneimine, allylamine, or vinylamine; and combinations thereof.
154. A method for improving the stability of an emulsion, dispersion, or foam system, said method comprising the step of including, in the system, a derivatized microfibrillar polysaccharide derivatized by electrostatic and/or steric substituents, further wherein said electrostatic substituents comprise the presence of anionic charge.
- 10 155. The method of claim 154, wherein said derivatized microfibrillar polysaccharide is added to the system.
156. The method of claim 155, wherein said system comprises an emulsion, further wherein said emulsion is produced by processing of an emulsion formulation.
- 15 157. The method of claim 156, further wherein said derivatized microfibrillar polysaccharide is added prior to completion of processing of said emulsion formulation.
158. The method of claim 156, wherein a non-microfibrillated polysaccharide is added prior to completion of processing of said emulsion formulation, and said emulsion formulation is processed under conditions sufficient to microfibrillate said non-microfibrillated polysaccharide.
- 20 159. The method of claim 158, further wherein said non-microfibrillated or only partially microfibrillated polysaccharide is non-derivatized or only partially derivatized, and said emulsion formulation is further processed under conditions sufficient to derivatize said non-derivatized polysaccharide, or to complete derivatization of said only partially derivatized polysaccharide, respectively.
- 25 160. The method of claim 156, wherein a non-derivatized or only partially derivatized polysaccharide is added prior to completion of processing of said emulsion formulation, and the emulsion formulation is processed under conditions sufficient to derivatize said non-derivatized polysaccharide, or to complete derivatization of said only partially derivatized polysaccharide, respectively.
- 30 161. The method of claim 160, further wherein said non-derivatized or only partially derivatized polysaccharide is non-microfibrillated or only partially microfibrillated,

600720-9424260

145/101
145/152

and said emulsion formulation is further processed under conditions sufficient to microfibrillate said non-derivatized polysaccharide, or to complete microfibrillation of said only partially derivatized polysaccharide, respectively.

- 5 162. The method of claim 155, wherein said system is a water-in-oil or oil-in-water emulsion.
163. The system produced by the method of claim 154.
164. A system comprising an emulsion, dispersion, or foam containing a derivatized microfibrillar polysaccharide, wherein said derivatized microfibrillar polysaccharide is derivatized to comprise substituents that provide electrostatic and/or steric
- 10 functionality, further wherein said electrostatic functionality is provided by anionic charge.
165. A polyelectrolyte complex comprising a derivatized microfibrillar polysaccharide comprising substituents that provide electrostatic and/or steric functionality, wherein said electrostatic functionality comprises anionic charge.

60720-91231260

THE UNIVERSITY OF CHICAGO

10

Docket No.
Cash, et al. Case 1**Declaration and Power of Attorney For Patent Application****English Language Declaration**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Derivatized Microfibrillar Polysaccharide

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International
Application Number _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	☐
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	☐
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	☐

104
155
152

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

_____	_____
(Application Serial No.)	(Filing Date)
_____	_____
(Application Serial No.)	(Filing Date)
_____	_____
(Application Serial No.)	(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

105
156
153

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Boyd, Steven D., Reg. No. 31,000

Cairns, James A., Reg. No. 32,557

Dalickas, Gail Ann, Reg. No. 40,979

Edwards, David, Reg. No. 27,293

Kuller, Mark D., Reg. No. 31,925

Markowitz, Steven H., Reg. No. 27,095

Morrison, Joyce L., Reg. No. 31,902

O'Flynn O'Brien, Robert P., Reg. No. 35,629

Sloan, Martin F., Reg. No. 38,618

Szanto, Ivan G., Reg. No. 24,181

VonNeida, Philip H., Reg. No. 34,942

Bernstein, Bruce H., Reg. No. 29,027

Greenblum, Neil F., Reg. No. 28,394

Rowland, James L., Reg. No. 32,674

Glass, Roger P., Reg. No. 32,674

Turk, Arnold, Reg. No. 33,094

Send Correspondence to: **Hercules Incorporated**
Hercules Plaza
1313 North Market Street
Wilmington, Delaware 19894-0001

Direct Telephone Calls to: *(name and telephone number)*
James A. Cairns (302) 594-6675

Full name of sole or first inventor Mary Jean Cash	
Sole or first inventor's signature	Date
Residence USA	
Citizenship US	
Post Office Address 2837 Grubb Road	
Wilmington, Delaware 19810	

Full name of second inventor, if any Anita Ngai Chan	
Second inventor's signature	Date
Residence USA	
Citizenship US	
Post Office Address 709 Ashford Road	
Wilmington, Delaware 19803	

106
137
134

Full name of third inventor, if any Herbert Thompson Conner	
Third inventor's signature	Date
Residence USA	
Citizenship US	
Post Office Address 121 Glennann Drive	
Landenberg, Pennsylvania 19350	

Full name of fourth inventor, if any Patrick Joseph Cowan	
Fourth inventor's signature	Date
Residence USA	
Citizenship US	
Post Office Address 13 Bernard Boulevard	
Hockessin, Delaware 19707	

Full name of fifth inventor, if any Robert Alan Gelman	
Fifth inventor's signature	Date
Residence USA	
Citizenship US	
Post Office Address 507 Langwater Drive	
Newark, Delaware 19711	

Full name of sixth inventor, if any Kate Marritt Lusvardi	
Sixth inventor's signature	Date
Residence USA	
Citizenship US	
Post Office Address 7 Cardinal Lane	
Chadds Ford, Pennsylvania 19317	

107
158
155

Full name of seventh inventor, if any Samuel Anthony Thompson	
Seventh inventor's signature	Date
Residence USA	
Citizenship US	
Post Office Address 113 Glenside Avenue	
Wilmington, Delaware 19803	

Full name of eighth inventor, if any Frank Peine Tise	
Eighth inventor's signature	Date
Residence USA	
Citizenship US	
Post Office Address 5907 Stone Pine Road, The Pines	
Wilmington, Delaware 19808	

Full name of ninth inventor, if any	
Ninth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of tenth inventor, if any	
Tenth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Figure 1 (1/9)

156


O-O G'
 X-X G''
 + + delta
 V-V Viscosity*

PP 40, 1 mm

F 1.0 Hz

No of M 1
 MI 5 s

T 24.8 - 25.1 C

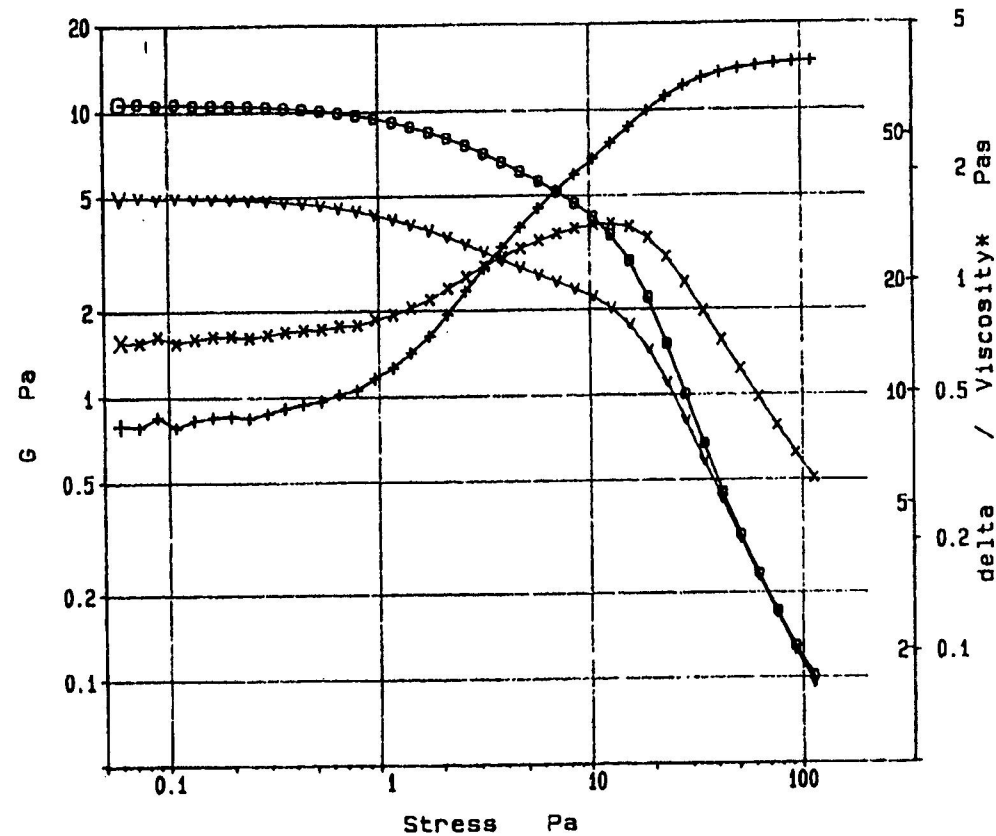

156

Figure 2 (2/9)

157

○-○ G'
 x-x G''
 + delta
 v-v Viscosity*


PP 40, 1 mm

F 1.0 Hz

No of H 1
 NI 5 s

T 24.9 - 25.3 C


C:\DATA98-1\VL581053

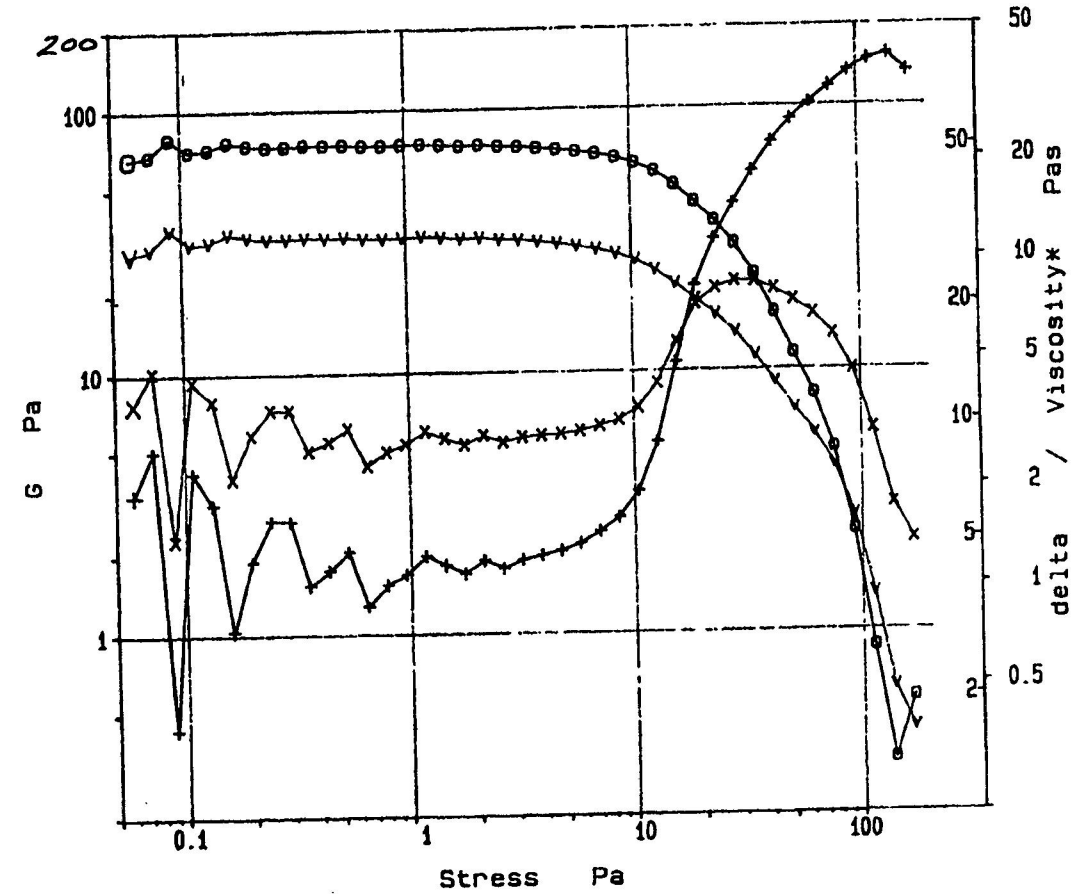

159

660120-51264260

Figure 3 (3/9)

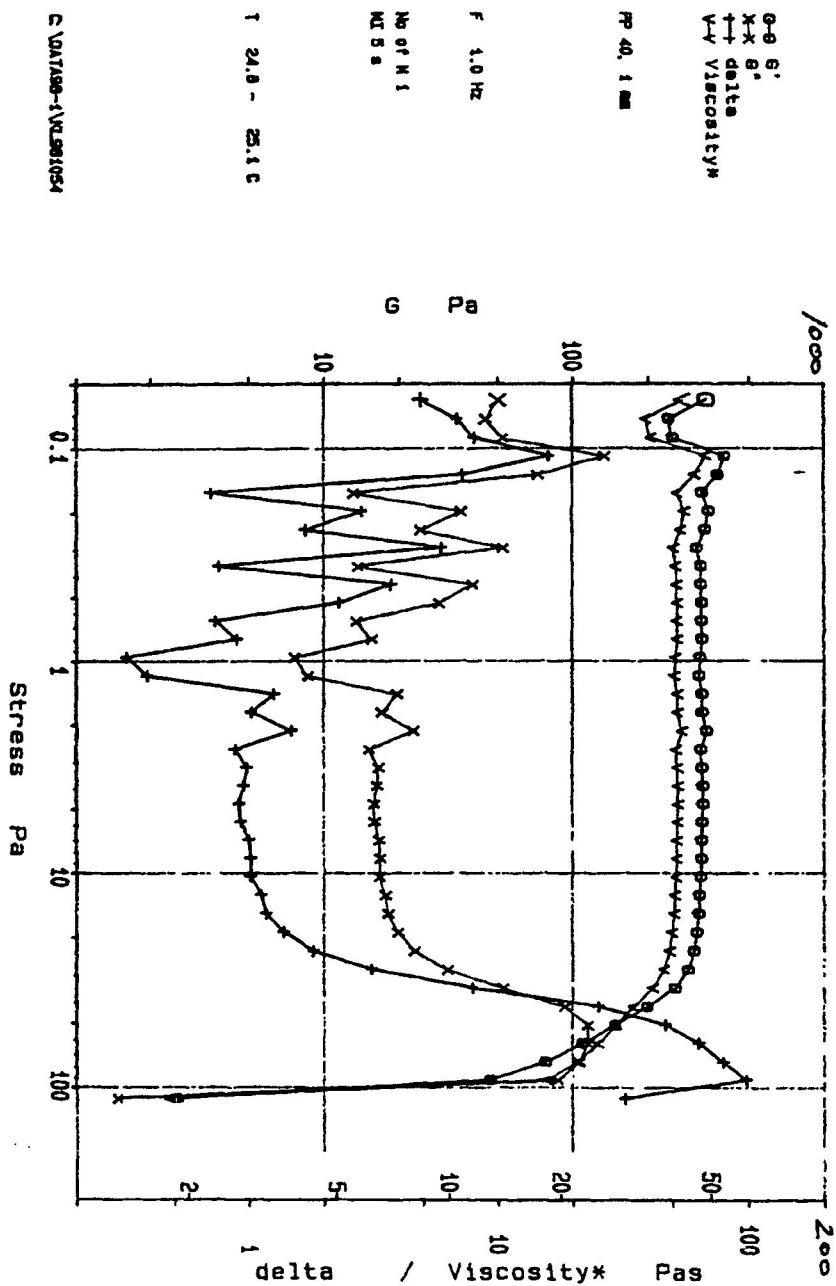

158

191
H

660720* 54264260

Figure 4 (4/9)

159

G-G G'
 X-X G''
 + delta
 V-V Viscosity


PP 40, 1 mm

F 1.0 Hz

No of M 1
 MI 5 s

T 24.9 - 25.2 C

C:\DATA98-1\VL981055

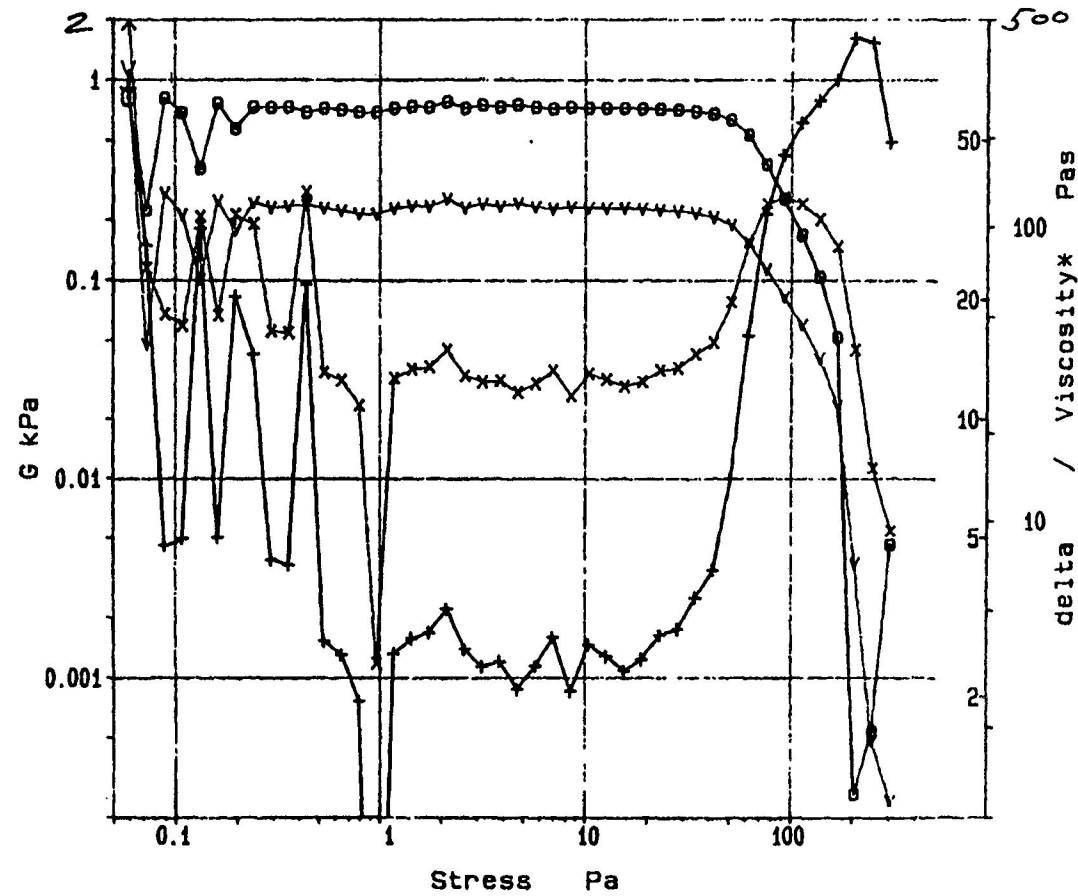


1/1

660720-110267250

160

Figure 5 (5/9)

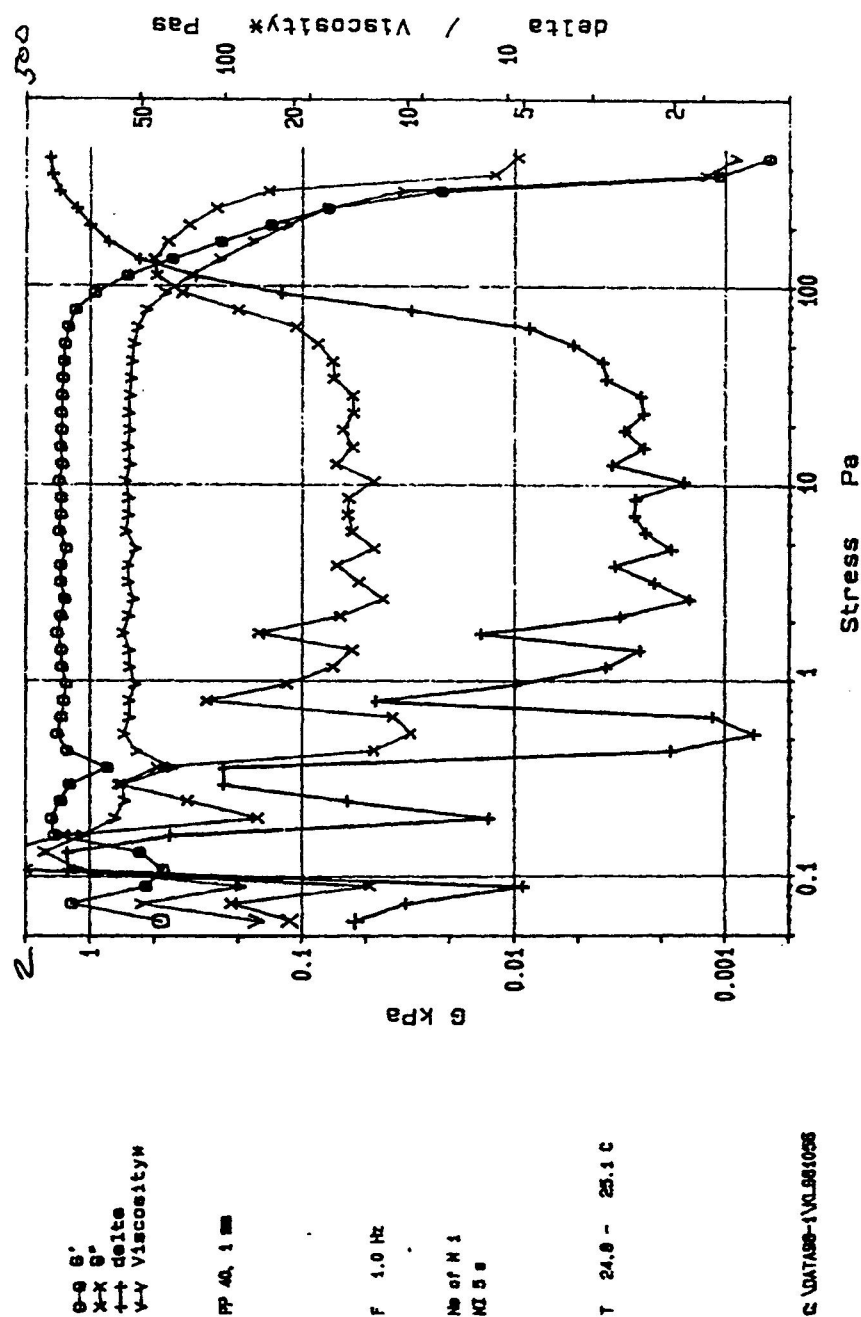

214
163

Figure 6 (6/9)

161


○-○ G'
 x-x G''
 + + δ
 v-v Viscosity*

PP 40, 1 mm

F 1.0 Hz

No of M 1
 MI 5 s

T 24.9 - 25.1 C

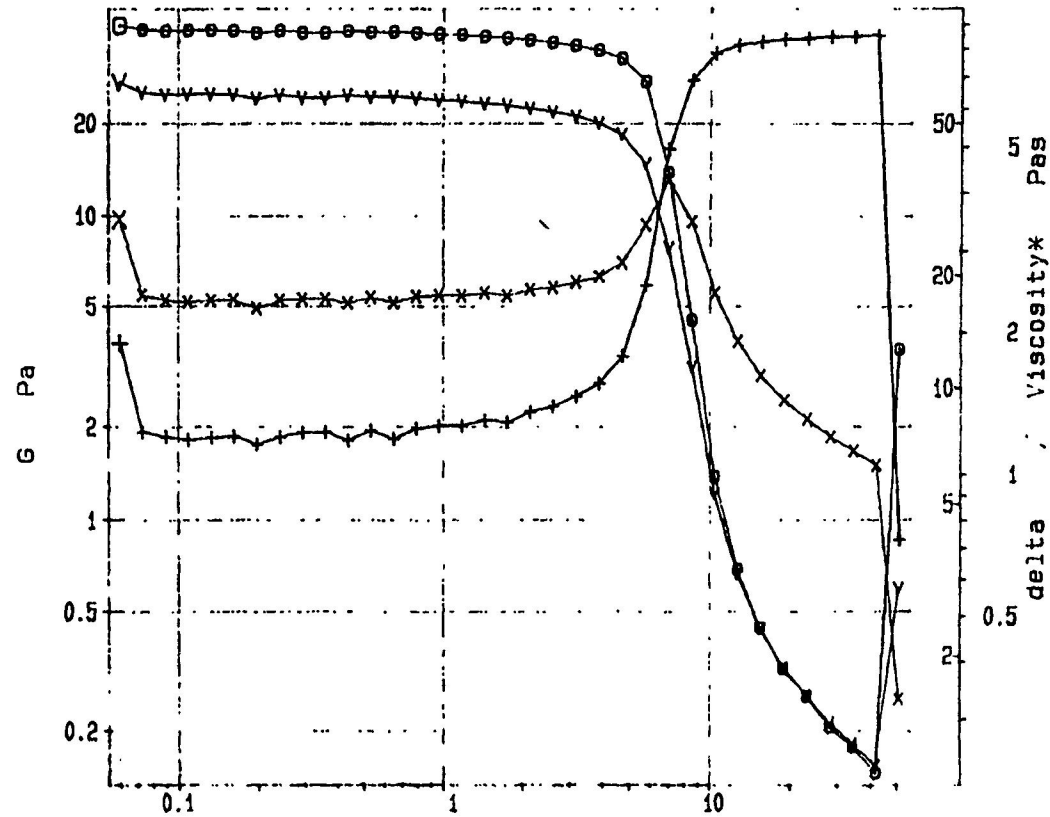

161 163

Figure 7 (7/9)

162

○-○ G'
 ×-× G''
 + delta
 v-v Viscosity*


PP 40, 1 mm

F 1.0 Hz

No of M 1
 MI 5 s

T 25.0 - 25.0 C

C:\DATA98-1\PC981345

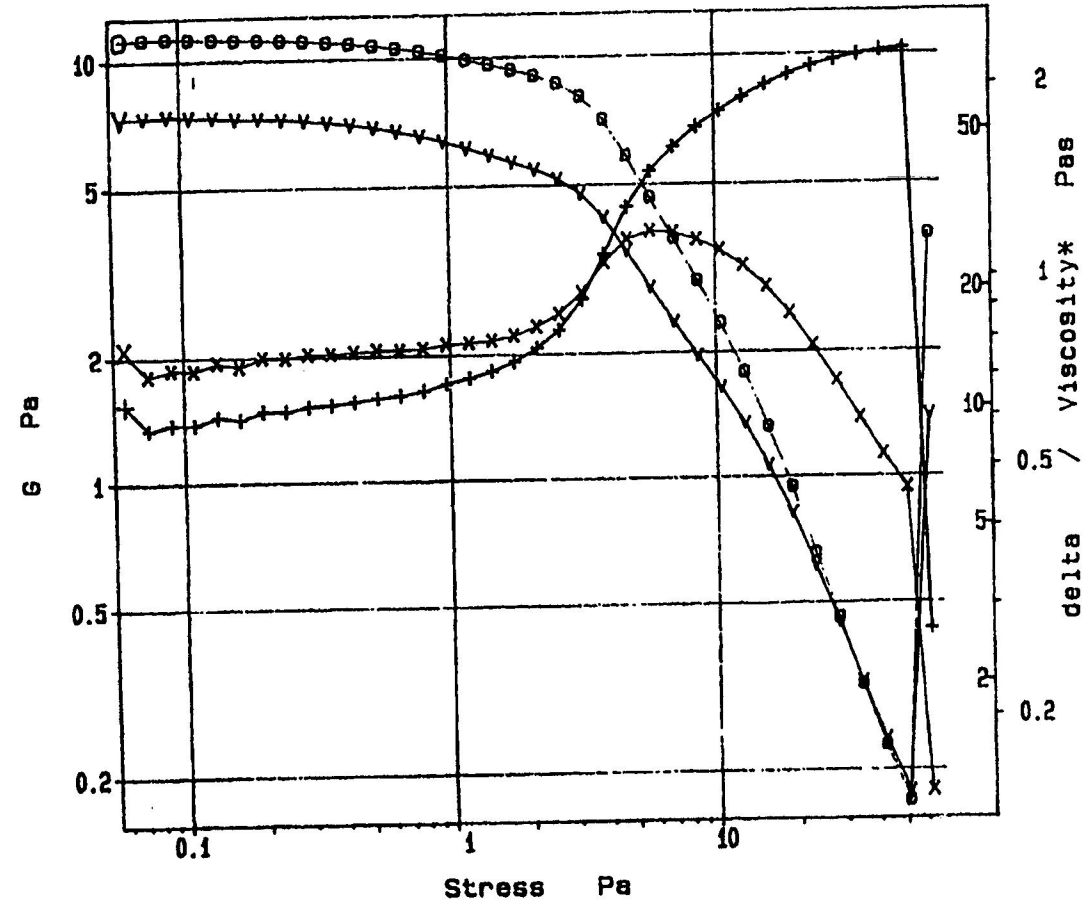

14/15

163

Figure 8 (8/9)

o-o G'
x-x G''
++ delta
v-v Viscosity*


PP 40, 1 mm

F 1.0 Hz

No of N 1
XI 5 s

T 25.0 - 25.1 C

C:\DATA88-1\PC881343

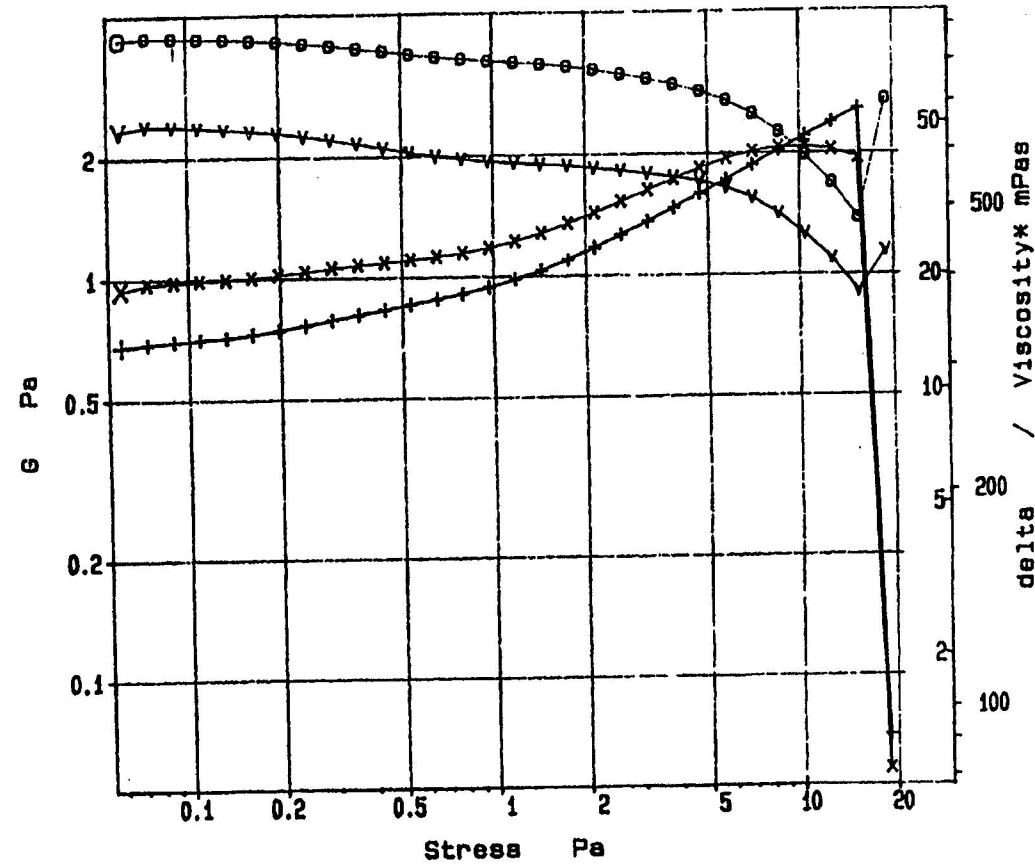

175
178

Figure 9 (9/9)

Gel-Neg. Stained
1.0 μ m
Magnification 10,000 X



LAD
D.C.

[illegible]