

AS: 82.015

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO
DIVISION DE NUEVAS CREACIONES
E. S. D.

REF.: Expediente No. 00 024.444 solicitud de Patente a nombre de
PFAUDLER, INC.

RAMIRO CASTRO DUQUE, vecino de Bogotá, portador de la tarjeta profesional No. 1003 del Consejo Superior de la Judicatura, obrando como apoderado de PFAUDLER, INC., según lo acredita el documento de poder presentado en la Secretaría General, de acuerdo con el Artículo 44 de la Decisión 486 de la Comisión de la Comunidad andina, me permito solicitar que se examine si la invención contenida en la solicitud en referencia es patentable.

De acuerdo con lo anterior, me permito anexar el recibo oficial de caja No. 03-31,720 por valor de \$335.000.

Señor Superintendente,


RAMIRO CASTRO DUQUE
C.C. No. 170.322 de Bogotá
Código 340
T.P. No. 1003 del C.S.J.
Cra 7 No. 16-56 Piso 9

Junio 10, 2003
CHP/hsr.

78

SUPERINDUSTRIA Y COMERCIO

Radicacion : 00024444 00000003 Folios: 2
Fecha (AMD): 2003-06-10 16:33:27
Tramite : 002 PATENTES D 1 REGISTRO/ 538 PETICION
Dependencia: 2020 DIVISION DE NUEVAS CREACIONES

NIT : 800176089-2

RECIBO OFICIAL DE CAJA : 03 - 31,720
FECHA : MAYO 7 DE 2003

***** CONSIGNACION *****

DEPOSITANTE	TIPO PAGO	BANCO	CUENTA	No. PAGO	FECHA PGO	Vr. PAGO
BRISARD & CASTRO LTDA	CONSIGNACION	BANCO POPULAR	050-00110-6	7394228	07/05/2003	30,030,000.00

***** CONCEPTO *****

CANT.	RENTISTICO	CONCEPTO	TOTAL CONCEPTO
1	50005-01-01 SOLICITUDES	85 EXAMEN DE PATENTABILIDAD DE INVEN	335,000.00
TOTAL :			\$ 335,000.00

SON: TRESCIENTOS TREINTA Y CINCO MIL PESOS

RESPONSABLE :

RECIBO DE CAJA APLICADO AL EXPEDIENTE No. _____



US005791780A

United States Patent [19]**Bakker**[11] **Patent Number:** **5,791,780**[45] **Date of Patent:** **Aug. 11, 1998****[54] IMPELLER ASSEMBLY WITH
ASYMMETRIC CONCAVE BLADES****[75] Inventor:** **Andries Bakker**, Dayton, Ohio**[73] Assignee:** **Chemineer, Inc.**, Dayton, Ohio**[21] Appl. No.:** **846,334****[22] Filed:** **Apr. 30, 1997****[51] Int. Cl.⁶** **B01F 7/16****[52] U.S. Cl.** **366/317; 366/102; 366/330.3;**
261/86; 261/93**[58] Field of Search** 366/101, 102,
366/106, 279, 317, 325.1, 325.92, 330.1,
330.2, 330.3, 330.7; 416/197 R, 243; 261/86,
87, 93**[56] References Cited****U.S. PATENT DOCUMENTS**

4,193	9/1845	Phleger	416/204 R
636,400	11/1899	Friedman	416/211
1,372,834	3/1921	Schmelzer	416/197 R
2,350,939	6/1944	Sprouse	416/197 R
3,879,949	4/1975	Hays et al.	416/197
4,305,673	12/1981	Herbst	366/343
4,519,715	5/1985	Golobic et al.	366/343
4,779,990	10/1988	Hjort et al.	366/102
5,198,156	3/1993	Middleton et al.	261/87



5,246,289	9/1993	Middleton et al.	366/330.1
5,246,342	9/1993	Bergstein	416/197 R
5,316,443	5/1994	Smith	416/197 R


FOREIGN PATENT DOCUMENTS

451893	12/1948	Canada
123731	7/1931	Germany
2207144	8/1973	Germany
16592	8/1908	United Kingdom

Primary Examiner—Tony G. Soohoo**Attorney, Agent, or Firm**—Thompson Hine & Flory LLP**[57] ABSTRACT**

An impeller assembly for agitating a fluid contained in a vessel and dispersing a gas introduced therein. The impeller assembly includes an impeller having a plurality of generally radially extending blades. Each of the blades includes diverging upper and lower sheet-like portions having generally radially extending leading edges. The upper and lower portions are joined to form a generally V-shaped cross-section with a trailing vertex. The width of the upper portion of each blade is greater than the width of the lower portion of the blade such that the upper portion leading edge extends forwardly of the lower portion leading edge, thus producing an upper portion overhang to capture and disperse rising gas bubbles. The impeller assembly further comprises a drive assembly for rotating the impeller assembly.

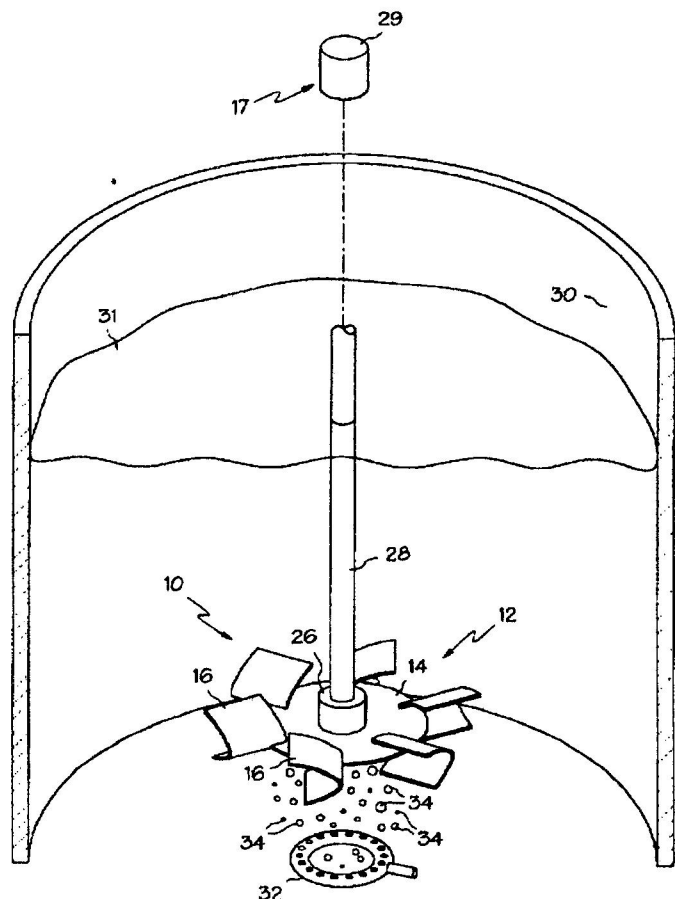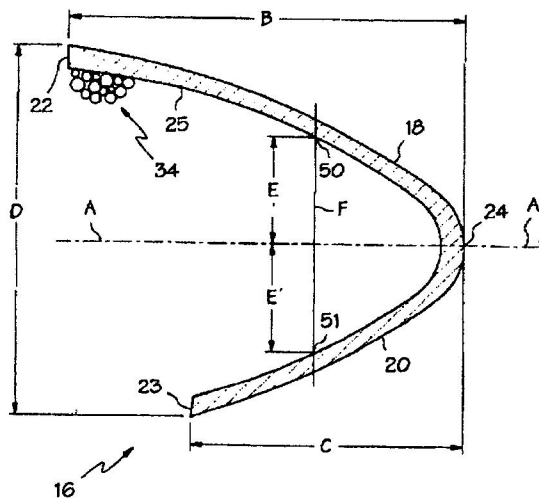83 Claims, 3 Drawing Sheets

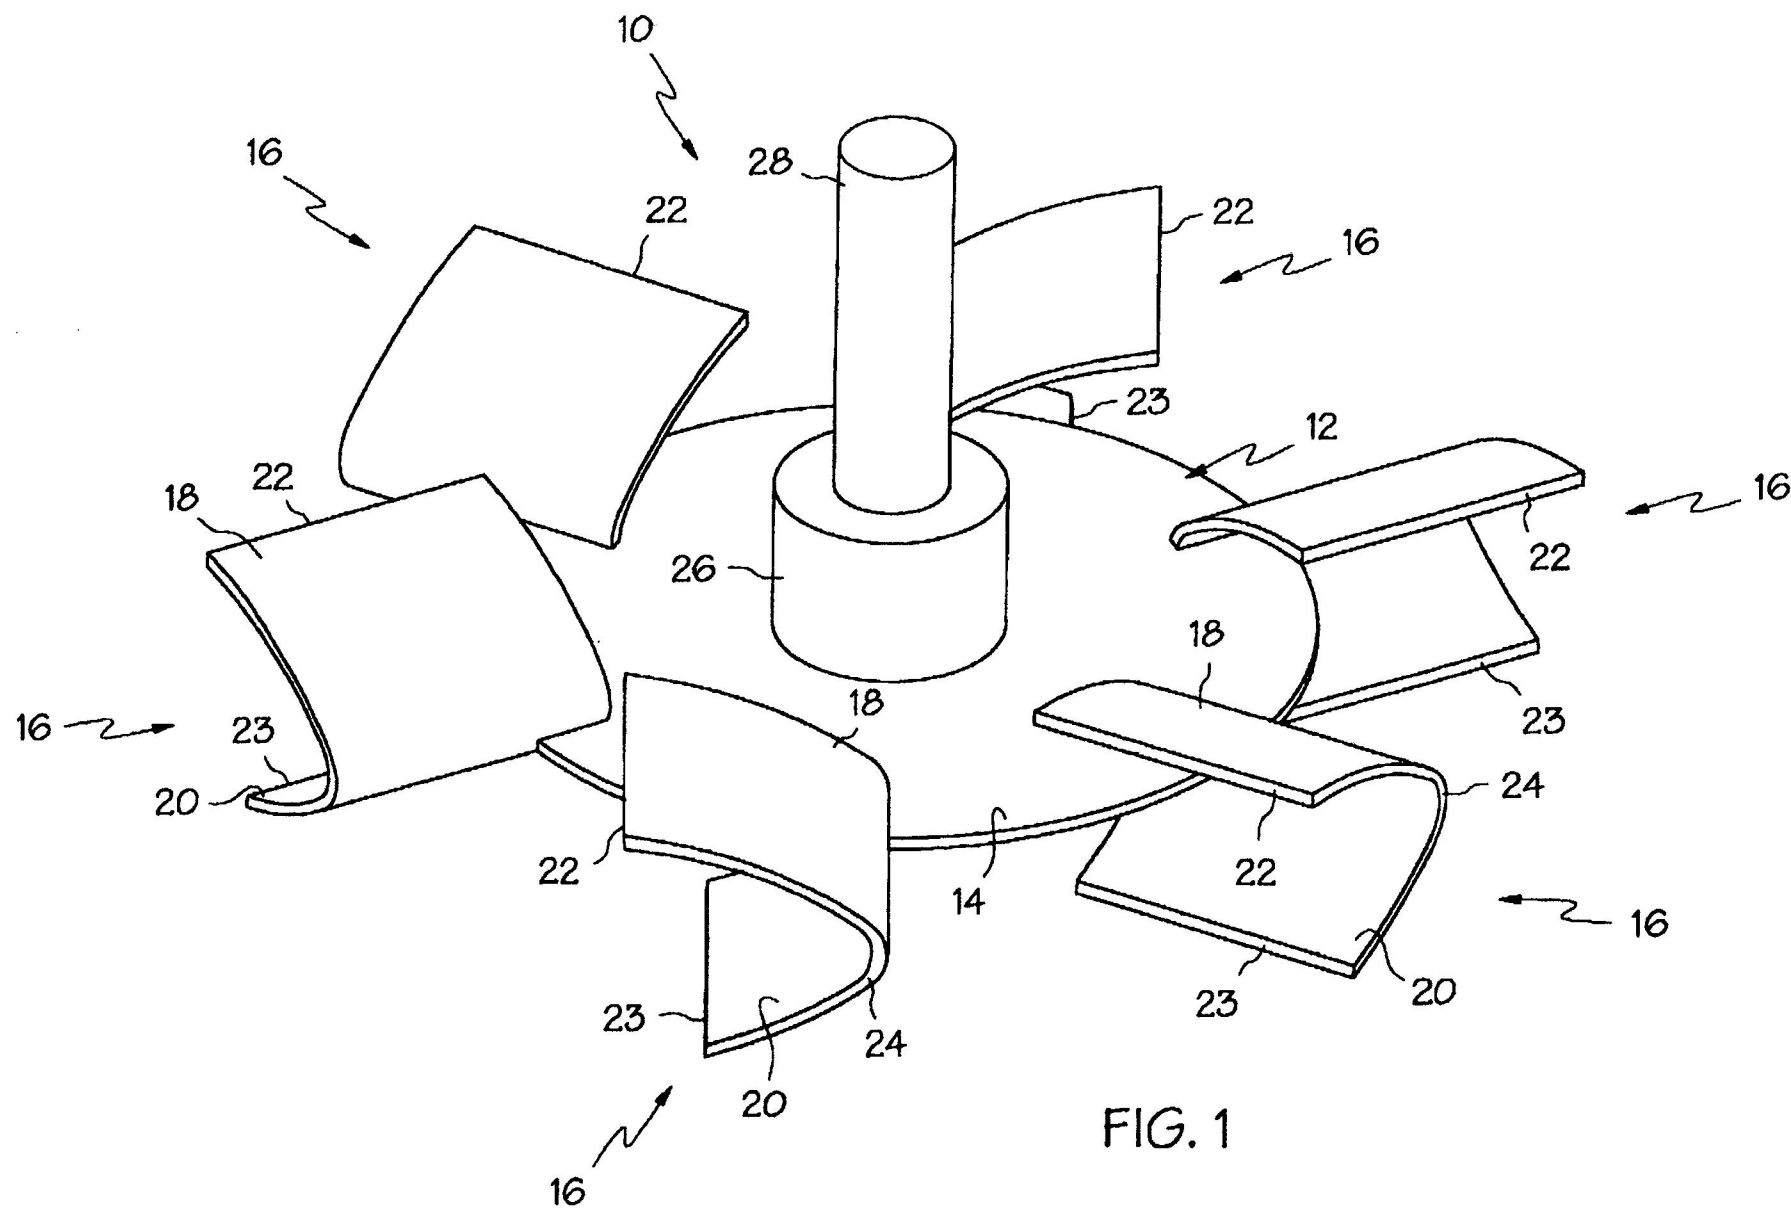

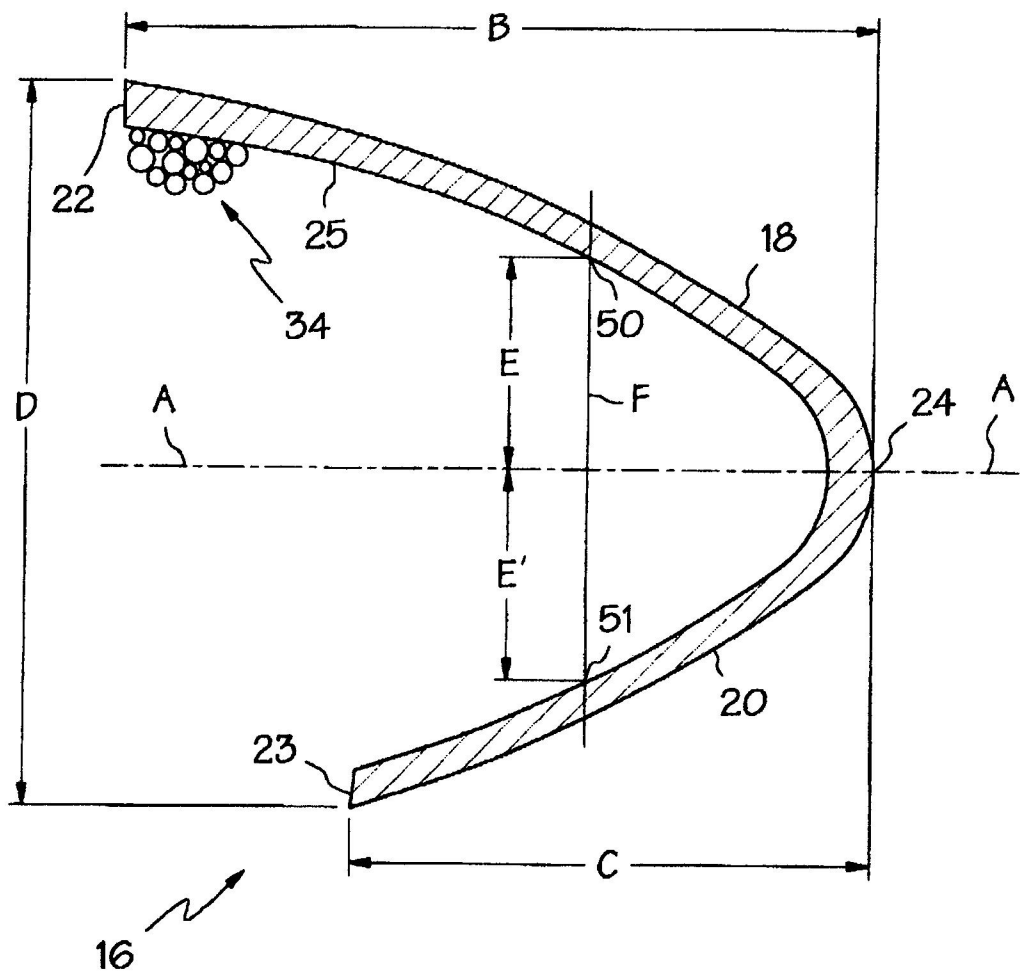


FIG. 2

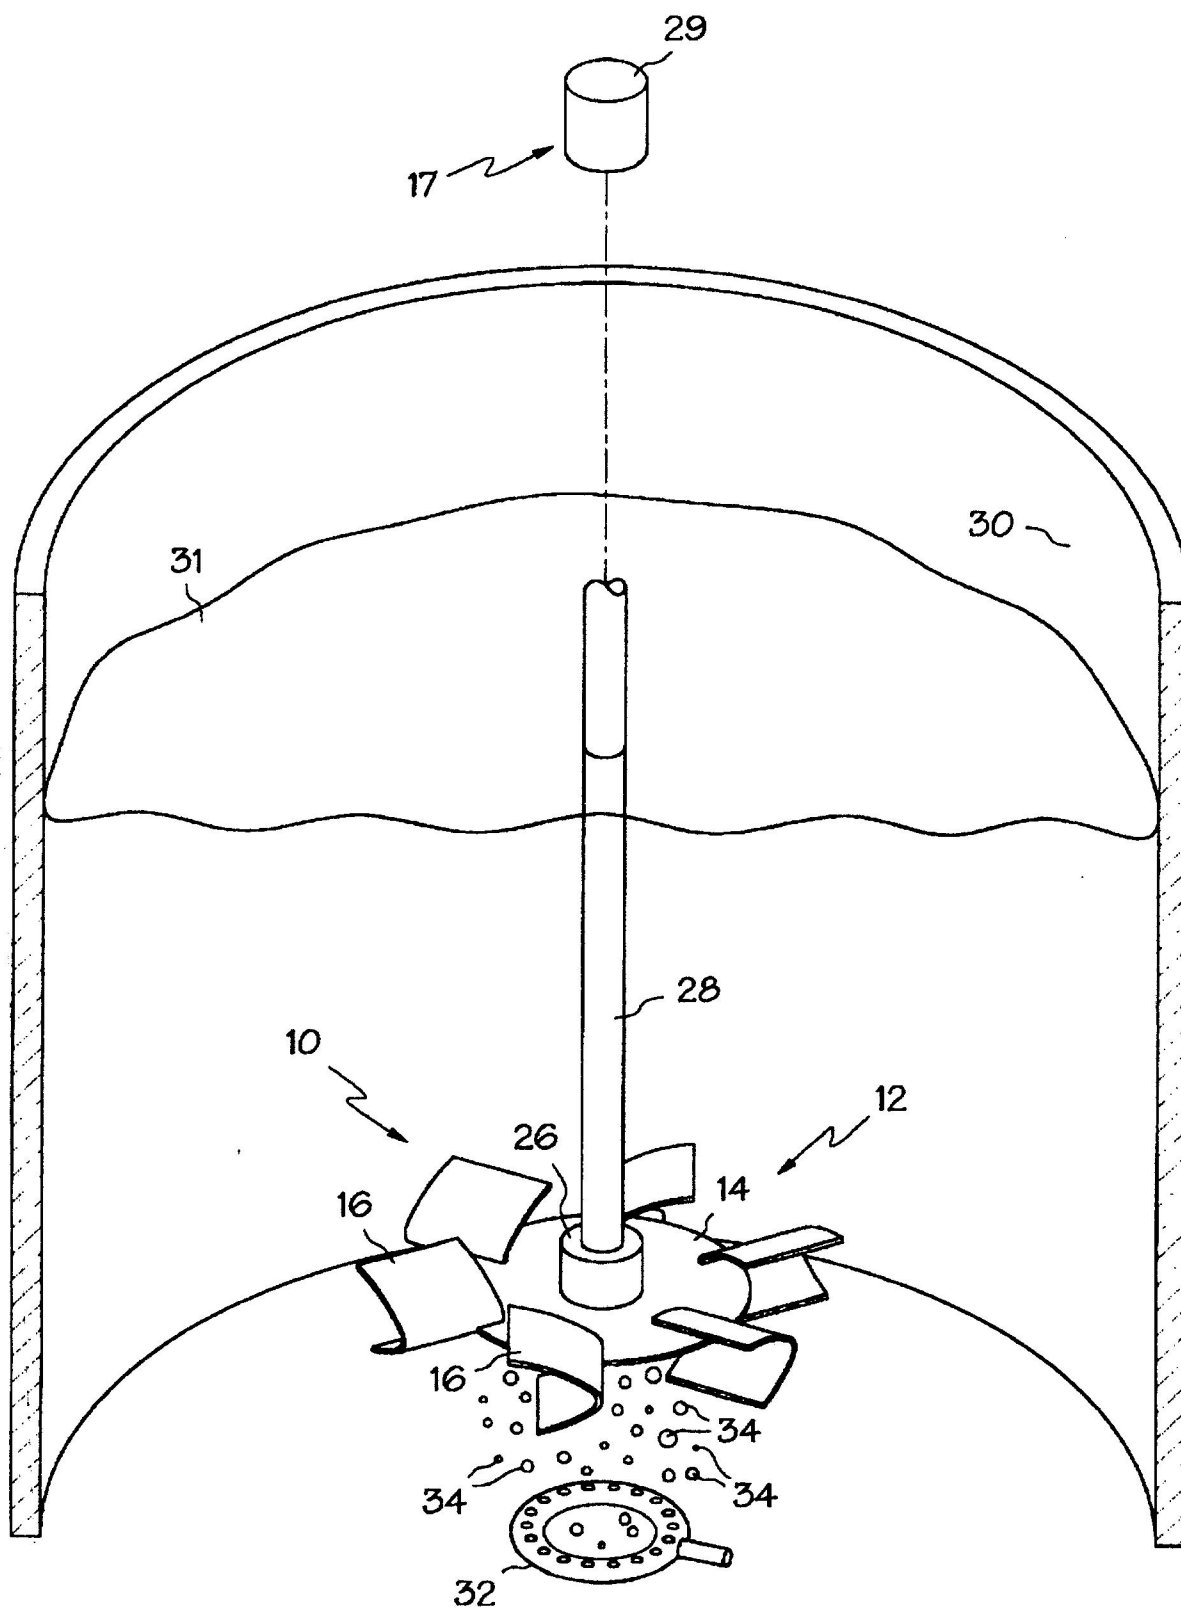


FIG. 3

1

IMPELLER ASSEMBLY WITH ASYMMETRIC CONCAVE BLADES

BACKGROUND

The present invention relates to devices and methods for dispersing gases in fluids and, more particularly, to impeller assemblies for use in vessels to mix gases with fluids.

It is often desired to mix a gas in a fluid to effect dispersement of the gas throughout the fluid. Gas-fluid mixing operations are often utilized in a variety of oxygenation and hydrogenation processes, as well as fermentation operations. One conventional method of dispersing a gas into a fluid in a vessel utilizes an impeller immersed in the fluid for dispersing the gas, and a gas sparger for introducing gas bubbles into the fluid. Typically, the impeller includes a plurality of blades mounted on a horizontally-oriented disk-shaped rotor member which, in turn, is mounted on a shaft. A variety of blade shapes may be used in conjunction with such an impeller, including flat plates, solid wedge-shaped elements, or hollow concave blades.

In operation, the impeller is rotated in a horizontal plane while a sparger releases gas bubbles into the fluid below the impeller. The rotating impeller blades act upon the surrounding fluid and the rising gas bubbles contained therein, redirecting the fluid and bubbles in a radial direction, thereby effecting mixing and dispersement of the gas in the fluid.

The use of flat plates as impeller blades in the aforementioned apparatus results in gas filled cavities forming adjacent to the trailing face of the blades during operation. This phenomenon causes the power draw of the impeller to drop, which indicates that the pumping rate or capacity of the impeller has decreased. As a result, the gas is not completely dispersed throughout the fluid, but instead simply rises to the fluid surface. This situation is termed "flooded," and is detrimental to mass transfer between the fluid and gas. Every impeller, rotating at a given speed, has a flooding point at which the amount of gas introduced into the liquid is so great that the impeller cannot disperse the gas in the fluid satisfactorily.

Concave blades (oriented such that the concavity faces forward) are used to counter this effect, since they reduce the size of the cavities formed behind the blades, and thereby increase the power draw. The effect of the gas-filled cavities is also reduced by further increasing the curvature of the blades to produce a "deeper" blade profile. Such a blade contour also increases power draw when gas is present.

However, there is a need to maximize the effectiveness of such an impeller in dispersing gas in a fluid to break up the rising gas bubbles. Accordingly, there exists a need for an impeller assembly for dispersing a gas in a fluid with a high gassed power draw, a minimal effect of gas-filled cavities, while yielding high mixing efficiencies without the impeller being flooded.

SUMMARY OF THE INVENTION

The present invention is an impeller assembly for dispersing gas introduced into a fluid-filled vessel, which has a high gassed power draw, causes minimal cavitation behind the blades, and provides effective, thorough dispersement of the gas throughout the fluid. In addition, the impeller assembly has a much higher flooding point than prior art impellers of comparable size and speed.

In particular, the impeller assembly of the present invention utilizes concave impeller blades which are asymmetric

2

in that they include an upper portion overhang to capture and disperse rising gas bubbles in a fluid. Since the flow of rising gas bubbles in a fluid is perpendicular to the plane of impeller rotation, the present invention accounts for such asymmetries in the gas flow by providing an overhang to capture and disperse gas bubbles that would rise undispersed through a conventional concave impeller.

As a result, the impeller assembly of the present invention provides high mixing efficiencies. In addition, the overhang shape enables the impeller assembly of the present invention to accommodate greater amounts of gas without flooding.

In a preferred embodiment of the impeller assembly of the present invention, an impeller having a disk member includes a plurality of generally radially extending blades mounted on and spaced evenly about the circumference of the disk member. Each of the blades includes diverging upper and lower sheet-like portions having generally radially extending leading edges. The upper and lower portions are joined to form a generally V-shaped cross-section with a trailing vertex. The width of the upper portion of each blade is greater than the width of the lower portion of the blade such that the upper portion leading edge extends forwardly of the lower portion leading edge, thus producing the upper portion overhang.

The impeller assembly further preferably comprises a drive assembly for rotating the impeller such that the upper portion segment catches and disperses the rising gas bubbles. Also in the preferred embodiment, the upper and lower portions extend from the vertex such that a distance from a point on the upper portion to a plane of the disk member is substantially equal to a distance to the disk member plane of a corresponding point on the lower portion such that the upper and lower portions diverge uniformly relative to the plane.

Accordingly, it is an object of the present invention to provide an impeller assembly for dispersing a gas introduced into a fluid-filled vessel which produces a high ratio of gassed to ungassed power draw and relatively small gas-filled cavities; an impeller assembly which is relatively robust; an impeller assembly which is relatively easy to maintain; and an impeller assembly which provides effective, efficient, and complete dispersement of a gas sparged into a liquid.

These and other objects and advantages of the present invention will be more fully understood and appreciated by reference to the following description, the accompanying drawings and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a preferred embodiment of the impeller assembly of the present invention;

FIG. 2 is a detail side elevation in section of an impeller blade of the assembly of FIG. 1; and

FIG. 3 is a perspective view of the impeller assembly of FIG. 1 shown in a cylindrical vessel, the vessel shown in section.

DETAILED DESCRIPTION

As shown in FIGS. 1 and 3, a preferred embodiment of the impeller assembly of the present invention, generally designated 10, includes an impeller 12, comprised of a disk member 14 and a plurality of generally radially extending blades 16, and a drive member 17 (see FIG. 3). With reference to FIGS. 1 and 2, the blades 16 include diverging upper and lower sheet-like portions 18, 20. Each of the

portions 18, 20 has a generally radially extending leading edge 22, 23. The upper and lower portions 18, 20 are joined to form a generally V-shaped cross section with a trailing vertex 24. The blades 16 are preferably generally parabolic in cross section (see FIG. 2), and the vertex 24 is preferably curved. As shown in FIG. 2, the upper and lower portions 18, 20 are angled so that they diverge from the plane A of the disk member approximately symmetrically.

The width of the upper portion 18 of the blades 16 (represented by dimension B) is greater than the width of the lower portion 20 (represented by dimension C). Consequently, the leading edge 22 extends in front of the leading edge 23, creating an overhang 25. The overhang 25 captures rising gas bubbles 34 and thereby promotes their dispersion. The optimal blade design utilizes a configuration wherein the overhang 25 represents about 15-50% of the width B of the upper portion 18. More preferably, the overhang 25 represents about 25% of the width B. The impeller blade 16 further has a height dimension D. The height-to-width ratio (i.e. D:B) of the blades 16 of the present invention optimally is in the range of about 0.5:1 to 1.5:1, with 1:1 being preferred.

As shown in FIGS. 1 and 3, the impeller 12 preferably has six blades 16 mounted on the disk member 14. The impeller 12 may have other numbers of blades, ranging from 4 to 12 blades, without departing from the scope of the invention. The blades 16 are preferably evenly spaced circumferentially about the disk member 14, and preferably are attached to the disk member 14 at their vertices 24. Preferably, the blades 16 are notched to receive the disk member 14. The ratio of the radius of the disk member 14 to the radius of the impeller 16 optimally is in the range of about 0.5 to 0.8, with 0.65 being preferred.

The impeller assembly 10 further includes a hub 26 for mounting the assembly on a shaft 28. The shaft 28 is attached to a drive motor 29, so that the drive motor 29 and shaft 28 comprise the drive assembly 17. The impeller assembly 10 preferably is rotated in a substantially horizontal plane such that the vertex 24 trails the leading edges 22, 23 of the blades 16.

As shown in FIG. 3, the impeller assembly 10 is utilized with a vessel 30 filled with a fluid 31. The fluid 31 may be a slurry, a liquid, or a mixture of liquids. Substantially cylindrical vessels 30 are preferred, but other shapes, such as rectangular vessels or other shapes in elevation, may be used in accordance with the present invention. The impeller assembly and vessel are selected such that the ratio of impeller diameter to the vessel diameter is optimally in the range of about 0.2 to 0.6, with 0.4 being preferred. The impeller assembly 10 is submersed in the fluid 31, and is preferably located near the bottom of the vessel 30. The impeller assembly 10 is located such that the shaft 28 is generally vertically oriented and centered in the vessel 30. The assembly 10 is suspended above a gas sparger 32, which is connected to a source of gas under pressure (not shown) and releases the gas to be mixed into the fluid as gas bubbles 34.

The disk member 14 may be of various geometric configurations, can be of other shapes in elevation, or may include cut-outs or spokes of various shapes without departing from the scope of the invention. The disk member 14 preferably has a thickness less than its radius. The impeller assembly 16 is preferably constructed of stainless steel or other non-corrosive materials, such as titanium, but may be constructed of less durable materials, such as carbon steel.

The present invention further provides for an impeller as described above wherein the upper portion 18 and lower

portion 20 uniformly diverge from the vertex 24 with respect to the disk member plane A. The distance from each point on the upper portion 18 to the disk member plane A is substantially equal to the distance from a corresponding point on the lower portion 20 to the disk member plane A. For illustrative purposes, upper point 50 on upper portion 18, and its corresponding point, lower point 51, are shown in FIG. 2. Line F is a line perpendicular to the disk plane A and passing through upper point 50. Lower point 51 is located at the point where line F intersects the lower portion 20. The distance from the plane of the disk member A to upper point 50 is shown as distance E. The distance from lower point 51 to the disk member plane A is shown as distance E'. In accordance with the present invention, the distance E is substantially equal to the distance E'. This relation holds true for all points on the upper portion 18 and their corresponding points on the lower portion 20.

The operation of the impeller assembly 10 is as follows. In order to effect mixing of gas 34 with the liquid 31, the impeller assembly 10 is rotated in a horizontal plane while the sparger 32 releases gas into the fluid below the impeller. The drive member 17 rotates the impeller 10 such that blades 16 act upon the surrounding fluid 31 and the rising gas bubbles 34 contained therein, redirecting the fluid and bubbles in a radial direction. This action further breaks up the bubbles 34 in the fluid 31. When the impeller assembly 10 has sufficient rotational speed, the gas bubbles may recirculate below the impeller assembly 10. Release of the gas bubbles 34 by the sparger 32 and rotation of the assembly 10 may continue for as long as mixing is desired.

While the forms of apparatus herein described constitute a preferred embodiment of the invention, it is to be understood that the present invention is not limited to these precise forms and that changes may be made therein without departing from the scope of the invention.

What is claimed is:

1. An impeller assembly for agitating a fluid contained in a vessel and dispersing a gas introduced therein, the impeller assembly comprising:
 - an impeller including a plurality of generally radially extending blades, each of said blades including diverging upper and lower sheet-like portions having generally radially extending leading edges, said upper and lower portions being joined to form a generally V-shaped cross-section with a trailing vertex, and wherein a width of said upper portion is greater than a width of said lower portion such that said upper portion leading edge extends forwardly of said lower portion leading edge, whereby a segment of said upper portion overhangs said lower portion; and
 - a drive assembly for rotating said impeller such that said upper portion segment catches rising gas bubbles so that said impeller disperses said gas bubbles in a generally radial direction.
2. The impeller assembly of claim 1 further comprising a disk member having a thickness less than a radius thereof, said radially extending blades being mounted on and circumferentially arranged about said disk member.
3. The impeller assembly of claim 2 wherein said vertex is rounded in cross section.
4. The impeller assembly of claim 3 wherein said upper and lower portions of each said blade are arranged such that a percentage of said width of said upper portion extends forwardly of said lower portion leading edge, said percentage being in the range of about 15% to 50%.
5. The impeller assembly of claim 4 wherein each of said blades is attached to said disk member at said vertex.

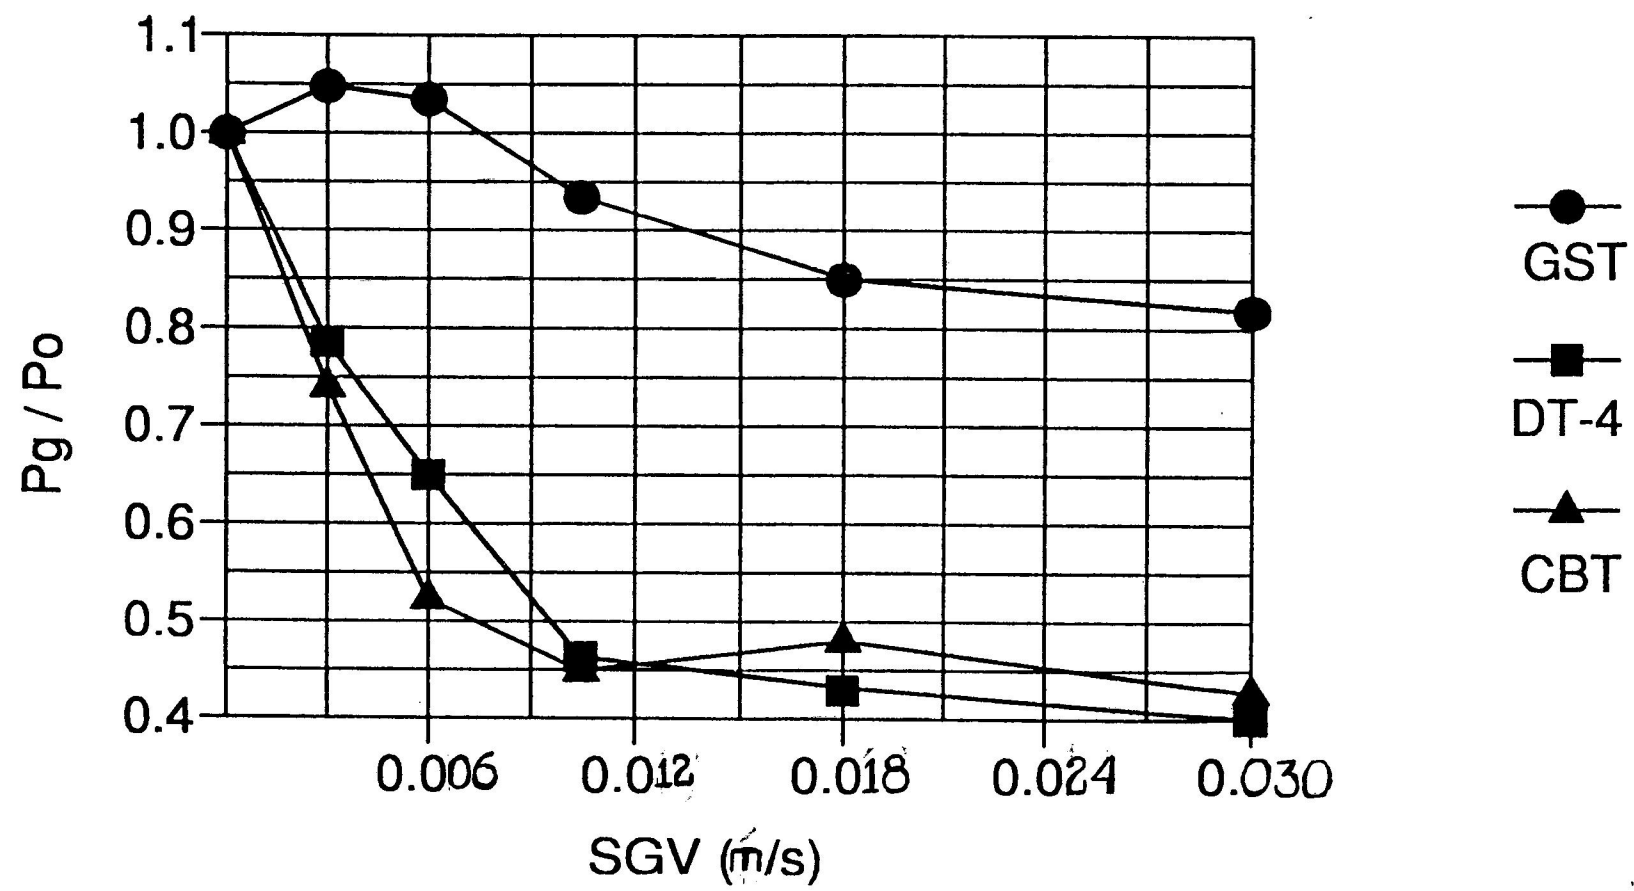


Fig. 6

85

**SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO
DIVISION DE NUEVAS CREACIONES**

2020
Bogotá, D.C.,

375
2007-02-08

Abogado (señor):
RAMIRO CASTRO DUQUE.

ASUNTO: Radicación No. 00-24444
 Trámite 002
 Evento 001
 Actuación 430
 Oficio 000-1774
 Folios 11

Como resultado del examen de fondo, realizado con fundamento en el artículo 45 de la Comisión de la Comunidad Andina, se le comunica:

1. Documentos estudiados:

Para el presente estudio se tuvo en cuenta el capítulo descriptivo comprendido en los folios 5 a 14, el capítulo reivindicatorio conformado por 20 cláusulas que se encuentran en los folios 15 a 18 y los dibujos comprendidos en los folios 79 a 84 de la solicitud en estudio.

2. Objeto de la Invención:

La presente invención se relaciona con impelentes de mezclado resistentes a la corrosión y más particularmente se relaciona con impelentes de mezclado de metal revestido con vidrio.

La invención titulada, "Impelente revestido de vidrio de alta eficiencia en dispersión de gas", se lleva a cabo de acuerdo con las características reivindicadas, donde la reivindicación 1 dice: *"Un impelente (10) de dispersión de gas revestido, dicho impelente que comprende un cubo (12) que tiene un orificio (14) centralmente colocado, dicho orificio que tiene un eje central (16), dicho orificio (14) que está dimensionado para pasar sobre un árbol de accionamiento que tiene un eje longitudinal (20) esencialmente que se extiende verticalmente en forma tal que el eje central del orificio (14) colocado centralmente corresponde con el eje (20) longitudinal del árbol (15), dicho impelente que tiene una pluralidad de ángulos y bordes, todos los cuales tienen una configuración redonda, dicho impelente que comprende adicionalmente una pluralidad de cuchillas (22) aseguradas a dicho cubo (12) y que se extiende radialmente desde el eje central, caracterizado porque cada una de dichas cuchillas (22) tienen una superficie de entrada cóncava (24) y una superficie de salida convexa (26) ambas de las cuales están definidas por un borde inferior (28), un borde superior (30), un borde interior (32) y un borde exterior (34), dicha superficie cóncava (24) que está configurada en forma tal que el borde superior (30) cubre el borde interior (28) "*.

El objeto de la invención definido anteriormente se clasificó de acuerdo con el IPC así: B01F 7/22.

3. Determinación del estado de la técnica:

El artículo 16 de la decisión 486 de la comisión de la Comunidad Andina que establece que *"El estado de la técnica comprenderá todo lo que haya sido accesible al público por una descripción escrita u oral, utilización, comercialización o cualquier otro medio antes de la fecha de presentación de la solicitud de patente o, en su caso, de la prioridad reconocida."*

Solo para el efecto de la determinación de la novedad, también se considerará dentro del estado de la técnica, el contenido de una solicitud de patente en trámite ante la oficina nacional competente, cuya fecha de presentación o de prioridad fuese anterior a la fecha de presentación o de prioridad de la solicitud de patente que se estuviese examinando, siempre que dicho contenido esté incluido en la solicitud de fecha anterior cuando ella se publique o hubiese transcurrido el plazo previsto en el artículo 40".

Consultadas las bases de datos y los archivos con que cuenta la entidad se encontró que antes del 9 de abril de 1999, fecha de prioridad de la solicitud en estudio, dos documentos que podría afectar la presente solicitud:

N°	Documento	Titulo	Fecha de publicación
D1	US 5.791.780	IMPELLER ASSEMBLY WITH ASYMETRIC CONCAVE BLADES	11-08-1998
D2	US 4.365.897	SEPARABLE BLADE AGITATOR WITH CLIP-ON IMPELLERS	28-12-1982

4. Evaluación de los requisitos de patentabilidad:

El artículo 14 de la Decisión 486 de la Comisión de la Comunidad Andina establece que *"Los Países Miembros otorgarán patentes para las invenciones, sean de producto o de procedimiento, en todos los campos de la tecnología, siempre que sean nuevas, tengan nivel inventivo y sean susceptibles de aplicación industrial"*. En cumplimiento del artículo 14 de la Decisión 486, se procedió a evaluar el cumplimiento de los requisitos de novedad, nivel inventivo y aplicación industrial, con el fin de establecer la patentabilidad de la invención reivindicada en la solicitud en estudio.

Antes de realizar el análisis de patentabilidad de la presente invención, se le recuerda al solicitante que:

- La esencia o razón de ser de una reivindicación consiste en definir la invención, indicando sus características técnicas, dándole el alcance de la protección. Las reivindicaciones deberán delimitar claramente la invención respecto al estado de la técnica o tecnología anterior, de modo que se observe en forma concisa lo nuevo que se está aportando a la tecnología y todo aquello que lo hace diferente de lo ya existente.

- b) El examen de novedad se efectúa comparando elemento por elemento de la invención tal como es definido por las reivindicaciones con los del estado de la técnica. No hay que olvidar que el tenor de las reivindicaciones es el que determina el alcance de la protección conferida por la patente (art. 51). Por ello, al analizar la novedad se deben interpretar las reivindicaciones tomando el sentido más amplio de las definiciones empleadas.
- c) Cuando se ha establecido la falta de novedad de la invención, no es necesario evaluar el nivel inventivo, dado que no existe diferencias entre la invención y el estado de la técnica.

Evaluación de la novedad:

El artículo 16 de la decisión 486 de la comisión de la Comunidad Andina que establece que *"El estado de la técnica comprenderá todo lo que haya sido accesible al público por una descripción escrita u oral, utilización, comercialización o cualquier otro medio antes de la fecha de presentación de la solicitud de patente o, en su caso, de la prioridad reconocida."*

Solo para el efecto de la determinación de la novedad, también se considerará dentro del estado de la técnica, el contenido de una solicitud de patente en trámite ante la oficina nacional competente, cuya fecha de presentación o de prioridad fuese anterior a la fecha de presentación o de prioridad de la solicitud de patente que se estuviese examinando, siempre que dicho contenido esté incluido en la solicitud de fecha anterior cuando ella se publique o hubiese transcurrido el plazo previsto en el artículo 40".


De acuerdo con la definición de novedad del Artículo 16 de la Decisión 486 de la Comisión de la Comunidad Andina y basándonos en el objeto de la invención se realizó el siguiente análisis:

- 1) La presente invención se lleva acabo de acuerdo con las características reivindicadas, donde la reivindicación 1 dice: *"Un impelente (10) de dispersión de gas revestido, dicho impelente que comprende un cubo (12) que tiene un orificio (14) centralmente colocado, dicho orificio que tiene un eje central (16), dicho orificio (14) que está dimensionado para pasar sobre un árbol de accionamiento que tiene un eje longitudinal (20) esencialmente que se extiende verticalmente en forma tal que el eje central del orificio (14) colocado centralmente corresponde con el eje (20) longitudinal del árbol (15), dicho impelente que tiene una pluralidad de ángulos y bordes, todos los cuales tienen una configuración redonda, dicho impelente que comprende adicionalmente una pluralidad de cuchillas (22) aseguradas a dicho cubo (12) y que se extiende radialmente desde el eje central, caracterizado porque cada una de dichas cuchillas (22) tienen una superficie de entrada cóncava (24) y una superficie de salida convexa (26) ambas de las cuales están definidas por un borde inferior (28), un borde superior (30), un borde interior (32) y un borde exterior (34), dicha superficie cóncava (24) que está configurada en forma tal que el borde superior (30) cubre el borde interior (28)".*
- 2) El documento US 5.791.780 (mencionado como D1) revela un impelente (ver columna 2, línea 65 – columna 3, línea 20; figuras 1, 2). Al comparar elemento por elemento de la invención tal como es definido por la reivindicación 1 de la solicitud en estudio con las características del documento D1, vemos que D1

describe un impelente que comprende:

- Un cubo (26) que tiene un orificio central, donde va el árbol de accionamiento (28)
- Una pluralidad de cuchillas (20) aseguradas a dicho cubo y que se extienden radialmente desde el eje central,
- Cada cuchilla (20) tiene una superficie de entrada cóncava y una superficie de salida convexa (ver figura 1-2)
- Las cuchillas definidas por un borde inferior (23), un borde superior (22), un borde interior y un borde exterior (ver figura 1)
- la superficie cóncava de la cuchilla esta configurada en forma tal que el borde superior (22) cubre el borde inferior (23) (ver figura 2).

Fig. 1 del documento US 5.791.780 (D1)

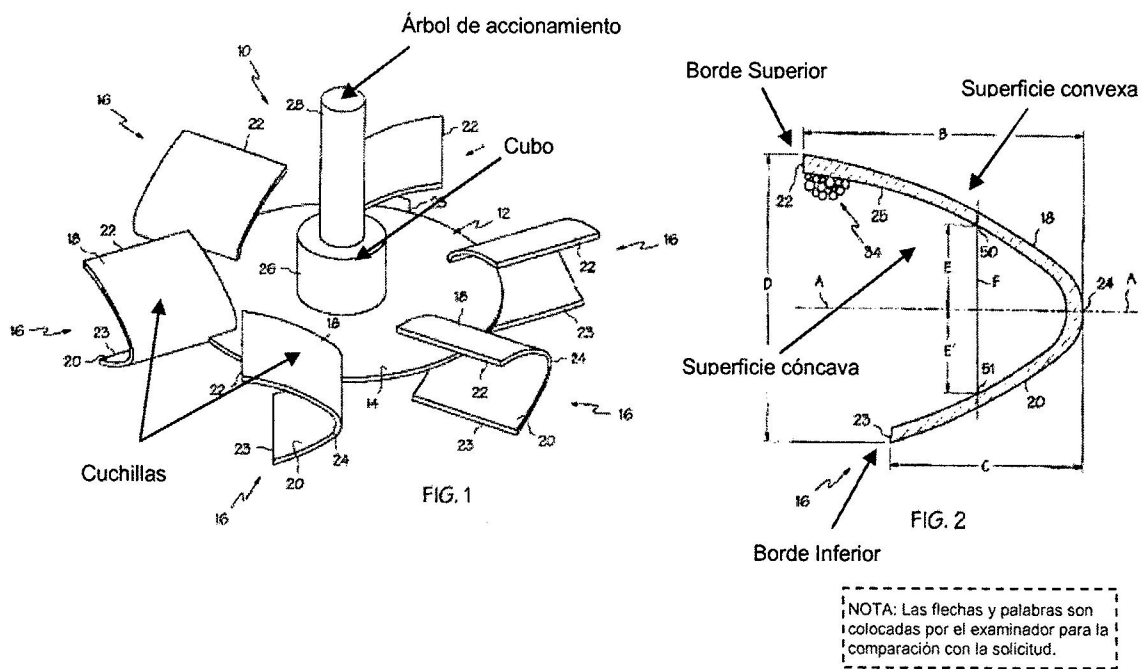

3) Realizada la comparación del documento D1 con la presente solicitud en estudio, se observa que dicho documento contiene las características de las reivindicación 1 de la solicitud; por lo tanto, el objeto de la solicitud en estudio podría ser idéntico a lo comprendido en el estado de la técnica, con lo cual quedaría desvirtuada la novedad de esta.

En conclusión, los requisitos de patentabilidad de la presente solicitud se podrían ver afectados así:

Nº	Documento	Reivindicaciones afectadas	Requisito que afecta
D1	US 5.791.780	1-20	Novedad-Nivel Inventivo
D2	US 4.365.897	1-20	Nivel Inventivo

En cumplimiento del artículo 45 de la Decisión 486 de la Comisión de la Comunidad Andina, se le indica que debe dar respuesta dentro del término de sesenta días contados a partir de la fecha de la notificación de la presente comunicación. En caso de no dar respuesta al presente requerimiento o si a pesar de la respuesta subsistieran los impedimentos para la concesión, se denegará la patente.

Notifíquese el presente oficio conforme a lo dispuesto en el numeral 5.2, literal e), del capítulo quinto del título primero de la Circular Unica N° 10 de 2001.



ALIX CÉSPEDES DE VERGEL.
Jefe de la División de Nuevas Creaciones

El anterior requerimiento fue notificado por fijación en lista, de fecha 08 FEB 2007

CONCEPTO TÉCNICO Número: 146		EXAMINADOR TÉCNICO Código:202018
---------------------------------	--	-------------------------------------



INVENTARIO DOCUMENTAL



Royal
Technologies S.A.
Enterprise Content Management & BPM

RADICACIÓN	TIPO UNIDAD DE CONSERVACIÓN	FOLIOS	CONTENIDO						Cual
			CR	FB	C	F	DB	Otros Documentos	
002444	PAPEL	90					2	7	figuras

Convenciones: CR: Copias de Resoluciones FB: Formato Blanco C: Copias F: Fotocopias DB: Documento en Blanco

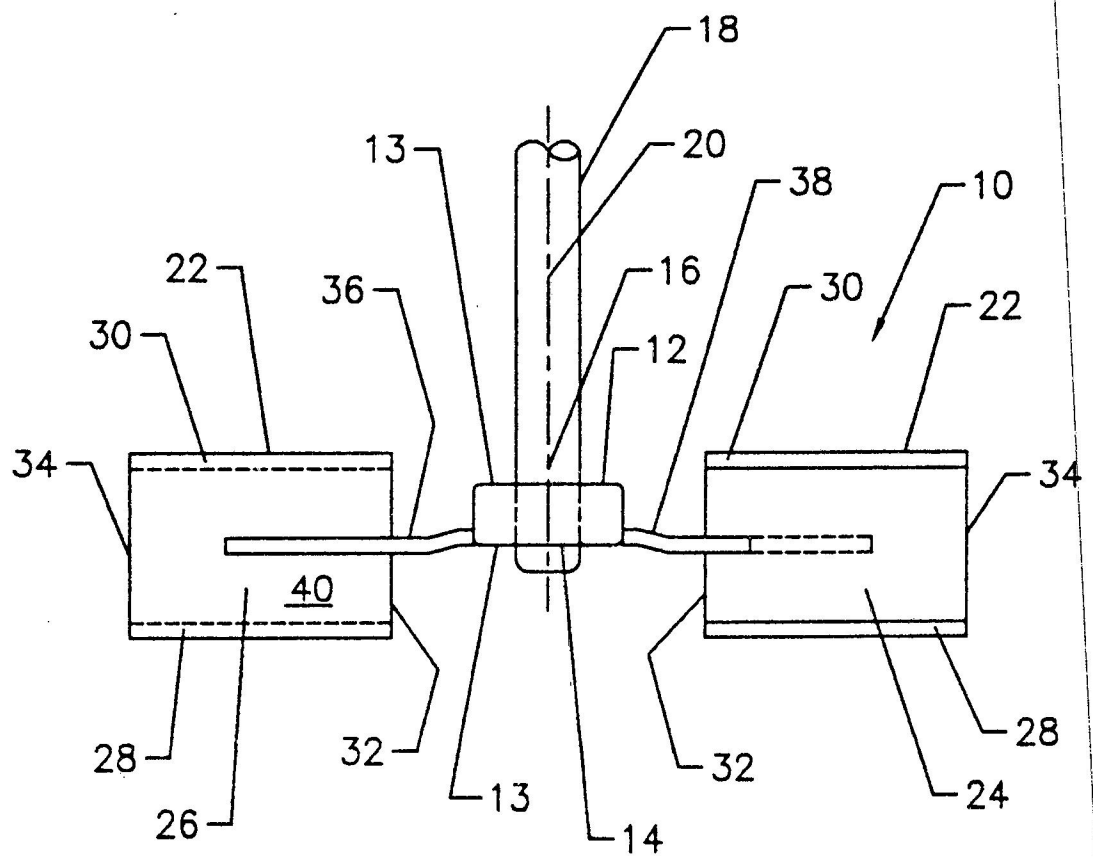


Fig. 1

27

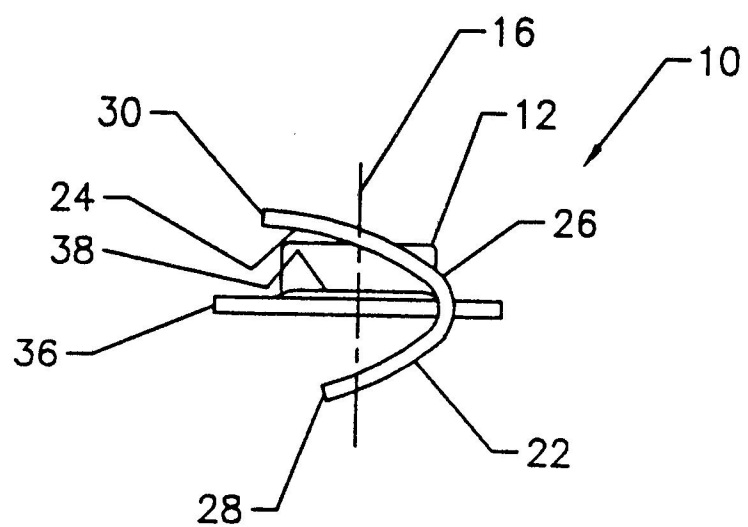


Fig. 2

28

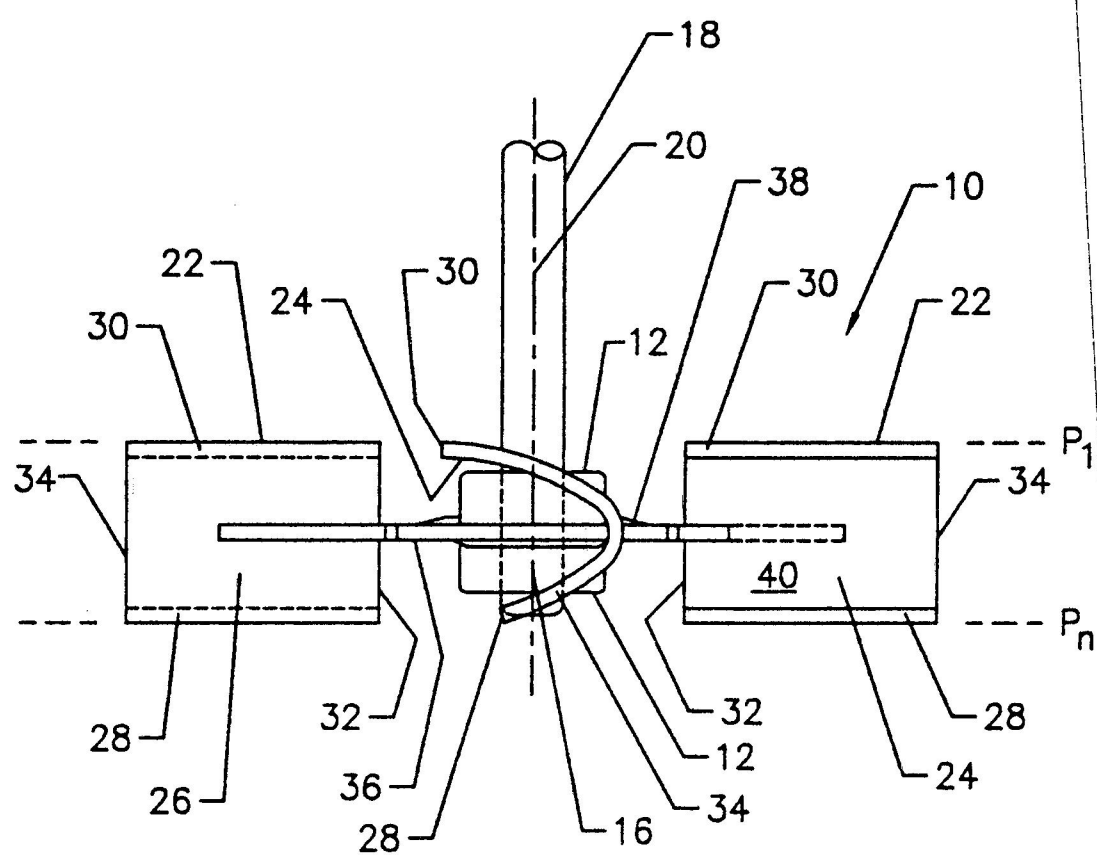


Fig. 3

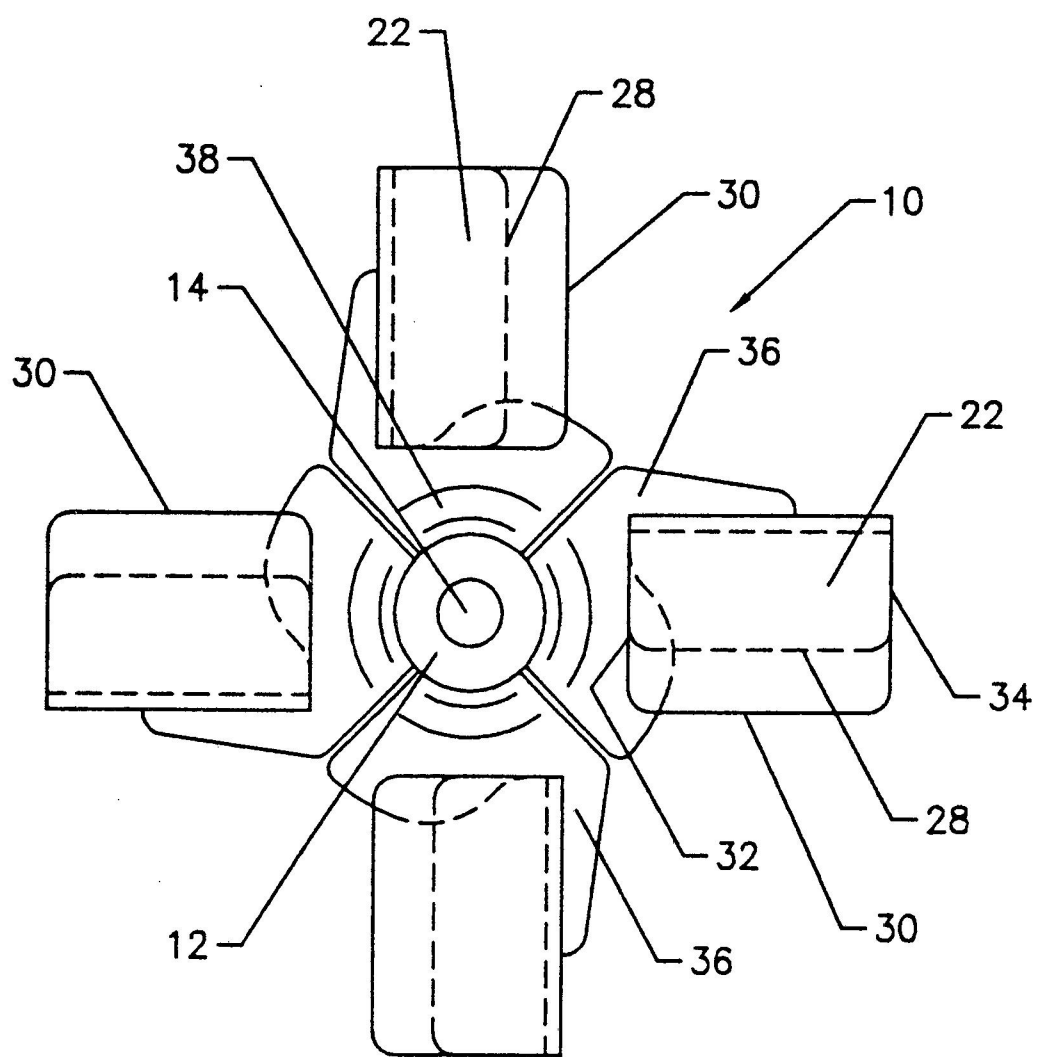
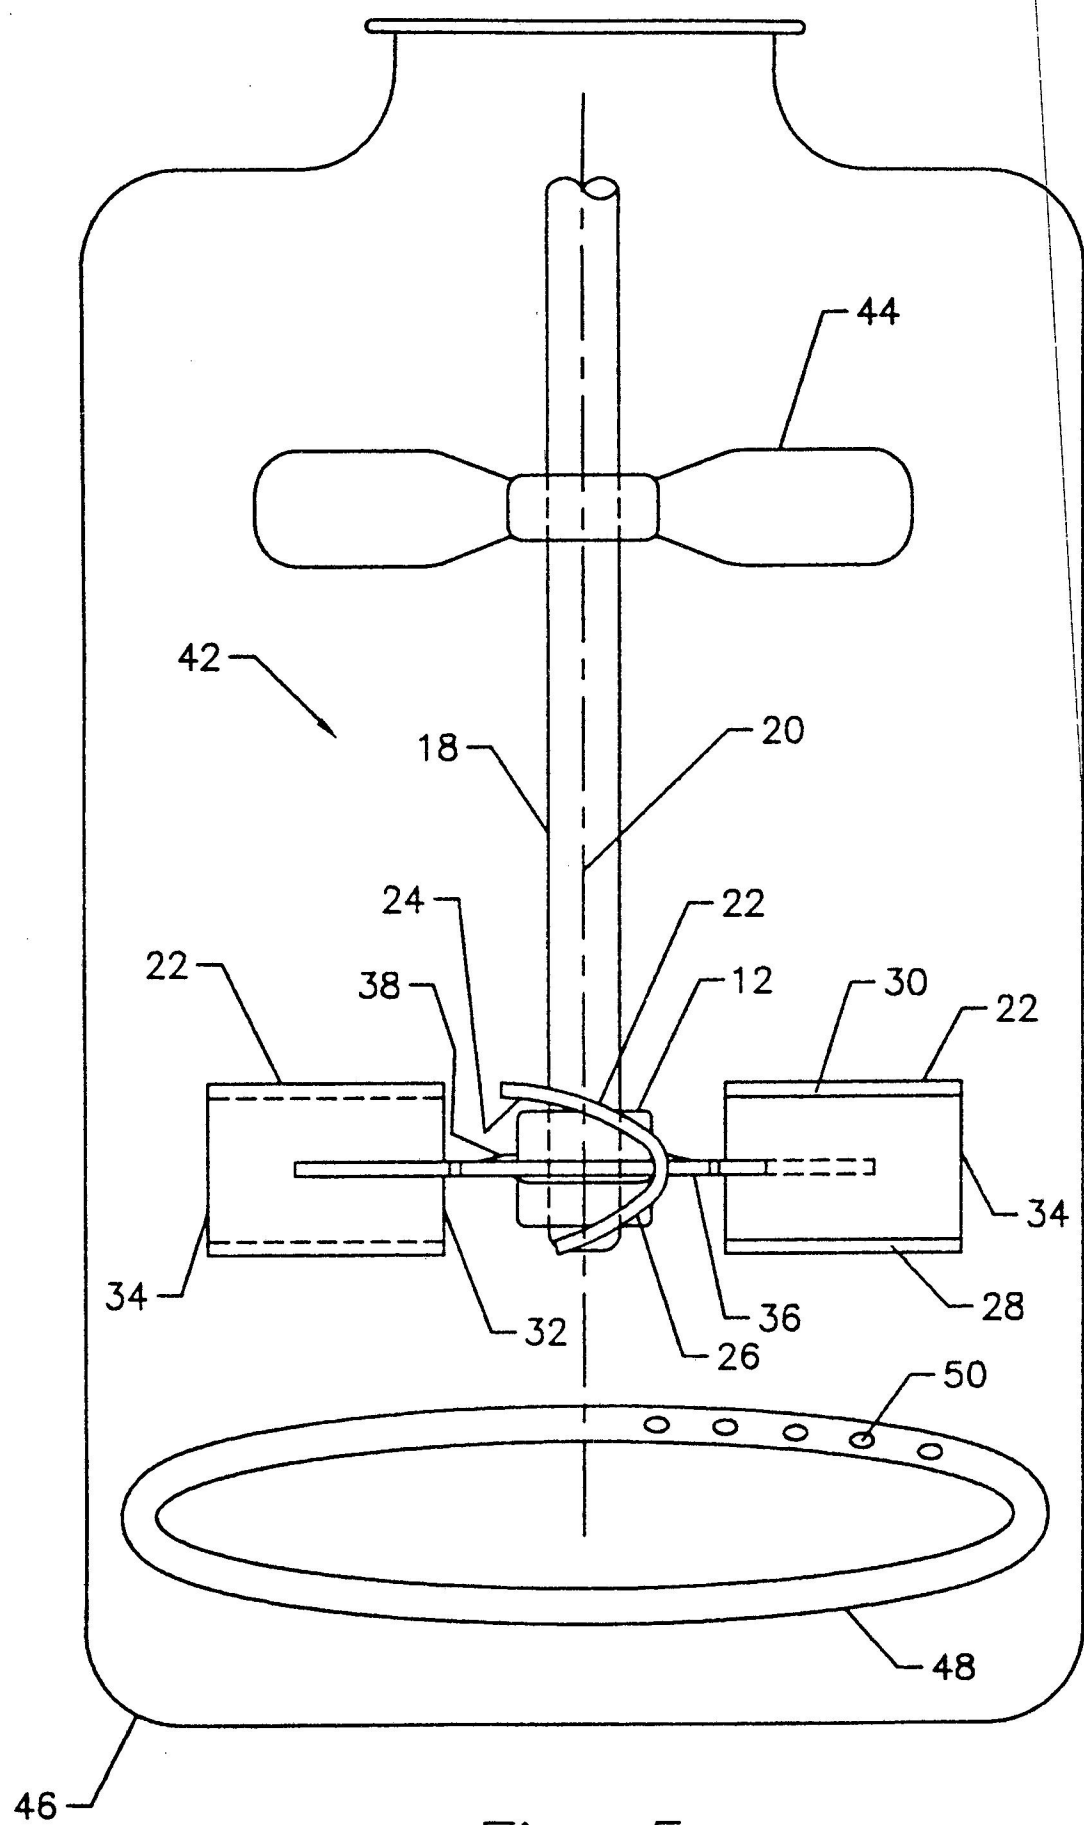


Fig. 4



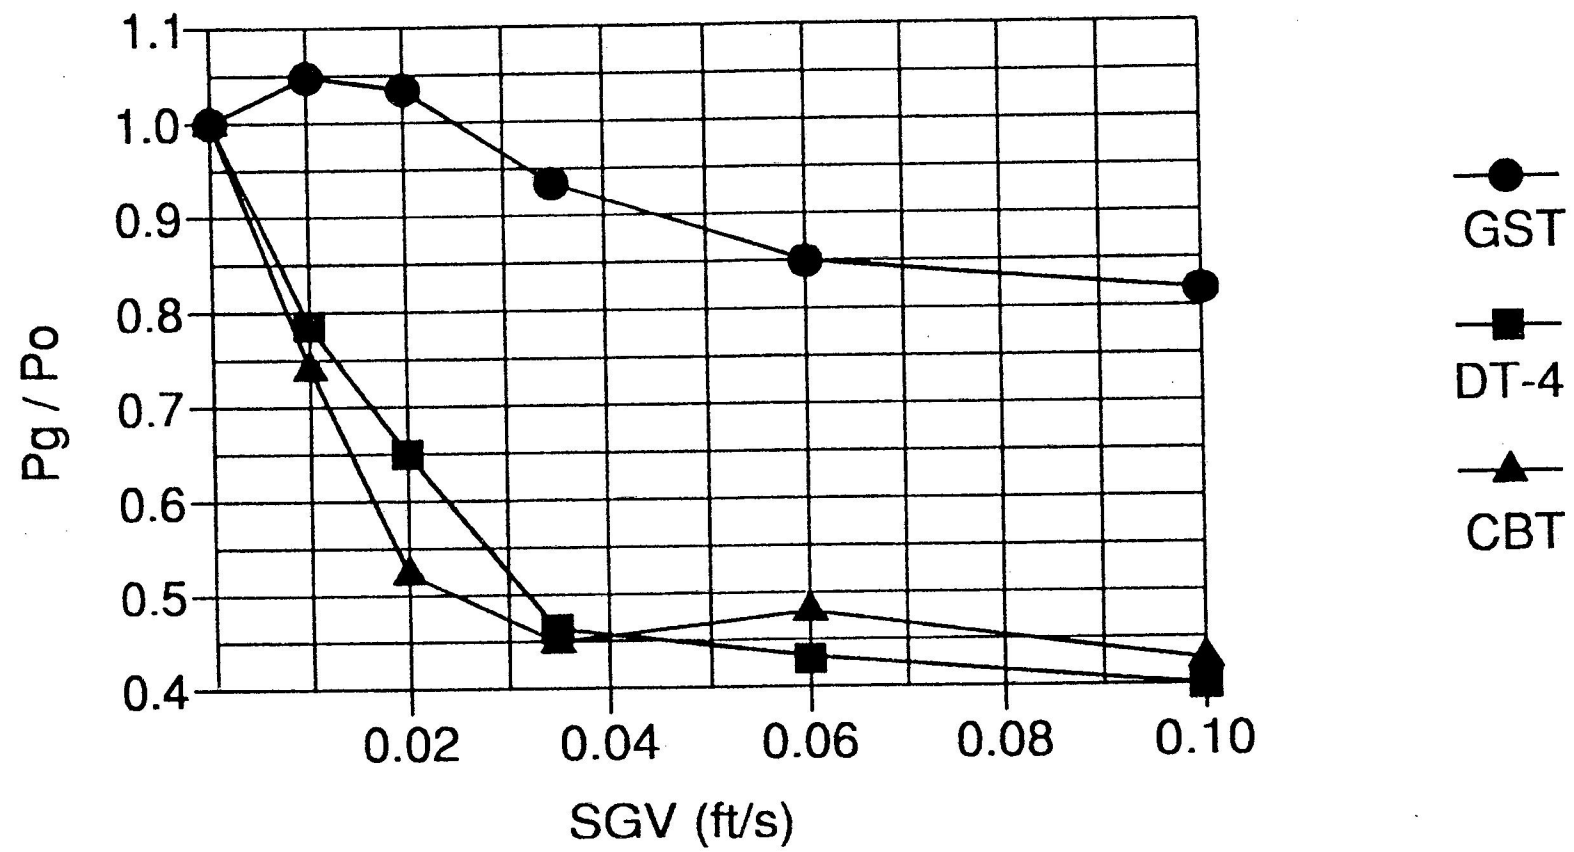


Fig. 6

