

Clarke, M
COLOMBIA

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO



No. 08-116825- -00002-0000

Fecha: 2008-12-29 14:43:15 Dep. 2020 NUECREACION
Tra. 2 PATENTES Eve: 1 REGDEPOSITO
Act. 329 CTOINFORMACION Folios: 49

P-1720

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO
DIVISION DE NUEVAS CREACIONES
E. S. D.

Ref.: Expediente No. 08.116.825
Solicitud de Patente a nombre de
CODMAN & SHURTLEFF, INC.

Yo, JIMENA ESCOBAR URIBE, identificada como aparece al pie de mi firma, domiciliada en la Carrera 11 No. 86-53, piso 6, obrando como apoderada de la sociedad **CODMAN & SHURTLEFF, INC.**, domiciliada en Raynham, Massachussets, Estados Unidos de América, solicitante de la patente de la referencia, atentamente me permito presentar copia certificada de la solicitud de Patente número 11/931.151 presentada en Estados Unidos de América el día 31 de octubre de 2007, con la debida traducción de lo pertinente.

Señor Superintendente,


JIMENA ESCOBAR URIBE
C.C. 39.779.452 de Usaquén
T.P. 68.228
Cod. 5376
/srr

25

ESTADOS UNIDOS DE AMÉRICA
A TODOS AQUELLOS A QUIENES EL PRESENTE LLEGUE:

DEPARTAMENTO DE COMERCIO DE LOS ESTADOS UNIDOS
Oficina de Patentes y Marcas de los Estados Unidos

Octubre 30, 2008

Por medio del presente se certifica que adjunto se encuentra una copia de los archivos de la Oficina de Patentes y Marcas de los Estados Unidos de aquellos papeles de la solicitud de patente abajo identificada, la cual cumplió con los requisitos para que se le otorgara una fecha de presentación bajo 35 USC 111.

Número de Solicitud: 11/931,151

Fecha de Presentación: Octubre 31, 2007

El código del país y el número de su solicitud de prioridad para ser usado en presentación en el extranjero bajo la Convención de París, es US11/931,151


Por la autoridad del
Subsecretario de Comercio para la Propiedad Intelectual y el Director
de la Oficina de Patentes y Marcas de los Estados Unidos

(fdo) P.R. GRANT

Oficial Certificador

Sello oficial de la Oficina de Patentes y Marcas de los
Estados Unidos de América.

PA 1726390

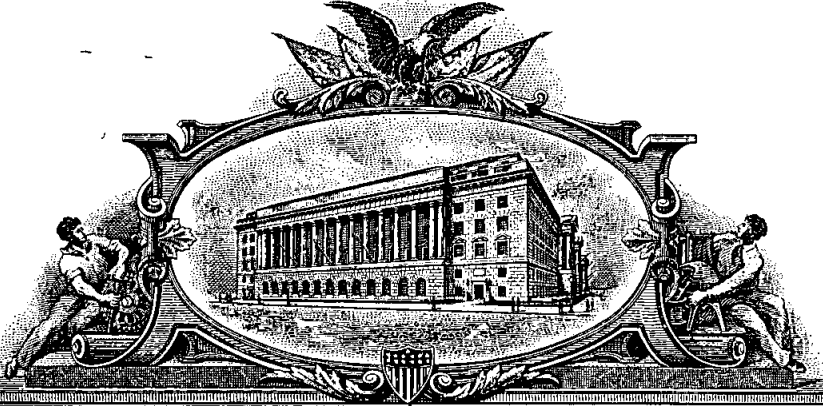

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

October 30, 2008

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.


APPLICATION NUMBER: *11/931,151*

FILING DATE: *October 31, 2007*

THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS CONVENTION, IS *US11/931,151*

By Authority of the
Under Secretary of Commerce for Intellectual Property
and Director of the United States Patent and Trademark Office




P. R. GRANT
Certifying Officer

Electronic Acknowledgement Receipt

EFS ID:	2403287
Application Number:	11931151
International Application Number:	
Confirmation Number:	1821
Title of Invention:	Wireless Pressure Sensing Shunts
First Named Inventor/Applicant Name:	Salim Kassem
Customer Number:	21125
Filer:	Joshua Trevor Matt
Filer Authorized By:	
Attorney Docket Number:	22719-92 (COD-5160USNP)
Receipt Date:	31-OCT-2007
Filing Date:	
Time Stamp:	14:51:57
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment was successfully received in RAM	\$ 1030
RAM confirmation Number	229
Deposit Account	

File Listing:

Document Number	Document Description	File Name	File Size(Bytes) /Message Digest	Multi Part /.zip	Pages (if appl.)
-----------------	----------------------	-----------	-------------------------------------	------------------	------------------

1	Application Data Sheet	ADS_fill.pdf	1010376 2d039b8ade5478e9c6415c87ad1a4fbb b0b2a24c	no	4
Warnings:					
Information:					
2		Application_22719_92.pdf	211909 1fe8bc70671a16343a0948b270b7a57c 8504882e	yes	22
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Specification		1	17	
	Claims		18	21	
	Abstract		22	22	
Warnings:					
ormation:					
3	Drawings-only black and white line drawings	Drawings_22719_92.pdf	829611 1e97aaaf35ad1097170395548f5dda11c7 061957	no	8
Warnings:					
Information:					
4	Fee Worksheet (PTO-06)	fee-info.pdf	8353 cd4f874149cbbc91c122ab31ad07460e 44554c6a	no	2
Warnings:					
Information:					
Total Files Size (in bytes):			2060249		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	22719-92 (COD5160USNP)
		Application Number	
Title of Invention	Wireless Pressure Sensing Shunts		
The application data sheet is part of the provisional or nonprovisional application for which it is being submitted. The following form contains the bibliographic data arranged in a format specified by the United States Patent and Trademark Office as outlined in 37 CFR 1.76. This document may be completed electronically and submitted to the Office in electronic format using the Electronic Filing System (EFS) or the document may be printed and included in a paper filed application.			

Secrecy Order 37 CFR 5.2

- ☐ Portions or all of the application associated with this Application Data Sheet may fall under a Secrecy Order pursuant to 37 CFR 5.2 (Paper filers only. Applications that fall under Secrecy Order may not be filed electronically.)

Applicant Information:

Applicant 1					Remove
Applicant Authority		☒ Inventor		☐ Legal Representative under 35 U.S.C. 117	☐ Party of Interest under 35 U.S.C. 118
Prefix	Given Name	Middle Name	Family Name		Suffix
	Salim		Kassem		
Residence Information (Select One) ☒ US Residency ☐ Non US Residency ☐ Active US Military Service					
City	North Attleboro	State/Province	MA	Country of Residence i	US
Citizenship under 37 CFR 1.41(b) i		CO			
Mailing Address of Applicant:					
Address 1	1 Stonefield Court				
Address 2					
City	North Attleboro	State/Province	MA		
Postal Code	02760	Countryi	US		
All Inventors Must Be Listed - Additional Inventor Information blocks may be generated within this form by selecting the Add button.					
Add					

Correspondence Information:

Enter either Customer Number or complete the Correspondence Information section below. For further information see 37 CFR 1.33(a).			
☐ An Address is being provided for the correspondence Information of this application.			
Customer Number	21125		
Email Address	j matt@nutter.com	Add Email	Remove Email

Application Information:

Title of the Invention	Wireless Pressure Sensing Shunts		
Attorney Docket Number	22719-92 (COD5160USNP)	Small Entity Status Claimed ☐	
Application Type	Nonprovisional		
Subject Matter	Utility		
Suggested Class (if any)		Sub Class (if any)	
Suggested Technology Center (if any)			
Total Number of Drawing Sheets (if any)	8	Suggested Figure for Publication (if any)	

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	22719-92 (COD5160USNP)
		Application Number	
Title of Invention	Wireless Pressure Sensing Shunts		

Publication Information:
☐ Request Early Publication (Fee required at time of Request 37 CFR 1.219)

Request Not to Publish. I hereby request that the attached application not be published under 35 U.S.C. 122(b) and certify that the invention disclosed in the attached application **has not and will not** be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.

Representative Information:

Representative information should be provided for all practitioners having a power of attorney in the application. Providing this information in the Application Data Sheet does not constitute a power of attorney in the application (see 37 CFR 1.32). Enter either Customer Number or complete the Representative Name section below. If both sections are completed the Customer Number will be used for the Representative Information during processing.

Please Select One: ☒ Customer Number ☐ US Patent Practitioner ☐ Limited Recognition (37 CFR 11.9)

Customer Number 21125

Domestic Benefit/National Stage Information:

This section allows for the applicant to either claim benefit under 35 U.S.C. 119(e), 120, 121, or 365(c) or indicate National Stage entry from a PCT application. Providing this information in the application data sheet constitutes the specific reference required by 35 U.S.C. 119(e) or 120, and 37 CFR 1.78(a)(2) or CFR 1.78(a)(4), and need not otherwise be made part of the specification.

Prior Application Status		Remove	
Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)

Additional Domestic Benefit/National Stage Data may be generated within this form by selecting the **Add** button.

Foreign Priority Information:

This section allows for the applicant to claim benefit of foreign priority and to identify any prior foreign application for which priority is not claimed. Providing this information in the application data sheet constitutes the claim for priority as required by 35 U.S.C. 119(b) and 37 CFR 1.55(a).

			Remove
Application Number	Country	Parent Filing Date (YYYY-MM-DD)	Priority Claimed
			☒ Yes ☐ No

Additional Foreign Priority Data may be generated within this form by selecting the **Add** button.

Assignee Information:

Providing this information in the application data sheet does not substitute for compliance with any requirement of part 3 of Title 37 of the CFR to have an assignment recorded in the Office.

Assignee 1	Remove
------------	------------------------

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	22719-92 (COD5160USNP)
		Application Number	
Title of Invention	Wireless Pressure Sensing Shunts		

If the Assignee is an Organization check here. ☒			
Organization Name	Codman Shurleff, Inc.		
Mailing Address Information:			
Address 1	325 Paramount Drive		
Address 2			
City	Raynham	State/Province	MA
Country	US	Postal Code	02767
Phone Number		Fax Number	
Email Address			
Additional Assignee Data may be generated within this form by selecting the Add button.			Add

Signature :

A signature of the applicant or representative is required in accordance with 37 CFR 1.33 and 10.18. Please see 37 CFR 1.4(d) for the form of the signature.					
Signature	/Joshua T. Matt/			Date (YYYY-MM-DD)	2007-10-31
First Name	Joshua	Last Name	Matt	Registration Number	55435

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether the Freedom of Information Act requires disclosure of these records.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspections or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

WIRELESS PRESSURE SENSING SHUNTS

FIELD OF THE INVENTION

[0001] The present invention generally relates to pressure sensors, and more particularly to pressure-sensing shunts.

BACKGROUND

[0002] Sensing pressure is useful for a variety of medical purposes. For example, treatment of hydrocephalus can involve monitoring the pressure of cerebrospinal fluid (CSF). Hydrocephalus is a neurological condition that is caused by the abnormal accumulation of CSF within the ventricles, or cavities, of the brain. CSF is a clear, colorless fluid that is primarily produced by the choroid plexus and surrounds the brain and spinal cord. CSF constantly circulates through the ventricular system of the brain and is ultimately absorbed into the bloodstream. CSF aids in the protection of the brain and spinal cord. Because CSF keeps the brain and spinal cord buoyant, it acts as a protective cushion or "shock absorber" to prevent injuries to the central nervous system.

[0003] Hydrocephalus, which affects children and adults, arises when the normal drainage of CSF in the brain is blocked in some way. Such blockage can be caused by a number of factors, including, for example, genetic predisposition, intra-ventricular or intra-cranial hemorrhage, infections such as meningitis, head trauma, or the like. Blockage of the flow of CSF consequently creates an imbalance between the amount of CSF produced by the choroid plexus and the rate at which CSF is absorbed into the bloodstream, thereby increasing pressure on the brain, which causes the ventricles to enlarge.

[0004] Hydrocephalus is most often treated by surgically inserting a shunt system that diverts the flow of CSF from the ventricle to another area of the body where the CSF can be absorbed as part of the circulatory system. Shunt systems come in a variety of models and typically share similar functional components. These components include a ventricular catheter which is introduced through a burr hole in the skull and implanted in the patient's ventricle, a drainage catheter that carries the CSF to its ultimate drainage site, and optionally a flow-control mechanism, e.g., shunt valve, that regulates the one-way flow of CSF from the ventricle to the

drainage site to maintain normal pressure within the ventricles. The pressure within the shunt valve, which can resemble the intra-ventricular pressure, may need to be measured and the results non-invasively communicated to a remote device.

[0005] Current pressure sensors are often large, particularly relative to the size of a shunt valve, involve complex circuitry for measurement or communication, and consume an inordinate amount of power. Accordingly, there remains a need for a pressure sensor effective to measure pressure within a body or within an implanted medical device, such as a implanted hydrocephalus shunt valve.

SUMMARY

[0006] In one embodiment, an implantable valve is provided. The implantable valve can include a housing having a reservoir adapted to receive fluid flow therethrough between an inlet port and an outlet port. The implantable valve can also include a substrate disposed within the reservoir. A radio frequency (RF) tag can be disposed on the substrate within the reservoir and can include circuitry adapted to change one or more electromagnetic characteristics in response to pressure applied thereto by fluid in the reservoir and can be adapted to produce a response to a wireless signal characterized by the one or more electromagnetic characteristics that correlates to a pressure of fluid in the reservoir, as well as a memory for storing data, which can reside on the same substrate as the circuitry adapted to change one or more electromagnetic characteristics in response to pressure applied thereto. For example, the one or more electromagnetic characteristics can be resonant frequency, harmonic spectra, or Q factor. In some embodiments, the pressure of fluid in the reservoir can detectably change any of the shape and the capacitance of the radio frequency tag so as to change the one or more electromagnetic characteristics thereof. Moreover, the circuitry in the radio frequency tag can include an inductor and a capacitor connected to form an electrical circuit having a resonant frequency, the capacitor comprising a pair of conductors separated by a dielectric. The pressure of fluid in the reservoir can detectably change a distance between the pair of conductors. The distance between the pair of conductors can correlate to any of the resonant frequency, harmonic spectra, and Q factor of the electric circuit.

[0007] A wide array of variations are possible. The radio frequency tag can have an antenna that

is adapted to communicate with an external reading device and to provide a response that correlates to the pressure of fluid flowing through the reservoir. The radio frequency tag can also include digital logic circuitry which can reside on the same substrate as the memory. In some embodiments, the stored data can include any of sensor identification data, sensed pressure data, and patient data.

[0008] In other embodiments, the implantable valve can include a valve assembly disposed within the housing and adapted to control a rate of fluid flowing through the housing. The radio frequency tag can be adapted to measure a pressure of fluid flowing through the valve assembly.

[0009] In another embodiment, an implantable valve is provided which has a housing defining a reservoir for receiving fluid flow therethrough. A valve assembly can be disposed in the housing and adapted to control a rate of fluid flow through the reservoir. In addition, a substrate can be disposed in said reservoir. A radio frequency tag can be disposed on the substrate in the reservoir and can include circuitry adapted to measure a pressure of fluid in the reservoir and to indicate the measured pressure via at least one electromagnetic characteristic of the radio frequency tag, and can further include a memory for storing data, the memory residing on the same substrate as the circuitry adapted to measure the pressure of fluid. For example, the electromagnetic characteristic can be resonant frequency, harmonic spectra, and Q factor. In some embodiments, the radio frequency tag can be adapted to store data and to communicate stored data to an external reading device. In other embodiments, the radio frequency tag can include an antenna adapted to communicate to an external reading device. The radio frequency tag can be adapted to communicate a radio frequency having the at least one electromagnetic characteristic to the external reading device upon receipt of a wireless signal from the external reading device.

[0010] In some embodiments, the pressure of fluid in the reservoir can detectably change the shape of the radio frequency tag so as to change the at least one electromagnetic characteristic of the radio frequency tag. For example, the circuitry in the radio frequency tag can include an inductor and a capacitor connected to form an electrical circuit having a resonant frequency, the capacitor comprising a pair of conductors separated by a dielectric. The pressure of fluid in the reservoir can detectably change a distance between the pair of conductors. The distance between

the pair of conductors can correlate to any of the resonant frequency, harmonic spectra, and Q factor of the electric circuit.

[0011] In other aspects, an exemplary method for measuring ventricular pressure is provided. The method can include positioning a distal end of a ventricular catheter within a patient's ventricle. The method can further include coupling a proximal end of the ventricular catheter to a valve inlet formed on an implantable valve, and coupling a valve outlet formed on the valve to a drainage catheter such that fluid flows from the ventricle through a reservoir in the valve to the drainage catheter. A rate of fluid flowing through the valve can be controlled by a valve assembly disposed within the implantable valve. The method can also include obtaining a pressure measurement of a pressure of fluid in the valve by detecting a electromagnetic characteristic of a response of a radio frequency tag associated with the valve. The method can also include storing data in a memory in the radio frequency tag. In some embodiments, obtaining the pressure measurement comprises wirelessly receiving a response from the radio frequency tag to a signal and detecting at least one electromagnetic characteristic. For example, the electromagnetic characteristic can be resonant frequency, harmonic spectra, or Q factor. Obtaining the pressure measurement can include detecting a change in one or more electromagnetic characteristics. In some embodiments, obtaining the pressure measurement can include wirelessly transmitting a signal to the radio frequency tag and measuring power received from the radio frequency tag. The signal can be distributed over a plurality of frequencies. In other embodiments, obtaining the pressure measurement includes wirelessly transmitting a signal to the radio frequency tag and measuring the resulting harmonic spectrum. In many embodiments, the radio frequency tag can include circuitry having a resonance frequency for sending pressure and, on the same substrate, a memory for storing data.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The invention will be more fully understood from the following detailed description taken in conjunction with the accompanying drawings, in which:

[0013] FIG. 1 is a schematic view of an exemplary embodiment of an implantable valve;

[0014] FIG. 2 is a schematic view of another embodiment of an implantable valve;

[0015] FIG. 3 is a schematic diagram of a resonator circuit;

[0016] FIG. 4 is a graph of an output current signal as a function of frequency for the circuit of FIG. 3;

[0017] FIG. 5 is a graph of an output voltage signal as a function of frequency for the circuit of FIG. 3;

[0018] FIG. 6 is a cross-sectional view of the implantable valve of FIG. 1 implanted in a body and an exemplary embodiment of an external radio frequency telemetry system disposed adjacent thereto outside the body for reading a signal from the implantable valve;

[0019] FIG. 7 is a perspective view of an exemplary embodiment of an external radio frequency telemetry system;

[0020] FIG. 8 is a perspective view of the external radio frequency telemetry system of FIG. 7 in a disassembled configuration;

[0021] FIG. 9 is a top view of another embodiment of an implantable valve;

[0022] FIG. 10 is an exploded view of a portion of the implantable valve shown in FIG. 9;

[0023] FIG. 11 is a perspective view of another exemplary embodiment of an implantable valve;

[0024] FIG. 12 is a side cutaway view of the valve shown in FIG. 11 showing a radio frequency tag disposed therein for sensing pressure; and

[0025] FIG. 13 is a top cutaway view of the valve shown in FIG. 12.

DETAILED DESCRIPTION

[0026] Certain exemplary embodiments will now be described to provide an overall understanding of the principles of the structure, function, manufacture, and use of the devices and methods disclosed herein. One or more examples of these embodiments are illustrated in the accompanying drawings. Those skilled in the art will understand that the devices and methods specifically described herein and illustrated in the accompanying drawings are non-limiting

exemplary embodiments and that the scope is defined solely by the claims. The features illustrated or described in connection with one exemplary embodiment may be combined with the features of other embodiments. Such modifications and variations are intended to be included within the scope of the present application.

[0027] Generally, methods and devices for sensing pressure, and in particular for sensing pressure within an implantable medical device such as a hydrocephalus shunt, are provided. In certain exemplary embodiments, the methods and devices can be particularly useful in that they can allow for non-invasive, instantaneous, and/or continuous monitoring of intra-ventricular pressure, thereby reducing risk of infections from invasive monitoring and improving the ability and speed of diagnosing problems within a shunt, such as valve blockage. The methods and devices disclosed herein can provide a compact and low-power sensor that can easily be incorporated into a wide range of medical devices. A person skilled in the art will appreciate that, while the devices and methods are described in connection with an implantable shunt valve, this is by way of illustration only. The device and methods can be used for a variety of medical procedures to measure the pressure in a variety of areas of the body and/or in a variety of devices. Furthermore, a person having ordinary skill in the art will appreciate that the implantable valve can have a variety of other configurations.

[0028] While the implantable valve 100 can have virtually any configuration, and a variety of implantable valves known in the art can be used, as shown in FIG. 1 the implantable valve 100 has a valve housing 102 with proximal and distal ends 104a, 104b. The housing 102 can have virtually any configuration, shape, and size, preferably one making the housing 102 suitable for subcutaneous implantation. Fluid (e.g., CSF) can flow through the housing 102 from an inlet (fluid entry) port 106 at the proximal end 104a, through a reservoir 108 and out an outlet (fluid exit) port 110 at the distal end 104b. The location and size of the ports 106, 110 can vary, but in many embodiments they can be adapted to allow fluid to flow therethrough and into and out of the housing 102. The proximal and distal ends 104a, 104b of the valve 100 can each be open and adapted to couple to another medical device, such as a catheter. The valve housing 102 can contain a valve assembly 112 for controlling the flow of fluid from the inlet port 106 to the outlet port 110, and a pressure sensor assembly 118 for measuring a pressure of the fluid flowing through the valve 100, as will be described in more detail below with respect to FIG. 2. While

the valve assembly 112 and the pressure sensor assembly 118 of the valve 100 are shown in-line with one another and with the inlet port 106 and outlet port 110, the valve 100 can have a variety of other configurations, and the valve assembly 112, the pressure sensor assembly 118, the inlet port 106, and the outlet port 110 can be positioned at various locations relative to one another. For example, the inlet port 106 can extend at a right angle with respect to the pressure sensor assembly 118 such that the inlet port 106 extends in a direction substantially transverse to a longitudinal axis of the valve 100. The valve assembly 112 itself can also have a variety of configurations. By way of non-limiting example, exemplary valves are described in U.S. Patent Nos. 3,886,948, 4,332,255, 4,387,715, 4,551,128, 4,595,390, 4,615,691, 4,772,257, and 5,928,182, all of which are hereby incorporated by reference in their entireties.

[0029] As shown, the valve 100 can include a chipless RF tag 114 disposed in the reservoir 108 for measuring a pressure of the fluid flowing through the valve 100 and for communicating with an external reading device, as will be described in more detail below. In some embodiments, the RF tag 114 can include a chip to store data and can communicate stored data to an external reading device. The pressure of fluid in the reservoir 108, can directly or indirectly (e.g., through a flexible membrane) push against the RF tag 114 and change electrical properties (e.g., capacitance) of circuitry in the RF tag 114. One or more of these changed properties can result in a change in the response (or a characteristics of the response) of the RF tag 114 to a signal from a reading device, thereby indicating and measuring pressure, e.g., intra-cranial pressure ("ICP"). For example, the characteristic can include one or more electromagnetic characteristics, such as resonance frequency, Q factor, or harmonic spectra of the RF tag 114. As will be explained in more detail below, the electromagnetic properties can be determined and/or altered by changes in the physical/electrical characteristics of circuitry in the RF tag 114.

[0030] The relative positions of the elements shown in the valve 100 of FIG. 1 can vary in different embodiments. For example, while the valve assembly 112 and the RF tag 114 are shown in-line with one another and with the inlet and outlet ports 106, 110, and the RF tag 114 is positioned upstream of the valve 100, the valve 100 can have a variety of other configurations and the valve assembly 112, the RF tag 114, the inlet port 106, and the outlet port 110 can be positioned at various locations relative to one another. For example, as shown in FIG. 2, the RF tag 114 is disposed in an offset tag housing area 200 of the reservoir 108 but is in fluid

communication with the reservoir 108.

[0031] The housing 102 can be formed from a variety of materials. In an exemplary embodiment, however, the housing 102 is formed from a flexible, biocompatible material. Suitable materials include, for example, polymers such as silicones, polyethylene, and polyurethanes, all of which are known in the art. The housing 102 can also optionally be formed from a radio-opaque material. A person skilled in the art will appreciate that the materials are not limited to those listed herein and that a variety of other biocompatible materials can be used.

[0032] The valve 100 and/or the RF tag 114 can also optionally include a coating 116 that is adapted to hermetically seal all or at least a portion of the valve 100, the RF tag 114, and/or other components such as a sensor, an antenna, a connector, etc. The coating 116 can be applied to only a portion of the RF tag 114, to the entire RF tag 114, and/or to the valve 100. The RF tag 114 and the valve 100 can be coated separately with different coatings, or alternatively, together in a single coating, which can seal the RF tag 114 in place with the valve 100. In the embodiment shown in FIG. 4 in which the RF tag 114 is disposed in the valve 100, the RF tag 114 is pre-coated prior to coupling the sensor assembly to the housing 102. Once coated, the RF tag 114 can be appropriately positioned. An adhesive or other mating technique can be used to affix the RF tag 114 within the housing 102, as shown in FIG. 5, however, in some embodiments it can be useful to allow the RF tag 114 to be removed from the valve 100 if necessary.

[0033] Alternatively, the valve 100 can be coated after the RF tag 114 is disposed in the reservoir 108 to form a protective sheath over the RF tag 114 and the housing 102. The ports 106, 110 can be protected from any coating applied thereto, formed after the coating is applied, or be cleared of any coating applied thereto to allow fluid to flow therethrough. In other embodiments, only certain components of the valve 100 can be coated. A person skilled in the art will appreciate that a variety of other techniques can be used to seal the RF tag 114 and/or other components of the valve 100.

[0034] The material used to form the coating 116 can vary, and a variety of techniques can be used to apply the coating. By way of non-limiting example, suitable materials include polyurethane, silicone, solvent-based polymer solutions, and any other polymer that will adhere to the components to which it is applied to, and suitable techniques for applying the coating

include spray-coating or dip-coating.

[0035] As previously mentioned, the RF tag 114 can be adapted to measure a pressure of an external environment, e.g., of fluid in the reservoir 108 and/or fluid flowing through the valve 100 through the reservoir 108. In use, the pressure of fluid in the valve 100 can impinge on the RF tag 114 through a coating, a deflectable membrane as described above, or in some embodiments directly contact the RF tag 114. The pressure from the fluid (or other external conditions) can alter the physical and electrical properties of the RF tag 114 which in turn can alter the electromagnetic behavior of the RF tag 114 in a measurable and predictable manner. In other words, the behavior of the RF tag 114 can change in response to a stimulus. The behavior manifests as a change in a measurable characteristic (for example, an electromagnetic characteristic such as resonant frequency, harmonic spectra, and/or quality (Q) factor) in the response of the RF tag 114 to an interrogating wireless signal (e.g., a time-varying electromagnetic field) directed at it from an external reader. Any characteristic, or a combination thereof, can be measured or analyzed to indicate CSF pressure.

[0036] In some embodiments, the RF tag 114 can be a planar electromagnetic resonator having capacitive and inductive elements therein, and in some embodiments it can have an electromagnetically active material located between its capacitive and inductive elements. For many embodiments, the RF tag 114 can be generally represented by a resonator circuit 300 as shown in FIG. 3. As shown, the circuit 300 includes a capacitor 302, an inductor 304, and an intrinsic resistance 306 (e.g., a dielectric between two conductors forming the capacitor 302). When the RF tag 114 is embedded in the valve 100, shifts in the resonant frequency of the circuit 300 can be monitored on a continuous or intermittent basis to measure pressure of fluid flowing through the valve 100. The fluid pressure can detectably change a distance between the conductors of the capacitor 302, where the distance can affect an electrical property of the circuit 300 that is manifested as a change in a resonant frequency or other electromagnetic characteristic. The resonant frequency of the circuit 300 or other characteristic can be detected in a variety of ways, such as by measuring power reflected from the circuit 300 or measuring decaying circulating power of the circuit 300 following a outside signal (e.g., from a telemetry device). FIG. 4 illustrates an example of a graph showing an output signal of the circuit 300 when introduced to an outside signal. The reflected power of the circuit 300 is at a minimum at

the resonant frequency, where ω can be expressed as:

$$\omega = 2\pi f = \frac{1}{\sqrt{LC}}$$

[0037] with f representing the resonant frequency, L representing inductance of the inductor 304, and C representing capacitance of the capacitor 302. FIG. 5 illustrates another example of a graph showing an output signal of the circuit 300 when introduced to an outside signal. The reflected power of the circuit 300 in this example is at a maximum at the resonant frequency.

[0038] Further information on RF tags, including techniques for interrogating them and examples of them, can be obtained from U.S. Patents No. 6,025,725, and 6,278,379, and U.S. Patent Application Publication No. 2004/0134991, all of which are hereby incorporated by reference in their entireties.

[0039] The shape, technical specifications, and size of the RF tag 114 can vary widely. In many embodiments, a relatively small RF tag can be used so as to minimize the footprint of the tag in the device, for example with dimensions in a range of about 5mm to 10mm, but in other embodiments, tags with dimensions of about 3mm to 50 mm can be used and any size is possible. The RF tag 114 can be adapted to be in communication with an external device (e.g., by having an antenna) and to store data.

[0040] The RF tag 114 can have any shape, such as elliptical, circular, or rectangular (including square), and can have virtually any size. The following table (Table 1) lists, by way of example only, available RF tags suitable for use with the devices and methods described herein. Passive as well as semi-passive and active tags can be used, although semi-passive and active tags sometimes are larger than passive tags because they can incorporate an internal battery, e.g., for power purposes.

Frequency	125 KHz	5-7 MHz	13.56MHz	303/433 MHz	860-960 MHz	2.45 GHz
Tag Type						
Passive	ISO11784/5, 14223	ISO10536 iPico	(ISO15693)	--	ISO18000-6 Electronic	ISO18000-4 Intellitag

	ISO18000-2	DF/iPX	(ISO15693) MIFARE (ISO14443) Tag-IT (ISO15693) ISO18000-3		Product Code ("EPC") Class 0 EPC Class 1 EPC GEN II Intellitag tolls (Title 21) rail (Association of American Railroads ("AAR") S918)	μ-chip
Semi- Passive	--	--	--	--	rail (AAR S918) Title 21	ISO18000-4 Alien BAP
Active	--	--	--	Savi (American National Standards Institute ("ANSI") 371.2) ISO18000-7 RFCode	--	ISO18000-4 WhereNet (ANSI 371.1)

[0041] It should be understood that in some embodiments, the RF tag 114 can be chipless, and its electromagnetic parameters, as altered by the physical force of pressure against it, can be used to determine pressure. The RF tag 114 need not have the capability to store data or to communicate according to a protocol, and need not have processing circuitry or digital logic. A chipless RF tag can provide a circuit (for example, having measurable electromagnetic characteristics, such as a tank circuit) and can be powered from the reading device signal. Such an RF tag can be advantageous due to its relatively low power requirements, and need not have

the ability to communicate stored data or “identify” itself. However, in many embodiments the RF tag 114 can provide, in addition to the pressure sensor functionality described above, data storage for storing additional information related to the application. In other words, the RF tag 114 can include an RF chip, which in some cases can be an off-the-shelf component. An example of chip-based tags are the commonly used RF identification tags. Some of these RF identification tags provide minimal information (such as a TRUE or FALSE value), while others can store several bytes of data. A chip-based RF tag can include memory circuitry, a separate antenna, and/or simple digital logic, which in many embodiments can reside on the same substrate or package as the circuitry provided for sensing pressure (for example, the tank circuit mentioned above). Providing both circuitry for measuring pressure and memory, or other circuitry, can be advantageous in many applications to save space and to provide increased functionality. Such RF tags also can be powered by the reading device signal. In alternative embodiments, RF tags with batteries and/or processing circuitry can also be used if their size, typically relatively large, can be accommodated by the application.

[0042] Various kinds of data can be stored in the memory of an RF tag. For example, in one embodiment, the RF tag 114 can include a memory for storing data related to the patient and/or sensor. By way of non-limiting example, the RF tag 114 can store sensed pressure data, sensor identification information (e.g., implantation date, sensor type, and sensor identifier code), sensor calibration data, historical data stored from the sensor, tag identification information (e.g., implantation date, tag type, and tag identifier code), and/or patient data (e.g., desired CSF flow rate, previous sensor measurements, and patient medical history). An external reading device, described further below, can read and/or store data in such an RF tag 114. In use, for example, an external reading device can read a sensed pressure from the RF tag 114, and can store data representing or related to the sensed pressure in the memory of the RF tag 114. In many embodiments, the external reading device can provide the power the RF tag 114 requires to operate.

[0043] As illustrated in FIG. 6, the RF tag 114 can be adapted to interact with a wireless signal 600 from an external reading device 602, such as an RF telemetry device (shown in more detail in FIGS. 7-8). The reading device 602 can emit a signal 600 at one frequency or over a range of frequencies and can receive a response thereto, e.g., from the RF tag 114 or a sensor. The

response to the RF tag 114 to the wireless signal 600 can communicate information from the RF tag 114. In the case of a chipless tag, a characteristic of the response from the tag can indicate a measured pressure, as explained above. In the case of a chip-based RF tag having memory associated therewith, the response of the tag can also include (e.g., according to a communication protocol) the information stored in its memory.

[0044] Virtually any type of external reading device can be used as the reading device 602. In one exemplary embodiment, the reading device 602 can include an RF module (e.g., transmitter and receiver), a control unit (e.g., microcontroller), a coupling element to the transponder (e.g., antenna), and an additional interface (e.g., Recommended Standard (RS) 232, RS-485, Firewire, USB, Bluetooth, ZigBee, etc.) to enable communication with another external device (e.g., a personal computer). The reading device 602 can provide the power required by the RF tag 114 to operate, e.g., through the coupling element. The reading device 602, as shown in FIG. 8, can be positioned adjacent to the RF tag 114 to telemetrically communicate with the RF tag 114, and thereby obtain and/or transmit data. The embodiment of the reading device 602 in FIG. 6 is shown in a front perspective in FIG. 7 and in a front perspective, disassembled configuration in FIG. 8.

[0045] FIGS. 9 and 10 illustrate another exemplary embodiment of an implantable valve 900 having an RF tag therein for sensing pressure. As shown, the implantable valve 900 has a valve housing 902 with an inlet 904 and an outlet 906. The valve housing 902 can contain a valve assembly or mechanism 908 for controlling the flow of fluid from the inlet 904 to the outlet 906, and a pressure sensing assembly 910 for measuring a pressure of the fluid flowing through the valve 900.

[0046] The pressure sensor assembly 910 shown in FIG. 9 is provided in more detail in FIG. 10. As shown, the pressure sensor assembly 910 can include a housing with a septum 1000 defining a fluid reservoir 1010 therein. An RF tag 1002 can be disposed in the reservoir 1010 for sensing pressure therein, supported by a washer 1008 and a backing 1004. The sensor assembly 910 can also include a needle guard 1006 disposed between the reservoir and the RF tag 1002, for example to protect the RF tag but still allow for the RF tag 1002 to be in fluid communication with the reservoir and thus obtain an accurate pressure measurement.

[0047] The septum 1000 can have a variety of shapes and sizes, but in the illustrated exemplary embodiment the septum 1000 has a generally hemi-spherical or domed portion that defines a reservoir 1010 therein. The reservoir can be in fluid communication with an inlet tube 1012 that couples to the inlet 904 of the valve 900, and an outlet tube 1014 that couples to the outlet 906 of the valve 900. When the septum 1000 is mated to the backing 1004, the reservoir 1010 defined by the septum 1000 is sealed, thereby allowing fluid to flow from the inlet 904 of the valve 900, through the tag housing 1000, through the valve 900, and out the outlet 906. A flange 1016 can be formed at around the base of the septum allow the device to be secured to tissue. For example, the flange 1016 can include one or more suture holes formed therein for receiving suture to attach the flange 1016 to tissue.

[0048] As shown, an RF tag 1002 can be disposed in the reservoir 1010 for sensing the pressure of fluid therein. The RF tag 1002, which can have any or all of the features of the RF tag 114 described previously, is shown as having a substantially circular shape, and can communicate with an external RF reading device, as previously described. The RF tag 1002 can also include a fluid-impermeable coating disposed therearound, as previously described, to protect the RF tag 1002 from fluid flowing through the reservoir 1010. A washer 1008 and a backing 1004 can provide support or a securing means for the RF tag 1002. As shown, the washer and the backing 1004 are disposed underneath the RF tag 1002, however a wide variety of configurations are possible. The washer 1008 can also be configured such that the RF tag 1002 is sub-flush with the washer 1008. Such a configuration can protect the RF tag 1002 from potential damage if the domed portion of the septum 1000 is depressed to pump fluid through the reservoir, to test the valve 900 or to clear the valve 900 from debris, etc.

[0049] As further shown in FIG. 10, the sensor assembly 910 can also include a needle guard 1006 for protecting the RF tag 1002. In particular, the needle guard 1006 can protect the RF tag 1002 from coming into contact with the domed portion of the septum 1000 when the domed portion is depressed, as the needle guard 1006 can be positioned between the RF tag 1002 and the septum 1000. The needle guard 1006 can also be provided to protect the RF tag 1002 from a needle inserted through the septum 1000 and into the reservoir 1010. A needle may be used to deliver or withdraw fluid from the reservoir through the septum 1000. While the shape of the needle guard 1006 can vary depending on the shape of the sensor assembly 910, in an exemplary

embodiment, as shown, the needle guard 1006 has a substantially planar, circular shape and it is adapted to be disposed between the domed portion of the septum 1000 and the RF tag 1002. The needle guard 1006 can, however, include an opening formed therein and positioned adjacent to the microchip RF tag 1002 to allow fluid in the reservoir 1010 to come into contact with the RF tag 1002 or membrane or covering over the RF tag 1002. In an exemplary embodiment, a flange or protective member 1018 is disposed over the opening, without blocking the opening from fluid flow, to prevent a user from accidentally inserting a needle through the opening. A person skilled in the art will appreciate that a variety of other techniques can be used to protect the RF tag 1002.

[0050] In use, the RF tag 1002 can sense the pressure of fluid in through the reservoir 1010. In particular, the inlet 904 of the valve 900 can be coupled to a ventricular catheter for receiving fluid flow from the ventricles, and the outlet 906 can be coupled to a drainage catheter. As the fluid enters the reservoir 1010, the pressure of the fluid will apply a force to the RF tag 1002 and change one or more of its electromagnetic characteristics, thereby allowing the fluid pressure to be measured, as was described previously. The sensed pressure can be communicated to an external reading device, such as the external reading device 602 shown in FIGS. 6-8, as previously described. As mentioned previously, in many embodiments the RF tag 1002 can include a memory, and the external reading device 602 can be used to store data representing or related to the sensed pressure (or other data) back in the memory of the RF tag 1002.

[0051] FIGS. 11-13 illustrate another exemplary embodiment of an implantable valve 1100 having a housing 1102 for receiving fluid flow between a valve inlet 1104 and an valve outlet 1106, and valve assembly 1110 for controlling fluid flow therethrough. As shown in FIGS. 11-13, the housing 1102 has a substantially linear configuration. A RF tag 1124 can be disposed in the housing 1102 in an area between the inlet 1104 and the valve assembly 1112. In some embodiments, the area can be enlarged to form a larger area or larger reservoir (for example, as shown in FIGS. 9-10) and/or can be located elsewhere in the valve 1100. In use, the pressure of the fluid on the RF tag 1124 can alter one or more of the electromagnetic characteristics thereof, which can be detected in its response to a signal from an external reader, as previously described.

[0052] As shown, the implantable valve 1100 shown in FIGS. 11-13 can also include a valve

assembly 1110 for controlling the flow of fluid according to one of a plurality of selectable pressure settings. As shown, the valve assembly 1110 includes a ball 1112 engaging a valve seat 1114, which sits in a valve opening 1115 in the fluid path between the valve inlet 1104 and the valve outlet 1106, and which controls fluid flow therethrough. The ball 1112 can be under the force of a spring 1118 or other biasing element. The spring 1118 can be in the form of an arm extending from an adjustment mechanism, which as shown in FIGS. 12-13 is a stepper motor 1120, to the upper surface of the ball 112 such that it exerts a downward force thereon. The stepper motor 1120 includes a stepped surface, each step representing a pressure setting. As can be seen in FIGS. 12-13, the rotational position of the stepper motor 1120 can determine the force of the spring 1118 on the ball 1112 and thereby control the pressure at which fluid will flow through the valve opening 1115. In use, the rotational position of the stepper motor 1120 can be controlled by an external programmer, for example via a changing electromagnetic field applied to magnetic field elements disposed about a central axis 1122 of the stepper motor 1120 to rotate the stepper motor in a controlled fashion. The magnetic field elements can be magnets shaped and positioned with respect to the axis or rotor of the stepper motor 1120. More information on the operation of stepper motors and such valves can be obtained from U.S. Patent Nos. 5,928,182; 4,772,257; and 4,615,691, all of which are hereby incorporated by reference in their entireties.

[0053] In another aspect, a method for sensing pressure in a medical device, such as any of the valves previously described, is provided. Referring for illustrative purposes only to FIG. 9, the inlet 904 of the valve 900 can be coupled to a proximal end of a ventricular catheter that has its distal end positioned in a patient's ventricle. The valve 900 can be implanted in a patient, e.g., subcutaneously behind the ear, elsewhere on the head, in a shoulder region (see FIG. 6, for example), torso, or virtually anywhere. The typically flexible catheter can extend through the patient to the ventricle.

[0054] A drainage catheter can be coupled to the outlet 906 of the valve 900, where the drainage catheter can extend through the patient to an area where excess fluid can safely drain. The rate of fluid flowing through the valve 900 from the inlet 904 to the outlet 906 can be controlled by the valve assembly 908. The pressure of fluid (e.g., CSF) within the valve 900 or flowing through the valve 900 can be obtained by measuring a response of the RF tag 1002 (e.g., using a

reading device 602) disposed in the reservoir under the domed portion 1010. The method can further include storing data (for example, data related to or representing a sensed pressure) back into the RF tag 1002 using an external device such as the reading device 602. In many embodiments, the reading device 602 can provide the power required by the RF tag 1002 to operate. The method can also include implanting the RF tag concurrently or subsequently (e.g., as a replacement or retrofit) with the valve or other medical device.

[0055] Further information on wireless shunts can be obtained from U.S. Patent Application No. _____, entitled "Wireless Pressure Setting Indicator" by Salim Kassem (Attorney Docket No. 22719-90 (COD-5163USNP)), U.S. Patent Application No. _____, entitled "Wireless Flow Sensor" by Salim Kassem (Attorney Docket No. 22719-91 (COD-5161USNP)), and U.S. Patent Application No. _____, entitled "Wireless Shunts With Storage" by Salim Kassem (Attorney Docket No. 22719-93 (COD-5176USNP)), all of which are being filed on the same date as the present application and which are hereby incorporated by reference in their entirety. Also incorporated by reference in its entirety is co-pending, commonly assigned U.S. Patent Application No. 10/907,665, entitled "Pressure Sensing Valve" and published as U.S. Publication No. 2006-0211946 A1.

[0056] A person skilled in the art will appreciate that the various methods and devices disclosed herein can be formed from a variety of materials. Moreover, particular components can be implantable and in such embodiments the components can be formed from various biocompatible materials known in the art. Exemplary biocompatible materials include, by way of non-limiting example, composite plastic materials, biocompatible metals and alloys such as stainless steel, titanium, titanium alloys and cobalt-chromium alloys, glass, and any other material that is biologically compatible and non-toxic to the human body.

[0057] One skilled in the art will appreciate further features and advantages based on the above-described embodiments. Accordingly, the description is not to be limited by what has been particularly shown and described, except as indicated by the appended claims. All publications and references cited herein are expressly incorporated herein by reference in their entirety.

[0058] What is claimed is:

REIVINDICACIONES

Lo que se reivindica es:

1. Una válvula implantable, comprende:

Una carcasa que tiene un reservorio adaptado para recibir flujo de líquido por él entre una puerta de entrada y una puerta de salida:

Un sustrato dispuesto dentro de dicho reservorio; y

Un marcador de radiofrecuencia colocado sobre el sustrato dentro del reservorio y que incluye circuitos adaptados para cambiar una o más características electromagnéticas en respuesta a la punción aplicada a este por el líquido en el reservorio y para producir una respuesta a una señal inalámbrica caracterizada por la una o más características electromagnéticas que se correlacionan con una punción de líquido en el reservorio,

El marcador de radiofrecuencia incluye adicionalmente una memoria para almacenar datos, la memoria reside en el mismo sustrato de los circuitos adaptados para cambiar

una o más características electromagnéticas en respuesta a la presión aplicada a esta.

2. La válvula implantable de la reivindicación 1, que comprende adicionalmente un detector de aguja dispuesto dentro de la carcasa y adaptado para proteger el marcador de radiofrecuencia de una penetración de aguja dentro de la carcasa.
3. La válvula implantable de la reivindicación 1, en donde la una o más características electromagnéticas se selecciona de la frecuencia de resonancia, el espectro armónico y el factor Q.
4. La válvula implantable de la reivindicación 1, que comprende adicionalmente:

Un conjunto de válvula dispuesto dentro de la carcasa y adaptado para controlar una velocidad del flujo que fluye por la carcasa,

En donde el marcador de radiofrecuencia está adaptada para medir una presión del flujo de líquido dentro de la carcasa.

5. La válvula implantable de la reivindicación 1, en donde el marcador de radiofrecuencia incluye circuitos de lógica digital, los circuitos de lógica digital residen en el mismo sustrato de la memoria.
6. La válvula implantable de la reivindicación 1, en donde los datos almacenados incluyen cualquier dato de identificación del sensor, datos de la presión medida, y datos del paciente.
7. La válvula implantable de la reivindicación 1, en donde la presión del líquido en el reservorio cambia de manera detectable cualquiera entre la forma y la capacitancia del marcador de radiofrecuencia de modo que cambia la una o más características electromagnéticas de la misma.
8. La válvula implantable de la reivindicación 1, en donde

Los circuitos incluyen un inductor y un capacitor conectados para formar un circuito eléctrico que tiene una frecuencia de resonancia, el capacitor comprende un par de conductores separados por un dieléctrico; y

Una presión de líquido en el reservorio que cambia de manera detectable una distancia entre el par de conductores,

En donde la distancia entre el par de conductores se correlaciona con cualquiera de la frecuencia de resonancia, el espectro armónico y el factor Q del circuito eléctrico.

9. Una válvula implantable, comprende:

Una carcasa que tiene un reservorio adaptado para recibir flujo de líquido por él;

Un conjunto de válvula dispuesto en la carcasa y adaptado para controlar una velocidad del flujo de líquido por el reservorio;

Un sustrato dispuesto dentro de dicho reservorio; y

Un marcador de radiofrecuencia colocado sobre el sustrato en el reservorio y que incluye circuitos adaptados para medir una presión de líquido en el reservorio y para indicar la presión medida por vía de por lo menos una

característica electromagnética del marcador de radiofrecuencia,

El marcador de radiofrecuencia incluye una memoria para almacenar datos, la memoria recibe sobre el mismo sustrato que el circuito adaptado para medir la presión del líquido.

10. La válvula implantable de la reivindicación 9, que comprende adicionalmente un protector de aguja dispuesto dentro de la carcasa y adaptado para proteger el marcador de radiofrecuencia de la penetración de una aguja por el septo.
11. La válvula implantable de la reivindicación 9, en donde por lo menos una característica electromagnética se selecciona del grupo que consiste de: frecuencia de resonancia, espectro armónico, y factor Q.
12. La válvula implantable de la reivindicación 9, en donde el marcador de radiofrecuencia comprende una antena adaptada para comunicarse con un dispositivo de lectura externo.

13. La válvula implantable de la reivindicación 12, en donde el marcador de radiofrecuencia está adaptada para comunicar una radiofrecuencia que tiene la por lo menos una característica electromagnética al dispositivo de lectura externo luego de recibir una señal inalámbrica desde el dispositivo de lectura externo.

14. La válvula implantable de la reivindicación 9, en donde la presión del líquido en el reservorio cambia de manera detectable la forma del marcador de radiofrecuencia de modo que cambia la por lo menos una característica electromagnética del marcador de radiofrecuencia.

15. La válvula implantable de la reivindicación 9, en donde

El circuito incluye un inductor y un capacitor conectados para formar un circuito eléctrico que tiene una frecuencia de resonancia, el capacitor comprende un par de conductores separados por un dieléctrico; y

La presión del líquido en el reservorio cambia detectablemente una distancia entre el par de conductores, en donde

La distancia entre el par de conductores se correlaciona con cualquiera entre la frecuencia de resonancia, el espectro armónico, y el factor Q del circuito eléctrico

16. Un método para medir la presión ventricular, comprende:

Posicionar un extremo distal de un catéter ventricular dentro de un ventrículo del paciente;

Acoplar un extremo proximal del catéter ventricular a una entrada de válvula formada sobre una válvula implantable, y

Acoplar una salida de válvula formada sobre la válvula hasta un catéter de drenaje de modo que el líquido fluye desde el ventrículo por un reservorio en la válvula hasta el catéter de drenaje, en donde la velocidad del flujo que fluye por la válvula es controlada mediante un conjunto de válvula dispuesto dentro de la válvula implacable;

Obtener de manera inalámbrica una medida de presión de una presión del líquido en la válvula mediante detectar una característica electromagnética a la respuesta de un marcador de radiofrecuencia asociada con la válvula; y

Almacenar los datos en una memoria en el marcador de radiofrecuencia.

17. El método de la reivindicación 16, en donde obtener la medida de presión comprende recibir de manera inalámbrica una respuesta del marcador de radiofrecuencia a una señal y detectar por lo menos una característica electromagnética seleccionada del grupo que consiste de: frecuencia de resonancia, espectro armónico, y factor Q.

18. El método de la reivindicación 16, en donde obtener la medida de presión incluye detectar un cambio en una o más de las características electromagnéticas a una respuesta del marcador de radiofrecuencia asociada con la válvula.

19. El método de la reivindicación 16, en donde obtener la medida de presión incluye transmitir de manera inalámbrica una señal al marcador de radiofrecuencia y medir la potencia recibida desde el marcador de radiofrecuencia.

20. El método de la reivindicación 16, en donde el marcador de radiofrecuencia incluye circuitos que tienen una

frecuencia de resonancia para enviar presión y, sobre el mismo sustrato, una memoria para almacenar datos.

CLAIMS:

1. An implantable valve, comprising:
 - a housing having a reservoir adapted to receive fluid flow therethrough between an inlet port and an outlet port;
 - a substrate disposed within said reservoir; and
 - a radio frequency tag disposed on the substrate within the reservoir and including circuitry adapted to change one or more electromagnetic characteristics in response to pressure applied thereto by fluid in the reservoir and to produce a response to a wireless signal characterized by the one or more electromagnetic characteristics that correlates to a pressure of fluid in the reservoir,

the radio frequency tag further including a memory for storing data, the memory residing on the same substrate as the circuitry adapted to change one or more electromagnetic characteristics in response to pressure applied thereto.
2. The implantable valve of claim 1, further comprising a needle guard disposed within the housing and adapted to protect the radio frequency tag from a needle penetrating into the housing.
3. The implantable valve of claim 1, wherein the one or more electromagnetic characteristics is selected from resonant frequency, harmonic spectra, and Q factor.
4. The implantable valve of claim 1, further comprising:
 - a valve assembly disposed within the housing and adapted to control a rate of fluid flowing through the housing,
 - wherein the radio frequency tag is adapted to measure a pressure of the fluid flowing within the housing.
5. The implantable valve of claim 1, wherein the radio frequency tag includes digital logic circuitry, the digital logic circuitry residing on the same substrate as the memory.
6. The implantable valve of claim 1, wherein the stored data includes any of sensor identification data, sensed pressure data, and patient data.

7. The implantable valve of claim 1, wherein the pressure of fluid in the reservoir detectably changes any of the shape and the capacitance of the radio frequency tag so as to change the one or more electromagnetic characteristics thereof.
8. The implantable valve of claim 1, wherein
the circuitry includes an inductor and a capacitor connected to form an electrical circuit having a resonant frequency, the capacitor comprising a pair of conductors separated by a dielectric; and
a pressure of fluid in the reservoir detectably changes a distance between the pair of conductors,
wherein the distance between the pair of conductors correlates to any of the resonant frequency, harmonic spectra, and Q factor of the electric circuit.
9. An implantable valve, comprising:
a housing defining a reservoir for receiving fluid flow therethrough;
a valve assembly disposed in the housing and adapted to control a rate of fluid flow through the reservoir;
a substrate disposed within said reservoir; and
a radio frequency tag disposed on the substrate in the reservoir and including circuitry adapted to measure a pressure of fluid in the reservoir and to indicate the measured pressure via at least one electromagnetic characteristic of the radio frequency tag,
the radio frequency tag including a memory for storing data, the memory residing on the same substrate as the circuitry adapted to measure the pressure of fluid.
10. The implantable valve of claim 9, further comprising a needle guard disposed within the housing and adapted to protect the radio frequency tag from a needle penetrating through the septum.
11. The implantable valve of claim 9, wherein the at least one electromagnetic characteristic is selected from the group consisting of: resonant frequency, harmonic spectra, and Q factor.
12. The implantable valve of claim 9, wherein the radio frequency tag comprises an antenna adapted to communicate to an external reading device.

13. The implantable valve of claim 12, wherein the radio frequency tag is adapted to communicate a radio frequency having the at least one electromagnetic characteristic to the external reading device upon receipt of a wireless signal from the external reading device.
14. The implantable valve of claim 9, wherein the pressure of fluid in the reservoir detectably changes the shape of the radio frequency tag so as to change the at least one electromagnetic characteristic of the radio frequency tag.
15. The implantable valve of claim 9, wherein
the circuitry includes an inductor and a capacitor connected to form an electrical circuit having a resonant frequency, the capacitor comprising a pair of conductors separated by a dielectric; and
the pressure of fluid in the reservoir detectably changes a distance between the pair of conductors, wherein
the distance between the pair of conductors correlates to any of the resonant frequency, harmonic spectra, and Q factor of the electric circuit.
16. A method for measuring ventricular pressure, comprising:
positioning a distal end of a ventricular catheter within a patient's ventricle;
coupling a proximal end of the ventricular catheter to a valve inlet formed on an implantable valve, and coupling a valve outlet formed on the valve to a drainage catheter such that fluid flows from the ventricle through a reservoir in the valve to the drainage catheter, wherein a rate of fluid flowing through the valve is controlled by a valve assembly disposed within the implantable valve;
wirelessly obtaining a pressure measurement of a pressure of fluid in the valve by detecting an electromagnetic characteristic a response of a radio frequency tag associated with the valve; and
storing data in a memory in the radio frequency tag.
17. The method of claim 16, wherein obtaining the pressure measurement comprises wirelessly receiving a response from the radio frequency tag to a signal and detecting at least one electromagnetic characteristic selected from the group consisting of: resonant frequency, harmonic spectra, and Q factor.

18. The method of claim 16, wherein obtaining the pressure measurement includes detecting a change in one or more electromagnetic characteristics a response of the radio frequency tag associated with the valve.

19. The method of claim 16, wherein obtaining the pressure measurement includes wirelessly transmitting a signal to the radio frequency tag and measuring power received from the radio frequency tag.

20. The method of claim 16, wherein the radio frequency tag includes circuitry having a resonance frequency for sending pressure and, on the same substrate, a memory for storing data.

ABSTRACT

Devices and methods useful for sensing or measuring a pressure and remotely indicating or communicating that pressure are provided. The devices and methods have particular utility in sensing pressures in implantable medical devices and more particularly in hydrocephalus shunts. In one exemplary embodiment, an implantable valve can include a housing having a reservoir adapted to receive fluid flow therethrough between an inlet port and an outlet port. The implantable valve can also include a needle-penetrable septum to allow fluid delivery to the reservoir and/or a needle guard disposed within the housing and adapted to protect the radio frequency tag from a needle penetrating into the housing. A radio frequency (RF) tag can be disposed within the reservoir and can be adapted to change one or more of its electromagnetic characteristics in response pressure applied thereto by fluid in or flowing through the reservoir. The RF tag can produce a response to a wireless signal characterized by the one or more electromagnetic characteristics that correlates to a pressure of fluid in or flowing through the reservoir.

1644794.2

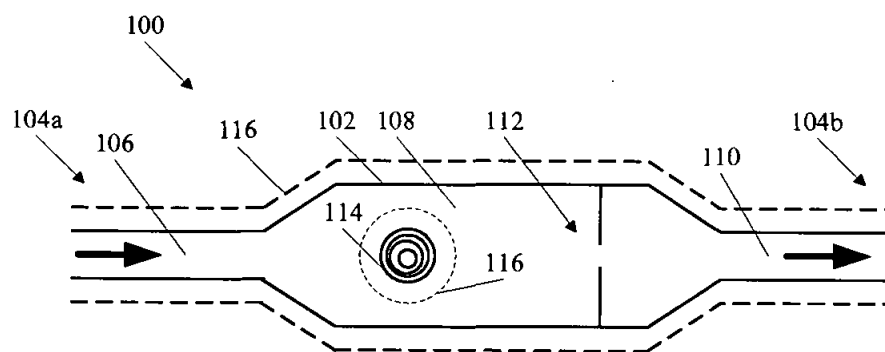


FIG. 1

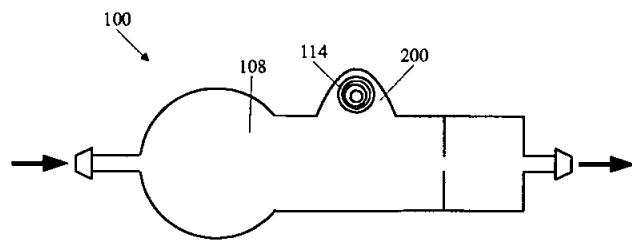


FIG. 2




FIG. 3

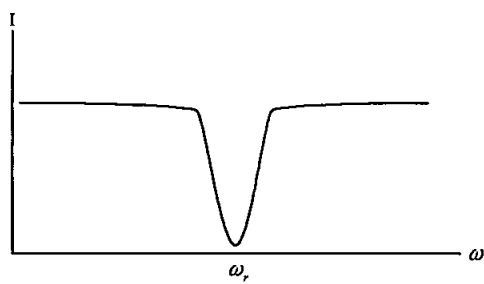


FIG. 4

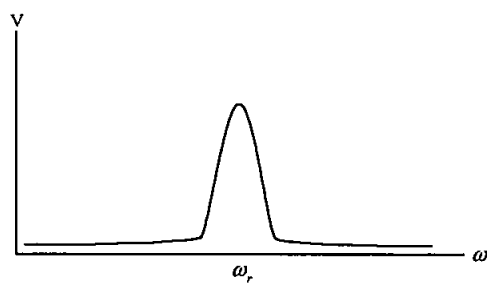


FIG. 5

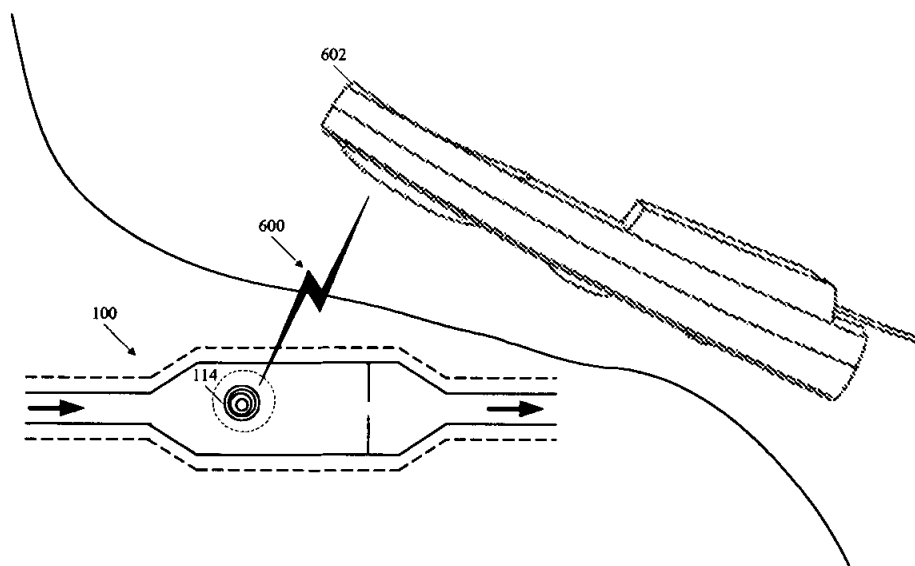


FIG. 6

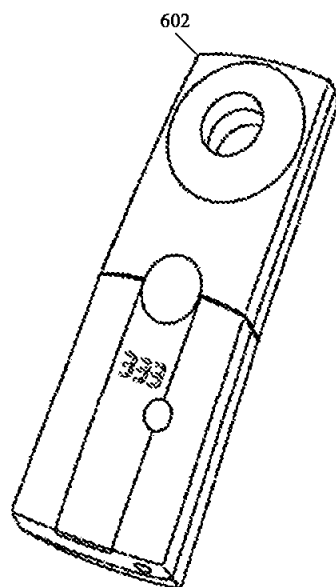


FIG. 7

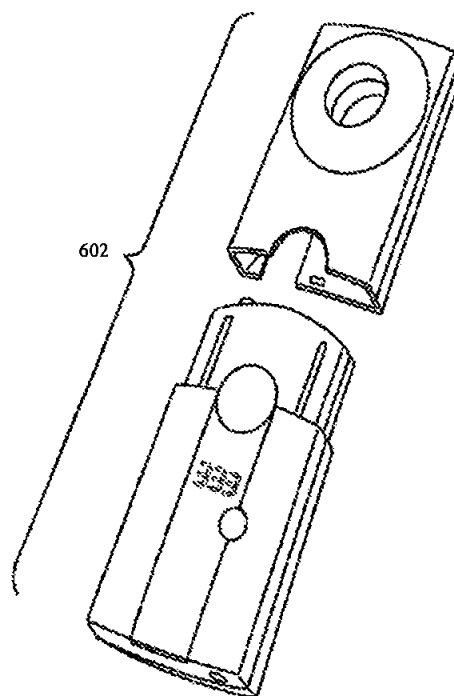


FIG. 8


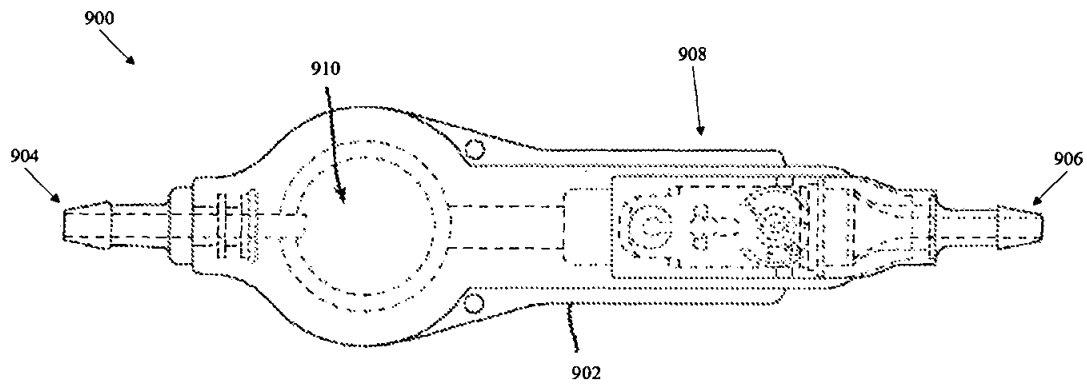




FIG. 9


130

FIG. 10

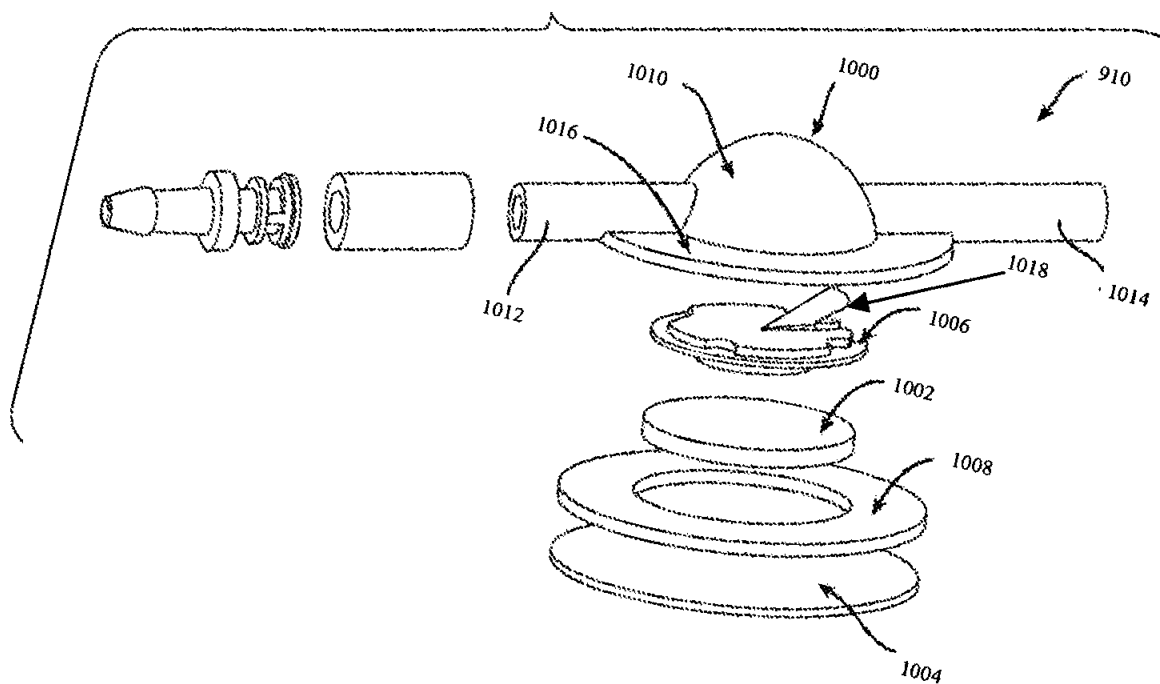

47

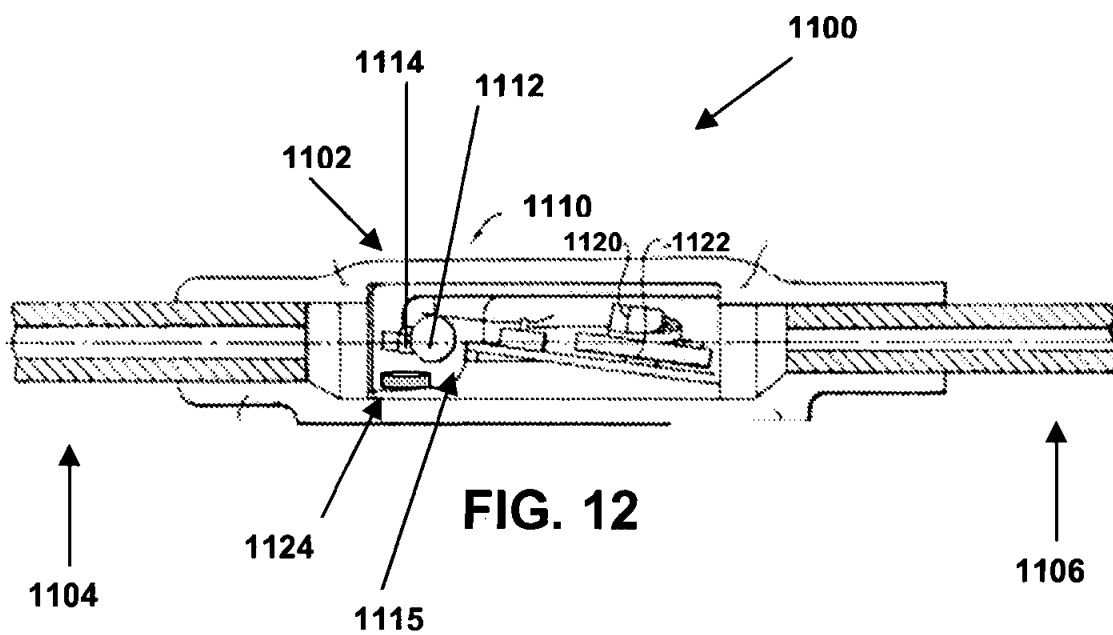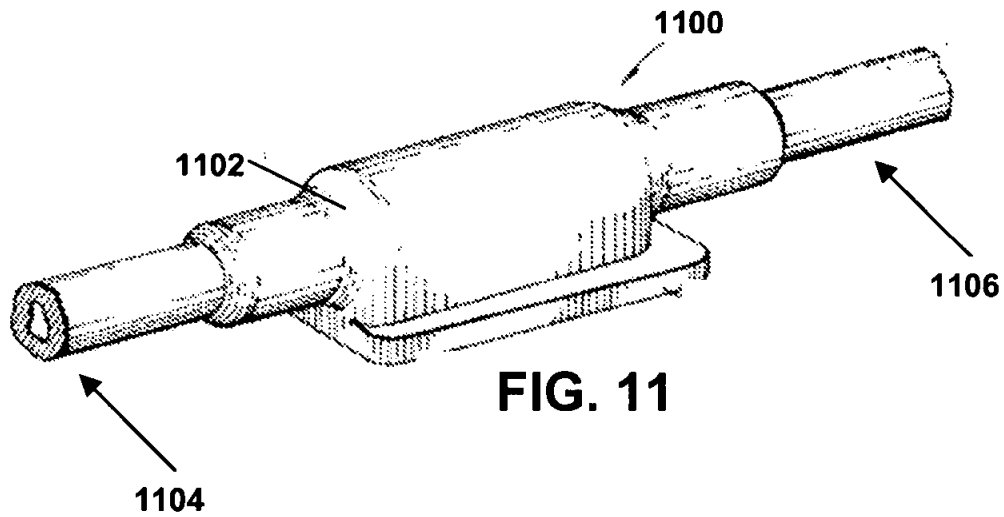

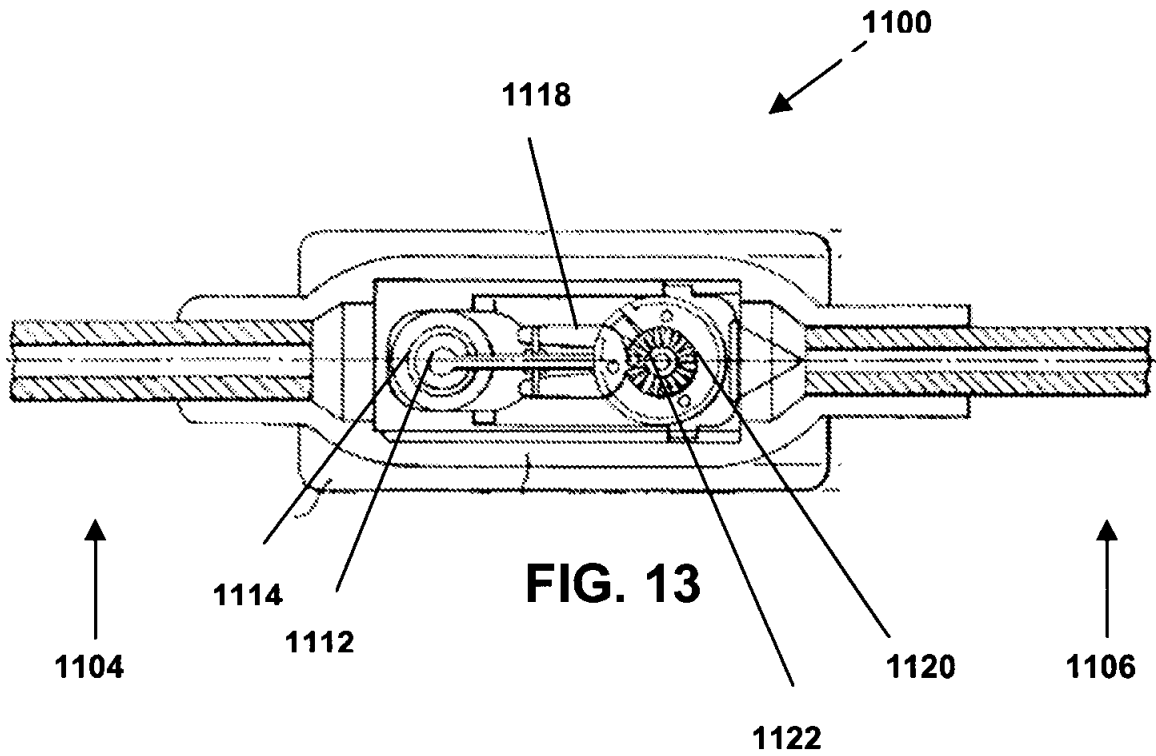

1659537.1