



83.222

REPUBLICA DE COLOMBIA

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO
DIVISION DE NUEVAS CREACIONES

CONTESTACION A REPAROS - OBSERVACIONES
APORTACION DE NUEVA DOCUMENTACION A
UNA SOLICITUD DE PATENTE DE INVENCION O
MODELO DE UTILIDAD O DISEÑO INDUSTRIAL

SUPERINTENDENCIA Y OFICIO

Indicacion : COTIAC 200002 Folios: 22
Fecha VCD: 2001-01-24 16:43:44
Trámite : C2 PATENTES D 1 REGISTRO/ 329 DEPTO. DE
Superficie: 2029 DIVISION DE NUEVAS CREACIONES

Solicitud de Patente
Expediente No. 00 075.409

CONTESTACION: Reparos _____
Observaciones _____
Otros _____

☐ Para dar cumplimiento al Auto N°3577 notificado por estado el 26 de Octubre, 2000, cuyo término fué prorrogado mediante escrito radicado el 11 de Diciembre de 2000

NUEVA DOCUMENTACION APORTADA _____

☒

☒ PATENTE

☐ MODELO DE UTILIDAD

☐ DISEÑO INDUSTRIAL

TITULO:

ARTICULO ABSORBENTE QUE EXHIBE MEJORADO AJUSTE AL CUERPO

SOLICITANTE:

KIMBERLY - CLARK WORLDWIDE, INC.

INDICE DE DOCUMENTOS QUE SE ACOMPAÑAN

- | | |
|---|--|
| ☒ 1 Nuevo capítulo reivindicatorio donde se ha eliminado la palabra "dicho (a)" de acuerdo con la observación del señor examinador. | ☐ a favor del solicitante, junto con su correspondiente traducción oficial del inglés al español. |
| ☒ 2 Extracto para publicación y Tarjeta de Archivo Temático. | ☒ 4 Artes finales (2 de 12 X 12 cm y 1 de 6 X 6 cm). |
| ☒ 3 Documento de cesión de derechos sobre la invención | ☐ |

APODERADO: RAMIRO CASTRO DUQUE Código 340

DOMICILIO: Cra. 7 No. 16-56 Piso 9

TEL: 2-812424

FIRMA:

NUMERO DE HOJAS 22

RADICADO POR: Nombres y Apellidos

Enero 23, 2000
CPB/hsr.

RETIRO FOLIOS 63, 64 y 65
DE EXTRACTO, TARJETA TECNICA
Y DETES

END

REIVINDICACIONES

Reivindicamos:

- 1 Un artículo absorbente que comprende:
 - a) una porción frontal;
 - b) una porción posterior que tiene un primer extremo y un segundo extremo, la porción posterior que está dividida en una primera sección y una segunda sección, la primera sección localizada adyacente al primer extremo y la segunda sección localizada adyacente al segundo extremo, las primera y segunda secciones que son extensibles en por lo menos una dirección, y la segunda sección que tiene un primer borde lateral, un segundo borde lateral y primer y segundo elásticos de piernas cada uno colocado adyacente a uno de los primer y segundo bordes laterales;
 - c) una porción de entrepierna que conecta la porción frontal a la porción posterior, la porción de entrepierna que tiene un primer borde lateral, un segundo borde lateral y primer y segundo elásticos de entrepierna cada uno colocado adyacente a uno de los primer y segundo bordes laterales, los primer y segundo elásticos de entrepierna que cooperan con los primer y segundo elásticos de piernas para proporcionar un ajuste cercano contra un cuerpo de usuario;
 - d) un absorbente asegurado a por lo menos una de las porciones frontal, posterior o de entrepierna; y
 - e) un medio para agarrar en forma liberable la porción posterior a la porción frontal por lo cual se forma un artículo similar a pantaloncito que tiene una abertura de cintura y un par de aberturas de piernas.

2. El artículo absorbente de la reivindicación 1 donde la primera sección es elástica.

3. El artículo absorbente de la reivindicación 1 donde la primera sección tiene un primer borde lateral y un segundo borde lateral, y la primera sección incluye múltiples tiras elásticas que se extienden desde el primer borde lateral al segundo borde lateral.

4. El artículo absorbente de la reivindicación 3 donde los primer y segundo elásticos de piernas están localizados adyacentes a por lo menos una de las múltiples tiras elásticas.

5. El artículo absorbente de la reivindicación 1 donde el artículo absorbente tiene un eje central longitudinal y un eje central transversal y las primera y segunda secciones son extensibles en una dirección transversal.

6. El artículo absorbente de la reivindicación 5 donde la primera sección es capaz de extenderse en la dirección transversal en por lo menos 25%.

7. El artículo absorbente de la reivindicación 5 donde la segunda sección es capaz de extenderse en la dirección transversal en por lo menos 25%.

8. El artículo absorbente de la reivindicación 5 donde la segunda sección contiene rugosidades alineadas a un ángulo con respecto al eje central longitudinal.

9. El artículo absorbente de la reivindicación 1 donde cada uno de los primer y segundo elásticos de entrepierna choca con uno de los primer y segundo elásticos de piernas.

10. Un artículo absorbente que comprende:

- a) una porción frontal;
- b) una porción posterior que tiene un primer extremo y un segundo extremo, la porción posterior que está dividida en una primera sección y una segunda sección, la primera sección localizada adyacente al primer extremo y la segunda sección localizada adyacente al segundo extremo, la primera sección que es elástica y la segunda sección que contiene rugosidades, las primera y segunda secciones que son extensibles en por lo menos una dirección, y la segunda sección que tiene un primer borde lateral, un segundo borde lateral y primer y segundo elásticos de piernas cada uno colocado adyacente a uno de los primer y segundo bordes laterales;
- c) una porción de entrepierna que conecta la porción frontal a la porción posterior, la porción de entrepierna que tiene un primer borde lateral, un segundo borde lateral y primer y segundo elásticos de entrepierna cada uno colocado adyacente a uno de los primer y segundo bordes laterales, los primer y segundo elásticos de entrepierna que cooperan con los primer y segundo elásticos de piernas para proporcionar un ajuste cercano contra un cuerpo de usuario;
- d) un forro permeable a líquidos asegurados a por lo menos una de las porciones frontal, posterior o de entrepierna;
- e) un absorbente colocado debajo de el forro; y
- f) un medio para agarrar en forma liberable la porción posterior a la porción frontal por lo cual se forma un artículo similar a

pantaloncito que tiene una abertura de cintura y un par de aberturas de piernas.

11. El artículo absorbente de la reivindicación 10 donde cada uno de los primer y segundo elásticos de piernas está espaciado desde uno de los primer y segundo elásticos de entrepierna.

12. El artículo absorbente de la reivindicación 11 donde un extremo de cada uno de los primer y segundo elásticos de entrepierna están localizados adyacentes a un extremo de uno de los primer y segundo elásticos de piernas y un extremo opuesto de cada uno de los primer y segundo elásticos de piernas están localizados adyacentes a por lo menos una de las múltiples tiras elásticas incluidas en la primera sección.

13. El artículo absorbente de la reivindicación 10 donde el artículo absorbente tiene un eje central longitudinal y un eje central transversal y la primera sección es extensible en una dirección transversal en por lo menos 50% y la segunda sección es extensible en una dirección transversal en por lo menos 25%.

14. El artículo absorbente de la reivindicación 13 donde las rugosidades están alineadas a un ángulo con respecto al eje central longitudinal y las rugosidades son extensibles a una orientación plana a medida que la primera sección se extiende.

15. Un artículo absorbente que comprende:

- a) una porción frontal;
- b) una porción posterior que tiene un primer extremo y un segundo extremo, la porción posterior que está dividida en una primera

sección y una segunda sección, la primera sección localizada adyacente al primer extremo y la segunda sección localizada adyacente al segundo extremo, la primera sección que tiene un primer borde lateral y un segundo borde lateral e incluye múltiples tiras elásticas que se extienden entre los primer y segundo bordes laterales, la segunda sección que tiene un primer borde lateral, un segundo borde lateral y primer y segundo elásticos de piernas cada uno colocado adyacente a uno de los primer y segundo bordes laterales, la segunda sección que contiene rugosidades, y las primera y segunda secciones que son extensibles en por lo menos una dirección;

c) una porción de entrepierna que conecta la porción frontal a la porción posterior, la porción de entrepierna que tiene un primer borde lateral, un segundo borde lateral y primer y segundo elásticos de entrepierna cada uno colocado adyacente a uno de los primer y segundo bordes laterales, los primer y segundo elásticos de entrepierna que cooperan con los primer y segundo elásticos de piernas para proporcionar un ajuste cercano contra un cuerpo de usuario;

d) un forro permeable a líquidos asegurado a por lo menos una de las porciones frontal, posterior o de entrepierna;

e) un absorbente colocado debajo de el forro; y

f) un medio para agarrar en forma liberable la porción posterior a la porción frontal por lo cual se forma un artículo similar a pantaloncito que tiene una abertura de cintura y un par de aberturas de piernas.

16. El artículo absorbente de la reivindicación 15 donde cada uno de los primer y segundo elásticos de piernas chocan con un extremo de uno de los primer y segundo elásticos de entrepierna.

17. El artículo absorbente de la reivindicación 15 donde el artículo absorbente tiene un eje central longitudinal y un eje central transversal y las primera y segunda secciones son extensibles en una dirección transversal en por lo menos 25%.

18. El artículo absorbente de la reivindicación 17 donde la primera sección es extensible en una dirección transversal en por lo menos 50%.

19. El artículo absorbente de la reivindicación 17 donde la segunda sección es extensible en a dirección transversal en por lo menos 40%.

20. El artículo absorbente de la reivindicación 17 donde las rugosidades están alineadas a un ángulo con respecto al eje central longitudinal y las rugosidades son extensibles con respecto a una orientación plana a medida que la primera sección se extiende.

CERTIFICATION

STATE OF WISCONSIN)
) SS
COUNTY OF WINNEBAGO)

I hereby certify that the attached paper constitutes a true copy of the original of a certain
Assignment to KIMBERLY-CLARK WORLDWIDE, INC. by Mary Anne Bruemmer-Prestley,
Sarah Jane Marie Freiburger, Nefetari Edris Bordain, Suzanne Marie Schmoker, and
David Arthur Fell of the subject matter disclosed in an application for Letters Patent of the
United States entitled

ABSORBENT ARTICLE EXHIBITING IMPROVED BODY FIT

which was signed by the said David Arthur Fell on August 9, 2000; Sarah Jane Marie
Freiburger on August 11, 2000; Suzanne Marie Schmoker on August 16, 2000; Mary
Anne Bruemmer-Prestley on August 24, 2000; and Nefetari Edris Bordain on August
29, 2000.

October 20, 2000
Date

Melissa A. Blob
Melissa A. Blob, Notary Public
My Commission Expires: August 1, 2004

(Legalization by Secretary of State of Wisconsin and Colombia Consulate)

HUGO NAVARRO ALVAREZ
TRADUCTOR E. INTERPRETE OFICIOS
Dec. 1078 11/10/2000

In the United States Patent and Trademark Office

Applicants: Mary Anne Bruemmer-Prestley et al. Docket No.: 18107
Serial No.: Unknown Group: Unknown
Filed: Herewith Examiner: Unknown
For: ABSORBENT ARTICLE EXHIBITING IMPROVED BODY FIT
Express Mail No.: EK583977343US

Assignment - Joint Inventors

ASSISTANT COMMISSIONER OF PATENTS
Washington, D.C. 20231

Sir:

WHEREAS Mary Anne Bruemmer-Prestley residing at 418 East Pershing Street, Appleton, WI 54911; Sarah Jane Marie Freiburger residing at 2708 Welhouse Drive, Kaukauna, WI 54130; Nefetari Edris Bordin residing at 5508 Treelodge Parkway, Dunwoody, GA 30350; Suzanne Marie Schmoker residing at 4212 Brooks Road, Oshkosh, WI 54904 and David Arthur Fell residing at 2055 Lynn Drive, Neenah, WI 54956 (hereinafter collectively referred to as Assignors), have made an invention and have each either (1) previously executed an application for Letters Patent of the United States of America therefor or (2) are contemporaneously executing an application for Letters Patent of the United States of America for the invention which is entitled:

ABSORBENT ARTICLE EXHIBITING IMPROVED BODY FIT

AND WHEREAS Kimberly-Clark Worldwide, Inc., a corporation of the State of Delaware, having offices at 401 North Lake Street, Neenah, Wisconsin 54956, United States of America, (hereinafter referred to as Assignee), is desirous of acquiring the entire right, title and interest in and to said invention and under said Letters Patent or similar legal protection to be obtained therefor in the United States and in any and all foreign countries.

NOW, THEREFORE, TO ALL WHOM IT MAY CONCERN: Be it known that in consideration of the payment by the Assignee to the Assignors of the sum of One U.S. Dollar (\$1.00 U.S.) and for other good and valuable consideration, the receipt and sufficiency of which is hereby acknowledged, the Assignors hereby sell, assign and transfer to the Assignee the full and exclusive right, title and interest to said invention and in and to any and all Letters Patent or similar legal protection in the United States and its territorial possessions and in any and all foreign countries to be obtained for said invention by said application or any continuation, continuation-in-part, divisional, renewal, substitute, re-examination, conversion or reissue thereof, including all extensions thereof, or any legal equivalent thereof in any foreign country for the full term or terms for which the same may be granted, including any and all convention rights.

The Assignors hereby covenant that no assignment, sale, agreement or encumbrance has been or will be made or entered into which would conflict with this assignment and sale.

The Assignors further covenant that the Assignors will promptly provide, upon written request, Assignee with all pertinent facts and documents relating to said application, said invention and said Letters Patent and legal equivalents in foreign countries as may be known and accessible to the Assignors and that they will promptly execute and deliver to Assignee or its legal representatives any and all papers, instruments or affidavits required to apply for, obtain, maintain, issue, extend and enforce said application, said invention and said Letters Patent and said equivalents thereof in any foreign country which may be necessary or desirable to carry out the purposes thereof.

IN WITNESS WHEREOF, the Assignors have executed this document on the date indicated below.

Mary Anne Bruemmer-Prestley
Mary Anne Bruemmer-Prestley

Date:

August 24, 2000

Sarah Jane Marie Freiburger
Sarah Jane Marie Freiburger

Date:

Aug 11, 2000

HUGO NAVARRO ALVAREZ
TRADUCTOR E. INTERPRETE OFICIA
No. 1276 Matrícula 1998

74⁶⁶

Nefetari Edris Bordin
Nefetari Edris Bordin

Date: August 29, 2000

Suzanne Marie Schmoker
Suzanne Marie Schmoker

Date: August 29, 2000

David Arthur Fell
David Arthur Fell

Date: 9 August 2000

100
VOTO

100
VOTO

25
67



CONSULADO DE COLOMBIA

WASHINGTON, D.C.

SECRET

No. 2868

EL CONSULADO DE COLOMBIA

CERTIFICA:

Que es auténtica la firma de PATRICK O. HATCHETT
quien el día 3 DE NOVIEMBRE DEL 2000
desempeñaba las funciones de OFICIAL DE AUTENTICACIONES DEPARTAMENTO DE ESTADO.
la cual aparece al pie de los documentos anexos relacionados con CERTIFICACION.

HUGO NAVARRO ALVAREZ
TRADUCTOR E INTERPRETE OFICIAL
Reg. 1276 Ministerio 1993

Dado en Washington, D.C. a los SEIS (6) días del mes de
NOVIEMBRE del año dos mil (2000)

Pagado Impuesto de Timbre 7=
Pagado Derecho Consular 15=
Total 22=

JACQUELINE ESPITIA ARBORE
Vicecónsul

(El Consulado no asume ninguna
responsabilidad por el contenido de los
documentos anexos)

MINISTERIO DE RELACIONES
EXTERIORES

473462
Enrique Espitia
CIVIL FICHA APARECE EN EL
DOCUMENTO DESEMPEÑA
LAS FUNCIONES INDICADAS

MINISTERIO DE
RESPONSABILIDAD DEL TESTO

1709 17 P 3 06
M. J. J. J.
JEFE DE LEGALIZACIONES
SANTAFE DE BOGOTA D.C.

SR. RAFAEL ALVAREZ
CONDUCTOR E INTERPRETE OFICIAL
Rm. 1078 Medellín 1988

United States of America



DEPARTMENT OF STATE

To all to whom these presents shall come, Greetings:

I Certify That the document hereunto annexed is under the Seal of the State(s) of Wisconsin, and that such Seal(s) is/are entitled to full faith and credit.*

In testimony whereof, I, Madeleine K. Albright, Secretary of State, have hereunto caused the seal of the Department of State to be affixed and my name subscribed by the Assistant Authentication Officer, of the said Department, at the city of Washington, in the District of Columbia, this third day of November, 2000.


Madeleine K. Albright
Secretary of State
By Paul O. Hannon
Assistant Authentication Officer,
Department of State

Issued pursuant to CHXIV, State of
Sept. 15, 1789, 1 Stat. 68-69; 22
USC 2657; 22 USC 2651a; 5 USC
301; 28 USE 1733 et. seq.; 8 USC
1443(f); RULE 44 Federal Rules of
Civil Procedure.

*For the contents of the annexed document, the Department assumes no responsibility

HUGO NAVARRO ALVAREZ
TRANSDUCTOR E. INTERPRETE
Em. 1876 Minjusticia 1980

This certificate is not valid if it is removed or altered in any way whatsoever

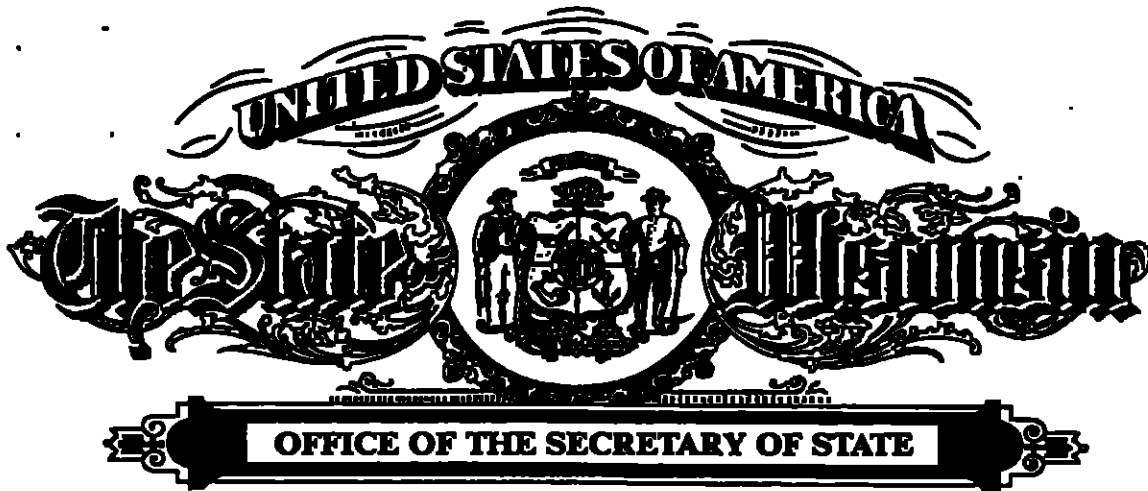

TO ALL TO WHOM THESE PRESENTS SHALL COME:

I, DOUGLAS LA FOLLETTE, Secretary of State of the State of Wisconsin, do hereby certify that according to the records of this office,

MELISSA A BLOB

was a Notary Public in and for the State of Wisconsin on October 20, 2000.

IN TESTIMONY WHEREOF, I have hereunto set my hand and affixed the Great Seal of the State of Wisconsin, in the City of Madison, on this day: October 26, 2000.



Douglas La Follette

DOUGLAS LA FOLLETTE
Secretary of State

HUGO NAVARRO ALVAREZ
TRANSDUCTOR E. INTERPRETE OFICIA
Dec. 1876 Minjuntelo 1988

TRADUCCION OFICIAL No. 416/2000 de un Documento de Cesión de Mary Anne Bruemmer-Prestley, Sarah Jane Marie Freiburger, Nefeterl Edrie Bordin, Suzanne Marie Schmoker y David Arthur Fell a Kimberly-Clark Worldwide, Inc., una Compañía del Estado de Delaware, con oficinas en 401 North Lake Street, Neenah, Wisconsin 54956, Estados Unidos de América de la invención titulada **ARTICULO ABSORBENTE QUE EXHIBE FIJACION MEJORADA DEL CUERPO**, del Inglés al español, el cual para su identificación se sella con el Sello del Traductor al mismo tiempo que la presente.-

++++
ANEXOS: El documento de Cesión arriba mencionado, Certificación Notarial, Certificación del Secretario de Estado del Estado de Wisconsin, Legalización del Consulado General de Colombia en Chicago, Estado de Illinois, Estados Unidos de América, Autenticación por el Ministerio de Relaciones Exteriores de Colombia.-

++++

**En La Oficina de Patentes y Marcas Comerciales de los
Estados Unidos**

Solicitantes: Mary Anne Bruemmer-Prestley y otros

Expediente No.: 16107

Serie No.: Desconocida

Grupo: Desconocido

Presentada: Con Esta

Examinador: Desconocido

Para: **ARTICULO ABSORBENTE QUE EXHIBE FIJACION
MEJORADA DEL CUERPO**

Correo Expreso No.: EK563977343US

Cesión - Inventores Conjuntos

COMISIONADO ASISTENTE PARA PATENTES

Washington, D.C., 20231


HUGO NAVARRO ALVAREZ
TRADUCTOR E. INTERPRETE OFICIAL
Des. 1878 Mta/Artículo 1808

Señor:

POR CUANTO QUE Mary Anne Bruemmer-Prestley residente en 418 East Pershing Street, Appleton, WI 54911; Sarah Jane Marie Freiburger residente en 2708 Welhouse Drive, Kaukauna, WI 54130; Nefetari Edrie Bordin residente en 5508 Treelodge Parkway, Dunwoody, GA 30350; Suzanne Marie Schmoker, residente en 4212 Brooks Road, Oshkosh, WI 54904 y David Arthur Fell residente en 2055 Lynn Drive, Neenah, WI 54956 (de aquí en adelante referidos como los Cedentes), han hecho una invención y cada uno de ellos ha (1) previamente ejecutado una solicitud para Títulos de Patente de los Estados Unidos de América para ésta o (2) está contemporáneamente ejecutando una solicitud para Títulos de Patente de los Estados Unidos de América para la invención la cual está titulada:

**ARTICULO ABSORBENTE QUE EXHIBE FIJACION MEJORADA
DEL CUERPO**

POR CUANTO QUE: Kimberly-Clark Worldwide, Inc., una compañía del Estado de Delaware, teniendo oficinas en 401 North Lake Street, Neenah, Wisconsin 54956, Estados Unidos de América, (de aquí en adelante referida como la Cesionaria), está deseosa de adquirir el interés total en y a la dicha invención y bajo dichos Títulos de Patente o protección legal similar para ser obtenida para éstos en Estados Unidos y en cualquiera y todos los países extranjeros.

AHORA, POR CONSIGUIENTE, A TODOS A QUIENES PUEDA INTERESARLES: Sépase que en consideración del pago por la Cesionaria a los Cedentes de la suma de Un Dólar de los E.U. (\$1.00), y por otra buena y valiosa consideración, el recibo y suficiencia de la cual están por medio del presente reconocidos, los Cedentes por medio del presente venden, ceden y transfieren a la Cesionaria el derecho total y exclusivo, título e interés a la dicha invención y en a todos los Títulos de Patente


HUGO NAVARRO ALVAREZ
TRADUCTOR E. INTERPRETE OFICIAL
Rev. 1878 Modificado 1989

o protección legal similar en los Estados Unidos y sus posesiones territoriales y en cualquiera y todos los países extranjeros para ser obtenidos para dicha invención por dicha solicitud o cualquier continuación, continuación-en-parte, división, renovación, sustitución, re-examen, conversión o reexpedición de ésta, incluyendo todas las extensiones de ésta, o cualquier equivalente legal de la misma en cualquier país extranjero por el término o términos completos para los cuales los mismos puedan ser otorgados, incluyendo todos los derechos de convención.

Los Cedentes por medio del presente convienen en que ninguna cesión, venta, contrato o impedimento ha sido o será hecho o celebrado el cual entraría en conflicto con esta cesión y venta.

Los Cedentes además convienen en que los Cedentes rápidamente proporcionarán, sobre solicitud por escrito, a la Cesionaria con todos los hechos y documentos pertinentes relacionados con dicha solicitud, dicha invención y dichos Títulos de Patente y equivalentes legales en países extranjeros como puedan ser conocidos y accesibles para los Cedentes y que ellos rápidamente ejecutarán y entregarán a la Cesionaria o sus representantes legales cualquiera y todos los papeles, instrumentos o declaraciones juradas requeridos para solicitar para, obtener, mantener, expedir, extender y poner en vigor dicha solicitud, dicha invención y dichos Títulos de Patente y dichos equivalentes de éstos en cualquier país extranjero los cuales puedan ser necesarios o deseables para llevar a cabo los propósitos de la misma.

EN TESTIMONIO DE LO CUAL, los Cedentes han ejecutado este documento en las fechas abajo indicadas.

Firma ilegible (Firmado) Fecha: Agosto 24 del año 2000
Mary Anne Bruemmer-Prestley


HUGO NAVARRO ALVAREZ
TRADUCTOR E. INTERPRETE OFICIAL
Dec. 2076 Minjucido 1998

Firma ilegible (Firmado)
Sarah Jane Marie Freiburger

Fecha: Agosto 11 del año 2000

Firma ilegible (Firmado)
Nefetari Edris Bordin

Fecha: Agosto 29 del año 2000

Firma ilegible (Firmado)
Suzanne Marie Schmoker

Fecha: Agosto 16 del año 2000

Firma ilegible (Firmado)
David Arthur Fell

Fecha: Agosto 9 del año 2000

+++++

Caso #16107
COLOMBIA

CERTIFICACION

**ESTADO DE WISCONSIN
CONDADO DE WINNEBAGO**

Por medio del presente certifico que el papel adjunto constituye una fiel copia del original de una cierta Cesión a KIMBERLY-CLARK WORLDWIDE, INC., por Mary Anne Bruemmer-Prestley, Sarah Jane Marie Freiburger, Nefetari Edris Bordin, Suzanne Marie Schmoker y David Arthur Fell del asunto del sujeto revelado en una solicitud para Títulos de Patentes de los Estados Unidos titulada

**ARTICULO ABSORBENTE QUE EXHIBE FIJACION MEJORADA
DEL CUERPO**

la cual fue firmada por el dicho David Arthur Fell en Agosto 9 del año 2000; Sarah Jane Marie Freiburger en Agosto 11 del año 2000; Suzanne Marie Schmoker en Agosto 16 del año


HUGO NAVARRO ALVAREZ
TRADUCTOR E. INTERPRETE OFICIAL
Edu. 1676 Minjusticia 1988

82
74

2000; Mary Anne Bruemmer-Prestley en Agosto 24 del año 2000; y Nefetari Edria Bordin en Agosto 29 del año 2000.

Octubre 20 del año 2000 Melissa A. Blob (Firmado)
Fecha Melissa A. Blob, Notario Público
Mi Comisión Expira: Agosto 1 del
año 2004

SELLO NOTARIAL EN RELIEVE.

(Legalización por el Secretario de Estado de Wisconsin y el
Consulado de Colombia)

+++++

01002923-1
ESTADOS UNIDOS DE AMERICA
DEPARTAMENTO DE ESTADO
A todos aquellos a quienes estas presentes llegaren,
Saludos:

Certifico que el documento aquí anexo al presente está
bajo el Sello del Estado(s) de Wisconsin, y que tal Sello(s)
merece plena fe y crédito.*

En testimonio de lo cual, yo, Madeleine K.
Albright, Secretaria de Estado, he causado que
se le fije al presente el sello del Departamento
de Estado y que mi nombre sea suscrito por el
Funcionario de Autenticaciones del dicho
Departamento, en la ciudad de Washington, en
el Distrito de Columbia, este tercer día de
Noviembre del año 2000.

Madeleine K. Albright (firmado)
Secretaria de Estado


HUGO NAVARRO ALVAREZ
TRADUCTOR E. INTERPRETE OFICIAL
Dec. 1876 Minjstido 1933

88
75

Por: Firma ilegible (firmado)
Funcionario de Autenticaciones
Asistente, Departamento de
Estado

• Por los contenidos del documento anexo, el
Departamento no asume ninguna responsabilidad.

SELLO EN RELIEVE.

Este certificado no es válido si se remueve o altera en
cualquier forma cualquiera que sea.

+++++

ESTADOS UNIDOS DE AMERICA
EL ESTADO DE WISCONSIN
OFICINA DEL SECRETARIO DE ESTADO
A TODOS A QUIENES ESTAS PRESENTES LLEGAREN:
YO, DOUGLAS La FOLLETTE, Secretario de Estado
del Estado de Wisconsin, por medio de la presente certifico que
de acuerdo con los registros de esta oficina,

MELISSA A BLOB

fue un Notario Público en y para el Estado de Wisconsin en
Octubre 20 del año 2000.

EN TESTIMONIO DE LO CUAL he firmado
el presente de mi puño y letra y fijado el
Gran Sello del Estado de Wisconsin, en
la Ciudad de Madison, este día: 26
Octubre del año 2000.

Douglas La Follette (firmado)
DOUGLAS La FOLLETTE
Secretario de Estado


HUGO NAVARRO ALVAREZ
TRADUCTOR E. INTERPRETE OFICIAL
Notario Público

84
75

SELLO EN RELIEVE.

+++++
EN ESPAÑOL: La Legalización del Consulado de Colombia en Washington, D.C., Estados Unidos de América bajo el número 2868 de fecha 6 de Noviembre del año 2000; Autenticación hasta por el Ministerio de Relaciones Exteriores de Colombia bajo el Número 473462 de fecha 17 de Noviembre del año 2000.

(Pagado impuesto de Timbre por valor de \$7.00 Dólares y Derechos Consulares por Valor de \$15.00 Dólares).

+++++
ES TRADUCCION FIEL Y COMPLETA DE LOS DOCUMENTOS ADJUNTOS.


HUGO NAVARRO ALVAREZ
TRADUCTOR E. INTERPRETE OFICIAL
Dec. 1876 Ministerio 1988

Resolución número 1876 del Ministerio de Justicia.

Fecha: 29 de Noviembre del año 2000.

MINISTERIO DE RELACIONES
EXTERIORES
575516
Hugo Navarro
SECRETARIA DE ESTADO
DE RELACIONES EXTERIORES
ESTADOS UNIDOS DE AMERICA

NO SE ASISTE
RESPONSABILIDAD DEL TENDU
200 DEC - 1
HUGO NAVARRO
SECRETARIA DE ESTADO
DE RELACIONES EXTERIORES
ESTADOS UNIDOS DE AMERICA

Brigard & Castro

Abogados

Tratado de los Patentes y el Resulto de las Decisiones
Expediente No. 00 075.409 - Solicitud de Patente
a favor de KIMBERLY - CLARK WORLDWIDE, INC.
401 North Lake Street, Neenah, Wisconsin 54956 USA

Apartado 3692

Cra. 7 16-56
Bogotá - Colombia S.A.

Tel. Conn. 2860777
Tel./Fax: (57.1) 2827976
(57.1) 2848297

E.Mall:bricas@brigardycastro.com.co

AS: 83.224

Señores

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO

DIVISION DE NUEVAS CREACIONES

E. S. D.

REF: Expediente No.00 075.409 - Solicitud de Patente

a favor de KIMBERLY - CLARK WORLDWIDE, INC.

401 North Lake Street, Neenah, Wisconsin 54956 USA

Titulada: ARTICULO ABSORBENTE QUE EXHIBE MEJORADO
AJUSTE AL CUERPO

RAMIRO CASTRO DUQUE, vecino de Bogotá, portador de la tarjeta profesional No. 1003, obrando como apoderado de la sociedad KIMBERLY-CLARK WORLDWIDE, INC. , según lo acredita el documento de poder protocolizado en esa División bajo el número 17397, me permito anexar al presente escrito los siguientes documentos:

1. Copia certificada por la Oficina de Patentes de los Estados Unidos de la primera solicitud presentada para la misma invención, de la cual REIVINDICAMOS PRIORIDAD, junto con su correspondiente traducción del Inglés al castellano.

Del señor Jefe atentamente,



RAMIRO CASTRO DUQUE

C.C. No. 170.322 de Bogotá

Código 340

Cra 7a. No. 16-56 Piso 9

Santafé de Bogotá, Marzo 12, 2001

CPB/hr.

87
83222/2422
78
Case # 16107
COLOMBIA

CERTIFICATION

STATE OF WISCONSIN)
) SS
COUNTY OF WINNEBAGO)

I hereby certify that the attached papers constitute an identical copy of the original of U. S. Patent Application corresponding to Serial No. 09/637,426 for **ABSORBENT ARTICLE EXHIBITING IMPROVED BODY FIT** filed on August 11, 2000, assigned to Kimberly-Clark Worldwide, Inc. and I further certify that Kimberly-Clark Worldwide, Inc. is a corporation organized and existing under the laws of the State of Delaware, United States of America.

Dated this 10th day of November, 2000, at Neenah, Wisconsin, United States of America.

Melissa A. Blob
Melissa A. Blob, Notary Public
My Commission Expires: August 1, 2004

(No Legalization)

PA 316379

88
79
X



THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE


United States Patent and Trademark Office

October 17, 2000

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 09/637,426


FILING DATE: August 11, 2000

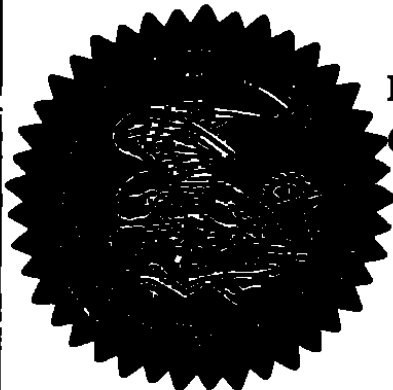


By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS

L. Edelen

L. EDELEN
Certifying Officer



08-14-00



In the United States Patent and Trademark Office

Applicants: Mary Anne Bruemmer-Prestley, Sarah Docket No.: 16107
Jane Marie Freiburger, Nefetari Edris
Bordain, Suzanne Marie Schmoker,
David Arthur Fell

Filed: Herewith **Date:** August 11, 2000

For: ABSORBENT ARTICLE EXHIBITING IMPROVED BODY FIT

Express Mail EK563977343US
Label No.:

Transmittal Letter

New Utility Patent Application under 37 C.F.R. 1.53(b)
Plural Inventors

ASSISTANT COMMISSIONER FOR PATENTS

BOX PATENT APPLICATION

Washington, D.C. 20231

Dear Sir:

Transmitted herewith for filing is the above-identified new utility patent application.

Enclosed are:

1. This Transmittal Form including Fee Authorization and a duplicate for fee processing.
2. A Specification having a total of 21 pages, including a one (1) page Abstract and twenty (20) claims.
3. Four (4) sheets of drawings.
4. A Combined Declaration and Power of Attorney. (UNSIGNED)

Pursuant to 35 U.S.C. §120 and/or 35 U.S.C. 119(e), Applicants hereby claim priority from presently copending U.S. Provisional Application No. 60/150,382 entitled "DISPOSABLE ARTICLE HAVING IMPROVED FIT THROUGH INTERACTION OF ELASTIC COMPONENTS AND FASTENING ELEMENTS" and filed on August 23, 1999, in the names of Sarah Jane Marie Freiburger et al. (Docket No. 14,509).

Please preliminarily amend the specification of the present application by inserting, as the first sentence following the title, the following: -This application claims priority from presently copending U.S. Provisional Application No. 60/150,382 entitled "DISPOSABLE ARTICLE HAVING IMPROVED FIT THROUGH INTERACTION OF ELASTIC COMPONENTS AND FASTENING ELEMENTS" and filed on August 23, 1999, in the name of Sarah Jane Marie Freiburger et al. (Docket No. 14,509).-

90
81
X

The filing fee, pursuant to 37 C.F.R. 1.16(a), (b), (c) and (d), has been calculated as follows:

	Number Filed		Number Extra	Rate	Fee
Total Claims	20	-20 =	0	x 18 (fee code 103) =	\$0.00
Independent Claims	3	-3 =	0	x 78 (fee code 102) =	\$0.00
First Presentation of Multiple Dependent Claims				+ 280 (fee code 104) =	\$0.00
				Base Fee (fee code 101)	\$890.00
				TOTAL	\$890.00

Please charge Kimberly-Clark Worldwide, Inc. deposit account number 11-0875 for (1) the filing fee indicated in the TOTAL above; and (2) any patent application processing fees required under 37 C.F.R. 1.17. In the event the filing fee indicated in the TOTAL above has been incorrectly calculated, please charge any additional filing fee or credit any excess in the filing fee to Kimberly-Clark Worldwide, Inc. deposit account number 11-0875.

Please address all correspondence to: Thomas J. Connelly, Kimberly-Clark Worldwide, Inc., Patent Department, 401 North Lake Street, Neenah, Wisconsin 54956.

The undersigned may be reached at telephone number (920) 721-2455 or fax number (920) 721-3129.

Respectfully submitted,

BRUEMMER-PRESTLEY ET AL

By: Thomas J. Connelly
Thomas J. Connelly
Registration No.: 28,404

CERTIFICATE OF MAILING

I, Lanette Burton, hereby certify that on August 11, 2000 this document is being deposited with the United States Postal Service, postage prepaid, Express Mail No. EK583977343US in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

By: Lanette Burton
Lanette Burton

09637426A0811

8291
K

"Express Mail" Mailing Label Number EC543877343US
 Date of Deposit August 11, 2000
 I hereby certify that this paper or fee is being
 deposited with the United States Postal Service
 "Express Mail Post Office To Addressee" service
 under 37 CFR 1.10 on the date indicated above and
 is addressed to the Assistant Commissioner for Patents,
 Washington, D. C. 20231.
Lenette Burton
 (Typed or printed name of person mailing paper or fee)
Lenette Burton
 (Signature of person mailing paper or fee)

ABSORBENT ARTICLE EXHIBITING IMPROVED BODY FIT

5

FIELD OF THE INVENTION

This invention relates to an absorbent article exhibiting improved body fit. More specifically, this invention relates to a disposable absorbent article having a refastenable mechanism and exhibits improved body fit that reduces the likelihood of fluid leakage.

10

BACKGROUND OF THE INVENTION

15

20

Today, various disposable absorbent articles exist which are designed to absorb and retain body fluid and/or excrement. Examples of such articles include incontinence products such as pants, briefs and undergarments, baby diapers, feminine care menstrual pants, training pants, etc. While most of these articles perform satisfactorily for their intended purpose, some are difficult to remove from the body of the wearer. Many do not have a refastenable mechanism that allows the article to be easily adjusted during use or be easily removed from the wearer's body before the product is permanently discarded while maintaining an underwear like fit. Some of today's commercially available products do not conform well to the human body and this poor fit increases the likelihood of fluid leakage while the product is being worn. Therefore, there remains a need for a disposable absorbent article having a refastenable mechanism that will provide improved fit to the human body and reduce the likelihood of fluid leakage.

25

Now, a disposable absorbent article has been invented which exhibits improved body fit that reduces the likelihood of fluid leakage.

0 37426 081100

8393
ASUMMARY OF THE INVENTION

Briefly, this invention relates to an absorbent article exhibiting improved body fit. The absorbent article has a front portion, a back portion and a crotch portion. The back portion has a first end and a second end. The back portion is divided into a first section and a second section. The first section is located adjacent to the first end and the second section located adjacent to the second end. The first and second sections are extendable in at least one direction. The second section has a first side edge, a second side edge and first and second leg elastics each positioned adjacent to one of the first and second side edges. A crotch portion connects the front portion to the back portion. The crotch portion has a first side edge, a second side edge and first and second crotch elastics each positioned adjacent to one of the first and second side edges. The first and second crotch elastics cooperate with the first and second leg elastics to provide a close fit against a wearer's body. The absorbent article also includes an absorbent secured to at least one of the front, back or crotch portions. The absorbent article further includes a fastening mechanism for releasably attaching the back portion to the front portion whereby a pant-like article is formed having a waist opening and a pair of leg openings.

The general object of this invention is to provide an absorbent article exhibiting improved body fit. A more specific object of this invention is to provide a disposable absorbent article having a refastenable mechanism and exhibits improved body fit that reduces the likelihood of fluid leakage.

Another object of this invention is to provide an absorbent article exhibiting improved body fit that is easy to manufacture, is relatively inexpensive and is easy to use. Still another object of this invention is to provide an absorbent article exhibiting improved body fit and which has a refastening mechanism that can easily be adjusted to conform to a wearer's body.

Other objects and advantages of the present invention will become more apparent to those skilled in the art in view of the following description and the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a top plane view of an absorbent article exhibiting improved body fit and shown in a pre-assembled flat configuration.

93
84
X

Fig. 2 is a cross-sectional view of Figure 1 taken along line 2—2.

Fig. 3 is a bottom view of the absorbent article showing an alternative embodiment for the fastening mechanism on the front portion.

Fig. 4 is a cross-sectional view of Figure 3 taken along line 4—4.

5 Fig. 5 is a cross-sectional view of Figure 1 taken along the line 5—5.

Fig. 6 is a top view of a portion of the back portion showing an alternative embodiment for the leg elastics.

Fig. 7 is a cross-sectional view of Figure 1 taken along the line 7—7.

Fig. 8 is a cross-sectional view of Figure 1 taken along the line 8—8.

10 Fig. 9 is a top view of a portion of the back portion showing a third embodiment for the leg elastics.

Fig. 10 is a top view of an alternative absorbent assembly.

Fig. 11 is a cross-sectional view of Figure 10 taken along line 11—11.

15 Fig. 12 is a perspective view of the "in use" configuration of the absorbent article shown in Figure 1 once the back portion is releasably attached to the front portion.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Figs. 1 and 2, a disposable absorbent article 10 having a refastenable mechanism is shown. The absorbent article 10 has a longitudinal central axis X—X, a transverse central axis Y—Y and a vertical central axis Z—Z. The absorbent article 10 includes a front portion 12, a back portion 14 and a crotch portion 16. The crotch portion 16 connects the front portion 12 to the back portion 14. The front, back and crotch portions 12, 14 and 16 can be formed from a single piece of material or from two or more pieces of material. Each of the front, back and crotch portions 12, 14 and 16 can be a single layer of material or each can be formed as a laminate having two or more layers. In Fig. 2, the front portion 12 is shown as a laminate having an upper layer 18 and a lower layer 20. Preferably, the front, back and crotch portions 12, 14 and 16, respectively, are formed as a laminate having two layers.

30 When a laminate is utilized, the upper layer 18 faces toward the body of the wearer in use and can be either liquid permeable or liquid-impermeable. A thermoplastic film can be used to make the upper layer 18 liquid-impermeable. The lower layer 20 faces away from the body of the wearer in use and it too can either be liquid permeable or liquid-impermeable. Preferably, the lower layer 20 is liquid permeable and is formed from

94
P
85

a soft material such as a non-woven. Spunbond is a non-woven material manufactured by Kimberly-Clark Corporation that is soft and pliable and functions well as the lower layer 20. It is beneficial to make one of the layers 18 or 20 liquid-impermeable in the crotch portion 16 so as to prevent body fluid absorbed by the absorbent article 10 from exuding.

5 The front portion 12, which will be aligned around a portion of the front torso of a wearer's body in use, includes a first end 22, a second end 24, a first side edge 26 and a second side edge 28. The front portion 12 can be constructed such that its lower layer 20 is formed from a material that has fastening qualities. For example, the lower layer 20 can be formed from either a hook material or a loop material. The entire front portion 12
10 can then act as a fastening element and be releasably attached to another member or have another member releasably attached to it. The front portion 12 can also be formed from other materials that have the ability to releasably attach to another member. The lower layer 20 can be an adhesive layer, a co-adhesive layer or have some other properties that allow it to be releasably fastened to another member.

15 Referring to Figs. 3 and 4, a bottom view of the absorbent article 10 showing an alternative embodiment for the fastening mechanism on the front portion 12. For ease of understanding, the same numerals will be used in Figs. 3 and 4 as were used in Figs. 1 and 2 except for the use of prime numbers for the front portion 12'. The front portion 12' of the absorbent article 10' is formed as a single layer 30 having a surface 32. The surface
20 32 faces away from the body of the wearer during use. Secured to the surface 32 is a fastener 34. The fastener 34 can be a separate piece or patch of material or it can include two or more distinct pieces. The fastener 34 is a "releasable fastener" having the ability to fasten onto another member or have another member fasten onto it. A "releasable fastener" is one that will permit two members to be fastened and then
25 unfastened multiple times. A "releasable fastener" differs from a "permanent fastener" in that it does not require the bond to be permanently destroyed once the connection is broken. The fastener 34 can be formed from a hook material or from a loop material. The fastener 34 can also be formed from an adhesive, a co-adhesive or from some other kind of material that will allow for a releasable attachment or connection to occur with another
30 member. The purpose of the fastener 34 will be explained shortly.

Returning again to the Fig. 1, the front portion 12 has a length L_1 . The length L_1 is measured parallel to the longitudinal central axis X—X. The length L_1 should be equal to or greater than about 1 inches (about 2.5 cm).

95
X 85

Referring now to Figs. 1 and 5, the absorbent article 10 also includes the back portion 14 that will contact the back and sides of a wearer's torso in use. The back portion 14 has a first end 36, a second end 38, and first and second side edges 40 and 42, respectively. The back portion 14 is depicted as a laminate. The laminate includes the upper layer 18 which faces the body of the wearer during use and the lower exterior layer 20 which faces away from the wearer's body during use. The upper layer 18 can be either liquid permeable or liquid-impermeable. Preferably, the upper layer 18 is liquid permeable.

The back portion 14 is divided into a first section 44 and a second section 46. The first section 44 has a length L_2 measured perpendicularly from the first end 36 to a line 48 drawn parallel thereto. The length L_2 should be equal to or greater than about 2 inches (about 5 cm). Preferably, for an adult size garment, the length L_2 should range from between about 3 inches to about 7 inches (about 7.6 cm to about 18 cm). Most preferably, for an adult size garment, the length L_2 should range from between about 6 inches to about 7 inches (about 15 cm to about 18 cm).

The first section 44 of the back portion 14 should be extendable in the transverse direction so that it can easily stretch to accommodate the anatomy of the wearer's torso. The "transverse direction" is a direction parallel to the transverse central axis Y—Y of the absorbent article 10. The first section 44 can also be extendable in the X—X and/or Z—Z directions if desired. The first section 44 can be made to be extendable in a number of ways. One way is to construct the first section 44 into gathers, pleats or undulations such that as one pulls on the first and second side edges 40 and 42, respectively, the first section 44 extends in the transverse direction. Another way to make the first section 44 extendable is to form it from an elastic material, an elastic composite or it can contain elastic 50. The first section 44 could also be formed from a material having elastic properties and characteristics. Preferably, the first section 44 is elastic and will be able to stretch and retract like a rubber band. The first section 44 should be capable of extending and retracting multiple times. This ability to extend and retract will allow the refastening mechanism of the absorbent article 10 to be adjusted whenever needed by the wearer.

The first section 44 will exhibit elastic properties if it is formed from a material such as "stretch bonded laminate". A "stretch bonded laminate" is a material that can be used to form the first section 44. Stretch bonded laminate is a material manufactured by Kimberly-Clark Corporation having an office at 401 North Lake Street, Neenah, Wisconsin

96
87

54956. Other elastic materials or materials exhibiting elastic properties or characteristics can also be used. Such materials are known to those skilled in the art.

Another way of making the first section 44 elastic is to position and bond one or more elongated elastic strands 50 between the upper and lower layers 18 and 20, respectively. By sandwiching multiple elastic strands 50 between the upper and lower layers 18 and 20, one can adjust the amount of stretch imparted into the first section 44. In Fig. 1, multiple elastic strands 50 are shown. There can be from between about 2 to about 100 elastic strands 50 present in the first section 44. Preferably, there are from between about 10 to about 50 elastic strands 50 present in the first section 50. Most preferably, there are from between about 15 to about 25 elastic strands present in the first section 44. The elastic strands 50 can be in the form of elongated strands, ribbons, bands, strips, etc. The cross-sectional configuration of the elastic strands 50 can vary. The cross-section of the elastic strands 50 can be circular, square, rectangular, oval, etc. The elastic strands 50 preferably will extend transversely across the first section 44 from the first side edge 40 to the second side edge 42. The elastic strands 50 function to cause the first section 44 to securely and snugly contact the back and sides of a wearer's torso and prevent fluid leakage from occurring at or about the waist opening.

As shown in Fig. 1, the elastic strands 50 can be present throughout the entire length L_1 of the first section 44. Likewise, if the first section 44 is made from an elastic material, the elastic material can extend the full length L_2 .

The amount the first section 44 can extend or stretch can vary depending upon the type of disposable absorbent article produced and the size of the person wearing such an article. However, for an incontinence garment designed to be worn by an adult, the first section 44 should be capable of extending in the transverse direction by at least about 25%. Preferably, the first section 44 should be capable of extending in the transverse direction by at least about 50%. More preferably, the first section 44 should be capable of extending in the transverse direction by at least about 75%. Most preferably, the first section 44 should be capable of extending in the transverse direction from between about 75% to about 400%. The first section 44 should also be sized so as to fit around from between about 25% to about 80% of a person's torso when in a non-extended condition. Preferably, the first section 44 should also be sized so as to fit around from between about 30% to about 70% of a person's torso when in a non-extended condition. Most preferably, the first section 44 should also be sized so as to fit around from between about 40% to about 60% of a person's torso when in a non-extended condition. This size

97
88

dimension for the first section 44 will reduce the need for the material forming it to be stretched to an extreme amount when being fitted around a person's torso.

Referring again to Figs. 1-3, the back portion 14 includes a fastening mechanism for releasably attaching it to the front portion 12 such that a pant-like article is formed having a waist opening and a pair of leg openings. The fastening mechanism can include a first fastener 52 and a second fastener 54, each secured to the back portion 14. Each of the first and second fasteners 52 and 54 can be positioned adjacent to one of the first and second side edges 40 and 42, respectively. Each of the first and second fasteners 52 and 54 can be secured by glue, an adhesive, by ultrasonic bonding, by heat, by pressure, by a combination of heat and pressure, by thread, by a mechanical means or by other means known to those skilled in the art. In Figs. 1-3, the first and second fasteners 52 and 54 are depicted as distinctive, discrete members having a rectangular profile. The first and second fasteners 52 and 54 are shown being located slightly inboard of the respective first and second side edges 40 and 42. The size and shape of the first and second fasteners 52 and 54 can vary. Each of the first and second fasteners 52 and 54 is preferably formed of similar material, although each can be made from a different material, if so desired. The first and second fasteners 52 and 54 can be formed from many different types of materials. For example, the first and second fasteners 52 and 54 can be an adhesive, a co-adhesive, a hook material, a loop material, etc. Preferably, the first and second fasteners 52 and 54 are formed from either a hook material or from a loop material since these materials are readily available and inexpensive.

It should be also be recognized that other types of fastening mechanisms can be used to releasably attach the front and back portions 12 and 14 together. Such other fastening mechanisms can include adhesives, co-adhesives, as well as mechanical fasteners, such as buttons and buttonholes, etc. Those skilled in the art are familiar with the various fastening mechanisms that can be utilized.

The first and second fasteners 52 and 54 are constructed such that they are releasably attachable to the front portion 12 or 12'. For example, at least one of the first and second fasteners 52 and 54 can be made from a hook material so that it can be releasably attached to the front portion 12 or 12' that would be formed from a loop material. It is also possible to form at least one of the first and second fasteners 52 and 54 from a loop material so that it can be releasably attached to the front portion 12 or 12' that would be formed from a hook material. The refastening aspect of this invention allows the wearer to easily remove the absorbent article 10 from his or her torso, for

98
59

example, to go to the bathroom. The refastenable aspect also allows the wearer to release and adjust the fit of the absorbent article 10 against his or her body as required. For example, if the absorbent article 10 appears to be too loose or too tight, the fasteners 52 and 54 can be released and be readjusted.

Referring now to Fig. 6, an alternative embodiment is shown for a fastener 56 which is secured to the first side edge 40 of the first section 44. The fastener 56 is shown as a separate piece of material securely bonded to the first side edge 40 so as to extend outward therefrom. A similar fastener 58 would be present on the second side edge 42 of the first section 44. As explained above for the first and second fasteners 52 and 54, the fastener 56 can be formed from a hook material, a loop material or from some other kind of material. The fastener 56 can be elastic or non-elastic. The fastener 56 can vary in size and shape and how it is permanently secured onto the back portion 14. Preferably, the fastener 56 is either a hook or loop material that can be releasably attachable to the front portion 12 or 12'. It should be noted that the entire surface of each of the fasteners 56 does not have to be formed from a fastening material. Instead, only a portion of the surface can be the fastening element and the remaining portion of the surface can be formed from a non-fastening material.

Referring now to Figs. 1 and 7, the second section 48 of the back portion 14 has a length L_2 measured perpendicularly from the second end 38 to the line 48 drawn parallel to the first end 36. The length L_2 should be equal to or greater than about 1 inch (about 2.5 cm). Preferably, for an adult size garment, the length L_2 should range from between about 3 inches to about 10 inches (about 8 cm to about 25 cm). Most preferably, for an adult size garment, the length L_2 should range from between about 4 inches to about 8 inches (about 10 cm to about 20 cm).

By designing and manufacturing the absorbent article 10 to have a ratio L_2/L_3 , which ranges from between about 0.1 to about 2, one can improve the body fit of the disposable absorbent article 10. Preferably, the ratio L_2/L_3 ranges from between about 0.2 to about 1.6, and more preferably, the ratio L_2/L_3 ranges from between about 0.3 to about 1.5. By manufacturing the back portion 14 to this desired ratio, one can also minimize fluid leakage.

The amount the second section 48 can extend or stretch can vary depending upon the type of disposable absorbent article produced and the size of the person wearing such an article. However, for an incontinence garment designed to be worn by an adult, the second section 48 should be capable of extending in the transverse direction by at least

99
90

about 25%. Preferably, the second section 46 should be capable of extending in the transverse direction by at least about 40%. More preferably, the second section 46 should be capable of extending in the transverse direction by at least about 50%. Most preferably, the second section 46 should be capable of extending in the transverse direction from between about 25% to about 150%.

The second section 46 may or may not contain elastic 50 that extends transversely thereacross. The second section 46 will contain rugosities 47, preferably a multitude of rugosities. The rugosities 47 are wrinkles or creases that give the second section 46 an undulating or ridged appearance. Pleats, folds, gathers or other means of overlapping the material forming the second section 46 can also be used, if desired. The rugosities 47 allow the material forming the second section 46 to be stretched or extended in at least the transverse direction. Preferably, the material forming the second section 46 will be extendable in more than one direction, for example, in the longitudinal and transverse directions as well as in the z-direction. As the material forming the second section 46 extends, the rugosities 47 will extend to a planar orientation.

The rugosities 47 can be aligned parallel to or at an angle to the longitudinal central axis X—X of the absorbent article 10. If aligned at an angle, the angle can vary from 0 to 90 degrees relative to the longitudinal central axis X—X.

The second section 46 has first and second leg elastics 58 and 60 that are aligned adjacent to first and second edges 62 and 64. Preferably, the line 48 will intersect at a point where the first and second edges 62 and 64 meet the first and second edges 40 and 42, respectively. The first and second leg elastics 58 and 60 can include one or more elastic strands, ribbons, bands or strips that are arranged approximately parallel to the first and second edges 62 and 64, respectively. Preferably, there are from between about 1 to about 6 elongated elastic strands making up each leg elastic 58 and 60. Most preferably, each of the leg elastics 58 and 60 contains three elastic strands. The elastic strands can be aligned parallel to one another. For good results, the leg elastics 58 and 60 should be positioned inward about 1 inch (about 2.5 cm) from the first and second edges 62 and 64, respectively. More preferably, the leg elastics 58 and 60 should be positioned inward about .75 inches (about 2 cm) from the first and second edges 62 and 64, respectively. Most preferably, the leg elastics 58 and 60 should be positioned inward about .5 inches (about 1.3 cm) from the first and second edges 62 and 64.

The first and second leg elastics 58 and 60 are shown extending from the line 48 to the second end 38 of the back portion 14. One should note that the exact location of

100
91
10

the line 48 would dictate whether the leg elastics 58 and 60 are completely contained within the second section 48 or if they extend into the first section 44. In one embodiment, see Fig. 1, the first and second leg elastics 58 and 60 are located adjacent to at least one of the multiple elastic strands 50 present in the first section 44. In a second embodiment, see Fig. 6, each of the first and second leg elastics 58 and 60 extend to one of the first and second side edges 40 and 42, respectively, of the first section 44. The first and second leg elastics 58 and 60 do not actually intersect or contact one of the multiple elastic strands 50 but will be aligned in close proximity to the elastic strands 50. This will allow the first and second leg elastics 58 and 60 to extend in at least the transverse direction as the elastic strands 50 are stretched in the transverse direction. Preferably, the first and second leg elastics 58 and 60 will extend in the x-direction and in the y-direction as the elastic strands 50 are stretched in the transverse direction.

Referring again to Fig. 6, the first and second leg elastics 58 and 60 can extend out to the first and second side edges 40 and 42 of the first section 44, if desired. The leg elastics 58 and 60 function to gather the material from which the second section 48 is formed at a location adjacent to the leg openings. The leg openings are formed as the first and second fasteners 52 and 54 are releasably attached to the front portion 12 to form a pant-like article. Various types of elastics can be used to form the leg elastics 58 and 60. The leg elastics 58 and 60 should have a tension of from between about 10 grams to about 400 grams. Preferably, the leg elastics 58 and 60 should have a tension of from between about 50 grams to about 220 grams. More preferably, the leg elastics 58 and 60 should have a tension of from between about 80 grams to about 200 grams.

Referring to Figs. 1 and 8, the absorbent article 10 also includes the crotch portion 16. The crotch portion 16 connects the front portion 12 to the back portion 14. As noted above, the front portion 12, back portion 14 and the crotch portion 16 can all be part of a single sheet of material. The crotch portion 16 has a first side edge 66 and a second side edge 68 and can have an hourglass, rectangular, square, oval or some other configuration. Each of the side edges 66 and 68 can be straight and aligned parallel or non-parallel to one another. The side edges 66 and 68 can also be curved, arcuate, irregular, convex or concave in shape. Preferably, the side edges 66 and 68 are arcuate in shape with the narrowest distance between the side edges 66 and 68 occurring along the transverse centerline Y—Y.

The crotch portion 16 can be a single layer or a laminate, as depicted. Since the crotch portion 16 acts as a baffle to body fluid that is absorbed by the absorbent article 10,

09637426.081100

101
92
X

It should be liquid-impermeable. If the crotch portion 16 is a laminate, at least one of the layers forming the laminate should be liquid-impermeable. Polypropylene, polyethylene, or any other thermoplastic material works well as a liquid-impermeable layer. Preferably, the crotch portion 16 is a laminate formed from a layer of thermoplastic film and a layer of non-woven material. The non-woven material can be spunbond. Spunbond is a non-woven material manufactured and commercial sold by Kimberly-Clark Corporation having an office at 401 North Lake Street, Neenah, Wisconsin 54956.

The crotch portion 16 also includes first and second crotch elastics 70 and 72, respectively. The crotch elastics 70 and 72 are located adjacent to the first and second side edges 66 and 68, respectively. The crotch elastics 70 and 72 are preferably contoured to match the profile of the side edges 66 and 68. The crotch elastics 70 and 72 are located inward about 1 inch (about 2.5 cm) of the first and second side edges 66 and 68, respectively. Preferably, the crotch elastics 70 and 72 are located inward about .75 inches (about 2 cm) of the first and second side edges 66 and 68, respectively. More preferably, the crotch elastics 70 and 72 are located inward about .5 inches (about 1.3 cm) of the first and second side edges 66 and 68, respectively.

The crotch elastics 70 and 72 should have a tension of from between about 10 grams to about 400 grams. Preferably, the crotch elastics 70 and 72 should have a tension of from between about 50 grams to about 220 grams. More preferably, the crotch elastics 70 and 72 should have a tension of from between about 80 grams to about 200 grams.

The crotch elastics 70 and 72 can include one or more elongated elastic strands, ribbons or strips. Preferably, each of said first and second crotch elastics 70 and 72 includes at least two strands of elastics, and more preferably, at least three strands of elastics. The strands of each of the crotch elastics 70 and 72 can be aligned parallel to one another or they can be aligned in a non-parallel relationship, if so desired. A parallel alignment is preferred. The strands of each of the crotch elastics 70 and 72 can be spaced fairly close together, for example, within a millimeter of each other. The exact spacing can be adjusted depending on the size of the article, the width of the crotch portion 16, the strength of the crotch elastics 70 and 72, the material from which the absorbent article 10 is constructed, etc.

Referring to Figs. 7 and 8, the crotch elastics 70 and 72 can be positioned and secured between the layers 18 and 20 forming the laminate, similar to that shown in Fig. 7. Alternatively, the crotch elastics 70 and 72 can be adhered to an upper surface 74

963742
081100

102
93
8

of the upper layer 18 of the laminate, see Fig. 8. Preferably, the first and second crotch elastics 70 and 72 are bonded to the upper surface 74 of the upper layer 18 by an adhesive.

Referring to Figs. 1, 6 and 9, three different embodiments for the elastic strands 50, the leg elastics 58 and 60 and the crotch elastics 70 and 72 are shown. In Fig. 1, one end of the leg elastics 58 and 60 abuts the elastic strands 50 approximate the line 48. An opposite end of each of the leg elastics 58 and 60 terminate at the second end 38 of the back portion 14, and abut an end of each of the crotch elastics 70 and 72. The important aspect is that the leg elastics 58 and 60 cooperate with the elastic strands 50 and the crotch elastics 70 and 72 to provide a close fit against the wearer's body. This fit will occur around the crotch area and around both leg openings.

In Fig. 6, an alternative configuration is depicted wherein the leg elastic 58 continues to the first side edge 40 of the first section 44. The leg elastic 60 on the opposite side of the absorbent article 10, not shown, would continue to the second side edge 42. In Fig. 9, a third embodiment is depicted wherein one end of the leg elastic 58 is spaced apart from the elastic strands 50 by a gap, denoted G_1 . The opposite end of the leg elastic 58 is spaced apart from an end of the crotch elastic 70 by a gap, denoted G_2 . The gaps G_1 and G_2 should be less than about 1 inch (about 2.5 cm) apart. Preferably, the gaps G_1 and G_2 should be less than about .5 inch (about 1.3 cm) apart, and more preferably, the gaps G_1 and G_2 should be less than about .4 inch (about 1 cm) apart. The gaps G_1 and G_2 are measured when the absorbent article 10 is laid flat and in an extended condition.

It should be noted that the ends of the leg elastics 58 and 60 can be spaced apart from, be abutting, or overlap the elastic strands 50 and an end of the crotch elastics 70 and 72. It is also possible to run or extend the leg elastics 58 and 60 out to the first and second side edges 40 and 42 of the first section 44. In this case, the first and second leg elastics 58 and 60 can be aligned parallel to the elastic strands 50. Furthermore, it is possible to construct the leg elastics 58 and 60 and the crotch elastics 70 and 72 such that one is an extension of the other. In other words, the leg elastic 58 and the crotch elastic 70 would be the same piece of elastic. Similarly, the leg elastic 60 and the crotch elastic 72 would be the same piece of elastic.

The tension in the leg elastics 58 and 60 can be made to be less than, equal to or greater than the tension in the crotch elastics 70 and 72 or the tension in the elastic strands 50. Preferably, the tension in the leg elastics 58 and 60 will be greater than the

103
94
X
/

tension in the crotch elastics 70 and 72. Furthermore, the tension in the elastic strands 50 can be equal to, less than or greater than the tension in either the leg elastics 58 and 60 or the crotch elastics 70 and 72. Preferably, the tension in the elastic strands 50 will be greater than the tension in either the leg elastics 58 and 60 or the crotch elastics 70 and 72.

Returning again to the back portion 14, it should be noted that the interaction of the elastic strands 50, the first and second leg elastics 58 and 60 and the first and second crotch elastics 70 and 72 will allow the absorbent article 10 to properly fit the wearer's body. As the side edges 40 and 42 are pulled apart, the elastic strands 50 will stretch in the horizontal or x-direction. As this occurs, the second section 44 will expand in the x and y directions and the rugosities 47 will flatten out. This action will cause the leg elastics 58 and 60 to be extended outward in the x and y directions. As the first and second leg elastics 58 and 60 extend, they will create a tension on the crotch elastics 70 and 72 and cause them to stretch as well. It should be noted that the crotch elastics 70 and 72 would not extend to the same extent as the first and second leg elastics 58 and 60. The extension of the elastic strands 50, the first and second leg elastics 58 and 60 and the first and second crotch elastics 70 and 72 will create what are known as "lines of fit". The "lines of fit" assure that adequate pressure is applied against the waist, legs and crotch regions of the wearer's body to prevent body fluid from leaking from the absorbent article 10.

Referring again to Figs. 1, 2, 7 and 8, the absorbent article 10 can include a liquid permeable liner 76. The liquid permeable liner 76 is also referred to as a bodyside cover. The liner 76 is not required but the absorbent article 10 will be described as including the liner 76. The liquid permeable liner 76, when present, can be formed from any natural or synthetic material that is liquid permeable. The liquid permeable liner 76 can also be formed from a non-woven material. Spunbond is a good material from which to construct the liquid permeable liner 76.

The bodyside liner 76 can be secured to at least one of the front, back or crotch portions 12, 14 or 16. The bodyside liner 76 is shown being directly attached to the crotch portion 16 in Fig. 8. Alternatively, the bodyside liner 76 can be indirectly attached to the crotch portion 16 via one or more layers. In this case, the intermediate layer would be secured to at least one of the front, back or crotch portions 12, 14 or 16. For example, the bodyside liner 76 could be secured to a liquid-impermeable baffle, that is then adhesively secured to the crotch portion 16.

109
95


In Fig. 1, the periphery of the bodyside liner 76 and the periphery of the crotch portion 16 are shown to be coterminous. When the crotch elastics 70 and 72 are positioned on the upper surface 74 of the laminate, see Fig. 8, they can be adhesively secured to the bodyside liner 76 such that they are arranged adjacent to the side edges 66 and 68 of the crotch portion 16.

The absorbent article 10 further includes an absorbent 78 positioned below the liquid permeable liner 76. The absorbent 78 can be in direct contact with the upper layer 18 of the crotch portion 16. The absorbent 78 is designed to absorb body fluid, especially urine and can include one or more layers of absorbent material. The layers can be constructed of similar or different materials. Suitable materials for the absorbent 78 include cellulose, wood pulp fluff, rayon, cotton, and meltblown polymers such as polyester, polypropylene or coform. Coform is a meltblown air-formed combination of meltblown polymers, such as polypropylene, and absorbent staple fibers, such as cellulose. A preferred material is wood pulp fluff, for it is low in cost, relatively easy to form and has great absorbency. It should be noted that if two or more layers are utilized, that it is not necessary that all the layers be formed from the same material or have the same density.

The absorbent 78 can also be formed from a composite comprised of a hydrophilic material that can be formed from various natural or synthetic fibers, wood pulp fibers, regenerated cellulose or cotton fibers, or a blend of pulp and other fibers. A preferred material is airlaid tissue.

It is also possible and sometimes advantageous to insert a superabsorbent material into the absorbent 78 so as to increase its ability to absorb a large amount of fluid in relation to its own weight. Typical superabsorbents used in absorbent articles such as incontinence garments and diapers can absorb more than 10 times their weight in body fluid. The superabsorbent material can be inserted as particles, fibers or in sheet form. Hydroxyfunctional polymers have been found to be good superabsorbents for disposable absorbent articles. Such superabsorbents are commercially available from The Dow Chemical Company, Stockhausen, Inc., as well as other companies. Two such superabsorbents are DRYTECH® 2035 M and FAVOR® SXM 880. DRYTECH® is a registered trademark of The Dow Chemical Company having an office at 2030 Dow Center, Midland, Michigan 48642. FAVOR® is a registered trademark of Stockhausen, Inc. having an office at 2401 Doyle Street, Greensboro, North Carolina 27406. The superabsorbent can be a partially neutralized salt of cross-linked copolymers of

DS
96
2

polyacrylic acid. Other types of superabsorbent materials known to those skilled in the art can also be used.

Referring now to Figs. 10 and 11, an absorbent assembly 80 is depicted which includes, from top to bottom, a liquid permeable bodyside liner 76, one or more layers of an absorbent 78, one layer being shown, and a liquid-impermeable baffle 82. The liquid-impermeable baffle 82 can be formed from a thin layer of thermoplastic material such as polyethylene or polypropylene. The baffle 82 can also be formed from other kinds of liquid-impermeable material. Preferably, the baffle 82 is formed from a liquid-impermeable film. It should be noted that the baffle 82 could be formed from a laminate wherein at least one of the layers is liquid-impermeable.

In the absorbent assembly 80, the crotch elastics 70 and 72 are sandwiched between the liner 76 and the baffle 82. The crotch elastics 70 and 72 can be held in place by a glue, an adhesive, by ultrasonics, by heat, by pressure, by a combination of heat and pressure, or by some other bonding mechanism known to those skilled in the art. It is also possible to secure the crotch elastics 70 and 72 to the lower or exterior surface of the baffle 82 if desired. For good results, the crotch elastics 70 and 72 should be positioned within about 1 inch (about 2.5 cm) from the respective side edge 66 and 68. More preferably, the crotch elastics 70 and 72 should be positioned within about .75 inches (about 2 cm) from the respective side edge 66 and 68. Most preferably, the crotch elastics 70 and 72 should be positioned within about .5 inches (about 1.3 cm) from the respective side edge 66 and 68.

The absorbent assembly 80 can be placed or positioned on or over the crotch portion 16 of the absorbent article 10 and can be retained in place by an adhesive or some other type of fastener. Since the baffle 82 is liquid-impermeable, the crotch portion 16 would not have to be constructed from a liquid-impermeable material. The absorbent assembly 80 can be either permanently or releasably secured to at least one of the front, back or crotch portions 12, 14 or 16 of the absorbent article 10. Preferably, the absorbent assembly 80 is secured to the crotch portion 16 by an adhesive. Alternatively, the absorbent assembly 80 can actually serve as the front and crotch portions, 12 and 16 respectively, of the absorbent article 10.

Referring now to Figs. 1 and 12, the first and second fasteners 52 and 54 are releasably attached to the front portion 12 to form a pant-like article 84. The pant-like article 84 has a waist-opening 86 and a pair of first and second leg openings 88 and 90. The leg elastic 58, the crotch elastic 70, and possibly the elastic first section 44 can

106
97
2
N

cooperate to form gathers 92 around the first leg opening 88. Likewise, the leg elastic 80, the crotch elastic 72, and possibly the elastic first section cooperate to form gathers 94 around the second leg opening 90. It should be noted that the absorbent article 10 could be sold in either the flat, unassembled condition, as shown in Fig. 1, or in the assembled condition, as is shown in Fig. 12.

Referring again to Fig. 1, the back portion 14 of the absorbent article 10 has been described with reference to a first section 44 and a second section 46. The first section 44 has a length L_2 and the second section 46 has a length L_3 , both measured parallel to the longitudinal central axis X—X. The combination of the length L_2 and the length L_3 equals a new length L_4 . The length L_4 should range from between about 3 inches (about 7.5 cm) to about 25 inches (about 64 cm). Preferably, for an adult size garment, the length L_4 should range from between about 7 inches to about 17 inches (about 18 cm to about 43 cm). Most preferably, for an adult size garment, the length L_4 should range from between about 10 inches to about 15 inches (about 25 cm to about 38 cm).

In addition, the absorbent article 10 has an overall length L_5 measured perpendicularly from the first end 22 of the front portion 12 to the first end 36 of the back portion 14. The length L_5 should range from between about 10 inches (about 25 cm) to about 45 inches (about 114 cm). Preferably, for an adult size garment, the length L_5 should range from between about 20 inches (about 51 cm) to about 40 inches (about 102 cm). Most preferably, for an adult size garment, the length L_5 should range from between about 30 inches (about 76 cm) to about 35 inches (about 89 cm).

A ratio L_4/L_5 can be established which ranges from between about 0.1 to about 0.5. Preferably, the ratio L_4/L_5 ranges from between about 0.2 to about 0.5 and more preferably, the ratio L_4/L_5 ranges from between about 0.3 to about 0.4. By designing and manufacturing the absorbent article 10 to fit within the values established for the ratio L_4/L_5 , one can be confident that the absorbent article 10 will exhibit improved body fit and be less likely to leak body fluid.

While the invention has been described in conjunction with several specific embodiments, it is to be understood that many alternatives, modifications and variations will be apparent to those skilled in the art in light of the foregoing description. Accordingly, this invention is intended to embrace all such alternatives, modifications and variations that fall within the spirit and scope of the appended claims.

107
98
2

We claim:

1. An absorbent article comprising:
- a) a front portion;
 - b) a back portion having a first end and a second end, said back portion being divided into a first section and a second section, said first section located adjacent to said first end and said second section located adjacent to said second end, said first and second sections being extendable in at least one direction, and said second section having a first side edge, a second side edge and first and second leg elastics each positioned adjacent to one of said first and second side edges;
 - c) a crotch portion connecting said front portion to said back portion, said crotch portion having a first side edge, a second side edge and first and second crotch elastics each positioned adjacent to one of said first and second side edges, said first and second crotch elastics cooperating with said first and second leg elastics to provide a close fit against a wearer's body;
 - d) an absorbent secured to at least one of said front, back or crotch portions; and
 - e) means for releasably attaching said back portion to said front portion whereby a pant-like article is formed having a waist opening and a pair of leg openings.
2. The absorbent article of claim 1 wherein said first section is elastic.
3. The absorbent article of claim 1 wherein said first section has a first side edge and a second side edge, and said first section includes multiple elastic strands that extend from said first side edge to said second side edge.
4. The absorbent article of claim 3 wherein said first and second leg elastics are located adjacent to at least one of said multiple elastic strands.

108
X99
2

5. The absorbent article of claim 1 wherein said absorbent article has a longitudinal central axis and a transverse central axis and said first and second sections are extendable in a transverse direction.
6. The absorbent article of claim 5 wherein said first section is capable of extending in the transverse direction by at least about 25%.
7. The absorbent article of claim 5 wherein said second section is capable of extending in the transverse direction by at least about 25%.
8. The absorbent article of claim 5 wherein said second section contains rugosities aligned at an angle to said longitudinal central axis.
9. The absorbent article of claim 1 wherein each of said first and second crotch elastics about one of said first and second leg elastics.
10. An absorbent article comprising:
 - a) a front portion;
 - b) a back portion having a first end and a second end, said back portion being divided into a first section and a second section, said first section located adjacent to said first end and said second section located adjacent to said second end, said first section being elastic and said second section containing rugosities, said first and second sections being extendable in at least one direction, and said second section having a first side edge, a second side edge and first and second leg elastics each positioned adjacent to one of said first and second side edges;
 - c) a crotch portion connecting said front portion to said back portion, said crotch portion having a first side edge, a second side edge and first and second crotch elastics each positioned adjacent to one of said first and second side edges, said first and second crotch elastics cooperating with said first and second leg elastics to provide a close fit against a wearer's body;
 - d) a liquid permeable liner secured to at least one of said front, back or crotch portions;

leg
100
K

- 20 e) an absorbent positioned below said liner; and
f) means for releasably attaching said back portion to said front portion whereby a pant-like article is formed having a waist opening and a pair of leg openings.
11. The absorbent article of claim 10 wherein each of said first and second leg elastics are spaced apart from one of said first and second crotch elastics.
12. The absorbent article of claim 11 wherein an end of each of said first and second crotch elastics are located adjacent to an end of one of said first and second leg elastics and an opposite end of each of said first and second leg elastics are located adjacent to at least one of said multiple elastic strands included in said first section.
- 5 13. The absorbent article of claim 10 wherein said absorbent article has a longitudinal central axis and a transverse central axis and said first section is extendable in a transverse direction by at least 50% and said second section is extendable in a transverse direction by at least 25%.
14. The absorbent article of claim 13 wherein said rugosities are aligned at an angle to said longitudinal central axis and said rugosities are extendable to a planar orientation as said first section is extended.
15. An absorbent article comprising:
a) a front portion;
b) a back portion having a first end and a second end, said back portion being divided into a first section and a second section, said first section located adjacent to said first end and said second section located adjacent to said second end, said first section having a first side edge and a second side edge and including multiple elastic strands that extend between said first and second side edges, said second section having a first side edge, a second side edge and first and second leg elastics each positioned adjacent to one of said first and second side edges, said second section
- 5
10

110
N/O 101

containing rugosities, and said first and second sections being extendable in at least one direction;

- 15 c) a crotch portion connecting said front portion to said back portion, said crotch portion having a first side edge, a second side edge and first and second crotch elastics each positioned adjacent to one of said first and second side edges, said first and second crotch elastics cooperating with said first and second leg elastics to provide a close fit against a wearer's body;
- 20 d) a liquid permeable liner secured to at least one of said front, back or crotch portions;
- e) an absorbent positioned below said liner; and
- f) means for releasably attaching said back portion to said front portion whereby a pant-like article is formed having a waist opening and a pair of leg openings.

16. The absorbent article of claim 15 wherein each of said first and second leg elastics abut an end of one of said first and second crotch elastics.
17. The absorbent article of claim 15 wherein said absorbent article has a longitudinal central axis and a transverse central axis and said first and second sections are extendable in a transverse direction by at least 25%.
18. The absorbent article of claim 17 wherein said first section is extendable in a transverse direction by at least 50%.
19. The absorbent article of claim 17 wherein said second section is extendable in a transverse direction by at least 40%.
20. The absorbent article of claim 17 wherein said rugosities are aligned at an angle to said longitudinal central axis and said rugosities are extendable to a planar orientation as said first section is extended.

001180 52426 60

#11
102
Z**ABSTRACT OF THE DISCLOSURE**

An absorbent article is disclosed exhibiting improved body fit. The absorbent article has a front portion, a back portion and a crotch portion. The back portion has a first end and a second end. The back portion is divided into a first section and a second section. The first section is located adjacent to the first end and the second section
5 located adjacent to the second end. The first and second sections are extendable in at least one direction. The second section has a first side edge, a second side edge and first and second leg elastics each positioned adjacent to one of the first and second side edges. A crotch portion connects the front portion to the back portion. The crotch portion has a first side edge, a second side edge and first and second crotch elastics each
10 positioned adjacent to one of the first and second side edges. The first and second crotch elastics cooperate with the first and second leg elastics to provide a close fit against a wearer's body. The absorbent article also includes an absorbent secured to at least one of the front, back or crotch portions. The absorbent article further includes a fastening mechanism for releasably attaching the back portion to the front portion whereby a pant-
15 like article is formed having a waist opening and a pair of leg openings.

H2
103
K
L

In the United States Patent and Trademark Office

Applicants: Mary Anne Bruemmer-Prestley et al. Docket No.: 16107
Serial No.: Unknown Group: Unknown
Filed: Herewith Examiner: Unknown
For: ABSORBENT ARTICLE EXHIBITING IMPROVED BODY FIT
Express Mail EK563977343US

**Combined Declaration and Power of Attorney
Original U.S. Patent Application
Joint Inventors**

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

As the below-named inventors, we hereby declare that:

Our respective residence addresses, post office addresses and citizenship designations are as stated below, next to our names.

We believe that we are the original, first and joint inventors of the subject matter which is claimed and for which a patent is sought in the patent application entitled:

ABSORBENT ARTICLE EXHIBITING IMPROVED BODY FIT

the specification of which is attached hereto.

We hereby state that each of us has reviewed and understands the contents of the above-identified specification, including the claims and any accompanying drawings as amended by any amendment specifically referred to in the oath or declaration.

We acknowledge our duty to disclose all information which is material to the patentability of this application as defined by 37, C.F.R. 1.56.

As the named inventors, we hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the U.S. Patent and Trademark Office connected herewith:

Patricia A. Charlier, Reg. No. 38840; Thomas J. Connolly, Reg. No. 28404; Gregory E. Croft, Reg. No. 27542; Jeffrey B. Curtin, Reg. No. 37801; Alyssa A. Dudkowski, Reg. No. 40598; Jeremiah J. Duggan, Reg. No. 24470; Steven D. Flack, Reg. No. 40608; Thomas M. Gage, Reg. No. 33385; Scott B. Garrison, Reg. No. 39,198; Joseph P. Harps, Reg. No. 28854; William D. Herrick, Reg. No. 25488; Kyle K. Kappes, Reg. No. 34848; John P. Kirby, Jr., Reg. No. 25348; Nancy M. Klembus, Reg. No. 40051; Christos S. Kyriakou, Reg. No. 42776; Nicholas N. Leach, Reg. No. 31778; William W. Letson, Reg. No. 42797; Thomas J. Mielke, Reg. No. 31399; Douglas L. Miller, Reg. No. 30406; Thomas M. Parker, Reg. No. 42063; Sebastian C. Pugliese III, Reg. No. 42091; James B. Robinson, Reg. No. 34912; Karl V. Sidor, Reg. No. 32597; Douglas H. Tulley, Reg. No. 34743; Patrick C. Wilson, Reg. No. 31893; and Paul Y. Yee, Reg. No. 28460.

00180 924/E960

13
104
2/13/10

Please send all correspondence to Thomas J. Connolly, Kimberly-Clark Worldwide, Inc., 401 North Lake Street, Neenah, Wisconsin 54956.

Our representative may be reached at: (920) 721-2455.

We hereby declare that:

1. All statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and
2. These statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of this application or any patent issued thereon.

First Named Inventor's Full Name:

Mary Anne Bruemmer-Prestley

First Named Inventor's Signature:

Date of Execution of this Document by First Named Inventor:

Date:

First Named Inventor's Country of Citizenship:

United States of America

First Named Inventor's Residence Address:

418 East Pershing Street
Appleton, WI 54911

First Named Inventor's Post Office Address:

Same as Residence Address

Second Named Inventor's Full Name:

Sarah Jane Marie Freilburger

Second Named Inventor's Signature:

Date of Execution of this Document by Second Named Inventor:

Date:

Second Named Inventor's Country of Citizenship:

United States of America

Second Named Inventor's Residence Address:

2708 Welhouse Drive
Kaukauna, WI 54130

Second Named Inventor's Post Office Address:

Same as Residence Address

Third Named Inventor's Full Name:

Nefetari Edris Borden

Third Named Inventor's Signature:

Date of Execution of this Document by Third Named Inventor:

Date:

Third Named Inventor's Country of Citizenship:

United States of America

Third Named Inventor's Residence Address:

5508 Treelodge Parkway
Dunwoody, GA 30350

Third Named Inventor's Post Office Address:

Same as Residence Address

09637426.0 1100

105
2

Fourth Named Inventor's Full Name:

Suzanne Marie Schmoker

Fourth Named Inventor's Signature:

Date of Execution of this Document by Fourth Named Inventor:

Fourth Named Inventor's Country of Citizenship:

Date:

United States of America

Fourth Named Inventor's Residence Address:

4212 Brooks Road
Oshkosh, WI 54904

Fourth Named Inventor's Post Office Address:

Same as Residence Address

Fourth Named Inventor's Full Name:

David Arthur Fell

Fourth Named Inventor's Signature:

Date of Execution of this Document by Fourth Named Inventor:

Fourth Named Inventor's Country of Citizenship:

Date:

United States of America

Fourth Named Inventor's Residence Address:

2056 Lynn Drive
Neenah, WI 54956

Fourth Named Inventor's Post Office Address:

Same as Residence Address

09 37426-08100

09637426 081100

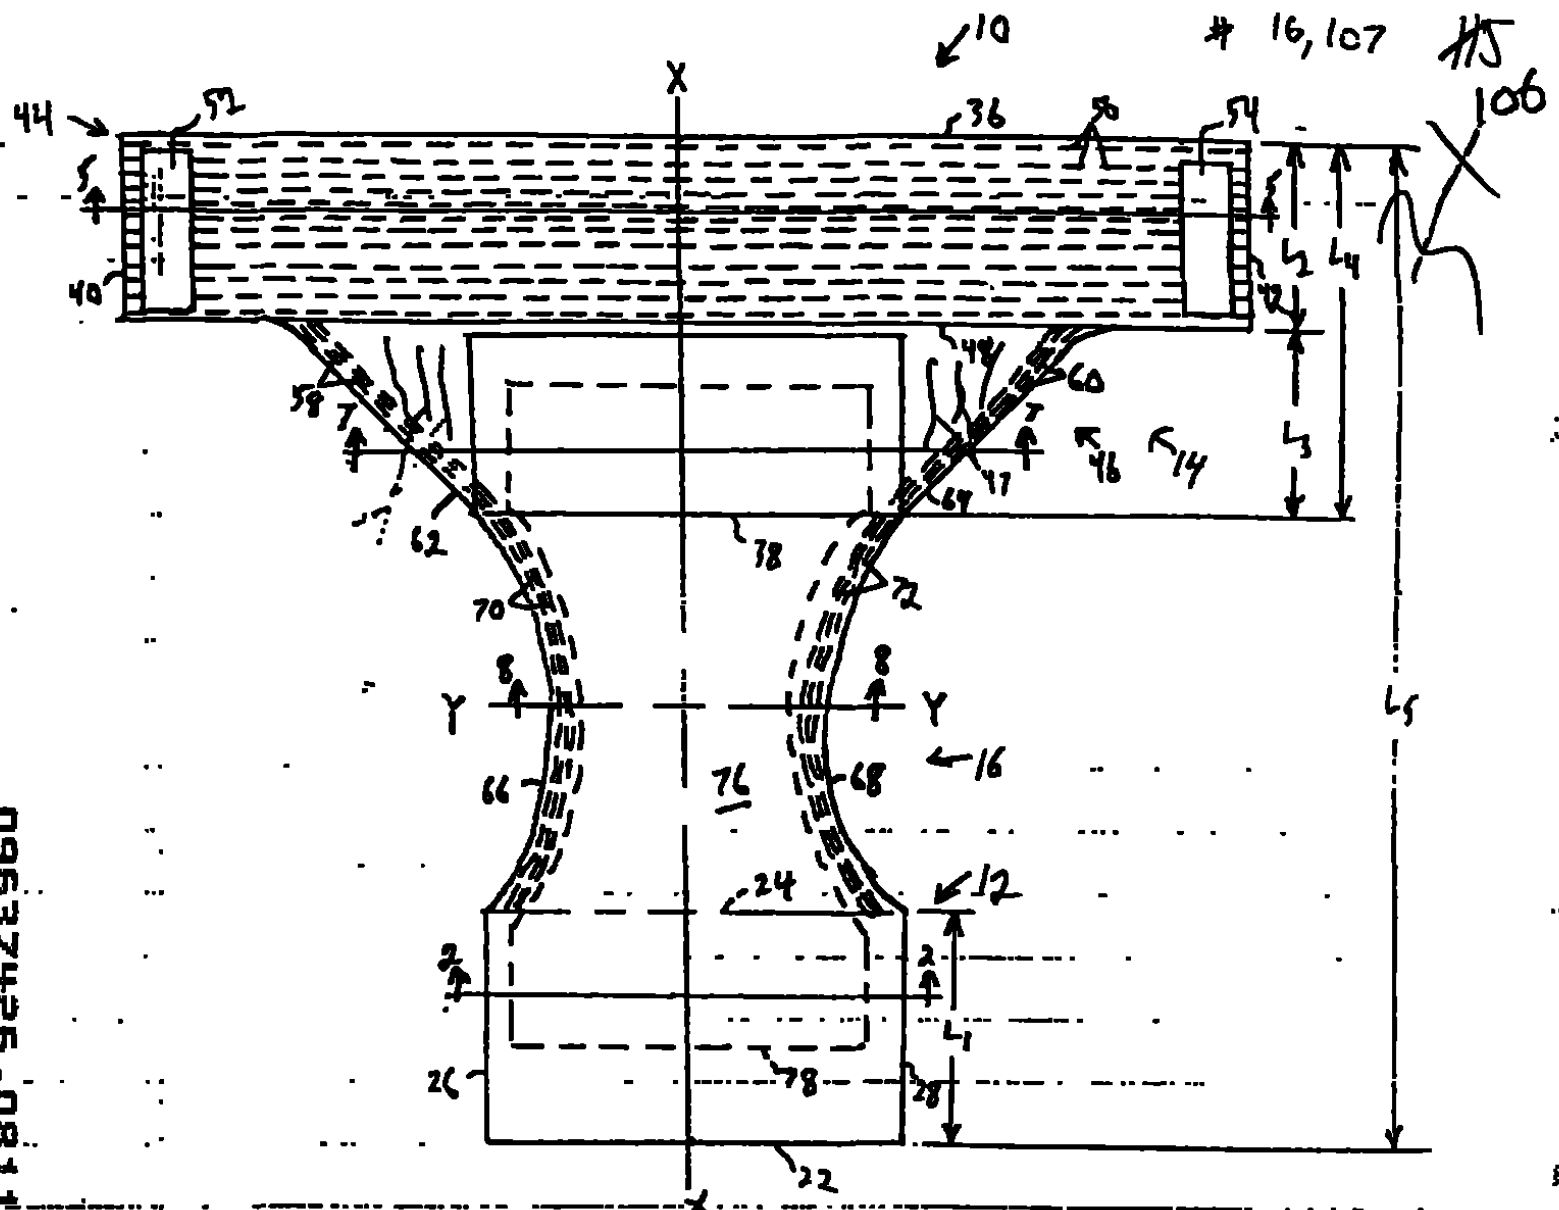


Fig. 1

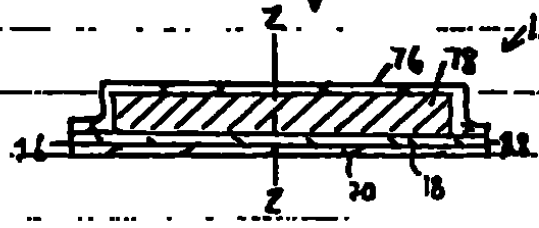


Fig. 2

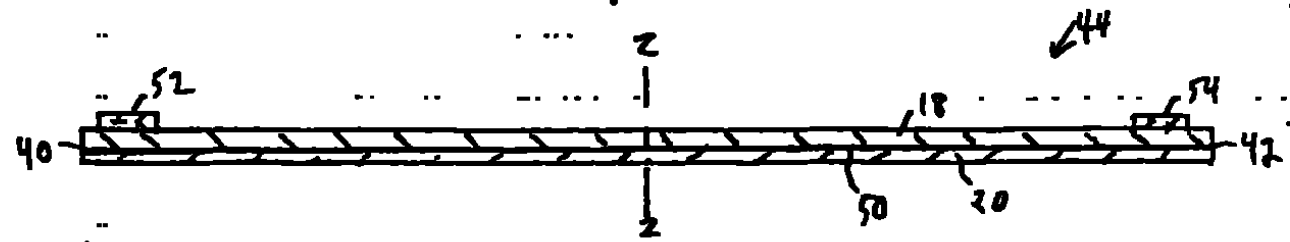


Fig. 5

16,107 #7
108

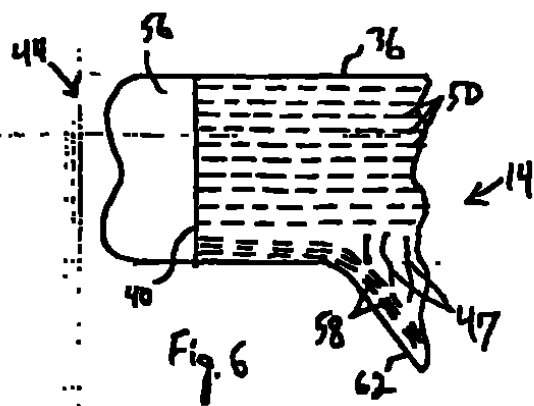


Fig. 6

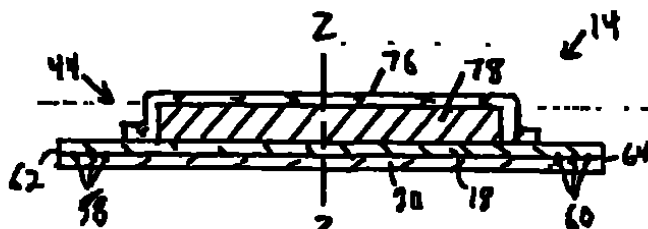


Fig. 7

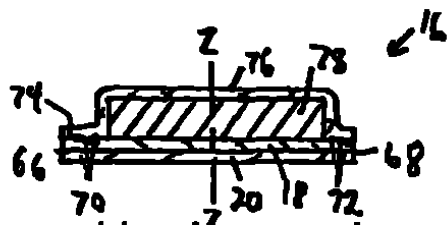


Fig. 8

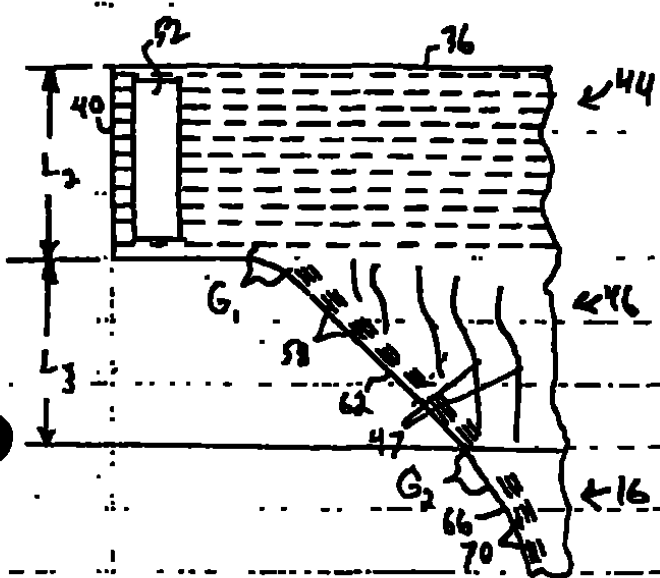


Fig. 9

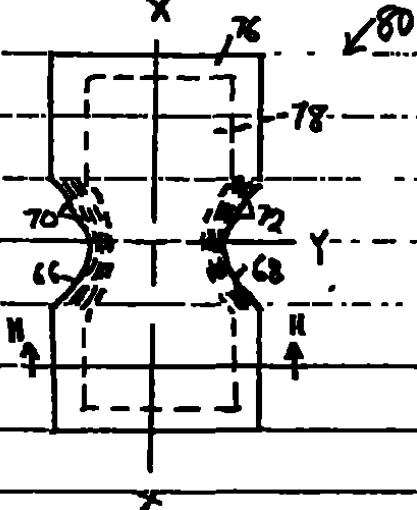


Fig. 10




Fig. 11

0963742610811

16,107 ~~118~~
~~109~~
 10

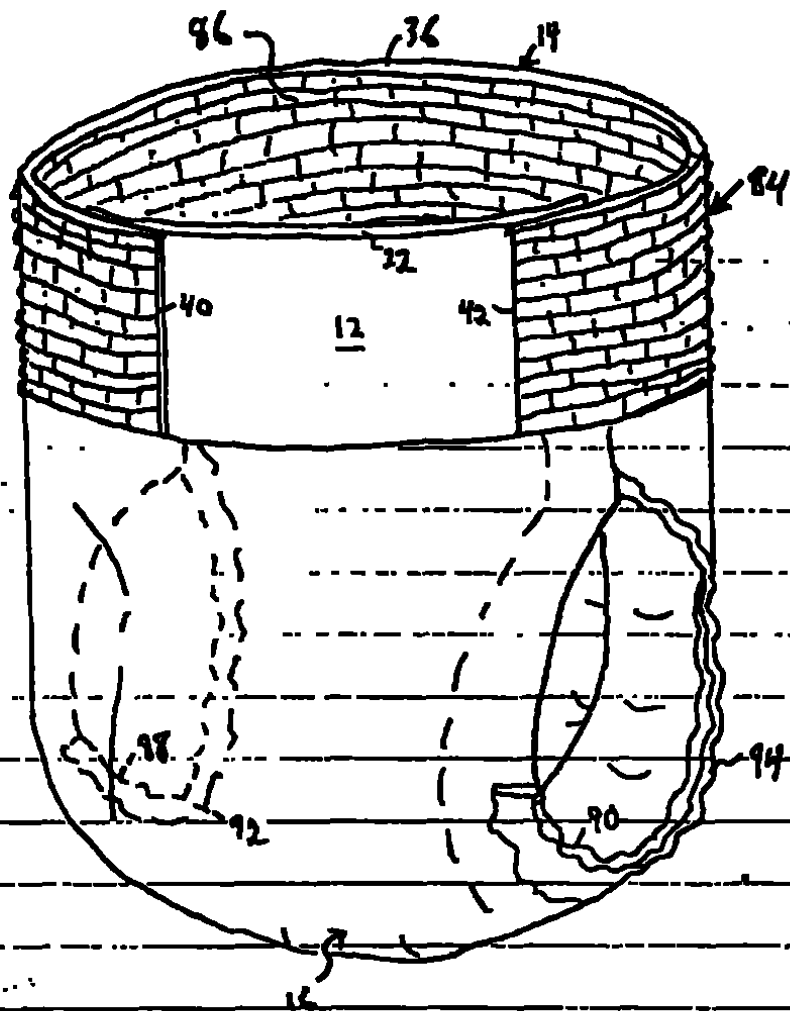


Fig-12

001180-9242960

110 120
K

(TRADUCCION DEL INGLES AL ESPAÑOL)

Caso #16107

COLOMBIA

CERTIFICACION

ESTADO DE WISCONSIN

CONDADO DE WINNEBAGO

Por medio del presente certifico que los papeles adjuntos constituyen una copia idéntica de la original de la Solicitud de Patente de los E.U. correspondiente a la Serie No. 09/637,426 para ARTICULO ABSORBENTE QUE EXHIBE FIJACIÓN DEL CUERPO MEJORADA PRESENTADA Agosto 11 del año 2000, asignada a Kimberly-Clark Worldwide, Inc. y además certifico que Kimberly-Clark Worldwide, Inc. es una compañía organizada y existente bajo las leyes del Estado de Delaware, Estados Unidos de América.

Fecha este día 10 de Noviembre del año 2000, en Neenah, Wisconsin, Estados Unidos de América.


Melissa A. Blob (Firmado)

Melissa A. Blob, Notario Público

**MI Comisión Expira: Agosto 1 del
año 2004**

SELLO NOTARIAL EN RELIEVE.

+++++

LOS ESTADOS UNIDOS DE AMERICA

A TODOS A QUIENES ESTAS PRESENTES LLEGAREN:

DEPARTAMENTO DE COMERCIO DE LOS ESTADOS UNIDOS

Oficina de Patentes y Marcas Comerciales de los Estados Unidos

111
X
20

Octubre 17 del año 2000

ESTA ES PARA CERTIFICAR QUE ANEXA A LA PRESENTE ESTA UNA FIEL COPIA DE LOS REGISTROS DE LA OFICINA DE PATENTES Y MARCAS COMERCIALES DE LOS ESTADOS UNIDOS DE AQUELOS PAPELES DE LA SOLICITUD DE PATENTE ABJO IDENTIFICADA QUE LOGRA LOS REQUERIMIENTOS PARA QUE LE SEA OTORGADA UNA FECHA DE PRESENTACIÓN BAJO 35USC111.

SOLICITUD NUMERO: 09/037,426

FECHA DE PRESENTACION: Agosto 11 del año 2000

Por Autorización del
**COMISIONADO DE PATENTES Y MARCAS
COMERCIALES**

L. EDELEN (Firmado)

L. EDELEN

Funcionario de Certificaciones

SELLO EN RELIEVE.

+++++

REIVINDICACIONES

Reivindicamos:

1 Un artículo absorbente comprende:

a) una parte frontal;

b) una parte trasera que tiene un primer extremo y un segundo extremo, dicha parte trasera estando dividida en una primera sección y una segunda sección, dicha primera sección localizada adyacente a dicho primer extremo y dicha segunda sección localizada adyacente a dicho segundo extremo, dichas primeras y segundas secciones siendo extendibles en por lo menos una dirección, y dicha segunda sección teniendo un primer borde

112
122
122

lateral, un segundo borde lateral y primero y segundo elásticos de pierna cada uno colocado adyacente a uno de dichos primero y segundo bordes laterales;

c) una parte de entrepierna que conecta dicha parte frontal a dicha parte trasera, dicha parte de entrepierna teniendo un primer borde lateral, un segundo borde lateral y un primero y segundo elásticos de entrepierna cada uno colocado adyacente a uno de dichos primero y segundo bordes laterales, dichos primero y segundo elásticos de entrepierna cooperando con dicho primero y segundo elásticos de pierna para proporcionar una fijación a un cuerpo de un usuario;

d) un absorbente asegurado a por lo menos una de dichas partes frontal, trasera o de entrepierna; y

e) medio para unir soltablemente dicha parte trasera a dicha parte frontal por medio del cual un artículo similar a pantalón se forma teniendo una abertura de cintura y un par de abertura de pierna.

2. El artículo absorbente de la reivindicación 1 en el cual dicha primera sección es elástica.

3. El artículo absorbente de la reivindicación 1 en el cual dicha primera sección tiene un primer borde lateral y un segundo borde lateral, y dicha primera sección incluye hebras elásticas múltiples que se extienden des de dicho primer borde lateral a dicho segundo borde lateral.

4. El artículo absorbente de la reivindicación 3 en el cual dicho primero y segundo elásticos de pierna están localizados adyacentes a por lo menos una de dichas hebras elásticas múltiples.

113/123
9

5. El artículo absorbente de la reivindicación 1 en el cual dicho artículo absorbente tiene un eje longitudinal central y un eje transversal central y dichas primera y segundas secciones son extendibles en una dirección transversal.

6. el artículo absorbente de la reivindicación 5 en el cual dicha primera sección es capaz de extenderse en la dirección transversal por al menos cerca del 25%.

7. El artículo absorbente de la reivindicación 5 en el cual dicha segunda sección es capaz de extenderse en la dirección transversal por al menos cerca del 25%.

8. El artículo absorbente de la reivindicación 5 en el cual dicha segunda sección contiene rugosidades alineadas a un ángulo a dicho eje central longitudinal.

9. El artículo absorbente de la reivindicación 1 en el cual cada uno de dichos primero y segundo elásticos de entrepierna sobre sale uno de dichos primero y segundos elásticos de pierna.

10. Un artículo absorbente comprende:

- a) una parte frontal;
- b) una parte trasera que tiene un primer extremo y un segundo extremo, dicha parte trasera estando dividida en una primera sección y una segunda sección, dicha primera sección localizada adyacente a dicho primer extremo y dicha segunda sección localizada adyacente a dicho segundo extremo, dicha primera sección siendo elástica y dicha segunda sección conteniendo rugosidades, dichas primera y segundas secciones siendo extendibles en por lo menos una dirección, y dicha segunda sección teniendo un primer borde lateral, un segundo borde lateral y primero y segundo elásticos de pierna cada uno colocado adyacente a uno de dichos primero y segundos bordes laterales;

114
124


c) una parte de entrepierna que conecta dicha parte frontal a dicha parte trasera, dicha parte de entrepierna teniendo un primer borde lateral, un segundo borde lateral y un primero y segundo elásticos de entre pierna cada uno colocado adyacente a uno de dicho primero y segundos bordes laterales, dichos primero y segundo elásticos de entrepierna cooperando con dicho primero y segundo elásticos de pierna para proporcionar una fijación estrecha contra un cuerpo de un usuario;

d) un foro permeable al liquido asegurado a por lo menos una de dichas partes traseras o de entrepierna;

e) un absorbente colocado debajo de dicho foro; y

f) medio para soltablemente unir dicha parte trasera a dicha parte frontal por medio del cual un artículo similar a pantalón se forma teniendo una abertura de cintura y un para de abertura de pierna.

11. El artículo absorbente de la reivindicación 10 en el cual cada uno de dichos primero y segundo elásticos de pierna están espaciados aparte de uno de dichos primero y segundo elásticos de entrepierna.

12. El artículo absorbente de la reivindicación 11 en el cual un extremo de cada uno de dichos primero y segundo elásticos de entre pierna esta localizado adyacente a un extremo de 1 de dichos primero y segundo elásticos de pierna y un extremo opuesto de cada uno de dichos primero y segundo elásticos de pierna esta localizado adyacente a por lo menos uno de dichas hebras elásticas múltiples incluidas en dicha primera sección.

13. El artículo absorbente de la reivindicación 10 en el cual dicho artículo absorbente tiene un eje central longitudinal y un eje central transversal y dicha primera sección es extendible en una dirección transversal por lo menos 50% y dicha segunda sección es extendible en una dirección transversal por lo menos 25%.

14. el artículo absorbente de la reivindicación 13 en el cual dichas rugosidades están alineadas a un ángulo a dicho eje longitudinal central y dichas rugosidades son extendibles a una orientación planar según dicha primera sección es extendida.

15. Un artículo absorbente comprende:

a) una parte frontal;

b) una parte trasera que tiene un primero y según do extremo, dicha parte trasera estando dividida en una primera sección y una segunda sección, dicha primera sección localizada adyacente a dicho primer extremo y dicha segunda sección localizada adyacente a dicho segundo extremo dicha primera sección teniendo un primer borde lateral y un segundo borde lateral e incluyendo hebras elásticas múltiples que se extienden entre dichos primero y segundo bordes laterales. dicha segunda sección teniendo un primer borde lateral, un segundo borde lateral y primero y segundo elásticos de pierna cada uno colocado adyacente a uno de dichos primero y segundo bordes laterales, dicha segunda sección conteniendo rugosidades, y dichas primera y segunda secciones siendo extendibles en por lo menos una dirección.

c) Una parte de entrepierna conectando dicha parte frontal a dicha parte trasera, dicha parte de entrepierna teniendo un primer borde lateral, un segundo borde lateral y un primero y segundo elásticos de entrepierna cada uno colocados adyacente a uno de dichos primero y segundo bordes laterales, dicho primero y segundo elásticos de entrepierna cooperando con dichos primero y segundo elásticos de pierna para proporcionar una fijación estrecha contra un cuerpo de un usuario;

d) Un foro permeable al líquido asegurado a por lo menos una de dichas partes frontal trasera y de entrepierna;

e) Un absorbente colocado de dicho foro; y

f) Medio para soltamente unir dicha parte trasera a dicha parte frontal por medio del cual un artículo similar a pantalón se forma teniendo una abertura de cintura y un par de aberturas de pierna.

16. El artículo absorbente de la reivindicación 15 en el cual cada uno de dichos primero y segundo elásticos de pierna sobresale un extremo de uno de dichos primero y segundo elásticos de entrepierna..

17. El artículo absorbente de la reivindicación 15 en el cual dicho artículo absorbente tiene un eje longitudinal central y un eje central transversal y dichas primeras y segundas secciones son extendibles en una dirección transversal por al menos 25%.

18. El artículo absorbente de la reivindicación 17 en el cual dicha primera sección es extendible en una dirección transversal por lo menos 60%.

19. el artículo absorbente de la reivindicación 17 en el cual dicha segunda sección es extendible en una dirección transversal por lo menos 40%.

20. El artículo absorbente de la reivindicación 17 en el cual dichas rugosidades están alineadas a un ángulo a dicho eje longitudinal central y dichas rugosidades son extendibles a una orientación planar según dicha primera sección es extendida.

117 127

RESUMEN DE LA REVELACIÓN

Un artículo absorbente está revelado exhibiendo fijación del cuerpo mejorada. El artículo absorbente tiene una parte frontal, una parte trasera y una parte de entrepierna. La parte trasera tiene un primer extremo y un segundo extremo. La parte trasera está dividida en una primera sección y una segunda sección. La primera sección está localizada adyacente al primer extremo y la segunda sección localizada adyacente al segundo extremo. La primera y segunda secciones son extendibles en por lo menos una dirección. La segunda sección tiene un primer borde lateral, un segundo borde lateral y un primero y segundo elásticos de pierna cada uno colocado adyacente a uno del primero y segundo bordes laterales. Una parte de entrepierna conecta la parte frontal a la parte trasera. La parte de entrepierna tiene un primer borde lateral, y un segundo borde lateral y primer y segundo elásticos de entrepierna cada uno colocado adyacente a uno de los primero y segundo bordes laterales. El primero y segundo elásticos de entrepierna cooperan entre el primero y segundo elásticos de pierna para proporcionar una fijación estrecha contra un cuerpo de usuario. El artículo absorbente también incluye un absorbente asegurado a por lo menos una de las partes frontal, trasera o de entre pierna. El artículo absorbente además incluye un mecanismo de amarrar para soltablemente unir la parte trasera a la parte frontal por medio del cual un artículo similar a pantalón se forma teniendo una abertura de cintura y un par de aberturas de pierna.

+++++

**ES TRADUCCIÓN FIEL Y COMPLETA DE LOS DOCUMENTOS
ADJUNTOS**

Descripción de la corrección o modificación solicitada
Estamos presentando nuevas Figuras 1, 3, 6, 9 y 10 donde se han realizado algunas modificaciones, reemplazando las inicialmente presentadas, las cuales no afectan en ningún sentido el alcance de la invención.

RESUMEN DE LA REVELACIÓN

Un artículo absorbente está revelado exhibiendo fijación del cuerpo mejorada. El artículo absorbente tiene una parte frontal, una parte trasera y una parte de entrepierna. La parte trasera tiene un primer extremo y un segundo extremo. La parte trasera está dividida en una primera sección y una segunda sección. La primera sección está localizada adyacente al primer extremo y la segunda sección localizada adyacente al segundo extremo. La primera y segunda secciones son extendibles en por lo menos una dirección. La segunda sección tiene un primer borde lateral, un segundo borde lateral y un primero y segundo elásticos de pierna cada uno colocado adyacente a uno del primero y segundo bordes laterales. Una parte de entrepierna conecta la parte frontal a la parte trasera. La parte de entrepierna tiene un primer borde lateral, y un segundo borde lateral y primer y segundo elásticos de entrepierna cada uno colocado adyacente a uno de los primero y segundo bordes laterales. El primero y segundo elásticos de entrepierna cooperan entre el primero y segundo elásticos de pierna para proporcionar una fijación estrecha contra un cuerpo de usuario. El artículo absorbente también incluye un absorbente asegurado a por lo menos una de las partes frontal, trasera o de entrepierna. El artículo absorbente además incluye un mecanismo de amarrar para soltablemente unir la parte trasera a la parte frontal por medio del cual un artículo similar a pantalón se forma teniendo una abertura de cintura y un par de aberturas de pierna.

+++++

**ES TRADUCCIÓN FIEL Y COMPLETA DE LOS DOCUMENTOS
ADJUNTOS**