

AVISO DE NOTIFICACION

0103

CORREO CERTIFICADO

Radicación :00076102 00000006 Fecha: 27/12/2005 8:08:34
Trámite :2 PATENTES DE INVENCION
Evento :1 REGISTRO/DEPOSITO/CONCESION/DEPOSITO
Actuación :432 COMUNICACION ACTO ADMINISTRATIVO
Solicitante :CASTILLO GRAU GERMAN Folios:1

Bogotá, D.C.

Señor (a) (es)
CASTILLO GRAU GERMAN
CRA 13 # 37-43 PISO 12
BOGOTA D.C.

REF: RESOLUCION No: 35114
FECHA No. 26/12/2005
EXPEDIENTE No. 0 76102
Trámite :2 PATENTES DE INVENCION
Evento :1 REGISTRO/DEPOSITO/CONCESION/DEPOSITO
Actuación :432 COMUNICACION ACTO ADMINISTRATIVO

Estimado Doctor (a) :

Comendidamente le solicito presentarse a este Despacho ubicado en la Carrera 13 No. 27 - 00 Piso Quinto (5), de la ciudad de Bogotá D.C., dentro del término de cinco (5) días hábiles contados a partir del envío de la presente citación, en horario de 8:30 a.m. a 5:00 p.m. jornada continua, con el fin de notificarle personalmente el contenido de la resolución de la referencia proferida dentro del expediente tramitado con el número de radicación citado en el asunto.

De no hacerse presente en el término indicado anteriormente, la providencia en mención se notificará por edicto, el cual se fijará por el término de diez (10) días en el Centro de Documentación e Información. Para su comodidad el texto completo de la resolución se encontrará disponible en la página web de la Entidad, desde el día hábil siguiente al que se desfije el edicto.

La consulta del listado notificación y del acto administrativo puede ser realizada desde un computador con acceso a Internet, en la página web www.sic.gov.co, con el número de resolución a través de la opción servicios en línea - caracter general - consulta actos administrativos.

Secretaría General
SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO

75

RADICACIÓN: 0-78102

EDICTO No. 1083

LA SECRETARÍA GENERAL AD-HOC HACE SABER:

Que esta Superintendencia profirió Resolución No. 35114 de 26-DIC-2005. Que el contenido de la parte resolutive es como sigue: El Superintendente de Industria y Comercio.

RESUELVE

ARTICULO PRIMERO: Otorgar privilegio de patente de invención a la creación denominada:

**" COMPOSICIONES DE CEMENTACION PARA POZOS PETROLIFEROS O
ANALOGOS EN ZONAS DE GRANDES ESFUERZOS "**

Clasificación IPC: E 21 B 33/13.

Reivindicación(es): 1 a 8 **Folios(a):** 67.

Titular(es): SOFITECH N.V.

Domicilio(a): Antwerpen, Bélgica.

Inventor(es): Sylvain Le Roy-Delage y Marc Thiercelin.

Prioridad N°: 9912681 **Fecha:** 07 de octubre de 1999 **País:** FR.

Vigente desde: 06 de octubre del 2000 **Hasta:** 06 de octubre del 2020

ARTICULO SEGUNDO: Negar el privilegio de patente solicitado para las reivindicaciones 9 a 11 contenidas en los folios 67 y 68 del expediente, de acuerdo con las razones expuestas en la parte considerativa de la presente resolución.

ARTICULO TERCERO: El titular tendrá los derechos y las obligaciones establecidos en la Decisión 486 de la Comisión de la Comunidad Andina y su privilegio caducará en las condiciones prescritas por las disposiciones legales vigentes sobre propiedad Industrial.

ARTICULO CUARTO: Entregar al titular copia auténtica de esta resolución y el certificado de patente, previas las anotaciones en los libros de registro .

ARTICULO QUINTO: Notificar el contenido de la presente resolución al doctor Germán Castillo Grau, o a quien haga sus veces, en su calidad de apoderado de Sofitech N.V., entregándole copia de la misma, advirtiéndole que contra ella proceda el recurso de reposición ante el Superintendente de Industria y Comercio, del cual podrá hacer uso al momento de la notificación o dentro de los cinco (5) días hábiles siguientes a ella.

NOTIFÍQUESE Y CUMPLASE
Dada en Bogotá, D.C., a los

26 DIC. 2005

EL SUPERINTENDENTE DE INDUSTRIA Y COMERCIO,

JAIRO ESCOBAR

Para notificar a los interesados, se fija el presente EDICTO en lugar visible al público en la SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO, por el término de (10) diez días hábiles contados a partir de las 8:30 a.m. de hoy.

Secretaría General Ad-Hoc 13-ENE-2006 Este edicto se desfija hoy 28-ENE-2006 a las cinco (5:00 p.m.)
Secretaría General Ad-Hoc
EDICTO No. 1083

96

Superintendencia de Industria y Comercio

Otorga la Patente de Invención a:

Pofitech N.V.

Antwerpen, Bélgica

A la Invención denominada:

*"Composiciones de cementación para pozos petrolíferos o análogos en zonas de grandes
cuerpos"*

Inventor(es):

Filvaine Le Roy-Delage

Karo Thiercelin

Certificado No. 28459

Clasificación Internacional: E21B 33/13
de Patentes

3 Reivindicaciones
Vigente Desde: 06/10/2000
Hasta: 06/10/2020

Prioridad No. FR 9912661 07/10/1999

*Que la solicitud de Patente de Invención No. 076102 cumple con los
requisitos previstos en las disposiciones legales vigentes, Resolución No. 35114
de 26/12/2005, en testimonio de ello se estampó la firma del funcionario
competente y el sello de esta Entidad.*

Superintendente de Industria y Comercio

19

EUROPEAN PATENT APPLICATION

Application number: 85300287.8

Date of filing: 25.02.86

Int. CL⁴: C 04 B 28/04
E 21 B 33/13
/(C04B28/04, 22:00, 22:12,
24:16, 24:18, 24:22)

Priority: 25.02.85 FR 8534816

Date of publication of application:
08.10.86 Bulletin 88/41

Designated Contracting States:
DE GB IT NL

Applicant: Etudes et Fabrication Dowell Schlumberger
Z.I. Molins BP 80
F-42003 Saint-Etienne Cedex (FR)

Inventor: Oberste-Padberg, Rüdiger
3, rue du Château
F-42100 St Etienne Terranoire (FR)

Inventor: Mc Lachlan, Richard
8 Place de l'Hôtel de Ville
F-42000 Saint Etienne (FR)

Inventor: Delosse, Camille
12 Domaine Poyeton
F-42050 Saint Jean Bonnetfonds (FR)

Inventor: Riva, Phil Etudes et Fabrication
Dowell Schlumberger Z.I. Molins BP 80
Saint Etienne Cedex 01 (FR)

Representative: Richebourg, Michel François
Etudes et Fabrication Dowell Schlumberger Z.I. Molins
La Chausette B.P. 80
F-42003 Saint-Etienne Cedex 1 (FR)

Cement slurry composition for cementing wells traversing salt formations, and corresponding cementing method.

The invention is characterized by a specific combination of additives in a salt-saturated cement slurry, said additives basically consisting of terpolymers, particularly sulfonated terpolymers, a substance such as NaF, a silicate and a naphthalenesulfonate.

The salt-saturated slurry thus obtained is only moderately delayed and affords good fluid loss control. Its rheology and its mechanical properties are not affected.

EP 0 196 689 A1

Cement slurry composition for cementing wells traversing salt formations and corresponding cementing methods

This invention relates to the cementing of drilling wells, particularly oil wells.

In drilling a well through underground formations in order to produce or inject fluids therein, the well must be cemented both to preserve its integrity and to keep control of the fluids injected therein or produced therefrom, among other purposes.

It is common practice for the production of fluids, such as for production of crude oil, to lower steel tubing into the drill hole. After this, a cement slurry with suitable properties is prepared at the surface and injected into the tubing. Thereafter, the cement slurry is displaced meaning that a displacement fluid is injected behind it up to a level of a few meters above the shoe of the tubing. Nearly all the cement slurry is thus pushed back into the annular space or annulus between the tubing and the wall of the well.

The slurry having been placed, it is allowed to set and its mechanical strength is allowed to develop to obtain sound support for the tubing, suitable bonding with the surrounding rocks of various compositions and isolation of the respective zones from fluid migrations.

A great number of slurry formulations are known which enable the properties of the cement slurry (mainly its density, setting time or thickening time, rheology, fluid loss, free water, compressive strength, permeability and resistance to chemical attack) to be adapted to meet the requirements stemming from the nature of the wells and that of the formations traversed.

A good mix design is especially important when the cement slurry is used to cement a well drilled through salt formations, as the equilibrium conditions between the cement and the saline zones are difficult to establish. Failing to establish these equilibrium conditions soon results in the salts dissolving and the alkalis migrating into the cement which slows the setting of the cement and consequently adversely affects its mechanical strength, and produces a poor bond between the cement and the surrounding formations.

Two main cementing techniques have been developed hereto, to seal wells going through salt formations: cementing with slurries strongly laden with salts (from 18% by weight of mix water, up to saturation), and cementing with slurries containing very small amounts of salts (from just a few percent by weight of water, down to 0%).

The first approach thus consists in using high-salt cements.

Since salt formations are drilled with salt-saturated mud, it seemed logical also to use cement slurries either saturated or nearly saturated with salts so that their slurry would be compatible with the drilling mud. The main advantage of this technique is that dissolution of any further quantities of salts from the formation cannot take place, so that a relatively good bond can be obtained between the cement and the surrounding formation.

In fact, however, there are a number of very serious disadvantages associated with the use of such salt-laden slurries, including:

1) Thickening time is difficult to adjust because these cement slurries are "intrinsically" delayed.

2) Said slurries are always viscous, so that it is difficult to adapt their rheology to turbulent flow.

3) Fluid loss from salt-laden slurries is very great.

4) Salt-laden cement slurries are not compatible with other formations or strata above or below the salt formations for which they were designed. For example, amorphous silica, which is encountered in certain sandstone formations and in acidic volcanic rock, reacts with salts to form expansible alkaline silicates which can completely destroy the formation as well as the cement — a phenomenon known as "silica-alkali reaction".

5) For salt-laden cement slurries to be pumpable, which in some cases can be very difficult, it is generally necessary to add to the slurries large quantities of plastifiers acting as retarders. Accordingly, the slurry has a tendency to gel rather than setting normally, and even such gelling takes place only after an extended period of thickening. Consequently, there is a long period during which the slurry is not liquid and barely transfers the hydrostatic pressure to the formation. Furthermore, this slurry is not yet strong enough to support and protect the tubing. Since the salt formations traversed by the drill hole are highly plastic and can easily flow into the well hole by geostatic pressure, there is obviously a risk of premature collapse of the well tubing.

Thus, although this solution may appear logical, it actually involves more drawbacks than advantages.

The second prior art solution consists in using cement slurries containing little or no salt. This technique is more recent.

It is much easier to control the properties of this type of cement slurry. The main drawbacks of these slurries are:

1) In order to reduce the quantity of salts incorporated into the cement by abrasion of the rock, the slurry must be pumped into the well very slowly.

2) Despite this precaution however, dissolutions will occur locally, such that high concentrations of salts will develop. Given that salt concentrations of less than 15% by weight of mix water have an accelerating effect on cement setting, it is necessary, in order to avoid premature setting, either to premix a certain quantity of salts with the slurry, or to use retarders. Both of these alternatives, if implemented, at best only enable determination of the minimum thickening time. As an absorption of salts occurs during displacement and setting of the slurry, thickening time will increase in an unpredictable manner.

UP-DATED
23 AVR. 1986
DOCUMENT

0196689-0 STL

88

-3-

Salt-free or low-salt cement slurries exhibit a high capacity for dissolving the salts which may be present in the surrounding rocks. Thus, during thickening of the slurry facing a salt zone, the slurry's liquid phase will still act to dissolve certain quantities of salts, such that a void will appear between the cement and the rocks that brings about poor bonding between the cement and the adjoining formation.

Therefore, although such slurries containing little or no salt improve certain cementing characteristics in salt zones, this technique is also less than satisfactory and is limited to just a few specific applications.

It should also be noted that these two known techniques cannot be utilized when salts of magnesium are present in the rock.

A new technique has recently been developed (as per French patent application FR-A-83 28383 by same Applicant). The cementing slurries according to this technique have a low salt content and contain a silicate which effects a very unique fibrous bond between the rock and the cement. These slurries also have a good rheology, good compressive strength and an adjustable setting time.

The present invention concerns a cement slurry composition having the same fibrous bonding capability as the slurries just-mentioned, combined with excellent fluid loss control.

Fluid loss is understood to correspond to the passage, and therefore the loss, of the cement slurry's interstitial water into the formations surrounding the hole. This brings about a profound change in the characteristics of the slurry (density, rheology, setting time and so on) which cannot be countered from the surface and which can defeat cementing operations or make necessary additional, secondary cementing work.

Fluid loss control is therefore an essential property of the cement slurries under consideration.

More information on this matter can be found in French patent applications Nos. 83-81369 and 84-13788 by same Applicant and it is not deemed necessary to review the teachings of these French patent specifications in detail.

It needs only to be pointed out that the fluid loss control additives for cement compositions described in the said patent applications consist in the product of the hot processing, in the presence of at least one acid (especially hydrochloric acid or sulfuric acid), of an aqueous solution of at least one terpolymer, consisting of the following monomer fractions:

I ; I bis; II and III described in the following Drawing sheet.

(page 4 is cancelled)

in which R_1 and R_2 represent H or CH_3 , R_3 stands for CONH_2 , CN or COOCH_3 , R_4 stands for H, CH_3 or C_2H_5 and R_5 stands for H, CH_3 or C_2H_5 , or alternatively, R_4 and R_5 together form a propylene group which, together with the NCO group, forms a pyrrolidone radical, the Me^+ charge balancing cation being selected from among NH_4^+ , K^+ , Na^+ or Li^+

and the respective parts by weight of the starting monomers x, y and z for the formulas I, I bis, II and III range respectively from 5 to 50, 25 to 92 and 3 to 70, to which said aqueous solution will preferably be added a compound such as NaF or KF.

Moreover, R_3 may be extended to $R_3 = \text{COOH}$, COONa and

other salts, and ethyl, propyl esters and so on.

The additives described in the above-mentioned patent applications and their extensions as described shall be referred to hereinafter as "terpolymers".

It was envisaged to associate the teaching of French application FR-A-83 20303. (fibrous bonding technique) with the teaching according to which "terpolymers" enhance fluid loss control.

It was found however that the association thus obtained did not provide the expected properties of binding and fluid loss control (cf. the examples given hereinafter).

The present invention on the other hand concerns a composition of Portland cement slurry characterized by the combination of four additives in set proportions.

For convenience, these additives or admixtures will be designated throughout the following description as:

"A1" - mixture of lignosulfonate and Na silicate in a ratio of 1:100 to 1:20

(The ratio will be adjusted on the basis of simple tests of setting delay and mixability);

"Terpolymers" - as defined above;

"A3" - sodium salt of the naphthalenesulfonic acid/formaldehyde condensation product;

"A4" - NaCl.

Roughly, A1 + Terpolymers + A4 represents the above-mentioned attempt to combine the teachings of French patent applications 83.20303, 83.01369 and 84.13788.

As will be apparent from the examples given hereinafter, the properties resulting from such a combination turned out to be very unfavorable.

Inclusion of a fourth additive, namely "A3" above, leads to outstanding fluid loss control provided the concentration of this additive exceeds a certain threshold as explained later herein. Moreover, the quality of the cement/rock fibrous bond, the rheology of the slurry and compressive strength remain excellent.

Finally, the outstanding fluid loss control obtained by the invention does not entail an unacceptable delay of setting (as happens with the prior art fluid loss control agents).

Also, as the examples will show, if agent A3 is kept, but the terpolymers eliminated, the properties again become very unfavorable.

The conclusion which can be drawn from the foregoing is that the terpolymers, for reasons as yet unknown, do not, in the presence of A1 and A4, fulfill the anticipated function of a fluid loss control agent, but that this function is restored and even amplified by the combination with A3.

Additive A3 is a product well known for its dispersant properties.

Nevertheless, when employed in heavy concentrations in salty slurries of the density under consideration, as documented in Table III following, it leads to an overdispersion which causes sedimentation of the cement, and thus to the appearance of free water, which cannot be allowed.

What has been learned from the prior art, therefore, is that the use of this product in salt-laden media and in heavy concentrations was known to be very detrimental.

The invention is thus based upon the discovery of a inter-reaction between the terpolymer agents and additive A3, which combine to produce, in the salty slurries considered here, an outstanding fluid loss control effect without augmenting setting time.

The compositions according to the invention comply with the formulations set forth in the chart which follows, giving the recommended amounts of each additive in liters per metric ton of cement (l/t), or in percent by weight of fresh water (%BWOW) or percent by weight of cement (%BWOC). The preferred ratios are given in the right-hand column.

API CLASS G PORTLAND CEMENT

A1 (l/t)	62 - 72	70
Terpolymers (l/t)	13 - 26	13
A3 (l/t)	40 - 100	44 - 60
A4 (%BWOW)	25 - 37	25 - 30
NiCl ₂ (%BWOC)	0.5	0.5
or CaCl ₂	1.5 - 2	1.5 - 2
Water (l/t)	380 - 480	390 - 410

The use of NiCl_2 or CaCl_2 is optional. Their only purpose is to enable a slight reduction in the proportions of terpolymers and A3.

If the mixing water is sea water or a brine, the proportion of A4 (NaCl) can be accordingly reduced.

The density of the slurries according to the invention can be reduced by means of a lightening or extending agent such as attapulgite, down to a density of about 1.5.

For the above-described systems, at a density of approximately 1.9, the following holds true:

- * Fluid loss under the conditions of API spec. 10, i.e.
 - Differential pressure $\Delta P = 70$ bar (7MPa)
 - Temperature: ambient to 100°C
 - Elapsed time: 30 min.
 is less than about 150ml.

- * The rheology is characterized by:
 - plastic viscosity (PV) $< 45\text{cP}$ (m.Pa.s)
 - yield value (YV) $< 15\text{Pa}$, approximately.
 - Yield values less than 10 Pa may often be obtained.
- * 24-hour compressive strength at 93°C (API spec. 10):
 - 207 - 275 bar
 - (20.7 - 27.5 MPa)

No NaCl -saturated cement slurry being only slightly delayed and enabling very good fluid loss control was known hereto.

Obviously, usual additives such as antifoam agents, lightening agents and weighting agents (baryte and/or hematite) may be added as required by one skilled in the art.

The examples which follow are given by way of illustration and should not be construed as limiting the scope of the invention.

Examples 1 through 8 (Table I)

Examples 1, 2 and 8 are according to the invention.

Examples 3 through 7 are given for the purpose of comparison.

Examples 1, 2 and 8 demonstrate the excellent properties of the slurries according to the invention.

Examples 3, 4 and 5 show that too-low A3 content (naphthalenesulfonate/formaldehyde) leads to very poor performance in terms of yield value (YV) and, especially, fluid loss control.

Examples 6 and 7 show that the absence of either A2 or A3 leads to catastrophic results.

Specifically, in Example 6, a YV = -1.8 indicates an over-dispersed slurry (over-extended) which will deposit, leaving a considerable amount of free water; a plastic viscosity of 73 indicates a very viscous slurry (poor pumpability); and a fluid loss of 1100ml indicates a slurry whose fluid loss is no longer controlled.

As concerns Example 7, no measurements were able to be made due to the extent to which viscosity had developed.

Examples 9 through 12 are for comparison purposes (Table II).

These examples show that the association of A1 (lignosulfonate + silicate) with a convention fluid loss control agent (hydroxyethylcellulose) in a salty medium leads to quite unacceptable YV values and poor or complete lack of control of fluid loss.

Examples 13 through 28 are also for comparative purposes (Table III).

These examples reveal the influence of 1) the salt concentration in the medium and 2) the A3 (naphthalenesulfonate/formaldehyde) concentration on the action of the A3 itself. As can be seen, the additive A3, when used in a salt-laden medium, or when highly concentrated, has an over-dispersion action which is not acceptable.

TABLE I (1)

Ex. N°	A1	A2	A3	A4	NICL ₂
	1/t	1/t	1/t	% BWOC	% BWOC
1	70	13	53	30	-
2	70	17	44	30	0.5
3	70	13	18	30	-
4	70	13	18	30	0.5
5	70	13	18	30	1.0
6	70	13	-	30	-
7	70	-	44	30	-
8	70	13	53	25	-

Notes: BWOC = by weight of cement
cement: Dickersoff G "Black Label"
Density of the slurry: 1.9

- 1) API Spec. 10 (after 30 min.
($\Delta p = 7 \text{ mPa}$
($T = 85^\circ \text{C}$
- 2) $T = 70^\circ \text{C}$
 $P = 35 \text{ mPa}$
- 3) $T = 75^\circ \text{C}$
 $P = 35 \text{ mPa}$

TABLE I (2)

Ex.	YV	PV	Fluid Loss	TT	Comments
N°	Pa	mPa.s	ml	min	
1	1.2	22	44	270 ²⁾	invention
2	0.2	20	30	472 ³⁾	invention
3	6.3	32	556	-	too
4	19	34	450	-	little
5	34	37	infinite	-	A3
6	-1.8	73	1 100	-	w/out A3
7	Not measurable because too viscous				w/out A2
8	1.2	28	83	118	invention

Notes: TT = Thickening Time

Cement: Dickerhoff G "Black Label"

Density of the slurry: 1.9

1) API Spec. 10 (after 30 min.
($\Delta p = 7$ mPa
($T = 85^{\circ}\text{C}$

2) $T = 70^{\circ}\text{C}$
 $P = 35$ mPa

3) $T = 75^{\circ}\text{C}$
 $P = 35$ mPa

87

TABLE II (1)

Ex. N°	A1	A2	A3	A4	MCl ₂
	1/t	1/t	1/t	% BWOC	% BWOC
9	50	-	-	25	-
10	50	-	-	25	-
11	50	-	-	30	-
12	50	-	-	30	-

TABLE II (2)

Ex. N°	HEC	YV	PV	Fluid Loss
	% BWOC	Pa	mPa.s	ml
9	0.4	117	56.2	392
10	0.8	166	43.0	320
11	0.4	122	47.4	infinite
12	0.8	209	55.1	infinite

Notes: HEC = hydroxyethylcellulose
% BWOC = % by weight of cement

88

TABLE III

Temperature: 71°C

Ex. N ^o	A3 1/t	M gBWOW	P.V. cP	Y.V. Pa	Comments
13	8	8	27.4	38.9	
14	22.2	8	15.6	- 2.63	1 cm of sedimentation
15	8	18	15.6	14.7	
16	22.2	18	15.4	- 1.86	1 cm of sedimentation
17	44.4	18	15.8	- 1.67	1.5 cm of sedimentation
18	8	38	14.6	3.78	
19	22.2	38	14.6	- 1.29	2 cm of sedimentation
20	44.4	38	15.2	- 1.53	5 cm of sedimentation

BWOW = by weight of fresh water


89

WHAT IS CLAIMED IS:


1. A cement slurry for cementing walls, having the following composition:

- Portland cement
- A1: mixture of lignosulfonate and Na silicate in ratios of 1:100 to 1:20 by weight included in quantities of 62 to 72 liters per metric ton of cement
- "Terpolymers", ie. the products of the heat treatment, in the presence of at least one acid (notably hydrochloric or sulfuric acid), of the aqueous solution of at least one terpolymer, consisting of the following monomer fractions:


I.

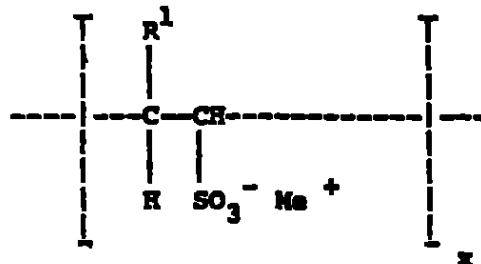


I bis.

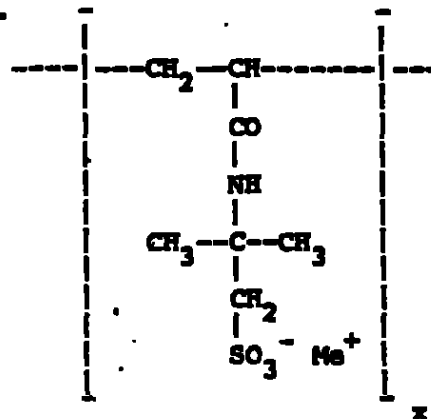

II.



III.

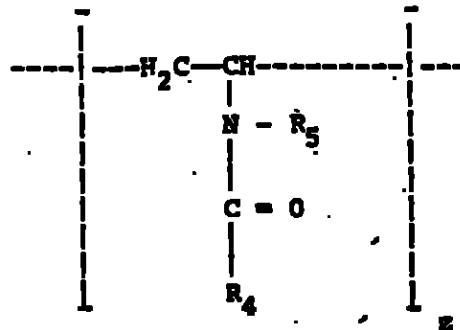

in which R_1 and R_2 represent H or CH_3 , R_3 represents CONH_2 , CN or COOCH_3 , COOH , COONa , COOEt , COOPr and other salts and esters, R_4 represents H, CH_3 or C_2H_5 , and R_5 represents H, CH_3 or C_2H_5 , or alternatively R_4 and R_5 together form a propylene group forming a pyrrolidone radical with the NCO group, the Me^+ charge balancing cation being selected from among NH_4^+ , K^+ , Na^+ or Li^+ and the

respective parts by weight of the starting monomers x, y and z for the formulas I, I bis, II and III range respectively from 5 to 50, 25 to 92 and 3 to 70, to which aqueous solution is preferably added a compound such as NaF or KF:

13 to 26 liters per metric ton of cement

— A3 (Na salt of the naphthalenesulfonic acid/formaldehyde condensation product):

40 to 72 l/ton (metric) of cement.

— A4 (NaCl):

25 to 37% by weight of fresh mix water.

— Mixing water:

300 to 400 l/ton (metric) of cement.

2. A cement slurry for cementing wells, having the following composition:


— Portland cement

— A1 (mixture of lignosulfonate and Na silicate in ratios of 1:100 to 1:200 by weight):


70 l/t (metric) of cement

— "Terpolymers" - product of the heat treatment in the presence of at least one acid (especially hydrochloric or sulfuric acid) of an aqueous solution of at least one terpolymer consisting of the following monomer fractions:


I.

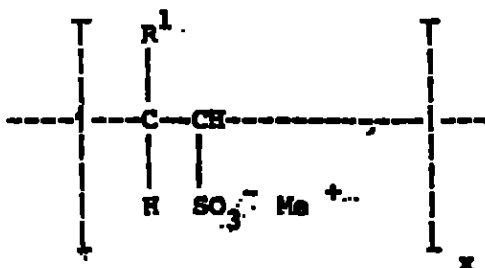


I bis.

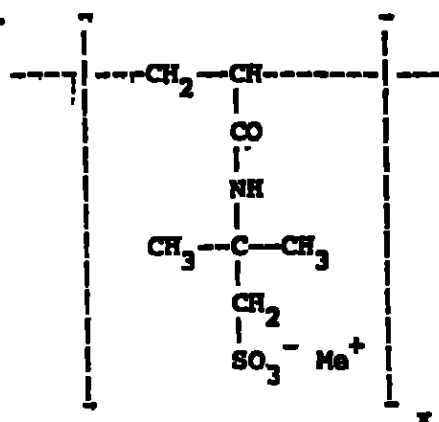

II.



III.

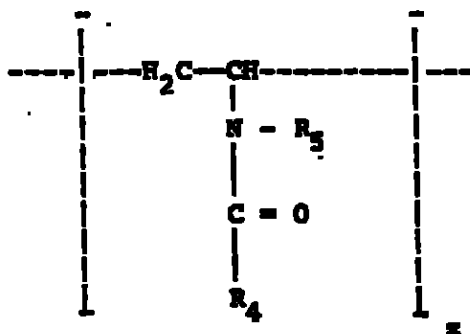

in which R_1 and R_2 represent H or CH_3 , R_3 represents $CONH_2$, CN or $COOCH_3$, $COOH$, $COONa$, $COOEt$, $COOPr$ and other salts and esters, R_4 represents H, CH_3 or C_2H_5 and R_5 represents H, CH_3 , or C_2H_5 , or alternatively R_4 and R_5 together form a propylene group forming a pyrrolidone radical with the NCO group, the cation compensating the Me^+ charge being selected from among NH_4^+ , K^+ , Na^+ and Li^+ , and the respective parts by weight of the initial monomers x, y and z for the formulas I, I bis, II and III range respectively from 5 to 50, 25 to 92 and 3 to 70, to which said aqueous solution is preferably added a compound such as NaF or KF:

13 l/t (metric) of cement.

— A3 (Na salt of the naphthalenesulfonic acid/formaldehyde condensation product):

44 to 53 l/t (metric) of cement.

— A4 (NaCl):

25 to 30% by weight of fresh mix water.

— Mixing water:

390 to 410 l/t (metric) of cement.

3. Slurry as in Claim 1 or Claim 2 further including $NiCl_2$ in a proportion of approximately 0.5% by weight of cement.

4. Slurry as in Claim 1 or Claim 2 further including $CaCl_2$ in a proportion of 1.5% to 2% by weight of cement.

5. Slurry as in Claim 1, further comprising conventional additives such as lightening or extending agents (attapulgate), weighting agents (baryte, hematite) and antifoam agents.


6. Method of cementing an oil, gas or similar well, consisting in injecting into the well annulus a cement slurry according to any one of claims 1 to 5.

11/1


0196689

93


I.

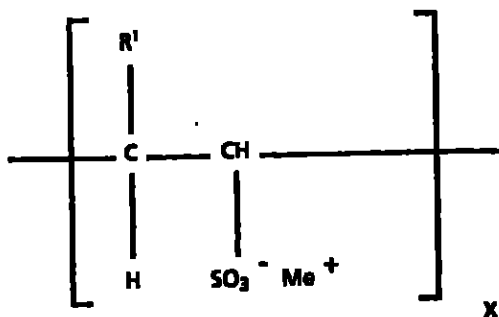


I bis.

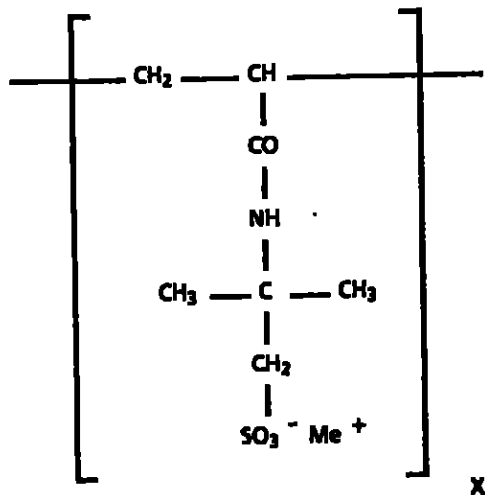

II.

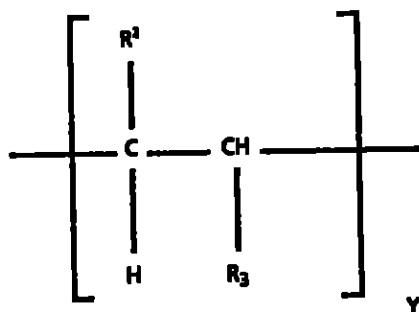

III.

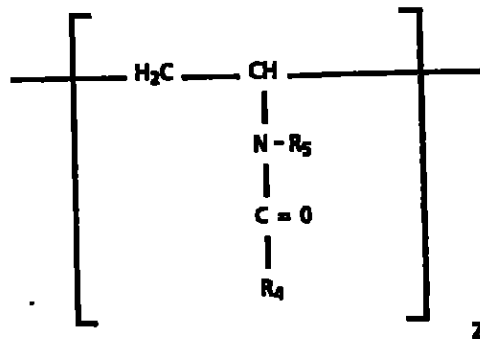



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to class	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
D,A	FR-A-2 540 098 (DOWELL-SCHLUMBERGER) * Claims; tables V,VII *	1,6	C 04 B 28/04 E 21 B 33/13 // (C 04 B 28/04 C 04 B 22:00 C 04 B 22:12 C 04 B 24:16 C 04 B 24:18 C 04 B 24:22)
A	--- US-A-3 582 375 (A.F. TRAGESSER) * Abstract; claims 1,6 *	1,6	
A	--- US-A-2 945 769 (A.R. GAMA et al.) * Claims 1,8,9 *	1,4,6	
A	--- CH-A- 427 620 (LICENTIA TALALMANYOKAT ERTEKESITO VALLALAT) * Claims, sub-claim 1 *	1	
A	--- CHEMICAL ABSTRACTS, vol. 95, no. 20, February 1981, page 320, abstract no. 174293z, Columbus, Ohio, US; B. OSBAECK et al.: "The influence of the content and distribution of alkalies on the hydration properties of portland cement", & CEW, CHEM. ENG. WORLD 1981, 16(6), 83-9	3	TECHNICAL FIELDS SEARCHED (Int. Cl.4) C 04 B 28/00 C 04 B 22/00 E 21 B 33/00
A	--- US-A-3 928 052 (C.C. CLEMENT)		
A	--- US-A-4 500 357 (L.E. BROTHERS et al.) -----		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 23-06-1986	Examiner DAELEMAN P.C.A.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		Y : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document	

⑲ RÉPUBLIQUE FRANÇAISE
INSTITUT NATIONAL
DE LA PROPRIÉTÉ INDUSTRIELLE
PARIS

⑪ N° de publication : 2 799 458
(à n'utiliser que pour les
commandes de reproduction)
⑫ N° d'enregistrement national : 99 12661
⑬ Int Cl⁷ : C 04 B 28/00, E 21 B 33/138, 33/14 // (C 04 B 28/00,
18:04, 14:30) C 04 B 111:50

⑫ DEMANDE DE BREVET D'INVENTION A1

⑭ Date de dépôt : 07.10.99. ⑮ Priorité :	⑰ Demandeur(s) : COMPAGNIE DES SERVICES DOWELL SCHLUMBERGER SA Société anonyme — FR.
⑱ Date de mise à la disposition du public de la demande : 13.04.01 Bulletin 01/15. ⑲ Liste des documents cités dans le rapport de recherche préliminaire : Se reporter à la fin du présent fascicule ⑳ Références à d'autres documents nationaux apparentés :	⑳ Inventeur(s) : LE ROY DELAGE SYLVAIN et THIERCELIN MARC. ㉑ Titulaire(s) : ㉒ Mandataire(s) : ETUDES ET PRODUCTIONS SCHLUMBERGER.

㉓ COMPOSITIONS DE CIMENTATION ET APPLICATION DE CES COMPOSITIONS POUR LA CIMENTATION DES
PUITS PETROLIERS OU ANALOGUES.

㉔ La présente invention a pour objet des compositions de cimentation pour puits pétrolier ou analogues comportant un liant hydraulique, des particules denses ayant une masse volumique supérieure à la masse volumique du liant hydraulique et des particules de renforcement ayant une masse volumique inférieure à 1,5 g/cm³, de préférence inférieure à 1,2 g./cm³ constituée par un caoutchouc ou un matériau flexible, peu compressible et dont la granulométrie moyenne est inférieure à 800 µm.
Les compositions selon l'invention sont plus particulièrement avantageuses pour la cimentation de zones soumises à des contraintes extrêmes comme les zones de perforation et les jonctions des branches d'un puits multilatéral. Elles sont également très bien adaptées à la constitution de bouchons.

FR 2 799 458 - A1



RAPPORT DE RECHERCHE
PRÉLIMINAIREétabli sur la base des dernières revendications
déposées avant le commencement de la recherche

2799458

N° d'enregistrement
nationalFA 577288
FR 9912661

DOCUMENTS CONSIDÉRÉS COMME PERTINENTS		Revendication(s) (numérotée(s))	Classement attribué à l'invention par l'INPI
Catégorie	Chaque document avec indication, en cas de besoin, des parties pertinentes		
D,A	DATABASE MPI Week 198809 Derwent Publications Ltd., London, GB; AN 1988-062204 XP002140512 & SU 1 323 699 A (AKTYUBINSK OIL SURV) * abrégé *	1,6	C04B28/00 E21B33/138 E21B33/14 C04B28/00 C04B16/04 C04B14/30 C04B111/50
D,A	US 5 779 787 A (L.E. BROTHERS, ET ALL) 14 juillet 1998 (1998-07-14)		
A	EP 0 196 689 A (DOWELL-SCHLUMBERGER) 8 octobre 1986 (1986-10-08) * revendication 5 *	2	
			DOMAINE TECHNIQUE RECHERCHÉ (n°CL.7)
			C04B E21B
Date d'achèvement de la recherche		Examineur	
19 juin 2000		Daeleman, P	
CATÉGORIE DES DOCUMENTS CITÉS			
X : particulièrement pertinent à lui seul Y : particulièrement pertinent en combinaison avec un autre document de la même catégorie A : avis - plan technologique O : divulgation non écrite P : document interne			
T : priorité ou principe à la base de l'invention E : document de brevet bénéficiant d'une date antérieure à la date de dépôt et qui n'a été publié qu'à cette date de dépôt ou qu'à une date postérieure. D : cité dans la demande L : cité pour d'autres raisons & : membre de la même famille, document correspondant			



97

File number : 00957721.2

20.11.02

Final Instructions

for closing an application (loss of all rights).

FINDING:

1. ☒ No use has been made of any of the legal remedies available.
 - ☐ The decision refusing the: appeal / application for reestablishment of rights / request for further processing has become final.
2. ☐ The application will not be dealt with as a European patent application (Rule 39 EPC).
 - ☐ The decision refusing the application has become final.
 - ☒ The application is deemed to be withdrawn.
3. Form 1320 has been dispatched (if necessary).
4. The return of Form 1320 is to be controlled by coding "BEEF".

The Hague, ...

.....
(Formalities Officer)

FINDING:

5. Checked with regard to costs; where applicable, refund ordered (RFAC). ☒

INSTRUCTIONS:

6. ADWI(3) or ~~RF~~ FU(3) and DEAD have been coded.

The Hague, 10.12.2002

Staab, Ulrike
.....
(Formalities Officer)

date of legal effect 08.05.2002

98

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/EP 00/09203

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 C04B28/02 E21B33/13 //(C04B28/02,14:36,16:04)		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 C04B E21B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data bases consulted during the international search (name of data base and, where practical, search terms used) WPI Data, COMPENDEX, EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of documents, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,Y	FR 2 787 441 A (SCHLUMBERGER CIE DOWELL) 23 June 2000 (2000-06-23) cited in the application claims	1-10
Y	EP 0 196 689 A (DOWELL-SCHLUMBERGER) 8 October 1986 (1986-10-08) claim 5	1-10
A	DATABASE WPI Week 198809 Derwent Publications Ltd., London, GB; AN 1988-062204 XP002140512 & SU 1 323 699 A (AKTYUBINSK OIL SURV) cited in the application abstract	1,6
-/-		
☒ Further documents are filed in the continuation of box C. ☒ Patent family members are listed in annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claims or which is cited to establish the publication date of another citation or other special reason (see specification) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "A" document member of the same patent family		
Date of the actual completion of the international search 13 December 2000		Date of mailing of the international search report 20/12/2000
Name and mailing address of the ISA European Patent Office, P.O. 5518 Patentplan 2 NL - 2280 HV Rijswijk Tel: (+31-70) 340-3040, Tx: 31 651 epo nl, Fax: (+31-70) 340-3010		Authorized officer Daeleman, P

Form PCT/ISA/210 (second sheet) (July 1993)

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 00/09203

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
A	US 5 779 787 A (L.E. BROTHERS, ET ALL) 14 July 1998 (1998-07-14) cited in the application -----	

Form PCT/ISA/210 (continuation of standard sheet) (July 1998)

100

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/EP 00/09203

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 2787441 A	23-06-2000	AU 1977100 A WO 0037387 A	12-07-2000 29-06-2000
EP 196689 A	08-10-1986	FR 2579216 A DE 3660621 D NO 861173 A	26-09-1986 06-10-1988 26-09-1986
SU 1323699 A	15-07-1987	NONE	
US 5779787 A	14-07-1998	NONE	