

ESCOBAR - URIBE ASOCIADOS

A B O G A D O S

Carrera 11A No. 94-76 Of. 305 - P.O. Box 94948, Santafé de Bogotá, Colombia S.A.

Tel.: (571) 6162051 - 6162061 - 6161859 - 6161

Fax: (571) 6161889

SUPERINTENDENCIA Y COMERCIO

Radicación: C397141 C397141

Folios: 34

Fecha (C39): 2001-02-21 16:21:00

Trámite: C32 PATENTES D 1 REGISTRO 329 COPIAS

Dependencia: 2322 DIVISIÓN DE NUEVAS CREACIONES

2414/P

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO DIVISIÓN DE NUEVAS CREACIONES

E. S. D.

Re: Expediente No. 00.097.141


Solicitud de Patente en nombre de
ETHICON, INC

Yo, JIMENA ESCOBAR URIBE, identificada como aparece al pie de mi firma, domiciliada en Bogotá, en la Carrera 11 A No. 94-76 Of. 305, obrando como apoderada de la sociedad ETHICON, INC, solicitante de la patente de la referencia, anexo al presente memorial el siguiente documento:

Copia certificada de la solicitud de Patente Número 09/469.742 presentada en Estados Unidos de América el 21 de Diciembre de 1999, con la debida traducción de lo pertinente, incluyendo el capítulo reivindicatorio.

A este mismo respecto, debe tenerse en cuenta que en la primera página de la copia en mención la Oficina de Patentes correspondiente certificó la fecha de presentación de esas solicitudes, cumpliéndose de esta forma todos y cada uno de los requisitos establecidos en el inciso segundo del artículo 10 de la Decisión 486 de la Comisión de la Comunidad Andina.

Señor Superintendente,



JIMENA ESCOBAR URIBE
C.C.39.779.452 de usaquén
T.P. 68228
Cód. 5376

36
33

**ESTADOS UNIDOS DE AMERICA
A TODOS AQUELLOS A QUIENES EL PRESENTE
LLEGUE:**

**DEPARTAMENTO DE COMERCIO DE LOS ESTADOS
UNIDOS
Oficina de Patentes y Marcas de los Estados Unidos**

Febrero 5, 2001

La presente es para certificar que el anexo es una copia fiel de los registros de la Oficina de Patentes y Marcas de los Estados Unidos, de los documentos de la solicitud de patente identificada más adelante, que cumplieron con los requerimientos para concederse una fecha de presentación de acuerdo con 35 USC 111.

Número de Solicitud: 09/469,742

Fecha de Presentación: Diciembre 21, 1999

Por la autoridad del
Comisionado de Patentes y Marca

(fdo) L. EDELEN
Oficial Certificador
Sello oficial de la Oficina de Patentes y Marcas de los
Estados Unidos de América

REIVINDICACIONES

1.- Una unidad de catéter, caracterizada porque comprende: una aguja; un cubo; un cuerpo accionador, el cuerpo accionador teniendo un primer miembro y un segundo miembro, en donde por lo menos uno de los miembros es acoplado al cubo; y el miembro despuntante es acoplado a una cámara de vacío y a un miembro de barrera, el miembro despuntante estando dispuesto coaxialmente dentro del agujero de la aguja.

2.- La unidad de catéter de conformidad con la reivindicación 1, caracterizada además porque el cuerpo accionador comprende además: un primer miembro que tiene un primer extremo y un segundo extremo, el segundo extremo está acoplado a un primer gozne distal y a un primer gozne proximal, el primer extremo tiene un primer punto de sujeción para los dedos; y un primer gozne proximal.

3.- La unidad de catéter de conformidad con la reivindicación 1, caracterizada además porque el cuerpo accionador comprende además: un segundo miembro que tiene un primer extremo y un segundo extremo, el segundo extremo está acoplado a un primer gozne distal y a un primer gozne proximal, el primer extremo tiene un primer punto de sujeción para los dedos; y un primer gozne proximal.

4.- La unidad de catéter de conformidad con la reivindicación 3, caracterizada además porque el cubo está acoplado al primer miembro y al segundo miembro.

5.- La unidad de catéter de conformidad con la reivindicación 3, caracterizada además porque el segundo extremo del primer miembro longitudinal tiene una superficie exterior y una superficie interior, y el segundo extremo del segundo miembro longitudinal tiene una primera superficie y una segunda superficie.

6.- La unidad de catéter de conformidad con la reivindicación 5, caracterizada además porque el cubo es liberado del primer miembro y el segundo miembro, presionando la superficie exterior del segundo extremo del primer miembro longitudinal.

7.- La unidad de catéter de conformidad con la reivindicación 5, caracterizada además porque el cubo es liberado del segundo miembro longitudinal presionando la superficie exterior del segundo extremo del segundo miembro longitudinal.

8.- La unidad de catéter de conformidad con la reivindicación 4, caracterizada además porque el cubo es liberado por el primer miembro y el segundo miembro y por el primer y segundo brazos que se mueven hacia fuera en dirección radial.

9.- La unidad de catéter de conformidad con la reivindicación 1, caracterizada además porque la cámara de vacío tiene un extremo proximal y

19
30

un extremo distal, y un miembro poroso está fijado al extremo distal de la cámara de vacío.

10.- La unidad de catéter de conformidad con la reivindicación 2, caracterizada además porque el miembro poroso es removible.

11.- La unidad de catéter de conformidad con la reivindicación 6, caracterizada además porque la punta distal roma avanza hacia una posición distal.

12.- Un ensamble intravascular, caracterizado porque comprende: una funda horadadora tubular que tiene un extremo proximal, un extremo distal y un lumen hueco que se extiende longitudinalmente a través; una aguja que tiene una punta distal afilada y un agujero hueco que se extiende longitudinalmente a través, la aguja estando inicialmente dispuesta coaxialmente dentro del lumen de la funda horadadora, de modo que la punta distal afilada de la aguja se proyecta fuera y más allá del extremo distal de la funda horadadora; un miembro despuntante alargado; y un cuerpo accionador.

13.- El ensamble intravascular de conformidad con la reivindicación 12, caracterizado además porque el cuerpo accionador comprende: un primer miembro y un segundo miembro, el primer miembro teniendo un extremo proximal que forma una palanca y un extremo distal, el extremo distal tiene una superficie que está ranurada; y un segundo miembro que tiene un extremo proximal que forma una palanca y un extremo distal, en donde el extremo distal está ranurado.

14.- El ensamble intravascular de conformidad con la reivindicación 13, caracterizado además porque el extremo proximal del primer miembro se traslada hacia un miembro girable hasta un vástago del miembro despuntante.

15.- El ensamble intravascular de conformidad con la reivindicación 13, caracterizado además porque el extremo proximal del segundo miembro se traslada hacia un miembro girable hasta un vástago del miembro despuntante.

16.- El ensamble intravascular de conformidad con la reivindicación 13, caracterizado además porque el extremo proximal del primer miembro es acoplado a un miembro girable y al vástago del miembro despuntante.

17.- El ensamble intravascular de conformidad con la reivindicación 13, caracterizado además porque el extremo proximal del segundo miembro es acoplado a un miembro girable y al vástago del miembro despuntante.

18.- Un método para mover un miembro romo en un catéter, caracterizado porque comprende: sujetar un cuerpo accionador, el cuerpo accionador es acoplado a un miembro despuntante, el miembro despuntante anidado coaxialmente en una aguja; comprimir una primera palanca del cuerpo accionador, en donde la primera palanca hace que un primer miembro longitudinal se mueva, el primer miembro longitudinal es acoplado a un primer gozne proximal a un vástago del miembro despuntante; comprimir una

segunda palanca, en donde la segunda palanca hace que un segundo miembro longitudinal se mueva, el segundo miembro longitudinal está acoplado a un segundo gozne proximal y al vástago del miembro despuntante; y mover el miembro despuntante hacia una posición distal.



THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

February 05, 2001

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 09/469,742

FILING DATE: December 21, 1999



**By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS**

**L. EDELEN
Certifying Officer**

12-27-99

A-45
+4012/21/99
10713 U.S. PTOPlease type a plus sign (+) inside this box → ☒PTOBB05 (2/88)
Approved for use through 08/30/03. OMB 0851-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for non-provisional applications under 37 CFR 1.53)	Attorney Docket No.	056301.P486
	First Inventor or Application Identifier	Thomas F. Lilley Jr.
	Title	SELF-BLUNTING SAFETY CATHETER
	Express Mail Label No.	EM560644284US

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20581
---	--

- | | |
|---|--|
| <p>1. ☒ Fee Transmitted Form
<small>(Submit an original, and a duplicate for fee processing)</small></p> <p>2. ☒ Specification
<small>(prepared arrangement set forth below)</small></p> <ul style="list-style-type: none"> - Descriptive title of the invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the invention - Brief Summary of the invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure <p>3. ☒ Drawing(s) (35 CFR 113) <small>Total/Sheet</small> 8</p> <p>4. Oath or Declaration <small>Total/Page</small> 3</p> <ul style="list-style-type: none"> a. ☒ Newly executed (original copy) b. ☐ Copy from a prior application (37 CFR 1.53(d))
<small>(attach statement of inventorship certification)</small>
<small>[Note Box 8 below]</small> i. ☐ DELETION OF INVENTOR(S)
<small>Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.53(d)(2) and 1.53(b).</small> | <p>5. ☐ Microfiche Computer Program (Appendix)</p> <p>6. Nucleotide and/or Amino Acid Sequence Submission
<small>(if applicable, all necessary)</small></p> <ul style="list-style-type: none"> a. ☐ Computer Readable Copy b. ☐ Paper Copy (identical to computer copy) c. ☐ Statement verifying identity of above copies |
|---|--|

ACCOMPANYING APPLICATION PARTS


7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignor)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO - 1448 ☐ Copies of IDS
Chattone
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 803)
(Should be specifically marked)
13. ☐ "Small Entity" Statement filed in prior application,
Statement(s) ☐ Status still proper and desired
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☐ Other:

**NOTE: FORM 1A IS NOW REQUIRED TO BE FILED TO PTO SMALL ENTITY FEE. A
SMALL ENTITY STATEMENT IS REQUIRED BY 37 CFR 1.53(d)(2), EXCEPT FOR FILED IN A
PRIORITY APPLICATION IS FILED UPON BY 37 CFR 1.53(d).**

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:
- ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____ / _____
- Prior application information: Examiner _____ Group/Art Unit: _____
- For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been lawfully certified from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number of BarCode Label		☒ Correspondence address below	
(Insert Customer No. or Attach bar code label here)			
Name	BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP		
Address	12400 Wilshire Boulevard, Seventh Floor		
City	Los Angeles	State	California
Country	U.S.A.	Zip Code	90025
Telephone	(310) 207-3800	Fax	(310) 820-5988

Name (Print/Type)	Carol F. Barry, Reg. No. 41,600		
Signature		Date	12/21/99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20581. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20581.

09469742:12219

The PTO did not receive the following:
Hired item(s), 3 Sheets Oath
Foreign data

Attorney's Docket No. 056301.P486
Express Mail No. EM560644284US

41

UNITED STATES PATENT APPLICATION

FOR

AN APPARATUS AND METHOD FOR A SELF-BLUNTING SAFETY CATHETER

Inventor:

Thomas F. Lilley Jr.

Prepared by:

**BLAKELY SOKOLOFF TAYLOR & ZAFMAN LLP
12400 Wilshire Boulevard, Seventh Floor
Los Angeles, California 90025
(310) 207-3800**

09469742-122199
6612221-24769460

42

BACKGROUND OF THE INVENTION

Field of the Invention

The invention relates generally to intravascular devices and more specifically to a blunting apparatus.

5 Description of Related Art

10 Intravascular assemblies such as catheter assemblies are generally used for passing fluids between a device such as a syringe or a drip to or from body lumens such as veins or arteries, or other internal target sites. A catheter assembly usually includes a hub, a catheter, and a needle. An eyelet ring is typically inserted into the catheter. The catheter, together with the eyelet ring, is then inserted into an opening in the nose of the hub and is secured to the hub by press fitting the eyelet ring within the nose of the hub. A needle is then inserted into the catheter. A sharp tip of the needle is used for piercing a body lumen so that access may be gained into the body lumen by the catheter and the needle. Once the catheter and the
15 needle are located within the body lumen, the needle is removed. A syringe or a pipe of a drip is then attached to the hub so that fluids may be passed through the hub and the catheter between the drip or the syringe and the body lumen. The hub is typically made of materials that provide sufficient rigidity thereto and the catheter is usually made of a material which is flexible.

20 One of the potential problems associated with a catheter involves the sharp tip of the introducer needle. After a health care worker has used a catheter on a

46
43

patient, the sharpened tip of the needle that has bodily fluids from the patient may cause harm to another person by the sharpened tip coming in contact with the skin of another. Accordingly, there is a need to provide catheters that reduce the likelihood of a catheter unit causing harm to another person such as a health care

5 workers.

661221 24269460

056301.P486
Express Mail No. EM560644284US

44

SUMMARY OF THE INVENTION

A catheter unit comprising a needle, an actuator body, and an elongated blunting member coupled to a flash chamber and to a safety member. The blunting member is disposed coaxially within the bore of the needle. Additional features, 5 embodiments, and benefits will be evident in view of the figures and detailed description presented herein.

00469742-122199

45

BRIEF DESCRIPTION OF THE DRAWINGS

The features, aspects, and advantages of the invention will become more thoroughly apparent from the following detailed description, appended claims, and
5 accompanying drawings in which:

Figure 1 is a perspective view of an intravascular assembly such as a catheter of one embodiment of the invention.

Figure 2 is the same device as in Figure 1 except it shows the intravascular assembly of Figure 1 in which the proximal end of the first longitudinal member
10 moves from an extended position to a retracted position.

Figure 3 shows the same device as in Figure 1 wherein both longitudinal members of the actuator body are compressed.

Figure 4 shows a proximal hinge about which a longitudinal member pivots of one embodiment of the invention.

Figure 5 shows an intravascular assembly of one embodiment of the. . . .
15 invention approaching a patient's skin.

Figure 6 shows the percutaneously insertion of a needle of the intravascular assembly into the blood vessel of a patient.

Figure 7 shows the blunting member of the assembly having moved from a
20 proximal position to a distal position wherein the blunting member extends beyond the distal tip of the needle of the intravascular assembly.

09469742-122199
66T22T*2H769H60

46

Figure 8 shows that after the needle and the blunting apparatus of the assembly have been removed, and a catheter is about to be inserted into the introducer of an intravascular assembly.

661221* 24269460

76
47

DETAILED DESCRIPTION OF THE INVENTION

Methods and apparatuses are disclosed wherein an intravascular assembly such as a catheter unit is modeled such that the blunting apparatus of the catheter can be advanced or retracted based upon the actions of the user of the catheter. In one embodiment, an actuator body that generally comprises a first and a second longitudinal member wherein pressure is applied against the proximal portion of one member of the actuator body of a catheter such that at least one end such as the distal end of the longitudinal member of the actuator body moves away from the blunting member in an outward direction releasing a hub of the catheter. In another embodiment of the invention, a user may compress a first longitudinal member and a second longitudinal member at the proximal ends of the longitudinal members. This results in the distal end of the first longitudinal member and the distal end of the second longitudinal member releasing the hub of the catheter.

Figure 1 shows one embodiment of the invention. Needle 15 extends outwardly from a nose 27. Needle 15 is formed of material such as stainless steel hypotubing and has a beveled or otherwise sharpened distal tip 20. A hollow bore 22 extends longitudinally through needle 15.

A transparent flash chamber housing 75 is formed on the proximal end of the elongated blunting member 40. A gap exists between carriage 55 and nose 27 which allows blood or other bodily fluids to enter. A hollow flash chamber bore 77 extends

09469742-122199
661221-24769460

42

longitudinally through the proximal flash chamber housing 75. The longitudinal flash chamber bore 77 has a cylindrical proximal inner wall of substantially continuous diameter. There is a continuous fluid path from hollow inner bore 77 and hollow bore 22 of needle 15 with and connected to hollow bore 22 of needle 15.

- 5 Coupled to the flash chamber is carriage 55 with blunting member 40. Blunting member 40 is secured at the proximal end of carriage 55.

Needle blunting apparatus 42 comprises an elongated blunting member 40 and carriage 55 used to secure blunting member 40. Elongated blunting member 40 is preferably formed of rigid material such as stainless steel hypotubing. Blunting apparatus 28 has an outer diameter which is slightly smaller than the inner diameter of hollow bore 22 of needle 15. This allows the blunting member to easily slide into hollow bore 22 of needle 15. A blunt distal tip is formed at the end of blunting member 40.

Blunting member 40 is formed on or otherwise associated with the blunting apparatus 42 to anchor or hold the blunting member in its respective "non-blunting" and "blunting" positions. O-ring 50 is used as a sliding seal between carriage 55 and the nose 27, or actuator body. A seal can also be achieved with a flexible lip seal that is an integral feature of carriage 55 or with sufficiently small clearance between carriage 55 and needle boss/actuator body. A variety of methods may be used to secure blunting member 40 to carriage 55. For example, blunting member 40 may be glued or attached to the inner portion of carriage 55 at the proximal end. Carriage 55 with the blunting member thereto is coupled to lock

09469742-122199

49

shoulder 65 and to first lock finger 60 and second lock finger 62. Lock shoulder 65 is cylindrical and tapers as lock shoulder 65 extends to the distal end. Lock shoulder 65 is coupled to member 68 at the proximal end of the catheter unit.

Member 68 is cylindrical in shape and narrows at a distal end. Member 68 serves the function of containing porous member or stopper that substantially prevents bodily fluids from escaping the catheter. A porous member generally fits securely within chamber 82. Cap-like member 88 is coupled to chamber 82 at the proximal end of chamber 82. A neck resides between cap-like member 88 and chamber 82. Neck 120 is coupled to hook portion 115 of first longitudinal member 95 and hook portion 118 of second longitudinal member 102.

Figure 1 shows blunting member 40 in a distal position Y_1 . Needle 15 and blunting apparatus 42 are initially disposed in a coaxially nested arrangement as shown in Figure 1 wherein needle 15 extends coaxially through lumen 18 of catheter 25. In the retracted position Y_1 , blunting member 40 does not extend through a portion of bore 22 of hollow bore of the needle 15.

As stated above, actuator body 90 generally comprises two longitudinal members such as first longitudinal member 95 and second longitudinal member 102. Each longitudinal member has a proximal end and a distal end. When pressure is applied to at least one of the proximal ends of one of the longitudinal members, the distal end of that longitudinal member moves up and away from the blunting apparatus. It will be appreciated that the actuator body may be characterized by more than two longitudinal members.

00469742-122199

50

Blunting member 40 is adaptable to move from a proximal position Y_1 to a distal position Y_2 . In the proximal position Y_1 , blunting member 40 is retracted. Therefore, the distal member of blunting member 40 does not extend beyond the distal end of needle 15.

5 Blunting member 40 advances to distal position Y_2 as shown in Figure 2. In order to advance to distal position Y_2 , second end 100 of first longitudinal member 95 or second end 110 of second longitudinal member 102 or both second ends of the longitudinal member (95, 102) must be compressed or gently squeezed on the outside portion of the second ends of the longitudinal member by the user. A gentle squeezing or pressing action causes the actuation of blunting member 40. Specifically, the second end of the second longitudinal member 102 or the first longitudinal member 95 is compressed, wherein the second end bends inwardly about the proximal hinge of that longitudinal member. This causes the hook of that longitudinal member to press against neck 120. When the hook of the longitudinal member presses against neck 120, member 68 presses against lock shoulder 65 resulting in lock shoulder 65 advancing to a position above lock fingers 60 and 62. Lock fingers 60 and 62 stay in position while lock shoulder 65 advances. Lock shoulder 65 impacts carriage 55. Carriage 55 holds blunting member 40 in place and blunting member 40 advances from position Y_1 to position Y_2 . Once the blunting member 40 advances to the proximal position Y_2 , blunting member 40 locks in place with a distinct audible and tactile click. This clicking noise serves to indicate to a user such as a health care worker that the distal position has been reached.

00469742-122199

31

It will be appreciated that carriage 55 may be formed or configured in a variety of ways without departing from its intended functions, including the function of providing a means of holding blunting member 40 in a secure manner and facilitating movement of blunting apparatus 42.

5 Second end 100 of first longitudinal member 95 moves from position X_1 to position X_2 about first distal hinge 70 when second end 100 of first longitudinal member 95 compressed by the user. Alternatively, second longitudinal member 102 may be moved from position X_3 to position X_4 about the second distal hinge 69. Hinges (125, 130) allow hook portions of the first longitudinal member and the
10 second longitudinal member (115, 118) to have inward motion similar to first longitudinal member and second longitudinal member (95, 102) where connected to first longitudinal member and second longitudinal member (95, 102) when first longitudinal member and the second longitudinal member (95, 102) are moved
15 inward, and hook portions (115, 118) have an upward motion where coupled to member 68. Hinges (69, 70) may serve as pivots allowing the first ends of first and second longitudinal members (97, 105) to move, turn, or rotate about the hinges (69, 70). It will be appreciated that a ball and socket joint may be used instead of a hinge. Figure 2 shows first longitudinal member 95 moving from position X_1 to position
20 X_2 . By doing so, blunting member 40 is advanced from proximal position Y_1 to distal position Y_2 . Figure 3 shows both longitudinal members undergoing compression at second ends (100, 110) resulting in blunting member 40 secured in blunting
 apparatus 42 advancing from proximal position Y_1 to distal position Y_2 .

09469742-122199

55
52

Second ends (100, 110) have inner (92, 93) and an outer surface (103, 104). The outer surfaces (103, 104) allow a user to hold and compress second ends (100, 110).

Figure 4 shows an enlarged view of one embodiment of a proximal hinge used in one of the longitudinal members which provides a means for moving
5 blunting apparatus 42 from a proximal position Y_1 to a distal position Y_2 .

Figures 5 through 7 show one mode of using one of the embodiments of the invention. Figure 5 shows needle 15 prior to entering the skin of a patient. A blood vessel is beneath the skin. The blunting apparatus 42 is initially retracted to its "non-blunting" position or proximal position shown in Figure 4. In Figure 6, distal
10 tip 20 of needle 15 pierces the skin or is percutaneously inserted into a blood vessel BV, as shown in Figure 6. Figure 7 shows the distal tip of blunting member 40 extends by a distance of Y_2 beyond the beveled or sharpened distal tip 20 of needle 15. Needle 15 is thereafter incapable of puncturing or harming the user to other individuals who may come into contact with used needle 15.

Figure 8 shows needle 15 and blunting apparatus 42 have been removed.
Figure 8 also shows a tubular catheter C advanced through introducer 32. Thereafter, introducer 32 is withdrawn leaving catheter C within the blood vessel BV.

In the preceding detailed description, the invention is described with
20 reference to specific embodiments thereof. It will, however, be evident that various modifications and changes may be made thereto without departing from the broader

09469742.122199

56
S3

spirit and scope of the invention as set forth in the claims. The specification and drawings are, accordingly, to be regarded in an illustrative rather than a restrictive sense.

66T22T-2769760

54

CLAIMS

What is claimed is:

- 1 1. A catheter unit comprising:
- 2 a needle;
- 3 a hub;
- 4 an actuator body, the actuator body having a first member and a second
- 5 member, wherein at least one of the members is coupled to the hub; and
- 6 the blunting member is coupled to a flash chamber and to a barrier member,
- 7 the blunting member being disposed coaxially within the bore of the needle.
- 1 2. The catheter unit of claim 1, wherein the actuator body further comprises:
- 2 a first member having a first end and a second end, the second end is coupled
- 3 to a first distal hinge and to a first proximal hinge, the first end has a first finger grip;
- 4 and
- 5 a first proximal hinge.
- 1 3. The catheter unit of claim 1, wherein the actuator body further comprises:
- 2 a second member having a first end and a second end, the second end is
- 3 coupled to a first distal hinge and to a first proximal hinge, the first end has a first
- 4 finger grip; and
- 5 a first proximal hinge.

09469742-122199

SS

1 4. The catheter unit of claim 3, further comprises:

2 the hub is coupled to the first member and the second member.

1 5. The catheter unit of claim 3, wherein the second end of the first longitudinal
2 member has an outer surface and an inner surface and the second end of the second
3 longitudinal member has a first surface and a second surface.

1 6. The catheter unit of claim 5, wherein the hub is released from the first
2 member and the second member by pressing the outer surface of the second end of
3 the first longitudinal member.

1 7. The catheter unit of claim 5, wherein the hub is released from the second
2 longitudinal member by pressing the outer surface of the second end of the second
3 longitudinal member.

1 8. The catheter unit of claim 4, wherein the hub is related by the first member
2 and the second member by the first and second arm moving outwardly in a radial
3 direction.

1 9. The catheter unit of claim 1, wherein the flash chamber has a proximal end
2 and a distal end and a porous member is attached to the distal end of the flash
3 chamber.

1 10. The catheter unit of claim 2, wherein the porous member is removable.

1 11. The catheter of claim 6, wherein the blunt advances to a distal position.

03469742.122198

75
56

1 12. An intravascular assembly, the assembly comprising:
2 a tubular introducer sheath having a proximal end, a distal end and a hollow
3 lumen extending longitudinally therethrough;
4 a needle having a sharpened distal tip and a hollow bore extending
5 longitudinally therethrough, the needle being initially disposed coaxially within
6 the lumen of the introducer sheath such that the sharpened distal tip of the needle
7 protrudes out of and beyond the distal end of the introducer sheath; and
8 an elongated blunting member;
9 and an actuator body.

1 13. The intravascular assembly of claim 12, wherein the actuator body comprises:
2 a first member and a second member, the first member having a proximal
3 end which forms a lever and distal end, the distal end has one surface which is
4 grooved; and
5 a second member having a proximal end which forms a lever and a distal
6 end, the distal end is grooved.

1 14. The intravascular assembly of claim 13, wherein the proximal end of the first
2 member transitions to a rotatable member to a stem of the blunting member.

1 15. The intravascular assembly of claim 13, wherein the proximal end of the
2 second member transitions to a rotatable member to a stem of the blunting member.

1 16. The intravascular assembly of claim 13, wherein the proximal end of the first
2 member is coupled to a turnable member and to the stem of the blunting member.

6612221-24269460

57

1 17. The intravascular assembly of claim 13, wherein the proximal end of the
2 second member is coupled to a turnable member and to the stem of the blunting
3 member.

1 18. A method of moving a blunt member in a catheter comprising:
2 gripping an actuator body, the actuator body is coupled to a blunting member,
3 the blunting member coaxially nestled into a needle;

4 squeezing a first lever of the actuator body, wherein the first lever causes a
5 first longitudinal member to move, the first longitudinal member is coupled to a
6 first proximal hinge to a stem of the blunting member;

7 squeezing a second lever, wherein the second lever causes a second
8 longitudinal member to move, the second longitudinal member is coupled to a
9 second proximal hinge and to the stem of the blunting member; and

10 moving the blunting member to a distal position.

09469742.122199

58

ABSTRACT


Disclosed is a catheter unit comprising a needle, an actuator body, and an elongated blunting member coupled to a flash chamber and to carriage. The blunting member is disposed coaxially within the bore of the needle. The blunting member is capable of moving from a proximal to distal position when the distal ends of at least one of the longitudinal members is pressed on the outer surface of the distal end causing the longitudinal member to advance which in turn causes the longitudinal member to press against a member causing the blunting member to advance from a proximal position to a distal position.

5

09469742-122199

82
59

09469742-122199

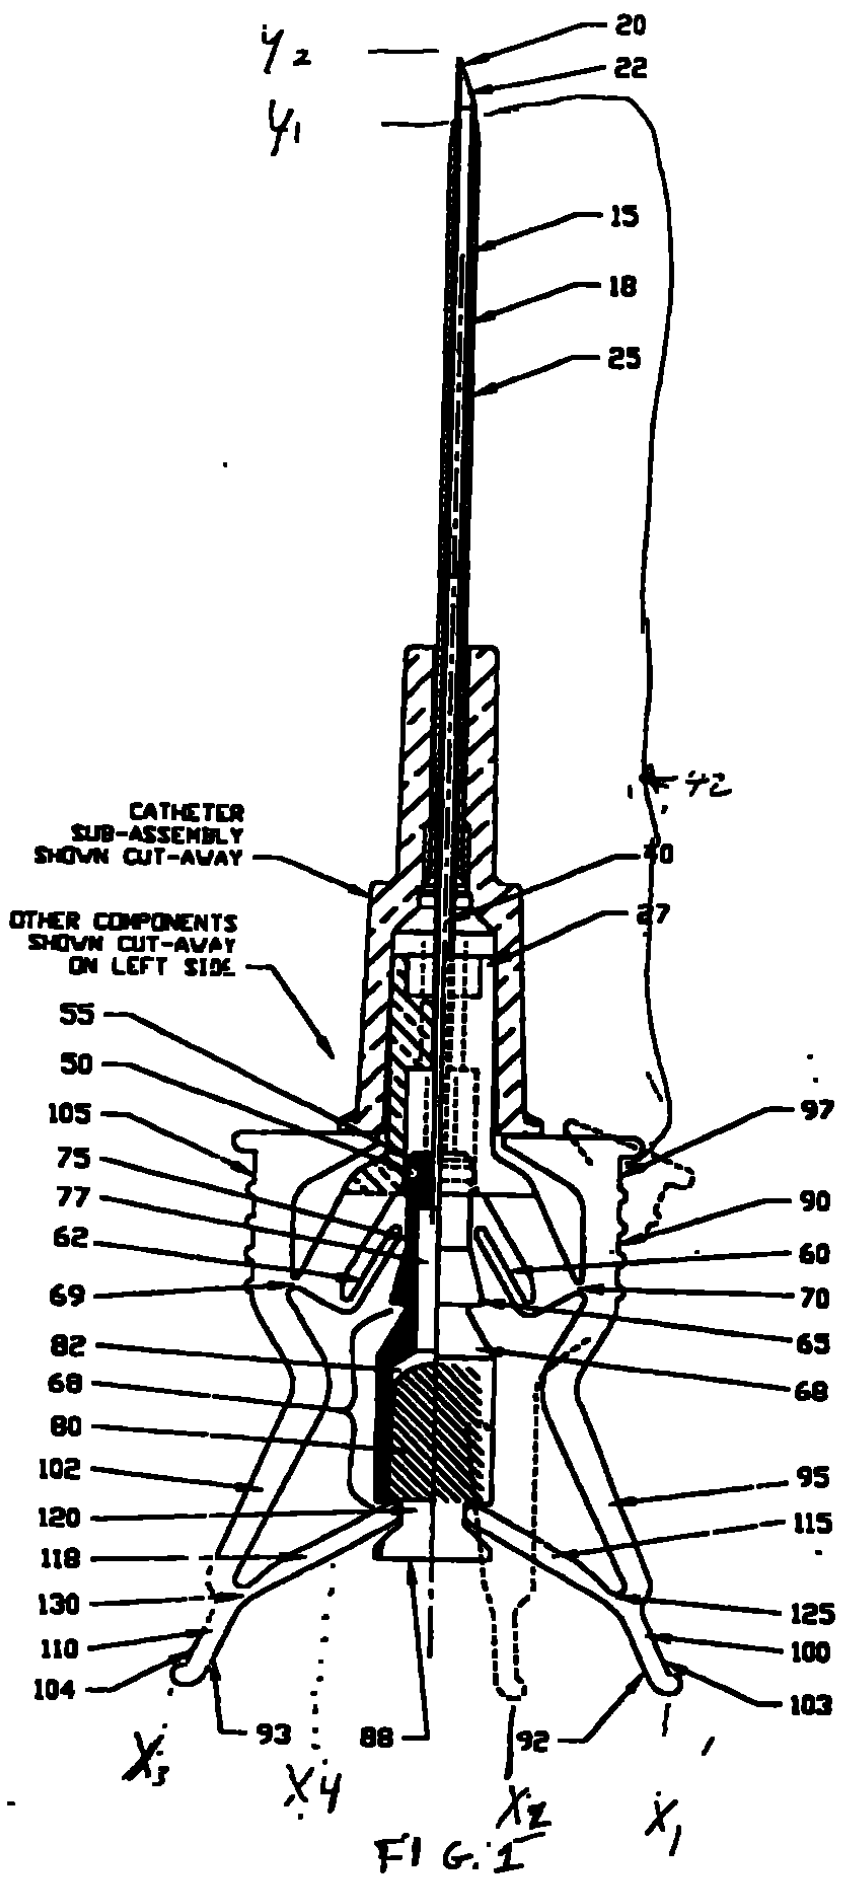

63
60

22-141 50 SHEETS
22-142 100 SHEETS
22-144 200 SHEETS



667227-27469460

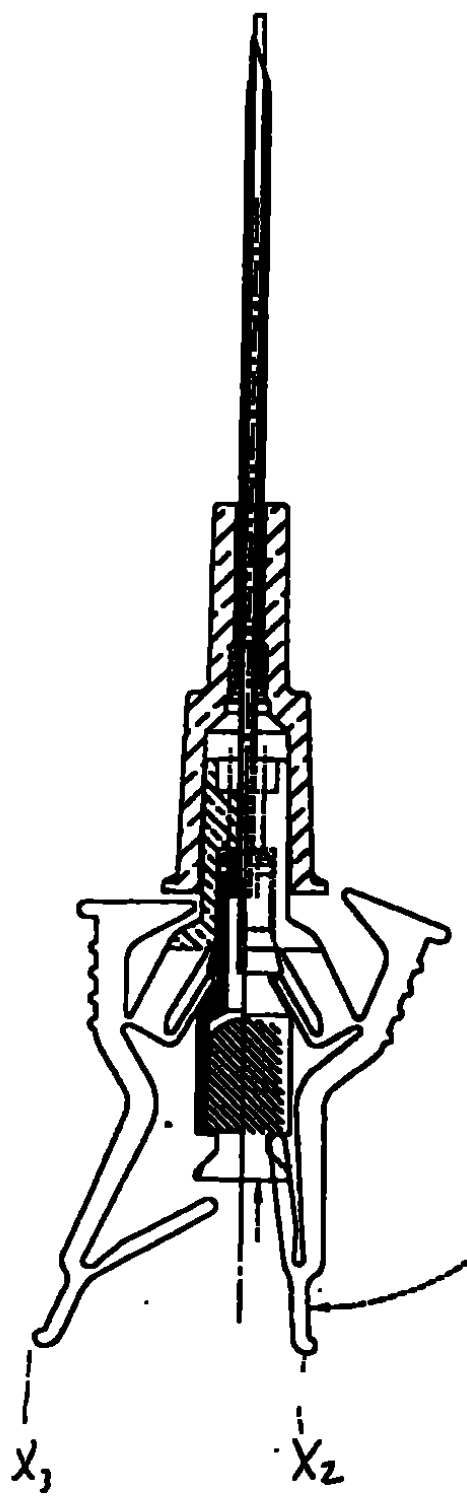


FIG. 2

56301. P486

61

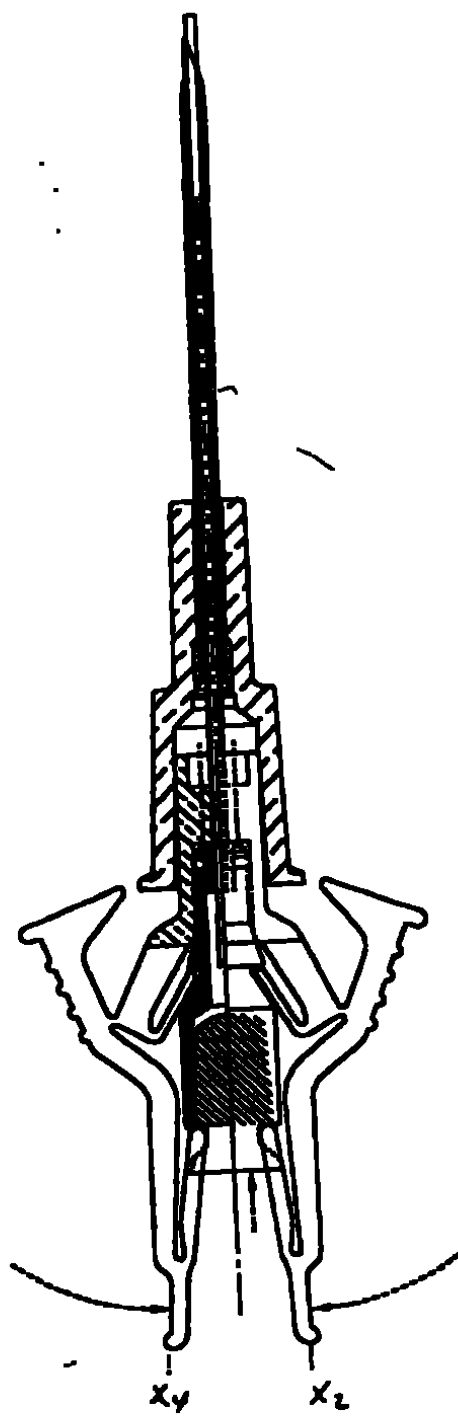


Fig. 3

56301. P486

22-141 40 SHEETS
22-142 100 SHEETS
22-144 200 SHEETS



66722T-24769760



7

22-141 50 SHEETS
22-142 100 SHEETS
22-144 200 SHEETS



667227-24269460

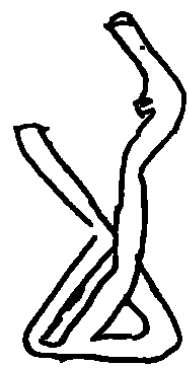


FIG. 4

56301, P486

09469742-122199

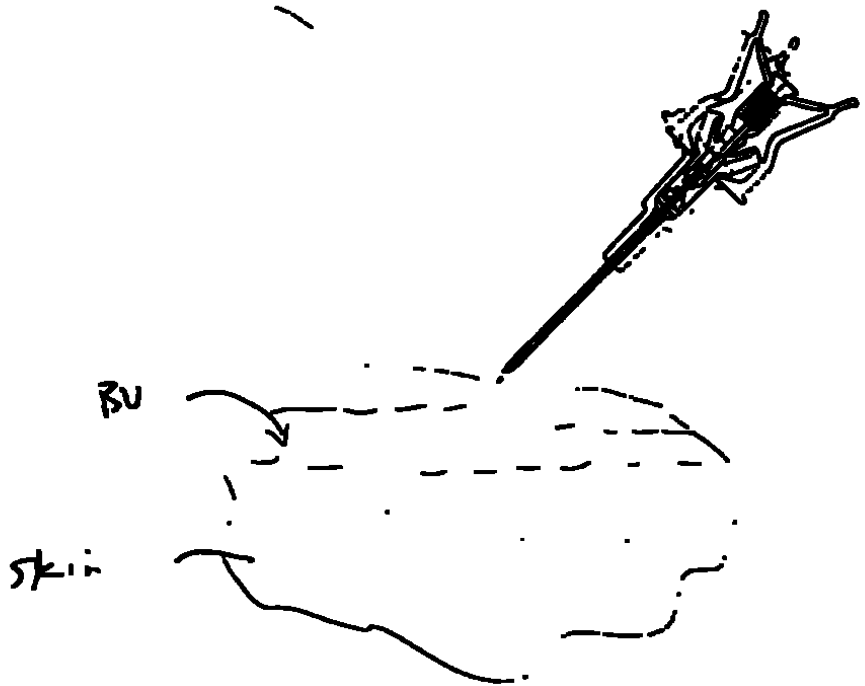


Fig. 5
56301. P486

67
64

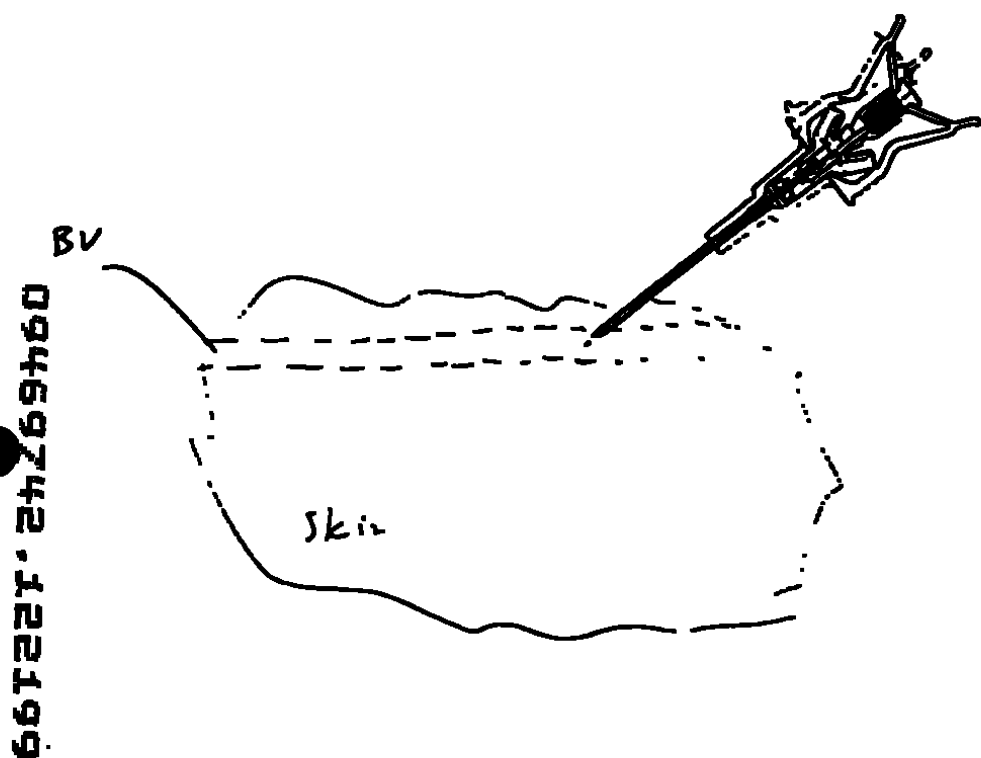


Fig. 6
56301. P486

66T2227-24269460 / 09469742-122199

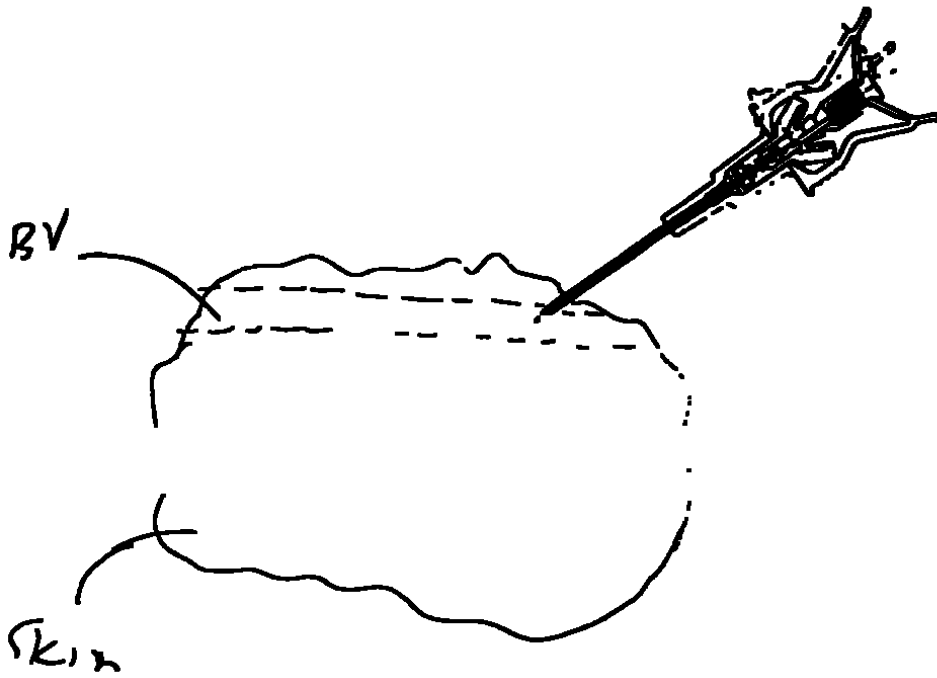


Fig. 7
56306. P486

66722T-24269460

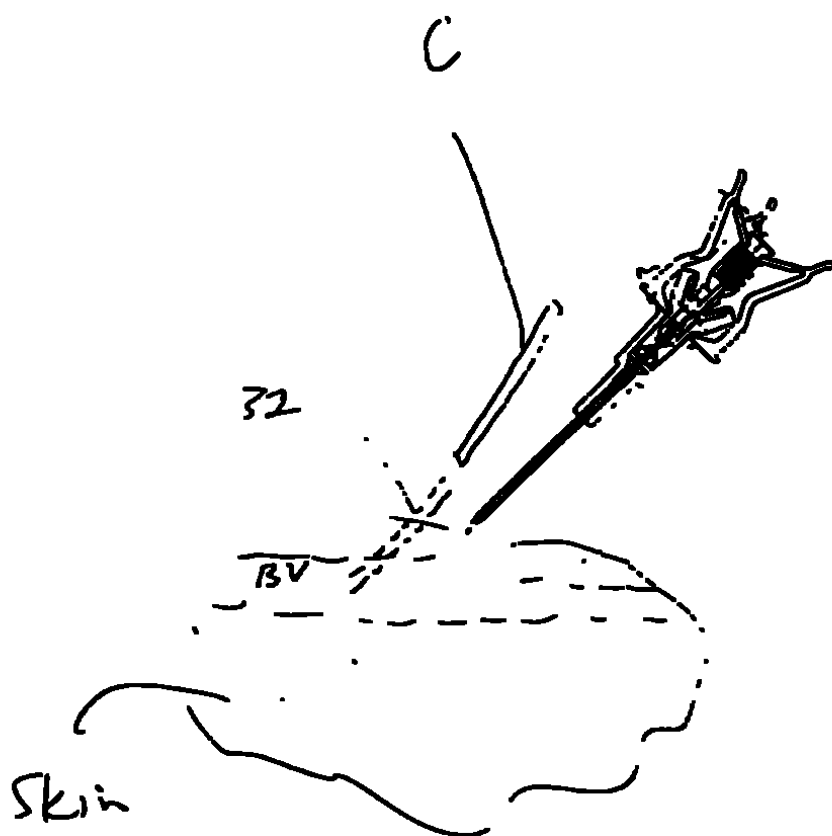


Fig. 1
56301. P486

66.