


10

ANEXOS

- ☒ Comprobante de pago de la tasa de presentación de la solicitud
- ☐ Comprobante de pago de la tasa por concepto de excedente de palabras en la publicación
- ☒ Comprobante de pago por reivindicación de prioridad
- ☒ Certificado de existencia y representación legal cuando el solicitante sea persona jurídica
- ☒ Poderes, si fuere el caso
- ☐ Copia certificada de la primera solicitud, si se reivindica prioridad
- ☐ Traducción simple de la primera solicitud, si se reivindica prioridad
- ☐ Documento de cesión del inventor al solicitante o a su causante
- ☒ Descripción de la invención
- ☒ Una o más reivindicaciones
- ☒ Dibujos y/o planos necesarios (spago.)
- ☐ De ser el caso, copia del contrato de acceso
- ☐ De ser el caso, documento que acredite la licencia o autorización de uso de conocimientos tradicionales de las comunidades indígenas
- ☐ De ser el caso, certificado de depósito del material biológico
- ☐ Arte final 12 x 12.

11

FIGURA CARACTERISTICA:

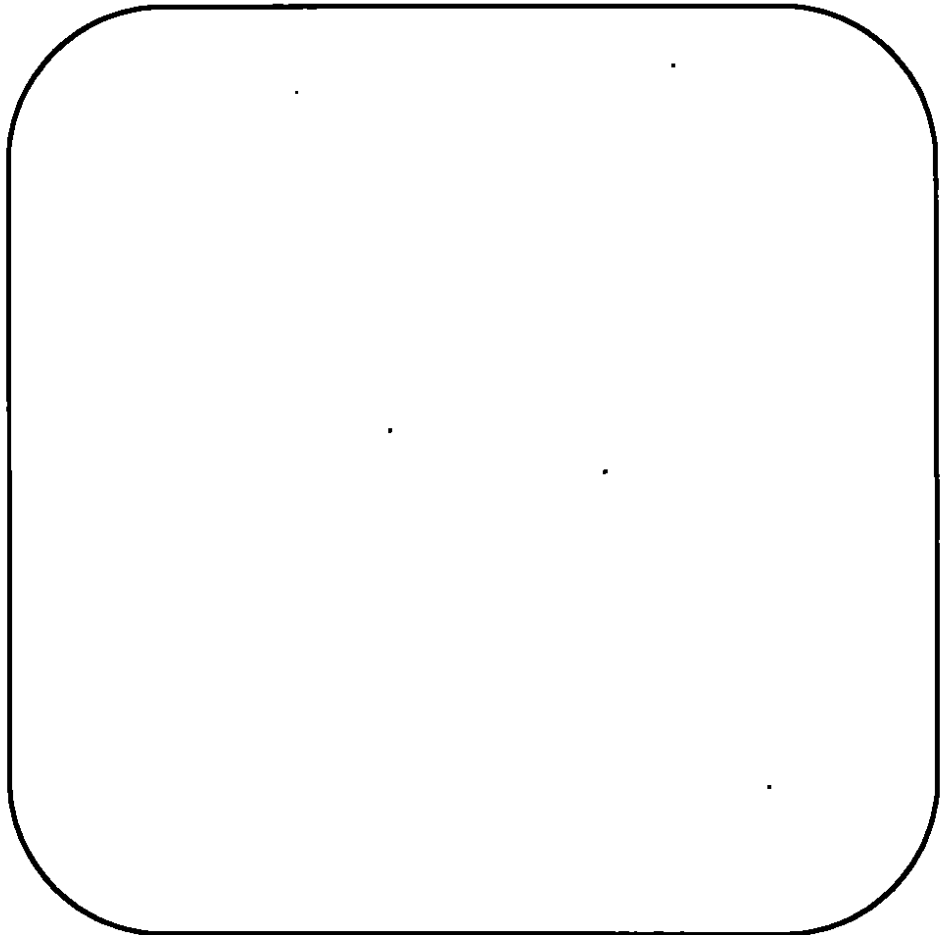

12

NOMBRE: EMILIO FERREROFIRMA: *Emilio Ferrero*
C.C. 438.019 de Usaquén T.P. 31.929

Instrucciones para el diligenciamiento del presente formulario, ver reverso de esta página

HOJA ANEXA

INVENTORES.

- 5- Gregg NEBGEN
- 6- Yuan-Pang Samuel DING
- 7- Varsha KALYANKAR
- 8- Keith M. K. ANDERSON
- 9- Lillian G. ZAKARIJA
- 10- Colleen S. CRAMER
- 11- Michael SCHARF
- 12 Larry A. ROSENBAUM

DOMICILIOS.

- 1- 1672 N. Cypress Pointe Drive, Vernon Hills, Illinois 60061, Estados Unidos de América.
- 2- 1013 Shari Lane, Libertyville, Illinois 60048, Estados Unidos de América.
- 3- 3025 Bethel Blvd. Zion, Illinois 60099, Estados Unidos de América.
- 4- 7589 Korbel Dr., Gurnee, Illinois, 60031, Estados Unidos de América.
- 5- 923 312TH avenue, Burlington, Wisconsin 53105, Estados Unidos de América
- 6- 302 Richmond Lane, Vernon Hills, Illinois 60061, Estados Unidos de América
- 7- 2343 Scott Court, Round Lake Beach, Illinois 60073, Estados Unidos de América
- 8- 206 Kenlock Avenue, Libertyville, Illinois, 60048, Estados Unidos de América
- 9- 5764 N. Lacey Ave. Chicago, Illinois 60646, Estados Unidos de América
- 10-1254 Illinois Street, Racine, Wisconsin 53405, Estados Unidos de América
- 11-3811 Dellshire LV. McHerry, Illinois 60050, Estados Unidos de América
- 12-855 Kristin Court, Gurnee, Illinois 60031, Estados Unidos de América

**MULTI-LAYERED POLYMER BASED MOISTURE BARRIER
STRUCTURE FOR MEDICAL GRADE PRODUCTS**

DESCRIPTION

Related Application

This is a continuation-in-part of U.S. Patent Application Serial Number 09/334,957, which was filed on June 17, 1999, which is a continuation of U.S. Patent Application No. 08/153,602 filed on November 16, 1993, now U.S. Patent No. 5,998,019. Both of these are incorporated herein by reference and made a part hereof.

Technical Field

The present invention relates generally to materials for making medical grade products and more specifically to a moisture-barrier film product which may be used to manufacture articles such as plastic containers and medical tubing.

Background Prior Art

In the medical field, where beneficial agents are collected, processed and stored in containers, transported, and ultimately delivered through tubes by infusion to patients to achieve therapeutic effects, materials which are used to fabricate the containers must have a unique combination of properties. For example, in order to visually inspect solutions for particulate contaminants, the container must be optically transparent. To infuse a solution from a container by collapsing the container walls, without introducing air into the container, the material which forms the walls must be sufficiently flexible. The material must be functional over a wide range of temperatures. The material must function at low temperatures by maintaining its flexibility and toughness because some solutions, for example, certain premixed drug solutions are stored and transported in containers at temperatures such as -25 to -30°C to minimize the drug degradation. The material must also be functional at high temperatures to withstand the heat of sterilization; a process which most medical packages and nutritional products are subjected to prior to shipment. The sterilization process usually includes exposing the container to steam at tempera-

tures typically 121°C and at elevated pressures. Thus, the material needs to withstand the temperature and pressures without significant distortions ("heat distortion resistance").

For ease of manufacture into useful articles, it is desirable that the material be sealable using radio frequency ("RF") generally at about 27.12 MHz. Therefore, the material should possess sufficient dielectric loss properties to convert the RF energy to thermal energy.

A further requirement is to minimize the environmental impact upon the disposal of the article fabricated from the material after its intended use. For those articles that are disposed of in landfills, it is desirable to use as little material as possible and avoid the incorporation of low molecular weight leachable components to construct the article. Thus, the material should be light weight and have good mechanical strength. Further benefits are realized by using a material which may be recycled by thermoplastically reprocessing the post-consumer article into other useful articles.

For those containers which are disposed of through incineration, it is necessary to use a material which helps to eliminate the dangers of biological hazards, and to minimize or eliminate entirely the formation of inorganic acids which are environmentally harmful, irritating, and corrosive, or other products which are harmful, irritating, or otherwise objectionable upon incineration.

It is also desirable that the material be free from or have a low content of low molecular weight additives such as plasticizers, stabilizers and the like.

Traditional flexible polyvinyl chloride materials meets a number of, and in some cases, most of the above-mentioned requirements. Polyvinyl chloride ("PVC") also offers the distinct advantage of being one of the most cost effective materials for constructing devices which meet the above requirements. However, PVC may generate objectionable amounts of hydrogen chloride (or hydrochloric acid when contacted with water) upon incineration, causing corrosion of the incinerator. PVC sometimes contains plasticizers which may leach into drugs or biological fluids or tissues that come in contact with PVC formulations. Thus, many materials have been devised to replace PVC. However, most alternate materials are too expensive to implement and still do not meet all of the above requirements.

For certain medical products it may be necessary to provide a barrier against the transmission of water to provide a low water vapor transmission rate (WVTR). For example, for a 50 ml flexible diluent container associated with medical reconstitution devices it is desirable that the container be capable of being left outside of an overpouch or overwrap material for a 12 month period without losing 8% of its diluent content to evaporation through the film. While the barrier to water vapor transmission can be enhanced by increasing the thickness of layers that resists water vapor transmission, such an increase in thickness of these barrier materials can render the container too rigid to collapse upon draining or make the container too rigid to easily perform a drug reconstitution procedure.

There have been many attempts to develop a film material to replace PVC, but most attempts have been unsuccessful for one reason or another. For example, in U.S. Patent No. 4,966,795 which discloses multilayer film compositions capable of withstanding the steam sterilization, cannot be welded by radio frequency dielectric heating thus cannot be assembled by this rapid, low costs, reliable and practical process. European Application No. EP 0 310 143 A1 discloses multilayer films that meet most of the requirements, and can be RF welded. However, components of the disclosed film are cross-linked by radiation and, therefore, cannot be recycled by the standard thermoplastic processing methods. In addition, due to the irradiation step, appreciable amounts of acetic acid is liberated and trapped in the material. Upon steam sterilization, the acetic acid migrates into the packaging contents as a contaminant and by altering the pH of the contents acts as a potential chemical reactant to the contents or as a catalyst to the degradation of the contents.

The main objective of the present invention is the creation of thermoplastic materials which are, overall, superior to those materials, of which we are aware, which have been heretofore known to the art or have been commercially used or marketed. The properties of such materials includes flexibility, extensibility, and strain recoverability, not just at room temperatures, but through a wide range of ambient and refrigerated temperatures. The material should be steam sterilizable at temperatures typically at 121°C or slightly above or below. The material should be capable of being subjected to significant strains without exhibiting strain whitening, which can indicate a physical and a cosmetic defect. A further objective is that the material be capable of assembly by the RF methods. Another objective is that the material be substantially free of low molecular weight leachable additives, and be capable of safe disposal by incineration without the generation of significant amounts of corrosive inorganic acids. Another objective is that the material be recyclable by standard thermoplastic processing methods after use. It is also desirable that the material incorporate reground scrap material recovered during the manufacturing process to save material costs and reduce manufacturing waste. It is also desirable that the material have high barrier to water vapor transmission so that the material may be fabricated into fluid containers that do not require the use of an overpouch or overwrap material. It is also desirable that the material not be oriented as oriented films may shrink when subjected to heat. Finally, the material should serve as a cost effective alternative to various PVC formulations currently being used for medical devices.

The present invention is provided to solve these and other problems.

Summary of the Invention

In accordance with the present invention certain multiple layer polymer based structures are disclosed. The films may be fabricated into medical grade articles such as diluent containers for reconstitution devices.

It is an object of the present invention to prepare a multi-layered film having the following physical properties: (1) a mechanical modulus less than 150,000 psi and more preferably less than 120,000 psi when measured in accordance with ASTM D-882; (2) a content of elemental halogens less than 0.1%, and more preferably less than 0.01%, (3) a low molecular weight water soluble fraction less than 0.1%, and more preferably less than 0.005%; (4) a maximum dielectric loss between 1 and 60 MHz and between the temperature range of 25-250°C greater than or equal to 0.05 and more preferably greater than or equal to 0.1; (5) an autoclave resistance measured by sample creep at 121°C under 27 psi loading is less than or equal to 60% and more preferably less than or equal to 20%; (6) there is no strain whitening after being strained at moderate speeds of about 20 inches per minute at about 100% elongation and the presence of strain whitening is noted or the lack thereof; (7) has a water vapor transmission rate for a water filled 50 ml container of less than 8%, more preferably less than 7% and most preferably less than 6% by weight when left outside an overpouch for a 12 month period and more preferably a 14 month period and (8) is not oriented.

The present invention provides a multiple layer thermoplastic structure suitable for manufacturing medical products satisfying the above-mentioned physical property requirements. The structure has a skin layer and a radio frequency susceptible layer. The skin layer is selected from the group consisting of polypropylene, ethylene homopolymers having a density from 0.930 g/cc-0.960 g/cc and blends of ethylene homopolymers and ethylene α -olefin copolymers having a density less than about 0.930 g/cc. The radio frequency susceptible layer is adhered to the skin layer and has a dielectric loss greater than 0.05 at 1-60 MHz and at temperatures of ambient to 250°C. The radio frequency susceptible layer comprises, in a preferred form of the invention, a four component blend. The first component is a first polyolefin selected from the group consisting of polypropylene and polypropylene copolymers. The second component is a second polyolefin selected from the group consisting of ethylene copolymers, ethylene and α -olefin copolymers, ultra-low density polyethylene, polybutene, and butene ethylene copolymers. The third component is a radio frequency susceptible polymer selected from the group consisting of ethylene copolymers having 50-85% ethylene content with comonomers selected from a first group consisting of acrylic acid, methacrylic acid, ester derivatives of acrylic acid with alcohols having 1-10 carbons, ester derivatives of methacrylic acid with alcohols having 1-10 carbons, vinyl acetate, carbon monoxide and vinyl alcohol. The RF susceptible polymer may also be selected from a second group consisting of homopolymers and copolymers containing segments of urethane, esters, ureas, imides, sulfones, and amides. These functionalities may constitute between 5-100% of the RF susceptible polymer. The fourth component of the radio frequency susceptible layer is a compatibilizing agent of a styrene and hydrocarbon copolymer.

The present invention further provides intermediate layers to provide additional physical properties such as enhanced lower temperature performance as will be discussed in greater detail

below. Also, the present invention provides using a three-component radio frequency susceptible layer.

Additional features and advantages of the present invention are described in, and will be apparent from, the drawing and the detailed description of the presently preferred embodiments.

5

Brief Description of the Drawings

Figure 1 shows a cross-sectional view of a two layered film structure of the present invention;

10

Figure 2 shows a cross-sectional view of a three layered film structure of the present invention including a core layer added to the film of Figure 1;

Figure 3 shows a cross-sectional view of the film of Figure 1 with a solution contact layer;

15

Figure 4 shows a cross-sectional view of a four layered structure of the present invention having a discrete layer of scrap material between the skin and the core layers;

Figure 5 shows a cross-sectional view of a film structure using reground scrap as a discrete layer between the core and the RF layers;

Figure 6 shows a cross-sectional view of a film structure using reground scrap as a discrete layer which splits the core layer into two core layers;

20

Figure 7 shows a cross-sectional view of a film structure of the present invention having seven layers including a barrier layer between the core and the RF layers and two tie layers;

Figure 8 shows the same structure of Figure 6 except the barrier layer is disposed between the core layer and the skin layers;

Figure 9 shows a cross-sectional view of a film structure having a barrier layer dividing the core layers;

Figure 10 shows a container constructed from one of the film structures of the present invention;

Figure 11 shows a reconstitution device having a diluent container and a vial containing a powdered drug to be reconstituted;

30

Figure 12 shows a two-layered water vapor barrier film of the present invention;

Figure 13 is a chart relating skin layer thicknesses to seal layer thicknesses to achieve a WVTR within the desired range for one of the films of the present invention;

Figure 14 shows an embodiment of a three-layered water vapor barrier film of the present invention; and

35

Figure 15 shows another embodiment of a four-layered water vapor barrier film of the present invention

Detailed Description

While this invention is susceptible of embodiments in many different forms, and will herein be described in detail, preferred embodiments of the invention are disclosed with the understanding that the present disclosure is to be considered as exemplifications of the principles of the invention and are not intended to limit the broad aspects of the invention to the embodiments illustrated.

According to the present invention, multiple layered film structures are provided which meet the requirements set forth above.

Figure 1 shows a two layered film structure 10 having a skin layer 12 and a radio frequency ("RF") susceptible layer 14. The skin layer 12 confers heat distortion resistance and abrasion resistance and is preferably a polypropylene and more preferably a polypropylene copolymer blended with styrene and hydrocarbon copolymer. The styrene and hydrocarbon copolymer can be a block copolymer including di-block, tri-block, star block, it can also be a random copolymer and other types of styrene and hydrocarbon copolymers that are known by those skilled in the art. In a preferred form of the invention the styrene and hydrocarbon copolymer is a block copolymer of styrene-ethylene-butene-styrene. More preferably, the skin layer 12 is a polypropylene copolymer blended with SEBS block copolymer within a range of 0-20% by weight. The skin layer 12 should have a thickness within the range of 0.2-3.0 mils thick.

The RF susceptible layer 14 of the present invention should have a dielectric loss of greater than 0.05 at frequencies within the range of 1-60 MHz within a temperature range of ambient to 250 °C. The RF layer 14 preferably has four components. The RF layer 14 confers RF scalability, flexibility, heat distortion resistance, and compatibility to the film structure 10. The first component of the RF layer 14 is chosen from polypropylene copolymers and preferably the propylene alpha-olefin random copolymers ("PPE"). The PPE's possess the required rigidity and the resistance to yielding at the autoclave temperatures of about 121°C. However, by themselves, the PPE's are too rigid to meet the flexibility requirements. When combined by alloying with certain low modulus polymers, good flexibility can be achieved.

These low modulus copolymers can include ethylene based copolymers such as ethylene-co-vinyl acetate ("EVA"), ethylene co-alpha olefins, or the so-called ultra low density (typically less than 0.90Kg/L) polyethylenes ("ULDPE"). These ULDPE include those commercially available products sold under the trademarks TAFMER® (Mitsui Petrochemical Co.), AFFINITY VP8770 (Dow Chemical Co.) under the product designation A4085, Exact® (Exxon Chemical Company) under the product designations 4023-4024, and Insite® technology polymers (Dow Chemical Co.). In addition, poly butene-1 ("PB"), such as those sold by Shell Chemical Company under product designations PB-8010, PB-8310; thermoplastic elastomers based on SEBS block copolymers, (Shell Chemical Company), poly isobutene ("PIB") under the product designations Vistanex L-80, L-100, L-120, L-140 (Exxon Chemical Company), ethylene alkyl

acrylate, the methyl acrylate copolymers ("EMA") such as those under the product designation EMAC 2707, and DS-1130 (Chevron), and n-butyl acrylates ("ENBA") (Quantum Chemical) were found to be acceptable copolymers. Ethylene copolymers such as the acrylic and methacrylic acid copolymers and their partially neutralized salts and ionomers, such as PRIMACOR® (Dow Chemical Company) and SURYLN® (E.I. DuPont de Nemours & Company) were also acceptable. Typically, ethylene based copolymers have melting point temperatures of less than about 110°C are not suited for autoclaving at 121°C applications. Furthermore, only a limited range of proportions of each component allows the simultaneous fulfillment of the flexibility and autoclavability requirements.

Preferably the first component is chosen from the group of polypropylene homo and random copolymers with alpha olefins which constitutes approximately 30-60%, more preferably 35-45%, and most preferably 45%, by weight of the film. For example, random copolymers of propylene and ethylene where the ethylene content is in an amount within the range of 0-6%, and more preferably within the range of 2-6%, of the weight of the propylene is preferred as the first component. The relative comonomer contents herein shall be stated as weight percentages except for ethylene vinyl alcohol copolymers where the relative comonomer content is stated as a mole percentage.

The second component of the RF layer 14 confers flexibility and low temperature ductility to the RF layer 14 and is chosen from the group consisting of polyolefins that do not have propylene repeating units ("non propylene based polyolefins") including ethylene copolymers including ULDPE, polybutene, butene ethylene copolymers, ethylene vinyl acetate, copolymers with vinyl acetate contents between approximately 18-50%, ethylene methyl acrylate copolymers with methyl acrylate contents being between approximately 20-40%, ethylene n-butyl acrylate copolymers with n-butyl acrylate content of between 20-40%, ethylene acrylic acid copolymers with the acrylic acid content of greater than approximately 15%. An example of these products are sold under such product designations as Tafmer A-4085 (Mitsui), EMAC DS-1130 (Chevron), Exact 4023, 4024 and 4028 (Exxon). Preferably, the second component is either ULDPE sold by Dow Chemical Co. under the tradename AFFINITY VP 8770, Mitsui Petrochemical Company under the designation TAFMER A-4085, or polybutene-1, PB8010, PB8310 and PB8410 (Shell Chemical Co.), and should constitute approximately 25-50%, more preferably 35-45%, and most preferably 45%, by weight of the film.

The first and second components of the RF layer 14 may be replaced by a single component selected from a high melting temperature and flexible olefins such as those polypropylenes sold by the Huntman Company under the product designation FPO. The melting point temperature of this component should be greater than 130 °C and the modulus less than 20,000 psi. This component should constitute between 30-60% by weight of the RF layer.

To impart RF dielectric loss to the RF layer 14, certain known high dielectric loss ingredients are included as the third component of the film structure 10. For example, EVA and EMA of sufficiently high co-monomer contents exhibit significant dielectric loss properties at 27 MHz to allow the compositions to be sealed by the dielectric process. Polyamides as a class of material, and ethylene vinyl alcohol ("EVOH") copolymers (typically produced by hydrolysing EVA copolymers), both possess high dielectric loss properties at suitable temperatures. Other active materials include PVC, vinylidene chlorides, and fluorides, copolymer of bis-phenol-A and epichlorohydrines known as PHENOXY[®] (Union Carbide). However, significant contents of these chlorine and fluorine containing polymers would make them environmentally unsound as incineration of such a material would generate inorganic acids. Therefore, the third component of the RF layer 14 is preferably chosen from the class of polyamides.

Preferably, the polyamides of the present invention will be chosen from aliphatic polyamides resulting from the condensation reaction of di-amines having a carbon number within a range of 2-13, aliphatic polyamides resulting from a condensation reaction of di-acids having a carbon number within a range of 2-13, polyamides resulting from the condensation reaction of dimer fatty acids, and amide containing copolymers (random, block or graft).

Polyamides such as nylons are widely used in film material because they offer abrasion resistance to the film. However, typically the nylons not found in the layer which contacts medical solutions as in some instances they can contaminate the solution by leaching out into the solution. However, it has been found by the applicants of the present invention that various dimer fatty acid polyamides sold by, for example, Henkel Corporation under the product designations MACROMELT and VERSAMID do not lead to such significant leachable levels and thus are the most preferred third component of the RF layer 14. The third component should constitute approximately 3-40%, more preferably between 7-13%, and most preferably 10%, by weight of the RF layer 14.

The fourth component of the RF layer 14 confers compatibility between the polar and nonpolar components of the RF layer 14. The fourth component was chosen from styrene-hydrocarbon copolymers and preferably styrene hydrocarbon block copolymers such as SEBS copolymers that are modified by maleic anhydride, epoxy, or carboxylate functionalities. Most preferably the fourth component is an SEBS block copolymer that is maleic anhydride functionalized. Such a product is sold by Shell Chemical Company under product designations KRATON 1901X or 1924X. The fourth component should constitute approximately 5-40%, more preferably 7-13%, and most preferably 10% by weight of the RF layer 14.

It may also be desirable to include a fifth component to the RF layer 14 of an SEBS block copolymer, not modified by the above functional groups, such as the one sold by the Shell Chemical Company under the product designation KRATON G-1652 or G-1657. This compo-

nent should constitute between 5-40% by weight of the RF Layer, more preferably between 7-13%, and most preferably 10%.

Preferably the RF susceptible layer will have a thickness from about 1-9 mils or more preferably from about 5.0 mils-8.0 mils, and most preferably about 5.0 mils. The skin layer will have a thickness within the range of about 0.2-3.0 mils and most preferably about 0.5 mils.

Figure 2 shows another embodiment of the present invention having a core layer 16 interposed between the skin layer 12 and the RF layer 14. The core layer 16 confers heat distortion resistance, and flexibility to the film structure 10 and compatibility among the components of the film structure 10. Preferably, the core layer will have a thickness within the range of 0.5-10 mils and more preferably 1-4 mils. The core layer 16 includes three components. The first component is a polyolefin and preferably a polypropylene in an amount that constitutes in a range of 20-60% by weight of the core layer 16, more preferably 35-50%, and most preferably 45% of the core layer 16.

The second component of the core layer 16 is chosen from a group consisting of compounds that confer flexibility to the core layer 16 including ULDPE, polybutene copolymers. Preferably, the second component of the core layer is ULDPE or polybutene-1 in an amount by weight of 40%-60%, more preferably 40-50%, and most preferably 40%.

The third component of the core layer 16 is chosen from a group of compounds that confer compatibility among the components of the core layer 16 and includes styrene-hydrocarbon block copolymers and most preferably SEBS block copolymers. The third component is in an amount preferably within a range of 5-40% by weight of the core layer 16, more preferably 7-15%, and most preferably 15%.

It is also possible to add as a fourth component of the core layer 16, reground trim scrap material recovered during the manufacturing of containers. The scrap material is dispersed throughout the core layer 16. Scrap may be added in an amount preferably between approximately 0-50% by weight of the core layer 16, and more preferably within the range of 10-30% and most preferably within the range of 3-12%.

Figure 3 shows the film or sheet structure of Figure 1 including a solution contact layer 17 adhered to a side of the RF layer opposite the skin layer 12. The solution contact layer 17 includes three components that may be chosen from the same first three components and the same weight percentage ranges of the core layer 16 set forth above. Preferably, the solution contact layer 17 has a thickness from about 0.2-1.0 mils and most preferably about 1.0 mil.

Figure 4 shows another embodiment of the multiple layer film structure having the skin layer 12, core layer 16, and RF layer 14 as described above with an additional discrete layer of scrap 20 between the skin layer 12 and the core layer 16. Figure 5 shows the discrete scrap layer 20 between the core layer 16 and the RF layer 20. Figure 6 shows the scrap layer 20 dividing the

core layer 16 into first and second core layers 16a and 16b. Preferably, the layer of regrind should have a thickness within the range of 0.5-5.0 mils and most preferably 1.0 mils.

Figure 7 shows another embodiment of the present invention having seven layers including the skin 12, core 16, and RF layers 14 discussed above, with a barrier layer 26 interposed between the core 16 and RF layers 14 and adhered thereto with tie layers 28 attached to opposite sides of the barrier layer 26. Figure 8 shows the barrier layer 26 between the core layer 16 and the skin layer 12. Figure 9 shows the barrier layer 26 dividing the core layer 14 into two core layers 14 a and 14 b. The barrier layer 26 increases the gas barrier properties of the film structure 10. The barrier layer 26 is selected from the group consisting ethylene vinyl alcohols such as that sold under the name Evalca (Evalca Co.), highly glassy or crystalline polyamide such as Sclar PA ® (Dupont Chemical Co.), high nitrile content acrylonitrile copolymers such as Barex ® sold by British Petroleum. Preferably, the barrier layer 26 is ethylene vinyl alcohol, and has a thickness within the range of 0.3-1.5 mils and most preferably 1.0 mils.

The tie layers 28 may be selected from modified ethylene and propylene copolymers such as those sold under the product designations Prexar (Quantum Chemical Co.) and Bynel (Dupont) and should have a thickness within the range of 0.2-1.0 mils and most preferably 0.5 mil.

The above layers may be processed by coextrusion, coextrusion coating, or other acceptable process. It should be understood; however, that the method of manufacturing the film structure is not a part of the present invention, and thus the scope of this invention should not be limited to this extent.

These materials may be used to manufacture I.V. therapy bags such as the one shown in Figure 10 and generally designated as 30.

Figure 11 shows a drug reconstitution device 50 having a flexible diluent container 52 and a vial access device 54 connecting the container 52 to a drug vial. The diluent container 52 contains water, saline solution or a ringers lactate solution or other solution suitable for reconstituting a drug. The diluent container typically is available in various sizes including 50 ml, 100 ml and 250 ml. The drug vial 56 contains a powdered drug or liquid drug that must be mixed with the diluent before being administered to a patient. The operation of the drug reconstitution device 50 is more fully set forth in U.S. Patent Application Serial No. 08/986,580 which is incorporated in its entirety herein by reference and made a part hereof. It has been found the films discussed above have inadequate water vapor barrier properties to provide the diluent container 52 in the 50 ml and 100 ml volume containers.

It is desirable that the container 52 is capable of being shipped and stored without having an additional overwrap or overpouch barrier material. This requires that the container sidewalls 60 be made of a material that has a high barrier to moisture loss. In a preferred form of the invention the sidewalls of a 50 ml container will have a water loss of less than 8% by weight, more preferably less than 7% by weight and most preferably less than 6% by weight after the container has been autoclaved at 121 °C for about 20 minutes and stored for 12 months or more in

has been autoclaved at 121°C for about 20 minutes and stored for 12 months or more in an environmentally regulated compartment having 35% relative humidity at 25°C. The 50 ml container should also satisfy the same WVTR criteria when an autoclaved container is placed in an environmentally regulated compartment having 15% relative humidity at 40°C for 90 days.

Figure 12 shows a two-layered water barrier film 70 that is suitable for fabricating the diluent container 52. The film 70 has a skin layer 72 and a radio-frequency susceptible layer 74. The skin layer 72 can be selected from polyolefin materials and more preferably from polypropylene polymers and copolymers and ethylene homopolymers and blends of ethylene homopolymers and ethylene and α -olefin copolymers. In a preferred form of the invention, the polypropylene should also be a high molecular weight polymer having a melt flow rate from 0.5-20 g/10 min., more preferably 1-10 g/10 min. and most preferably 1-5 g/10 min. The term "melt flow," "melt flow rate" and "melt flow index" is used herein as the amount, in grams, of a thermoplastic resin which can be forced through a given orifice under a specified pressure and temperature within 10 minutes. The value should be determined in accordance with ASTM D 1238.

Polypropylene copolymers can have ethylene comonomers up to about 3% by weight of the copolymers. Suitable polypropylenes are sold by FINA under the product numbers 6253 and 6671 having melt flows of 1.5 g/10 min. and 11.0 g/10 min. respectively.

Figure 13 shows a graph of the relationship between the thicknesses of the skin layer 72 and the radio-frequency susceptible layer 74 of the film shown in Figure 12 to achieve the desired WVTR. The desired WVTR can be achieved by having various combination of thicknesses for the skin layer and seal layer (radio frequency susceptible layer). If the plot of the datapoint of the relative thicknesses of the skin layer and seal layer places the datapoint on or above the plotted line then, the resulting 50 ml container or 100 ml containers described immediately above, will have the desired WVTR. For the 50 ml and 100 ml containers set forth above, the skin layer thickness will be greater than 3.0 mils and more preferably at least about 3.5 mils thick and even more preferably from about 3.5 mils to about 8.0 mils. The seal layer should have a thickness from about 3.0 mils to about 8.0 mils.

As set forth above, the skin layer may also be of an ethylene homopolymer such as a high density polyethylene having a density from about 0.930-0.960 g/cc.

In yet another form of the invention, the outer layer can also be a blend of an HDPE and an ethylene and α -olefin copolymer having a density of less than about 0.930 g/cc and more preferably from about 0.900 g/cc to about 0.930 g/cc and preferably is a linear low density polyethylene. The skin layer blend should have by weight from 20-95% HDPE and conversely by weight from 5% to about 80% LLDPE and more preferably from 25-45% HDPE and from 55-75% LLDPE, and most preferably 30% HDPE and 70% LLDPE.

The radio frequency susceptible layer can be selected from those three, four and five component blends set forth above and most preferably is a four-component blend having in

amount by weight of 40% polypropylene, 40% ULDPE, 10% SEBS and 10% dimer fatty acid polyamide.

Figure 14 shows a three-layered water vapor barrier film having a skin layer 72 a radio frequency susceptible layer 74 and an intermediate layer 76. The skin layer 72 and radio frequency susceptible layer 74 can be selected from the same materials as set forth above for the two-layered film shown in Figure 12. The intermediate layer 76 enhances the low temperature performance of the film 70 and in a preferred form of the invention is a polyolefin material and more preferably a polypropylene blended with an elastomer. Suitable polypropylenes for the intermediate layer 76 are those having a melt flow rate from 0.5-20 g/10 min., more preferably 1-10 g/10 min. and most preferably 1-5 g/10 min. Suitable elastomers include styrene and hydrocarbon copolymers and particularly diblock, triblock and star block copolymers, ethylene-propylene rubbers, ethylene propylene diene monomers, ultra-low density polyethylenes, and very-low density polyethylenes. Preferably the intermediate layer has by weight from about 70% to about 99% polypropylene and from about 1% to about 30% elastomer.

In a preferred form of the invention the skin layer has a thickness from about 2 mils to about 4 mils, the intermediate layer has a thickness from about 2 mils to about 4 mils and the radio frequency susceptible layer has a thickness from about 3 mils to about 7 mils.

Figure 15 shows a four-layered water vapor barrier film having a radio frequency susceptible layer 74 and a skin layer 72 and two intermediate layers 76 and 78. The skin layer 72 may be selected from the same materials set forth above for the skin layer of the two-layered film shown in Figure 12 and most preferably is a high molecular weight polypropylene. The radio frequency susceptible layer can also be selected from the same materials set forth above for the radio frequency susceptible layer for the two-layered film shown in Figure 12. The first intermediate layer 76 preferably is an ethylene and α -olefin copolymer having a density of from about 0.900 g/cc to about 0.930 g/cc. The second intermediate layer 78 is a tie layer for adhering the LLDPE layer 76 to the radio frequency susceptible layer 74. In a preferred form the tie layer 76 is a modified ethylene and propylene copolymers such as those sold under the product designations Prexar (Quantum Chemical Co.) and Bynel (Dupont) and should have a thickness within the range of 0.2-2.0 mils and most preferably 0.5 mil.

In a preferred form of the invention the skin layer 72 has a thickness from about 1 mil to about 4 mils and more preferably from about 1 mil to about 3 mils, the first intermediate layer 76 has a thickness from about 2 mils to about 4 mils and more preferably from 2 mils to about 3 mils, the tie layer 78 should have a thickness from 0.2-2.0 mils and more preferably 0.5 mils and the radio frequency susceptible layer has a thickness from about 3 mils to about 7 mils.

The barrier films of Figures 11, 12, 14 and 15 have sufficient flexibility to serve as a container for a reconstitution device. By sufficient flexibility it is meant to have a modulus of elasticity of less than 150,000 psi and more preferably less than 120,000 psi and most preferably

less than 100,000 psi. These barrier films also have a WVTR where a 50 ml container when stored in an environmentally regulated compartment having 35% relative humidity at 25°C for 12 months or longer and when placed in an environmentally regulated compartment having 15% relative humidity at 40°C for 90 days the container loses less than 8%, more preferably less than 7% and most preferably less than 6% by weight of the contained water. The barrier films also have a content of elemental halogens less than 0.1%, and more preferably less than 0.01%, a low molecular weight water soluble fraction of less than 0.1%, and more preferably less than 0.01% and most preferably less than 0.005%, a maximum dielectric loss between 1 and 60 MHz and between the temperature range of 25-250 °C of greater than or equal to 0.05 and more preferably greater than or equal to 0.1, an autoclave resistance measured by sample creep at 121 °C under 27 psi loading is less than or equal to 60% and more preferably less than or equal to 20%, and the material does not strain whiten after being strained at moderate speeds of about 20 inches per minute at about 100% elongation.

Barrier films of the present invention were tested in accordance with the following procedures.

(1) AUTOCLAVABILITY:

Autoclave resistance is measured by sample creep, or the increase in the sample length, at 121 °C under 27 psi loading for one hour. The autoclave resistance must be less than or equal to 60%.

(2) RF PROCESSIBILITY:

Containers of 50 ml volumes are sealed on a commercial scale RF sealing equipment sold by Kiefel at 12 kilowatts for a cycle time of about 5-6 seconds. The containers are filled with water and autoclaved at about 121°C for about 20 minutes. The autoclaved containers are squeezed with 20 psi pressure for about 10 seconds and checked for leakage.

(3) STRAIN WHITENING:

Film cut into about a ½ inch strip and stretched on an Instron machine to 100% elongation at 20 inches/minute and the stretched strip is observed for the presence of strain whitening.

(4) ENVIRONMENTAL COMPATIBILITY:

The environmental compatibility comprises three important properties: (a) the material is free of low molecular weight plasticizers which could leach into landfills upon disposal, (2) the material can be thermoplastically recycled into useful items upon fulfilling the primary purpose

of medical delivery, and (3) when disposed of by energy reclaim by incineration, no significant inorganic acids are released to harm the environment. ("Envir."). The composition will also contain less than 0.1% halogens by weight. In order to facilitate recycling by melt processing, the resultant composition should have a loss tangent greater than 1.0 at 1 Hz measured at processing temperatures.

(5) SOLUTION COMPATIBILITY

By solution compatibility we mean that a solution contained within the film is not contaminated by components which constitute the composition. ("S.Comp.") The low molecular weight water soluble fraction of the composition will be less than 0.1%.

(6) BARRIER PROPERTIES

The barrier properties are tested by measuring the WVTR of containers subjected to two different sets of environmental conditions. The containers are 50 ml containers and have sidewall thicknesses from 9-12 mils. Each container is filled with about 53-55 ml of water. Each container is autoclaved at 121°C for about 20 minutes. One container is placed in an environmentally regulated compartment having 35% relative humidity at 25°C and the weight loss is monitored over time. A second container is placed in an environmentally regulated compartment having 15% relative humidity at 40°C for and is monitored for weight loss. The percentage of water loss is measured based upon a plot of the weight loss over time.

(7) NOT ORIENTED

What is meant by the term "oriented" is a process of stretching a material in a non-molten state either in a single direction or in more than one direction to align a portion of the molecules of the material in the direction stretched. The film of the present invention is fabricated in an extrusion process that does not have an orientation step after the film exits the extruder and has solidified.

Examples:

Two-layered barrier films of the present invention were fabricated and tested to determine the WVTR of the container. In particular two layer films having skin layer and seal layer thicknesses as set forth in Table 1 below. The skin layers were fabricated from polypropylene (Fina 6253) and the seal layer was fabricated from a four component blend of polypropylene, ultra-low density polyethylene, dimer fatty acid polyamide and styrene-ethylene-butene-styrene block copolymer. The films were fabricated by coextrusion.

The films were fabricated into 50 ml containers by placing two sheets of film into registration and sealed using radio frequency energy to form a container having a fill port. The

15

containers had a surface area of about 23 square inches. Each container was then filled through the fill port with about 53ml of water. The containers were steam sterilized in an autoclave at about 121°C for 20 minutes. The containers were removed from the autoclave and placed in a container having a relative humidity of 15% and a temperature of 40°C. The rate of water loss was measured in grams/day as reported in Table 1. The time for each container to lose 6% of its water weight calculated based upon a plot of the water loss vs. time. A plot of these data is shown in Figure 13.

TABLE 1

Sample No.	Seal layer thickness	Skin layer thickness	Average measured water loss (G/day)	Number of days to lose 6% of weight of water (Calculated)
223-5	.0 mils	5.35 mils	0.0285	109 days
223-6	.0 mils	5.30 mils	0.0272	114 days
223-7	.0 mils	4.75 mils	0.0305	100 days
223-8	.5 mils	5.0 mils	0.0286	107 days
223-9	.4 mils	5.15 mils	0.029	98 days

It will be understood that the invention may be embodied in other specific forms without departing from the spirit or central characteristics thereof. The present examples and embodiments, therefore, are to be considered in all respects as illustrative and not restrictive, and the invention is not to be limited to the details given herein.

CLAIMS

1. A multiple layer thermoplastic structure:

(1) a skin layer selected from the group consisting of polypropylene, ethylene homopolymers having a density of from about 0.930 g/cc to about 0.960 g/cc, and ethylene homopolymers having a density of from about 0.930 g/cc to about 0.960 g/cc blended with an ethylene and α -olefin copolymer having a density less than about 0.930 g/cc, the skin layer having a thickness of greater than about 3.0 mils;

(2) a radio frequency susceptible layer adhered to the skin layer, the radio frequency susceptible layer having a dielectric loss greater than 0.05 at 1-60 MHz and at temperatures of ambient to 250°C, the radio frequency susceptible layer having:

(a) a first polyolefin selected from the group consisting of polypropylene and polypropylene copolymers,

(b) a second polyolefin selected from the group consisting of ethylene copolymers, ultra-low density polyethylene, polybutene, and butene ethylene copolymers;

(c) a radio frequency susceptible polymer selected from the group consisting of (i) ethylene copolymers having 50-85% ethylene content with comonomers selected from a first group consisting of acrylic acid, methacrylic acid, ester derivatives of acrylic acid with alcohols having 1-10 carbons, ester derivatives of methacrylic acid with alcohols having 1-10 carbons, vinyl acetate, and vinyl alcohol (ii) homopolymers and copolymers containing at least one segment of urethanes, esters, ureas, imides, sulfones, and amides, and

(d) a compatibilizing agent of a styrene and hydrocarbon copolymer;

wherein the structure when fabricated into a 50 ml container has a water vapor transmission rate of less than 8% by weight after the container has been autoclaved at 121°C for 20 minutes and stored for 90 days in an environmentally regulated compartment having 15% relative humidity at 40°C.

2. The structure of claim 1 wherein the styrene and hydrocarbon copolymer is a block copolymer selected from a diblock, triblock or star block copolymers.

3. The structure of claim 2 wherein the block copolymer is selected from a group consisting of a first styrene-ethylene-butene-styrene block copolymer, and a maleic anhydride functionalized styrene-ethylene-butene-styrene block copolymer.

4. The structure of claim 1 wherein the skin layer is a polypropylene having a melt flow rate of from about 0.5-20 g/10 min.

5. The structure of claim 1 wherein the skin layer is a high density polyethylene.

6. The structure of claim 1 wherein the skin layer is a blend of high density polyethylene
and a linear low density polyethylene.

7. The structure of claim 6 wherein the skin layer comprises by weight of the skin layer
from about 25% to about 95% high density polyethylene and from 5% to about 75% linear low
density polyethylene.

8. The structure of claim 7 wherein the skin layer is 30% by weight high density
polyethylene and 70% linear low density polyethylene.

9. The structure of claim 1 wherein the skin layer has a thickness from about 3.5-8.0 mils
and the radio frequency susceptible layer has a thickness from about 3.0 mils to about 8.0 mils.

10. The structure of claim 1 wherein the structure is not oriented.

11. The structure of claim 1 further comprising:
a first intermediate layer disposed between the skin layer and the radio frequency susceptible
layer, the first intermediate layer being selected from the group consisting of (1) a
polypropylene blended with an elastomer and (2) an ethylene and α -olefin copolymer having
a density of from about 0.900 g/cc to about 0.930 g/cc.

12. The structure of claim 11 wherein the elastomer is selected from the group consisting
of styrene and hydrocarbon copolymers ethylene-propylene rubbers, ethylene propylene diene
monomers, ultra-low density polyethylenes, and very-low density polyethylenes

13. The structure of claim 12 wherein the first intermediate layer comprises by weight
from about 99% to about 70% polypropylene and from about 1% to about 30% of the elastomer.

14. The structure of claim 13 wherein the first intermediate layer is 75% polypropylene
and 25% SEBS.

15. The structure of claim 12 wherein the first intermediate layer is a linear low density
polyethylene.

16. The structure of claim 15 further comprising a second intermediate layer attached to the first intermediate layer.

17. The structure of claim 16 wherein the second intermediate layer is a tie layer.

18. The structure of claim 17 wherein the tie layer is a modified ethylene and propylene copolymer.

19. The structure of claim 1 wherein the structure when fabricated into a 50 ml container has a water vapor transmission rate of less than 8% by weight after the container has been autoclaved at 121°C for 30 minutes and stored for 90 days in an environmentally regulated compartment having 15% relative humidity at 40°C.

20. A multiple layer thermoplastic structure suitable for manufacturing medical products, the structure comprising:

(1) a skin layer selected from the group consisting of polypropylene, ethylene homopolymers having a density of from about 0.930 g/cc to about 0.960 g/cc, and ethylene homopolymers having a density of from about 0.930 g/cc to about 0.960 g/cc blended with an ethylene and α -olefin copolymers having a density less than about 0.930 g/cc, and the skin layer having a thickness greater than about 3.0 mils; and

(2) a radio frequency susceptible layer adhered to the skin layer, the radio frequency susceptible layer having a dielectric loss greater than 0.05 at 1-60 MHz and at temperatures of ambient to 250°C and comprising:

(a) a first polyolefin in an amount in a range of 30-60% by weight of the radio frequency susceptible layer and selected from the group consisting of polypropylene and polypropylene copolymers,

(b) a second polyolefin in an amount within the range of 25-50% by weight of the radio frequency susceptible layer selected from the group consisting of ethylene copolymers, ultra-low density polyethylene, polybutene, and butene ethylene copolymers;

(c) a radio frequency susceptible polymer in an amount within the range of 3-40% by weight of the radio frequency susceptible layer selected from the group consisting of (i) ethylene copolymers having 50-85% ethylene content with comonomers selected from a first group consisting of acrylic acid, methacrylic acid, ester derivatives of acrylic acid with alcohols having 1-10 carbons, ester derivatives of methacrylic acid with alcohols having 1-10 carbons, vinyl acetate, and vinyl alcohol (ii)

homopolymers and copolymers containing at least one segment of urethanes, esters, ureas, imides, sulfones, and amides; and

(d) a compatibilizing agent of a styrene and hydrocarbon copolymer in an amount within the range of 5-40% by weight of the radio frequency susceptible layer, and

wherein the structure when fabricated into a 50 ml container has a water vapor transmission rate of less than 8% by weight after the container has been autoclaved at 121°C for 20 minutes and stored for 90 days in an environmentally regulated compartment having 15% relative humidity at 40°C.

21. The structure of claim 20 wherein the styrene and hydrocarbon copolymer is a block copolymer selected from a diblock, triblock or star block copolymers.

22. The structure of claim 21 wherein the block copolymer is selected from a group consisting of a first styrene-ethylene-butene-styrene block copolymer, and a maleic anhydride functionalized styrene-ethylene-butene-styrene block copolymer.

23. The structure of claim 20 wherein the skin layer is a polypropylene having a melt flow rate of from about 0.5-20 g/10 min.

24. The structure of claim 20 wherein the skin layer is a high density polyethylene.

25. The structure of claim 20 wherein the skin layer is a blend of high density polyethylene and a linear low density polyethylene.

26. The structure of claim 25 wherein the skin layer comprises by weight of the skin layer from about 25% to about 95% high density polyethylene and from 5% to about 75% linear low density polyethylene.

27. The structure of claim 26 wherein the skin layer is 30% by weight high density polyethylene and 70% linear low density polyethylene.

28. The structure of claim 20 wherein the skin layer has a thickness from about 3.5-8.0 mils and the radio frequency susceptible layer has a thickness from about 3.0 mils to about 8.0 mils.

29. The structure of claim 20 wherein the structure is not oriented.

30. The structure of claim 20 further comprising:

a first intermediate layer disposed between the skin layer and the radio frequency susceptible layer, the first intermediate layer being selected from the group consisting of (1) a polypropylene blended with an elastomer and (2) an ethylene and α -olefin copolymer having a density of from about 0.900 g/cc to about 0.930 g/cc.

31. The structure of claim 30 wherein the elastomer is selected from the group consisting of styrene and hydrocarbon copolymers ethylene-propylene rubbers, ethylene propylene diene monomers, ultra-low density polyethylenes, and very-low density polyethylenes

32. The structure of claim 31 wherein the first intermediate layer comprises by weight from about 99% to about 70% polypropylene and from about 1% to about 30% of the elastomer.

33. The structure of claim 32 wherein the first intermediate layer is about 75% polypropylene and about 25% SEBS.

34. The structure of claim 31 wherein the first intermediate layer is a linear low density polyethylene.

35. The structure of claim 34 further comprising a second intermediate layer attached to the first intermediate layer.

36. The structure of claim 35 wherein the second intermediate layer is a tie layer.

37. The structure of claim 18 wherein the tie layer is a modified ethylene and propylene copolymer.

38. The structure of claim 20 wherein the structure when fabricated into a 50 ml container has a water vapor transmission rate of less than 6% by weight after the container has been autoclaved at 121°C for 20 minutes and stored for 90 days in an environmentally regulated compartment having 15% relative humidity at 40°C.

39. A multiple layer thermoplastic structure suitable for manufacturing medical products comprising:

(1) a skin layer selected from the group consisting of polypropylene, ethylene homopolymers having a density of from about 0.930 g/cc to about 0.960 g/cc, and ethylene

homopolymers having a density of from about 0.930 g/cc to about 0.960 g/cc blended with an ethylene and α -olefin copolymers having a density less than about 0.930 g/cc;

(2) (2) a radio frequency susceptible layer adhered to the skin layer comprising:

(a) a polypropylene having a melting point temperature greater than 130°C and a modulus less than 20,000 psi in an amount in a range of 30-60% of the weight of the radio frequency susceptible layer,

(b) a radio frequency susceptible polymer in an amount within the range of 3-40% by weight of the radio frequency susceptible layer and selected from the group consisting of (i) ethylene copolymers having 50-85% ethylene content with comonomers selected from a first group consisting of acrylic acid, methacrylic acid, ester derivatives of acrylic acid with alcohols having 1-10 carbons, ester derivatives of methacrylic acid with alcohols having 1-10 carbons, vinyl acetate, and vinyl alcohol (ii) homopolymers and copolymers containing at least one segment of urethanes, esters, ureas, imides, sulfones, and amides,

(c) a first compatibilizing agent of a styrene and hydrocarbon copolymer in an amount within the range of 5-20% by weight of the radio frequency susceptible layer,

(d) wherein the radio frequency susceptible layer having a dielectric loss greater than 0.05 at 1-60 MHz and at temperatures of ambient to 250°C; and

(3) wherein the structure when fabricated into a 50 ml container has a water vapor transmission rate of less than 8% by weight after the container has been autoclaved at 121°C for 20 minutes and stored for 90 days in an environmentally regulated compartment having 15% relative humidity at 40°C.

40. The structure of claim 39 wherein the styrene and hydrocarbon copolymer is a block copolymer selected from a diblock, triblock or star block copolymers.

41. The structure of claim 40 wherein the block copolymer is selected from a group consisting of a first styrene-ethylene-butene-styrene block copolymer, and a maleic anhydride functionalized styrene-ethylene-butene-styrene block copolymer.

42. The structure of claim 39 wherein the skin layer is a polypropylene having a melt flow rate of from about 0.5-20 g/10 min.

43. The structure of claim 39 wherein the skin layer is a high density polyethylene.

44. The structure of claim 39 wherein the skin layer is a blend of high density polyethylene and a linear low density polyethylene.

45. The structure of claim 44 wherein the skin layer comprises by weight of the skin layer from about 25% to about 95% high density polyethylene and from 5% to about 75% linear low density polyethylene.

46. The structure of claim 45 wherein the skin layer is 30% by weight high density polyethylene and 70% linear low density polyethylene.

47. The structure of claim 39 wherein the skin layer has a thickness from about 3.5-8.0 mils and the radio frequency susceptible layer has a thickness from about 3.0 mils to about 8.0 mils.

48. The structure of claim 39 wherein the structure is not oriented.

49. The structure of claim 39 further comprising:
a first intermediate layer disposed between the skin layer and the radio frequency susceptible layer, the first intermediate layer being selected from the group consisting of (1) a polypropylene blended with an elastomer and (2) an ethylene and α -olefin copolymer having a density of from about 0.900 g/cc to about 0.930 g/cc.

50. The structure of claim 49 wherein the elastomer is selected from the group consisting of styrene and hydrocarbon copolymers ethylene-propylene rubbers, ethylene propylene diene monomers, ultra-low density polyethylenes, and very-low density polyethylenes

51. The structure of claim 50 wherein the first intermediate layer comprises by weight from about 99% to about 70% polypropylene and from about 1% to about 30% of the elastomer.

52. The structure of claim 51 wherein the first intermediate layer is about 75% polypropylene and 25% SEBS?

53. The structure of claim 50 wherein the first intermediate layer is a linear low density polyethylene.

54. The structure of claim 53 further comprising a second intermediate layer attached to the first intermediate layer.

55. The structure of claim 54 wherein the second intermediate layer is a tie layer.

56. The structure of claim 55 wherein the tie layer is a modified ethylene and propylene copolymer

5

57. The structure of claim 39 wherein the structure when fabricated into a 50 ml container has a water vapor transmission rate of less than 6% by weight after the container has been autoclaved at 121°C for 30 minutes and stored for 90 days in an environmentally regulated compartment having 15% relative humidity at 40°C.

10

ABSTRACT

The present invention provides a multiple layer thermoplastic structure of a (1) skin layer selected from the group consisting of polypropylene, ethylene homopolymers having a density of
5 from about 0.930 g/cc to about 0.960 g/cc, and ethylene homopolymers having a density of from about 0.930 g/cc to about 0.960 g/cc blended with an ethylene and α -olefin copolymers having a density less than about 0.930 g/cc, the skin layer having a thickness of greater than about 3.0 mils; (2) a radio frequency susceptible layer adhered to the skin layer, the radio frequency susceptible layer having a dielectric loss greater than 0.05 at 1-60 MHz and at temperatures of
10 ambient to 250°C, the radio frequency susceptible layer having: (a) a first polyolefin selected from the group consisting of polypropylene and polypropylene copolymers, (b) a second polyolefin selected from the group consisting of ethylene copolymers, ultra-low density polyethylene, polybutene, and butene ethylene copolymers; (c) a radio frequency susceptible polymer selected from the group consisting of (i) ethylene copolymers having 50-85% ethylene
15 content with comonomers selected from a first group consisting of acrylic acid, methacrylic acid, ester derivatives of acrylic acid with alcohols having 1-10 carbons, ester derivatives of methacrylic acid with alcohols having 1-10 carbons, vinyl acetate, and vinyl alcohol (ii) homopolymers and copolymers containing at least one segment of urethanes, esters, ureas, imides, sulfones, and amides, and (d) a compatibilizing agent of a styrene and hydrocarbon
20 copolymer; wherein the structure when fabricated into a 50 ml container has a water vapor transmission rate of less than 8% by weight after the container has been autoclaved at 121°C for 20 minutes and stored for 90 days in an environmentally regulated compartment having 15% relative humidity at 40°C.

2139

FIG.1

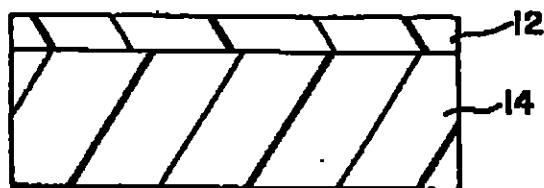


FIG.4

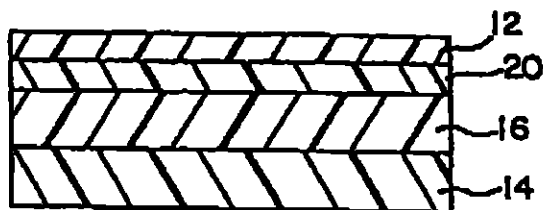


FIG.2

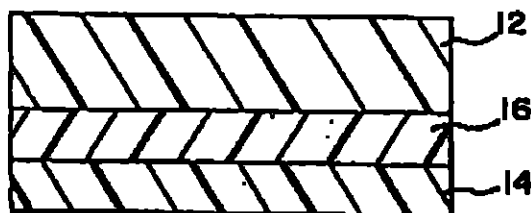


FIG.5

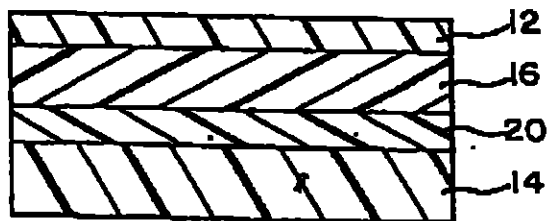


FIG.3


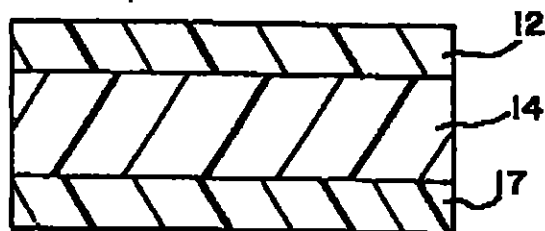


FIG.6

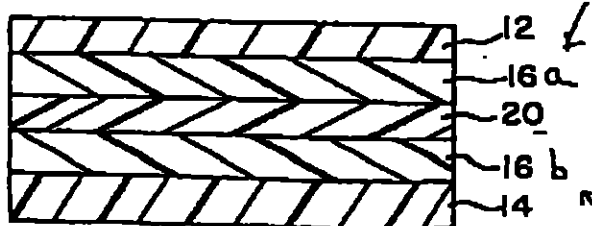

28

3

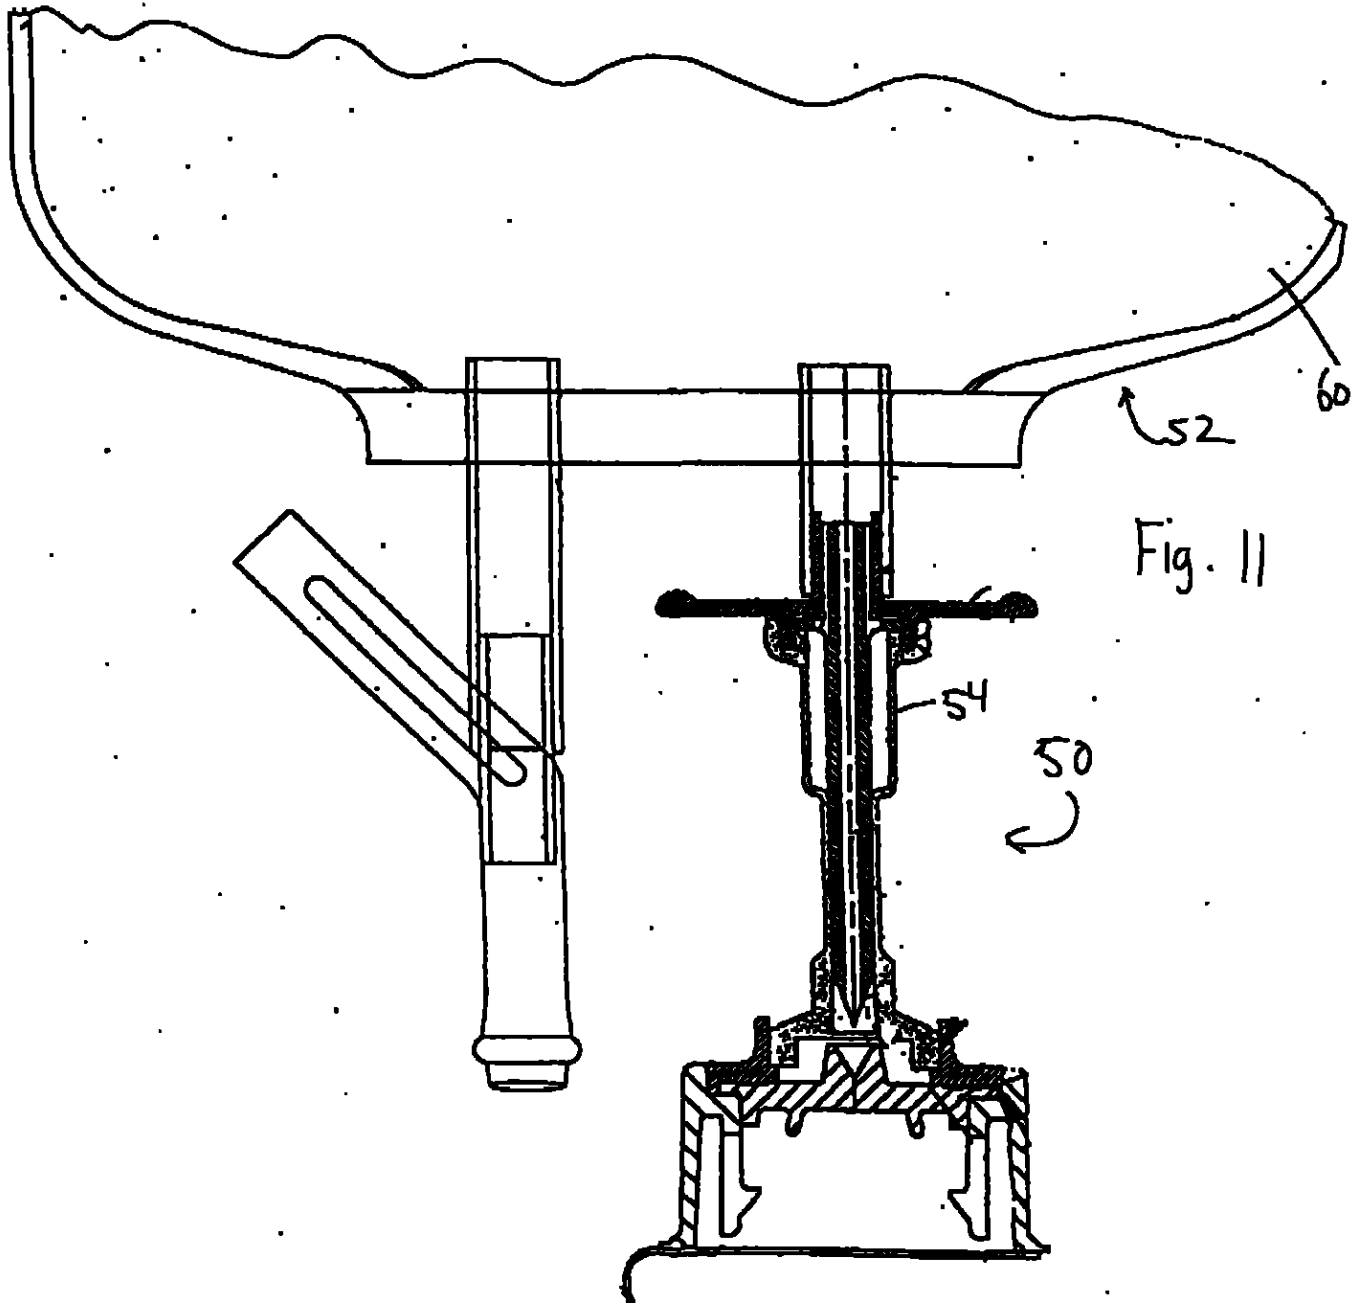


FIG.7

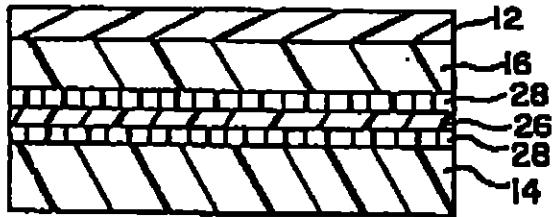


FIG.8

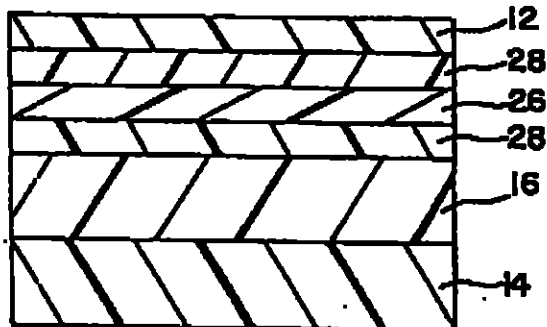


FIG.9



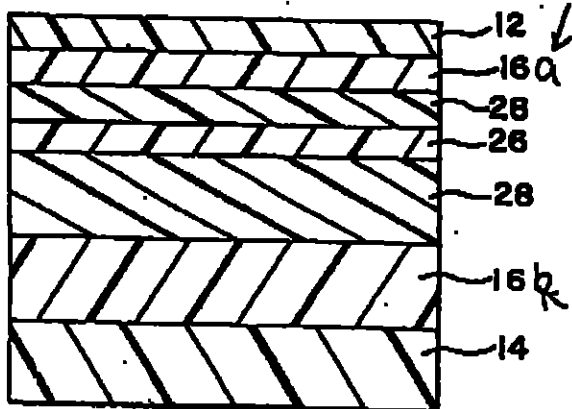


FIG.10

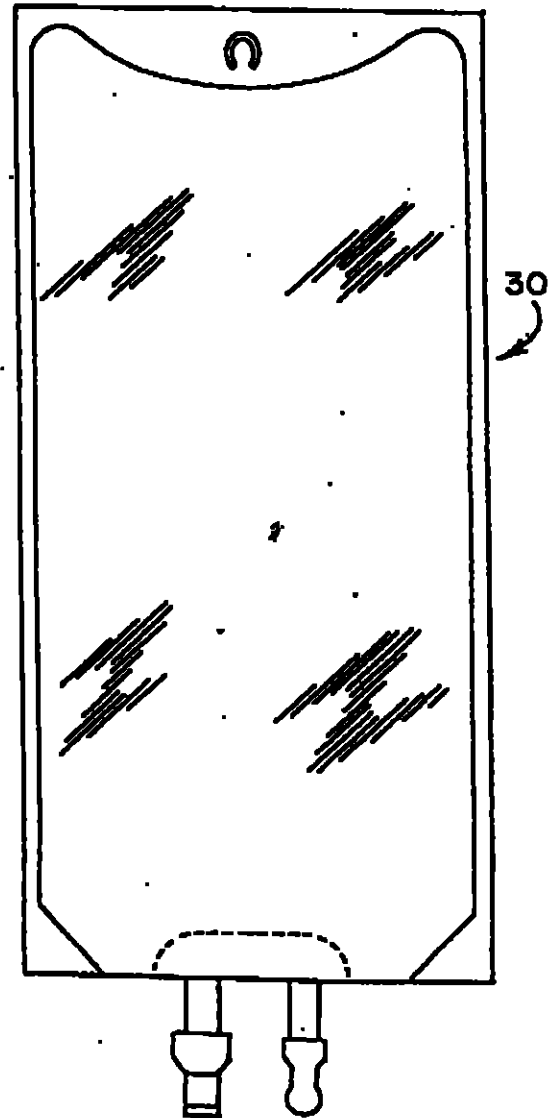

30

4

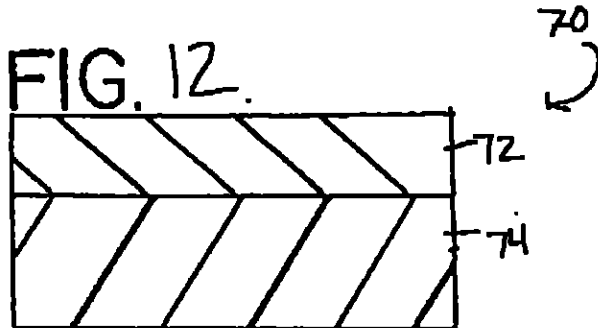


3/

5

Fig. 13

SHELFLIFE OF 50ML BAGS AT 40°C/15%RH

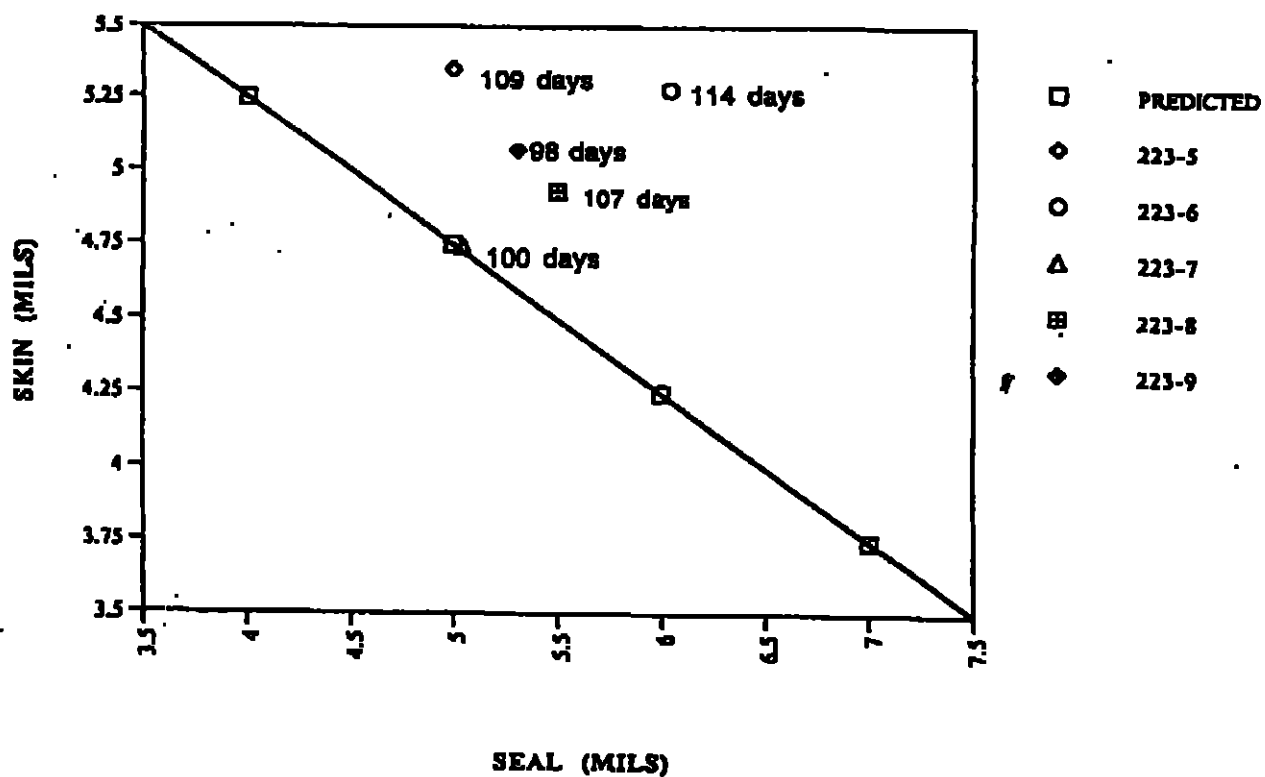

PROTOCOLS - MLT 89-003, TP08MP9910T

05873

08613

PODER

POWER OF ATTORNEY

Travassol - TMOA
312012
32Yo (nosotros), abajo firmado(s)
BAXTER INTERNATIONAL INC. domiciliado(s) en
Deerfield, Illinois, E.E.U.U. por el presente conferimos poder a
GERMAN CAVELIER tpa. 832
GONZALO PERDOMO tpa. 831
EMILIO FERRERO tpa. 31929
LUZ CLEMENCIA DE PAEZ tpa. 23555
Domiciliados en la Carrera 4a. No. 72-35,
Bogotá, Colombia

y para obtener la protección de mi (nuestra) propiedad industrial, a cuyo efecto autorizamos a los dichos apoderados para que nos representen ante cualesquiera entidades o personas, ejerzan o no jurisdicción, especialmente ante las del orden administrativo, contencioso-administrativo y judicial, en todo lo concerniente a los siguientes asuntos: a) Obtención de patentes de invención, modelos y dibujos industriales; el registro de marcas de fábrica, colectivas y de servicio; el depósito de nombres comerciales y enseñas; su renovación, traspaso, cambio de nombre o domicilio, cancelación voluntaria, y el registro de licencias de uso de esos derechos; b) las acciones de oposición, cancelación, nulidad, medidas cautelares, concesión de licencias y en general los juicios civiles, penales, administrativos o contencioso-administrativos relacionados con estos derechos; acciones y juicios que promovamos o se nos promuevan; y c) para que en todos los asuntos arriba determinados, puedan sustituir este mandato, transigir, desistir, cancelar, recibir, renunciar, aceptar notificaciones y nombrar apoderados judiciales y extrajudiciales.

Dado y firmado hoy ... Junio 16 de 1993
en Deerfield, Illinois 60015 E.E.U.U.

I (we), the undersigned BAXTER INTERNATIONAL INC.

of Deerfield, United States of America, ...


hereby grant to Messrs. Cavelier,
GERMAN CAVELIER, GONZALO PERDOMO,
EMILIO FERRERO, LUZ CLEMENCIA DE
PAEZ: Professional Cards Numbers: 832, 831, 31929,
and 23555 respectively. Domiciled at
Carrera 4a. No. 72-35, Bogotá, Colombia

and to obtain the protection of my (our) industrial property, for which purpose we authorize the said attorneys to represent us before any authorities or persons, with or without jurisdiction, specially those administrative, administrative contentious and judicial, in all matters concerning the following: a) Obtainment of patents, models and designs; the registration of trademarks, collective and service marks; the deposit of commercial names and ensigns; its renewal, assignment, change of name or domicile, voluntary cancellation; and the registration of licenses of use of the above rights; b) actions of opposition, cancellation, nullity, infringement, granting of licenses; and in general the civil, penal, and administrative suits relating to those rights; actions and suits instituted by me (us) or against me (us); and that in all the above matters they may substitute this Power of Attorney, compromise, desist, cancel, receive, renounce, accept notifications and appoint attorneys-in-fact in or out of Court.

Given and signed this ... JUNE 16, 1993
in DEERFIELD, ILLINOIS 60015, USA

BAXTER INTERNATIONAL INC.

A. GERARD SIECK, ASSISTANT SECRETARY

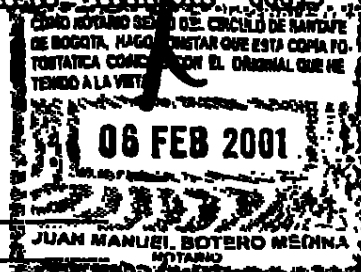Bernarda R. de Martínez
Traductora e Interprete Oficial
Resolución 653 Minjusticia 1991



SECRET

Official, Illinois, Chicago

1. General Information
 2. Personal Information
 3. Education
 4. Employment
 5. Financial Information
 6. Other Information

...the ...
...the ...
...the ...
...the ...
...the ...
...the ...
...the ...
...the ...

1. The first step is to identify the problem. This involves understanding the situation and the goals that need to be achieved.

CONFIDENTIAL

NOTARIO SEXTO DEL CIRCULO DE SANTAFE
 DE BOGOTA. HAGO CONSTAR QUE ESTA COPIA
 FOTOGRAFICA CONCORDA CON EL ORIGINAL QUE HE
 VUELTO A LA VISTA.

06 FEB 2000

JUAN MANUEL BOTERO CND.
 BOGOTÁ.

06 FEB 2004

JUAN MANUEL BOTERO

အသံအသံအသံ အသံအသံအသံ
အသံအသံအသံ အသံအသံအသံ
အသံအသံအသံ အသံအသံအသံ



Consulado General de Colombia

122 SOUTH MICHIGAN AVENUE, SUITE 1441
CHICAGO, ILLINOIS 60603

TEL (312) 341-0658 FAX (312) 341-1980

No. 1610193


Chicago, JUN 20 1993

El suscrito Cónsul General de Colombia, CERTIFICA que el señor Finde Jamuzi Hess quien autoriza el presente documento, ejercía legalmente, en la fecha allí expresada, las funciones de Secretaria del Condado y que la firma y sello que en el documento aparecen como suyos son los que usa y acostumbra en sus actos oficiales, de acuerdo con el registro que se lleva en este consulado.

El Cónsul no asume responsabilidad alguna por el contenido del documento.

PAGADO IMPUESTO DE TIMBRE
US\$ 6.00 (Seis dólares)
US\$ 15.00 (Quince dólares)
PAGADO DEERECTING OFFICES
FONDO ROTATORIO

Maria Teresa Gonzalez
MARIA TERESA GONZALEZ
Encargada de Funciones Consulares

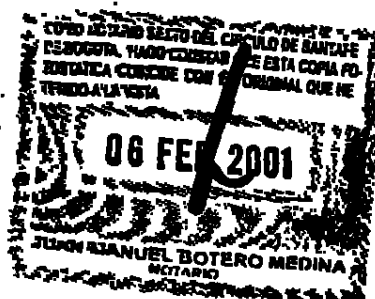

Bernarda R. de Martinez
Traductora e Interprete Oficial
Residencia 683 Minjucicia 1894

No. 481652

PRIMERA DE LAS ES

DE LAS ES

HA CE CONSTAR

Ver fe

Monte Fresca Gonzalez

de

de la

03 AGO 1993

no

por el

Juan Manuel Boteno Med

NOTARIO





LINDA IANUZI HESS
LAKE COUNTY CLERK
18 NORTH COUNTY STREET
WAUKEGAN, ILLINOIS 60085

Bernarda R. de Martínez
Traductora e Intérprete Oficial
Resolución 653 Minjusticia 1991

General Services 708/360-3610 • Elections 708/360-6628 • Tax Extension & Redemption 708/360-6657

STATE OF ILLINOIS))
COUNTY OF L A K E)) SS

CERTIFICATE OF AUTHORITY

I, Linda Ianuzzi Hess, County Clerk of Lake County in the State of Illinois, which office is an office of record having a seal, certify that Mary H. Cross by whom the foregoing or annexed document was notarized, was, on the 26 day of June, 1990, appointed a Notary Public in and for the County of Lake, State of Illinois and that as such, full faith and credit is and ought to be given to this Notary's official attestations. In testimony whereof I have affixed my signature and the seal of this office this 17 day of June, 1993.

**Certification not valid unless the seal
of Lake County, Illinois is affixed.**

LINDA IANUZI HESS
LAKE COUNTY CLERK

113-208 12/89



CERTIFICADO NOTARIAL (CORPORACION)

NOTARIAL CERTIFICATE (CORPORATION)

Estados Unidos de America
Condado de Lake
Estado de Illinois ss.
El día 16 de Junio de 1993
compareció A. Gerard Sieck a quien
conozco, quien, debidamente juramentado, declara
que el es SubSecretario
de BAXTER INTERNATIONAL, INC.
esta compañía, nombrada en el documento que ante
ceda, una corporación organizada conforme a las
leyes del Estado de Delaware
domiciliado en la ciudad de Deerfield
Estado de Illinois, E.E.U.U.
y legalmente constituido para un período de dura-
ción que aún no ha terminado, que el declarante
está autorizado por dicha compañía para conferir
este poder y que el sello estampado por él al pie de
este poder, en nombre y en representación de la ex-
presada compañía, es el sello social de ella.
El suscrito Notario ha visto los estatutos de incor-
poración firmados en Deerfield
Estado de Illinois con fecha
oct. 19/31... y certifica que de conformidad con
la legislación de dicho Estado la anterior declara-
ción juramentada es prueba suficiente de que los
hechos sobre que ella versa son ciertos o verdade-
ros, de lo cual da fe.
Notary Public (Notario Público)


United States of America
State of ILLINOIS ss.
County of LAKE
On this 16th day of June, 1993...
personally come A. GERARD SIECK
known to me, who being by me duly sworn did de-
pose and say that he is the ASSISTANT SECRETARY
of BAXTER INTERNATIONAL, INC.
the Company named within, a Corporation orga-
nized under the laws of the State of DELAWARE
domiciled at the City of DEERFIELD
State of ILLINOIS
of USA and legally constituted for a period of te-
nure not yet expired, that the deponent is authori-
zed by said Company to confer this Power of
Attorney, and that the seal affixed hereunto by the
deponent in the name and on behalf of said Cor-
poration is the Corporate seal thereof

The undersigned Notary Public has seen the Ar-
ticles of Incorporation of said Corporation executed
at DEERFIELD State of ILLINOIS
under date of OCT. 19, 1931 and hereby certifi-
es that under the laws of said State the foregoing ac-
knowledgment is a sufficient proof that the facts
therein contained are true, which she attests.

Mary H. Cross
MARY H. CROSS, NOTARY PUBLIC



Bernarda R. de Martinez
Traductora e Interprete Oficial
Resolución 653 Minjusticia 1971

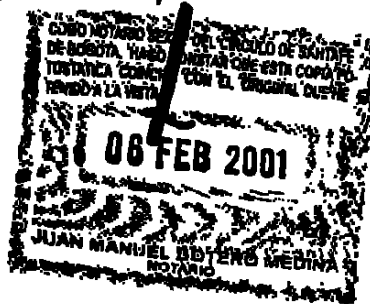

TRADUCCION OFICIAL No. 8.90.93 de un documento escrito en inglés el cual para su identificación se sella con el sello del Traductor al mismo tiempo que la presente. Esta traducción ha sido preparada por Bernarda R. de Martínez, Traductora Oficial debidamente reconocida por el Ministerio de Relaciones Exteriores y aprobada por el Ministerio de Justicia de Colombia mediante Resolución No. 683 de 1991.


(Se traducen sellos y legalizaciones que aparecen a continuación de un Poder escrito en inglés y español otorgado por la sociedad BAXTER INTERNATIONAL INC., a favor de los Doctores GERMAN CAVELIER, GONZALO PERDOMO, EMILIO FERRERO Y LUZ CLEMENCIA DE PAEZ).

Dado y firmado hoy 16 de junio de 1993, en Deerfield, Illinois, Estados Unidos de América, por el señor A. GERARD SIECK, ASSISTANT SECRETARY

CERTIFICADO NOTARIAL (SOCIEDAD) en inglés y español referente a la existencia y representación de la sociedad BAXTER INTERNATIONAL INC., expedido en la Ciudad de Deerfield, Estados Unidos de América, el 16 de junio de 1993.

(Firmado), Mary H. Cross, Notario Público

(Sello Notarial en tinta que dice):
Cross, Notario Público, Estado de Illinois
6/26/94

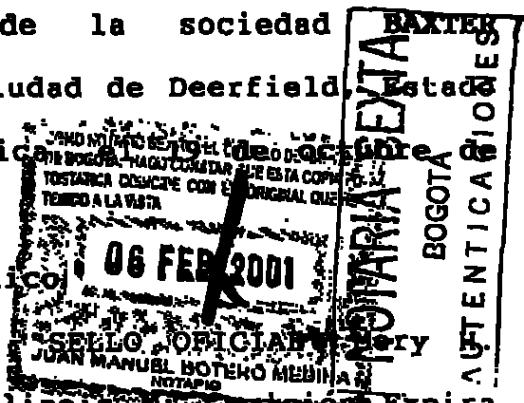

CERTIFICACION

LINDA IANUZI HESS

ESCRIBANO DEL CONDADO LAKE

18 NORTH COUNTY STREET

WAUKEGAN, ILLINOIS 60085

Servicios Generales 708/360-3610 * Elecciones 708/360-6628 *

Prórrogas y Redenciones de Impuestos 708/360-6657

ESTADO DE ILLINOIS)

) SS

CONDADO DE LAKE)

CERIFICADO DE AUTORIDAD

Yo, Linda Ianuzi Hess, Escribano de Condado del condado de Lake en el Estado de Illinois, cuya oficina es una oficina de registro que tiene un sello, certifico que Mary H. Cross quien ha notariado el documento anterior o adjunto, era el 26 de junio de 1990, Notario Público nombrado en y para el Condado de Lake, Estado de Illinois y como tal, todas sus certificaciones deben ser reconocidas. En testimonio de lo cual he firmado y estampado el sello de esta oficina hoy junio 17 de 1993.

(Firmado): LINDA IANUZI HESS


ESCRIBANO DEL CONDADO LAKE

(Sello seco en relieve que dice): SELLO OFICIAL CONDADO LAKE ILLINOIS

(Impreso): Esta certificacion no es valida a menos que se presente el sello del Condado Lake, Illinois.

(Impreso): 113-208 12/89

(En español): Legalización de la firma que fue otorgada por el CONSULADO GENERAL DE COLOMBIA EN CHICAGO, ILLINOIS, bajo el No. 1610/93, de fecha junio 29 de 1993, firmada por la señora María Teresa González, Encargada de Funciones Consulares.

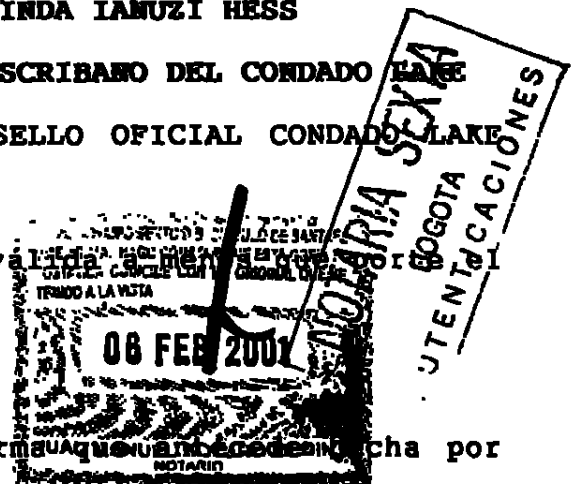

Pagados Impuesto de Timbre y Derechos Consulares por valor de veintiun dólares.

(Sello Consular en tinta que dice): CONSULADO GENERAL DE COLOMBIA * CHICAGO *


Legalización de la firma que antecede hecha por el MINISTERIO DE RELACIONES EXTERIORES DE COLOMBIA bajo el No. 481652 de fecha 5 de agosto de 1993, firmada por el señor Nelson Sánchez Torres, Jefe Legalizaciones.

Es traducción fiel y completa de la cual se deja copia en los archivos de esta oficina para su confrontación y a la cual me remito.

Bogotá, agosto 9 de 1993

COLO 5873-702-001-4

BRM-27

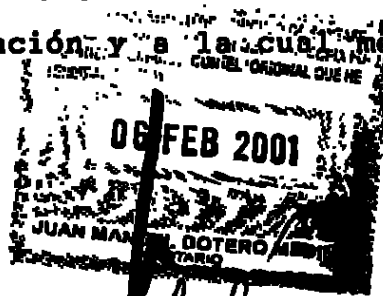

Bernardo R. de Martínez

Bernardo R. de Martínez
Traductora e Interprete Oficial
Resolución 683 Minjusticia 1991

No. 487876

MINISTERIO RELACIONES EXTERIORES
AREA DE NEGOCIOS GENERALES

HACE CONSTAR

Que el señor (a)

BERNARDO R. DE MARTINEZ

Cuya firma aparece al pie del presente documento, desempeñaba en esa fecha las funciones allí indicadas.

Santafé de Bogotá, D. C.

12 AGO. 1993

El suscrito Jefe de Legalizaciones no asume responsabilidad alguna por el contenido de este documento.

NELSON SANCHEZ TORRES
JEFE LEGALIZACIONES

COMO NOTARIO SEXTO ENCARGADO DE SANTAFÉ DE BOGOTÁ HACER CONSTAR QUE LA FIRMA PUESTA EN ESTE DOCUMENTO POR

Bernardo R. de Martínez

C. C. No. _____ coincide con la registrada en esta Notaría; SANTAFÉ DE BOGOTÁ D. C.

NOTARIA SEXTA
BOGOTÁ
AUTENTICACIONES



10 AGO. 1993


TRADUCCIÓN OFICIAL No. 08.03/00 preparada por María Elvira Martelo, Traductora Oficial aprobada por el Ministerio de Justicia mediante Resolución 2879 de 1995 y reconocida por el Ministerio de Relaciones Exteriores.

MODIFICACIÓN A LA TRADUCCIÓN OFICIAL No. 8.90.93. REALIZADA POR BERNARDA R. DE MARTÍNEZ CON FECHA 9 DE AGOSTO DE 1993.

Se modifica específicamente lo que se subraya en la siguiente transcripción de la parte de la traducción que corresponde al CERTIFICADO DE AUTORIDAD otorgado por el Escribano del Condado de Lake, la cual dice así: "Yo, Linda Ianuzi Hess, Escribano de Condado del Condado de Lake en el Estado de Illinois, cuya oficina es una oficina de registro que tiene un sello, certifico que Mary H. Cross quien ha notariado el documento anterior o adjunto, era el 26 de junio de 1990, Notario Público nombrado en y para todo el Condado de Lake, Estado de Illinois y como tal, todas sus certificaciones deben ser reconocidas. En testimonio de lo cual, he firmado y estampado el sello de esta oficina de 1993".

PARA QUE AHORA SE LEA ASÍ:

Yo, Linda Ianuzi Hess, Escribano de Condado del Condado de Lake en el Estado de Illinois, cuya oficina es una oficina de registro que tiene un sello, certifico que Mary H. Cross, quien ha notariado el documento anterior o adjunto, fue nombrada el 26 de junio de 1990 un Notario Público en y para todo el Condado de Lake, Estado de Illinois y como tal, a todas sus certificaciones deben ser reconocidas. En testimonio de lo cual, he firmado y estampado el sello de esta oficina hoy junio 17 de 1993.

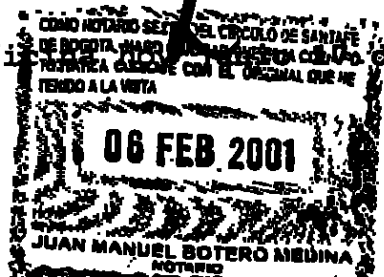

XO


(Al dorso) Legalización de la firma que antecede expedida por el
MINISTERIO DE RELACIONES EXTERIORES bajo el No. 481652 del 5 de
agosto de 1993, firmada por el Jefe de Legalizaciones.

Es traducción fiel de la cual se deja copia en esta oficina para
su confrontación.

COLO WPCL 5873-702-001-4

MAR.13/00


Maria Elvira Martelo
TRADUCCION No. 08.03/00
MARIA ELVIRA MARTELO
Traductora e Interprete Oficial
Inglés - Español - Inglés
Res. No. 2879 Min. Justicia

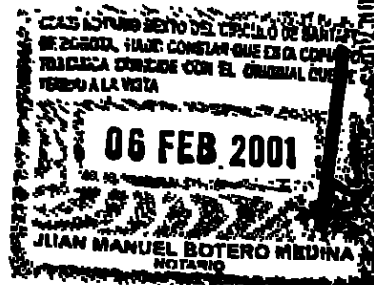


COMO NOTARIO SEXTO DEL CIRCUITO DE
BOGOTA, HAGO CONSTAR QUE LAZARUS DE

[Handwritten signature]

CONCORDA CON LA VENTA REGISTRADA F...
EL (ELLOS) EN ESTA NOTARIA
SANTAFE DE BOGOTA: 14 MAR. 2007

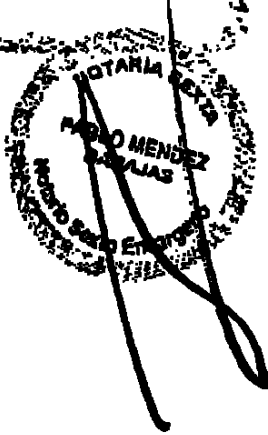

ANEXOS
SEÑALES DE FICIONES

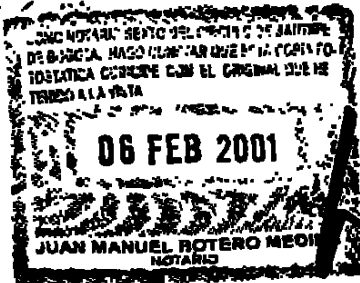

06 FEB 2001 V 11:29

CAVELIER

ABOGADOS

EDIFICIO SISKI

CARRERA 4ª, No. 72-35

BOGOTÁ 8, COLOMBIA

TELEFAX (57) (1) 2358850

TELEX: 45479 CAVE CÔ

(23)740 7175 CAVE UC

CORREO ELECTRONICO MUNDIAL CAVE

TELEFONO (57) (1) 2120100

CABLE: CAVELEYES


Señor Jefe de la
DIVISION DE NUEVAS CREACIONES
Superintendencia de Industria y Comercio
E. S. D.

Poderdante: BAXTER INTERNATIONAL INC.

Poder conferido el: 16-06-93

Yo, GERMAN CAVELIER, obrando en mi calidad de apoderado principal del poderdante arriba mencionado atentamente manifiesto a Usted que sustituyo el poder conferido en el doctor EMILIO FERRERO, Abogado con Tarjeta Profesional No. 31.929, con todas las facultades que me

Hago la anterior sustitución conforme al Código de Procedimiento Civil ya que los otros sustitutos faltan en este momento.

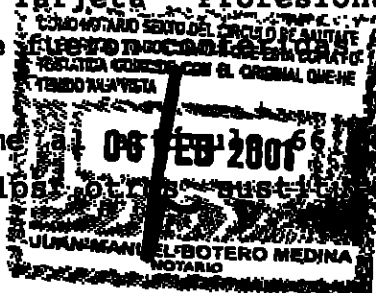

Señor Jefe,

German Cavelier

GERMAN CAVELIER

T.P.A. No. 832

C.C. No. 2.877.924 de Bogotá


Acepto:

Emilio Ferrero

EMILIO FERRERO

T.P.A. No. 31.929

C.C. No. 438.019 de Usaquén



2e-780-2

NOTARIA SEXTA DE BOGOTÁ

RECONOCIMIENTO Y PRESENTACIÓN PERSONAL

17 ABR 1999

Yo, el Sr. Emilio Fierro
del Círculo de Bogotá,
con la personalidad de Notario

que me ha presentado el Sr. Emilio Fierro
C.C. 458019

y la Sr. María Militar 287.7924

domiciliado(s) en Bogotá y María Militar 287.7924 que me
presentan en el presente documento (señal) (señal) (señal) y que
contenido del mismo es cierto.
En constancia se firma esta diligencia.



Emilio Fierro





10

1. SECRET
 2. CONFIDENTIAL
 3. SECRET
 4. CONFIDENTIAL
 5. SECRET
 6. CONFIDENTIAL
 7. SECRET
 8. CONFIDENTIAL
 9. SECRET
 10. CONFIDENTIAL
 11. SECRET
 12. CONFIDENTIAL
 13. SECRET
 14. CONFIDENTIAL
 15. SECRET
 16. CONFIDENTIAL
 17. SECRET
 18. CONFIDENTIAL
 19. SECRET
 20. CONFIDENTIAL
 21. SECRET
 22. CONFIDENTIAL
 23. SECRET
 24. CONFIDENTIAL
 25. SECRET
 26. CONFIDENTIAL
 27. SECRET
 28. CONFIDENTIAL
 29. SECRET
 30. CONFIDENTIAL
 31. SECRET
 32. CONFIDENTIAL
 33. SECRET
 34. CONFIDENTIAL
 35. SECRET
 36. CONFIDENTIAL
 37. SECRET
 38. CONFIDENTIAL
 39. SECRET
 40. CONFIDENTIAL
 41. SECRET
 42. CONFIDENTIAL
 43. SECRET
 44. CONFIDENTIAL
 45. SECRET
 46. CONFIDENTIAL
 47. SECRET
 48. CONFIDENTIAL
 49. SECRET
 50. CONFIDENTIAL
 51. SECRET
 52. CONFIDENTIAL
 53. SECRET
 54. CONFIDENTIAL
 55. SECRET
 56. CONFIDENTIAL
 57. SECRET
 58. CONFIDENTIAL
 59. SECRET
 60. CONFIDENTIAL
 61. SECRET
 62. CONFIDENTIAL
 63. SECRET
 64. CONFIDENTIAL
 65. SECRET
 66. CONFIDENTIAL
 67. SECRET
 68. CONFIDENTIAL
 69. SECRET
 70. CONFIDENTIAL
 71. SECRET
 72. CONFIDENTIAL
 73. SECRET
 74. CONFIDENTIAL
 75. SECRET
 76. CONFIDENTIAL
 77. SECRET
 78. CONFIDENTIAL
 79. SECRET
 80. CONFIDENTIAL
 81. SECRET
 82. CONFIDENTIAL
 83. SECRET
 84. CONFIDENTIAL
 85. SECRET
 86. CONFIDENTIAL
 87. SECRET
 88. CONFIDENTIAL
 89. SECRET
 90. CONFIDENTIAL
 91. SECRET
 92. CONFIDENTIAL
 93. SECRET
 94. CONFIDENTIAL
 95. SECRET
 96. CONFIDENTIAL
 97. SECRET
 98. CONFIDENTIAL
 99. SECRET
 100. CONFIDENTIAL
 101. SECRET
 102. CONFIDENTIAL
 103. SECRET
 104. CONFIDENTIAL
 105. SECRET
 106. CONFIDENTIAL
 107. SECRET
 108. CONFIDENTIAL
 109. SECRET
 110. CONFIDENTIAL
 111. SECRET
 112. CONFIDENTIAL
 113. SECRET
 114. CONFIDENTIAL
 115. SECRET
 116. CONFIDENTIAL
 117. SECRET
 118. CONFIDENTIAL
 119. SECRET
 120. CONFIDENTIAL
 121. SECRET
 122. CONFIDENTIAL
 123. SECRET
 124. CONFIDENTIAL
 125. SECRET
 126. CONFIDENTIAL
 127. SECRET
 128. CONFIDENTIAL
 129. SECRET
 130. CONFIDENTIAL
 131. SECRET
 132. CONFIDENTIAL
 133. SECRET
 134. CONFIDENTIAL
 135. SECRET
 136. CONFIDENTIAL
 137. SECRET
 138. CONFIDENTIAL
 139. SECRET
 140. CONFIDENTIAL
 141. SECRET
 142. CONFIDENTIAL
 143. SECRET
 144. CONFIDENTIAL
 145. SECRET
 146. CONFIDENTIAL
 147. SECRET
 148. CONFIDENTIAL
 149. SECRET
 150. CONFIDENTIAL
 151. SECRET
 152. CONFIDENTIAL
 153. SECRET
 154. CONFIDENTIAL
 155. SECRET
 156. CONFIDENTIAL
 157. SECRET
 158. CONFIDENTIAL
 159. SECRET
 160. CONFIDENTIAL
 161. SECRET
 162. CONFIDENTIAL
 163. SECRET
 164. CONFIDENTIAL
 165. SECRET
 166. CONFIDENTIAL
 167. SECRET
 168. CONFIDENTIAL
 169. SECRET
 170. CONFIDENTIAL
 171. SECRET
 172. CONFIDENTIAL
 173. SECRET
 174. CONFIDENTIAL
 175. SECRET
 176. CONFIDENTIAL
 177. SECRET
 178. CONFIDENTIAL
 179. SECRET
 180. CONFIDENTIAL
 181. SECRET
 182. CONFIDENTIAL
 183. SECRET
 184. CONFIDENTIAL
 185. SECRET
 186. CONFIDENTIAL
 187. SECRET
 188. CONFIDENTIAL
 189. SECRET
 190. CONFIDENTIAL
 191. SECRET
 192. CONFIDENTIAL
 193. SECRET
 194. CONFIDENTIAL
 195. SECRET
 196. CONFIDENTIAL
 197. SECRET
 198. CONFIDENTIAL
 199. SECRET
 200. CONFIDENTIAL
 201. SECRET
 202. CONFIDENTIAL
 203. SECRET
 204. CONFIDENTIAL
 205. SECRET
 206. CONFIDENTIAL
 207. SECRET
 208. CONFIDENTIAL
 209. SECRET
 210. CONFIDENTIAL
 211. SECRET
 212. CONFIDENTIAL
 213. SECRET
 214. CONFIDENTIAL
 215. SECRET
 216. CONFIDENTIAL
 217. SECRET
 218. CONFIDENTIAL
 219. SECRET
 220. CONFIDENTIAL
 221. SECRET
 222. CONFIDENTIAL
 223. SECRET
 224. CONFIDENTIAL
 225. SECRET
 226. CONFIDENTIAL
 227. SECRET
 228. CONFIDENTIAL
 229. SECRET
 230. CONFIDENTIAL
 231. SECRET
 232. CONFIDENTIAL
 233. SECRET
 234. CONFIDENTIAL
 235. SECRET
 236. CONFIDENTIAL
 237. SECRET
 238. CONFIDENTIAL
 239. SECRET
 240. CONFIDENTIAL
 241. SECRET
 242. CONFIDENTIAL
 243. SECRET
 244. CONFIDENTIAL
 245. SECRET
 246. CONFIDENTIAL
 247. SECRET
 2

C O N S I D E R A C I O N

DEPOSITANTE	TIPO PASO	DIAS	CUENTA	Nº. PASO	FECHA PAG	V. PASO
CANALIER RODRIGOS	CONSIGNACION	30 DIAS FORTALE	150 00110-6	2749326	05/02/2001	38,074,734.10

***** C O N C E P T *****

SOL: TRESCIENTOS CINCUENTA Y OCHO MIL SEISCIENTOS CUARENTA PESOS

TABLE :

RECIBO DE CASH APLICADO AL EXPEDIENTE N.º. _____

Carrera 13 No. 27-00 Pisos 5, 7 y 10
Conmutador: 382 0840
Fax: 350 5220
e-mail: Info@sic.gov.co
www.sic.gov.co
Bogotá, D.C., Colombia



43

Industria y Comercio

SUPERINTENDENCIA

Radicación: 2790726
 Fecha Recibida: 2001-02-07 12:45:33
 Fecha Recibida: 2001-02-07 12:45:33
 Fecha Recibida: 2001-02-07 12:45:33
 Fecha Recibida: 2001-02-07 12:45:33

NIT: 900176098-2

RECIBO OFICIAL DE CAJA : 01 - 6,925
 FECHA : FEBRERO 5 DE 2001

***** CONSIGNACION *****

DEPOSITANTE	TIPO PAGO	DIVIS	CUENTA	No. PAGO	FECHA PAGO	VAL. PAGO
CAVELIER ABOGADOS	CONSIGNACION	DIVIS PAGO	CUENTA	2790726	05/02/2001	30,477,775.00

***** D E B E T O *****

CONCEPTO	TOTAL CONCEPTO
50005 01-01 SOLICITUDES	100,000.00
52 INVOCACION DE UNA PRIORIDAD EN NU	100,000.00
TOTAL :	200,000.00

SUM: CIENTO MIL PESOS

RESPONSABLE :

RECIBO DE CAJA APLICADO AL EXPEDIENTE No.

Carrera 13 No. 27-00 Pisos 5, 7 y 10
 Conmutador: 382 0840
 Fax: 350 5220
 e-mail: info@sic.gov.co
 www.sic.gov.co
 Bogotá, D.C., Colombia

REQUISITOS MINIMOS PARA ADMISION A TRAMITE

PATENTE DE INVENCION ☒

MODELO DE UTILIDAD ☐

- Indicación de que se solicita la concesión de una patente ☒
- Datos de identificación del solicitante o de la persona que presenta la solicitud ☐
- Descripción de la invención ☒
- Dibujos de ser estos pertinentes ☒
- Comprobante de Pago de las tasas establecidas ☐

COMPLETA ☐

INCOMPLETA ☐

DISEÑO INDUSTRIAL ☐

- Indicación de que se solicita el registro de Diseño Industrial ☐
- Datos de identificación del solicitante o de la persona que presenta la solicitud. ☐
- Representación gráfica y fotográfica del Diseño Industrial o muestra del material que incorpora el diseño. ☐
- Comprobante de pago de las tasas establecidas. ☐

COMPLETA ☐

INCOMPLETA ☐

ESQUEMA DE TRAZADO ☐

- Indicación de que se solicita el registro de un Esquema de trazado. ☐
- Datos de identificación del solicitante o de la persona que presenta la solicitud. ☐
- Representación gráfica del esquema de trazado ☐
- Comprobante de pago de las tasas establecidas. ☐

COMPLETA ☐

INCOMPLETA ☐


Firma Responsable

Fecha:

Carrera 13 No. 27-00 Pisos 5 y 10
Conmutador: 334 12 21-2-3-4
Fax: 281 31 25 e-mail: info@ic.gov.co
Santa Fe de Bogotá D.C. - Colombia



2020
Bogotá, D.C.

Doctor
EMILIO FERRERO
Apoderado Sustituto

REFERENCIA:	Radicación No.	01-8830
	Trámite	002
	Evento	001
	Actuación	430
	Oficio No.	1190
	Folios	001

Como resultado del examen de forma, realizado con fundamento en el artículo 38 de la Decisión 486 de la Comisión de la Comunidad Andina, se le comunica que:

- De conformidad con el artículo 1° de la Resolución 210 del 2001, este Despacho considera pertinente que se allegue la traducción simple de la documentación allegada con la solicitud.
- Debe allegar copia del documento en que consta la cesión del derecho a la patente otorgado por el inventor al solicitante o a su causante (art. 26-k, Dec 486/2000).

En cumplimiento del artículo 39 de la Decisión 486 de la Comisión de la Comunidad Andina, se le requiere para que dentro del término de dos (2) meses siguientes a la fecha de notificación del presente oficio, complete los requisitos anteriormente enunciados. En caso de no dar cumplimiento al presente requerimiento, la solicitud se considerará abandonada y perderá su prelación.

Notifíquese el presente oficio conforme a lo dispuesto en el artículo 8 de la Resolución Reglamentaria No. 210 del 15 de enero del 2001.

ALIX CARMENZA CÉSPEDES DE VERGEL
Jefe de la División de Nuevas Creaciones

El anterior requerimiento fue notificado por fijación en lista de fecha 19 ABR. 2001.

Se recuerda al interesado que debe presentar, dentro de los dieciséis meses siguientes contados a partir de la fecha de presentación de la solicitud cuya prioridad se invoca, copia de la misma certificada por la autoridad que la expidió y, en los casos en que haya lugar, la traducción simple del capítulo reivindicatorio. El incumplimiento de este plazo, acarreará la pérdida de la prioridad invocada.

202027/202022

Carrera 13 No. 27-00 Pisos 5, 7 y 10
Conmutador: 382 0840
Fax: 382 2695
E-mail: info@slc.gov.co
Bogotá, D.C., Colombia