

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO
DIVISION DE NUEVAS DE CREACIONES
E. S. D.

Ref: Expediente No. NC2020/0005190
Solicitud de Patente a nombre LT LIGHTING (TAIWAN)
CORPORATION.


En el asunto de la referencia me permito informar que la presente solicitud de patente fue aprobada en los Estados Unidos de América bajo el No.10,381,840 B2 con fecha Agosto 13, 2019.

Como previa ayuda me permito presentar los siguientes documentos:

- 1- Copia de la patente de invención de los Estados Unidos, de cuya solicitud se reclamó prioridad en el presente caso.
- 2- Copia traducida de las reivindicaciones estadounidenses tal y como fueron presentadas para obtener la patente donde se puede apreciar cuales fueron eliminadas y cuales no sufrieron modificación alguna.
- 3- Para su estudio por parte del examinador, adjunto un pliego de reivindicaciones donde se suprimieron las enmiendas antes mencionadas y debidamente numeradas.

En la fecha se cancelaron los derechos correspondientes a la modificación a las reivindicaciones y al exceso de Cinco (5) reivindicaciones adicionales.

Atentamente,

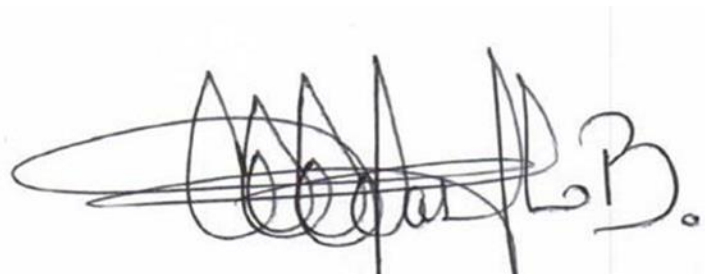A handwritten signature in dark ink, appearing to read 'JCB.', with a large, stylized flourish extending to the left.

JERONIMO CASTILLO BONILLA
C.C. 79.46 .057 de Bogotá
T.P. 104.167 del C.S.J.



(12) **United States Patent**
Shuy et al.

(10) **Patent No.:** **US 10,381,840 B2**
(45) **Date of Patent:** **Aug. 13, 2019**

(54) **PHOTOVOLTAIC POWER STATION**

(71) Applicant: **LT LIGHTING (TAIWAN) CORP.**,
Xiangshan District, Hsinchu (TW)

(72) Inventors: **Geoffrey Wen-Tai Shuy**, Taipei (TW);
Jau-Dar Liao, Toufen Township,
Miaoli County (TW); **Hsin-Chen Lai**,
Taichung (TW); **Feng-Tse Chung**,
Shuili Township, Nantou County (TW);
Hsiu-Wen Han, Hsinchu (TW)

(73) Assignee: **LT LIGHTING (TAIWAN) CORP.**,
Hsinchu (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/796,506**

(22) Filed: **Oct. 27, 2017**

(65) **Prior Publication Data**

US 2018/0069402 A1 Mar. 8, 2018

Related U.S. Application Data

(63) Continuation-in-part of application No. 15/424,566,
filed on Feb. 3, 2017, now Pat. No. 10,177,575, which
(Continued)

(51) **Int. Cl.**
H02J 3/14 (2006.01)
H02J 3/38 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H02J 3/385** (2013.01); **G05F 1/67**
(2013.01); **H02J 3/14** (2013.01); **H02J 7/34**
(2013.01);
(Continued)

(58) **Field of Classification Search**

CPC H02J 3/385; H02J 7/34; H02J 3/14; H02J
13/0003; H02J 3/38; H02J 13/00; H02M
7/66; G05F 1/67

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2010/0292853 A1* 11/2010 McDonnell H02J 3/34
700/287
2012/0262067 A1* 10/2012 Tam H05B 33/0845
315/119

(Continued)

OTHER PUBLICATIONS

PCT/US18/35454, Notification of Transmittal of the International
Search Report and the Written Opinion of the International Searching
Authority, or Declaration dated Jul. 12, 2018. (12 pages).

Primary Examiner — Jared Fureman


Assistant Examiner — Emmanuel Dominique

(74) *Attorney, Agent, or Firm* — Workman Nydegger

(57) **ABSTRACT**

A photovoltaic (PV) power station includes at least one AC
power production unit. The AC power production unit
includes an energy reservoir that is supplied with DC energy
from a DC power generator, such as PV panels. The energy
reservoir is used as a buffer to store energy, and improve the
efficiency of the PV power station. Whether or not an energy
reservoir is used, decoupler devices may be used to prevent
power annihilation that can decrease the amount of power
delivered by the power station to the grid. In system inte-
gration for a PV power station, it is found that the declared
rating of DC/AC converter in power grid convention should
not be taken as the power conversion capability.

15 Claims, 9 Drawing Sheets

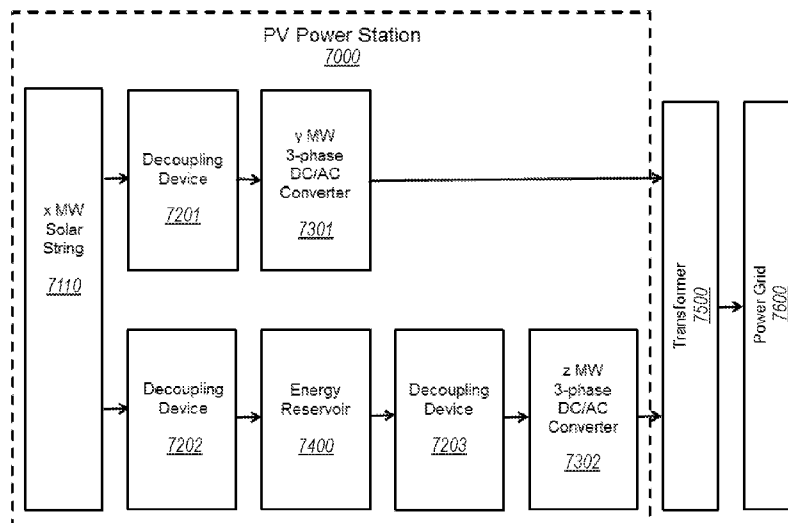

Related U.S. Application Data

is a continuation-in-part of application No. 14/880,101, filed on Oct. 9, 2015, now abandoned.

(51) **Int. Cl.**

H02J 13/00 (2006.01)
G05F 1/67 (2006.01)
H02J 7/34 (2006.01)
H02M 7/66 (2006.01)
H02S 40/38 (2014.01)

(52) **U.S. Cl.**

CPC **H02J 13/0003** (2013.01); **H02M 7/66**
 (2013.01); **H02S 40/38** (2014.12); **Y02E 10/58**
 (2013.01)


(56)


References Cited

U.S. PATENT DOCUMENTS

2013/0241297	A1 *	9/2013	Falk		H02J 3/383 307/80
2015/0229131	A1 *	8/2015	Gerhardinger		H02J 3/385 307/22
2016/0036232	A1	2/2016	Shuy		
2017/0149250	A1	5/2017	Shuy		

* cited by examiner

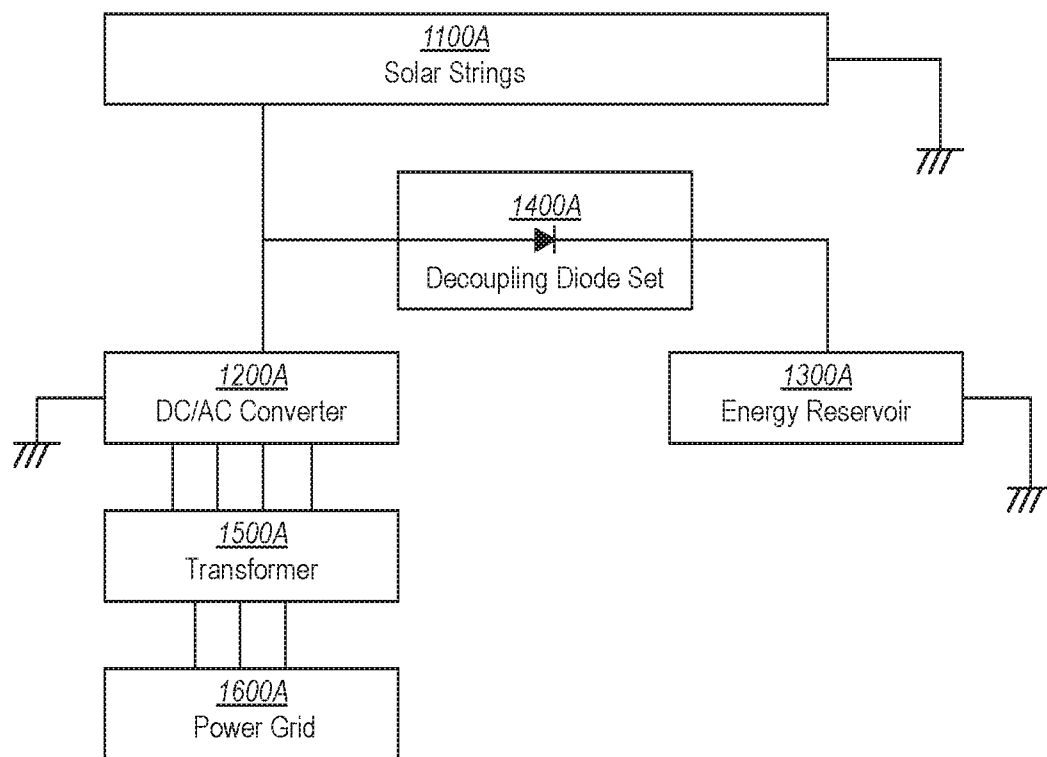**FIG. 1A**

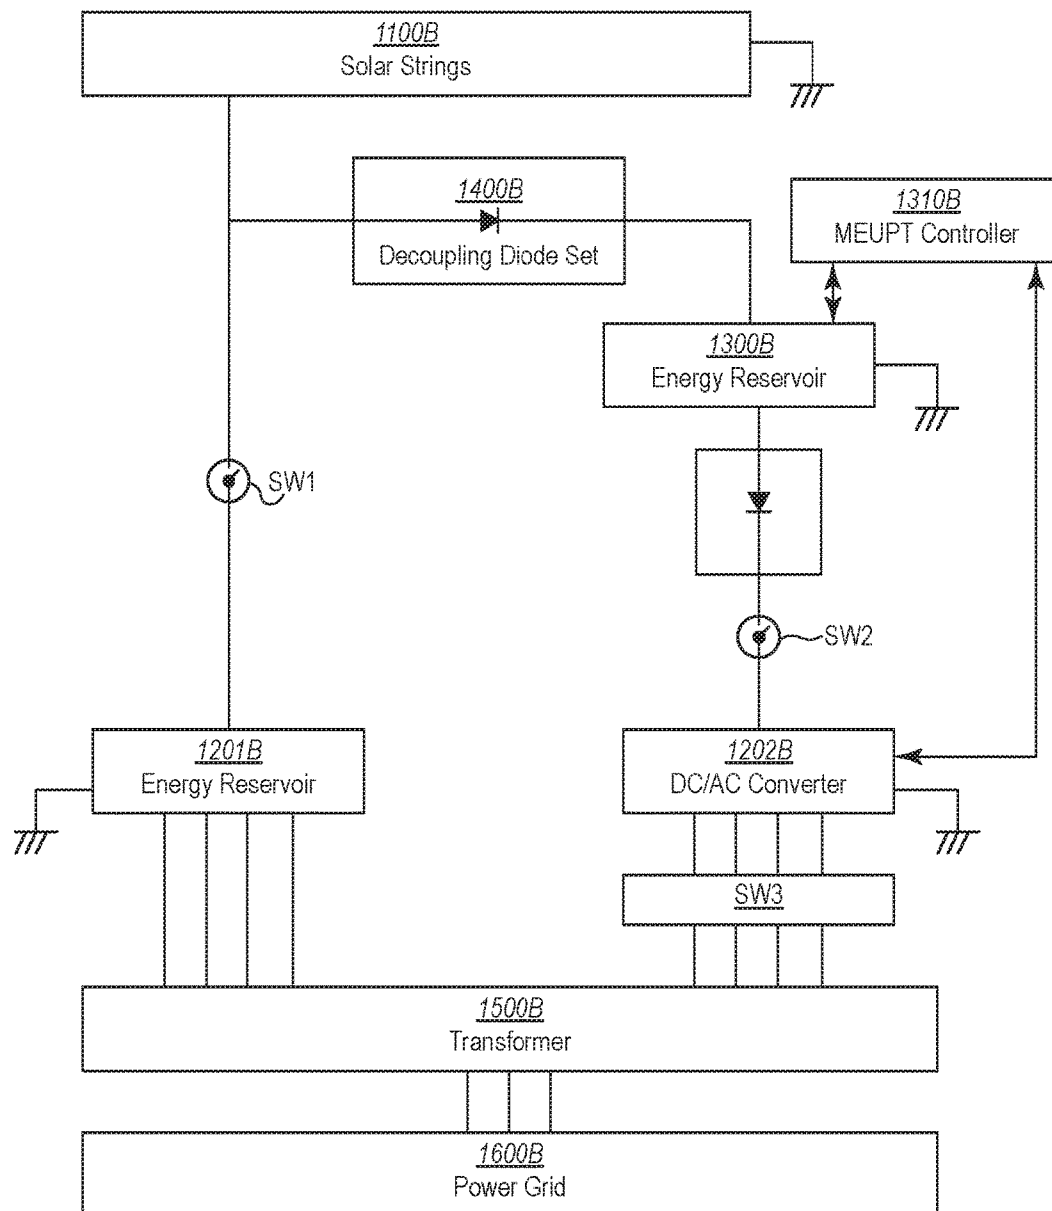**FIG. 1B**

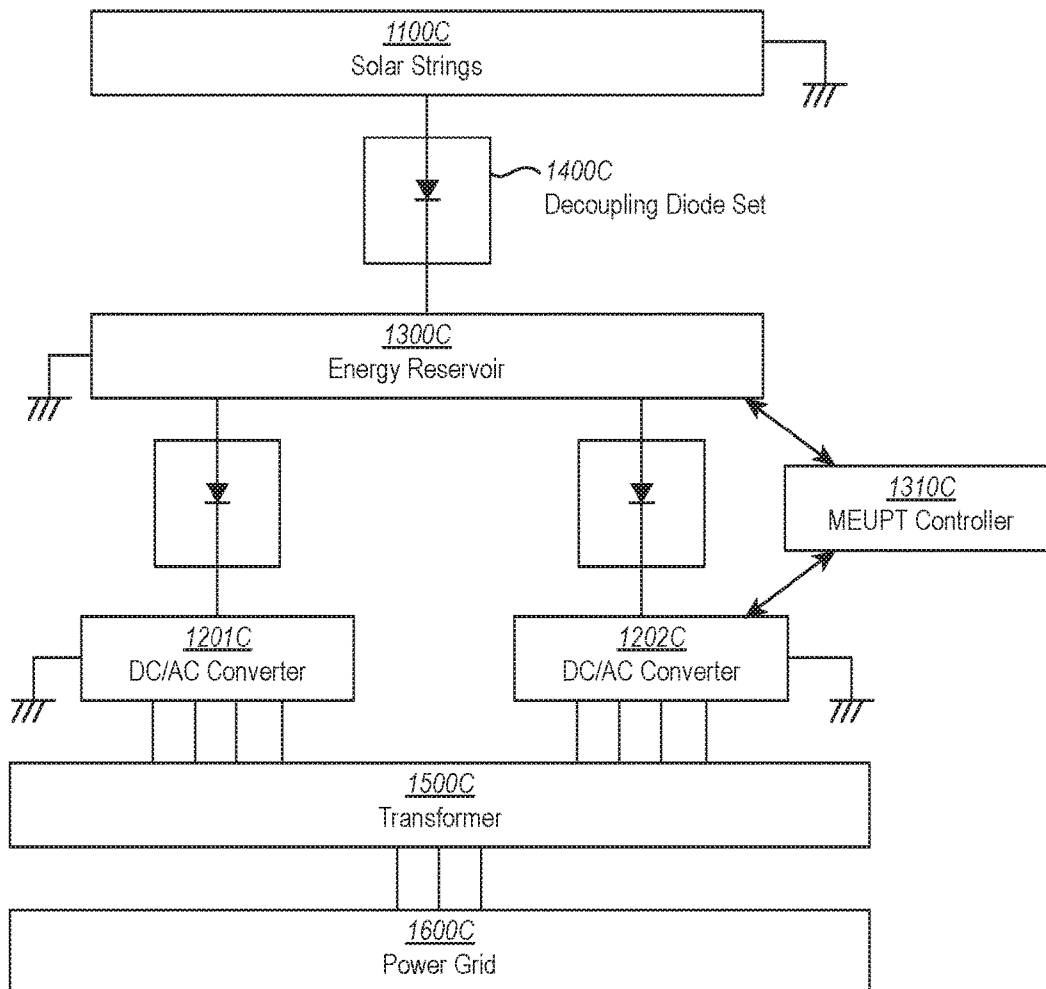


FIG. 1C

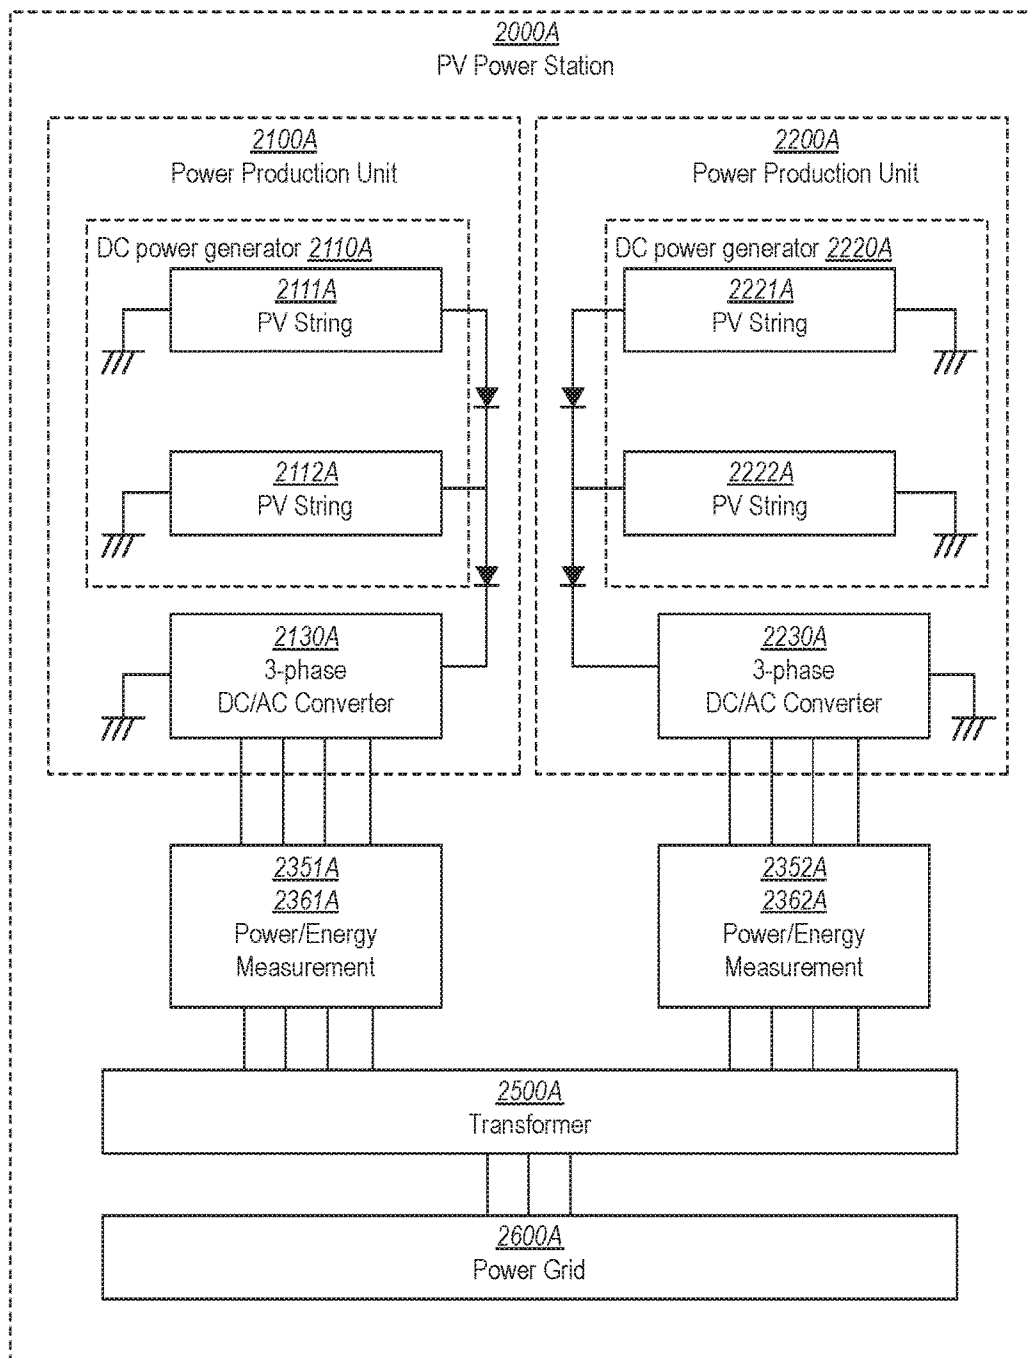


FIG. 2A

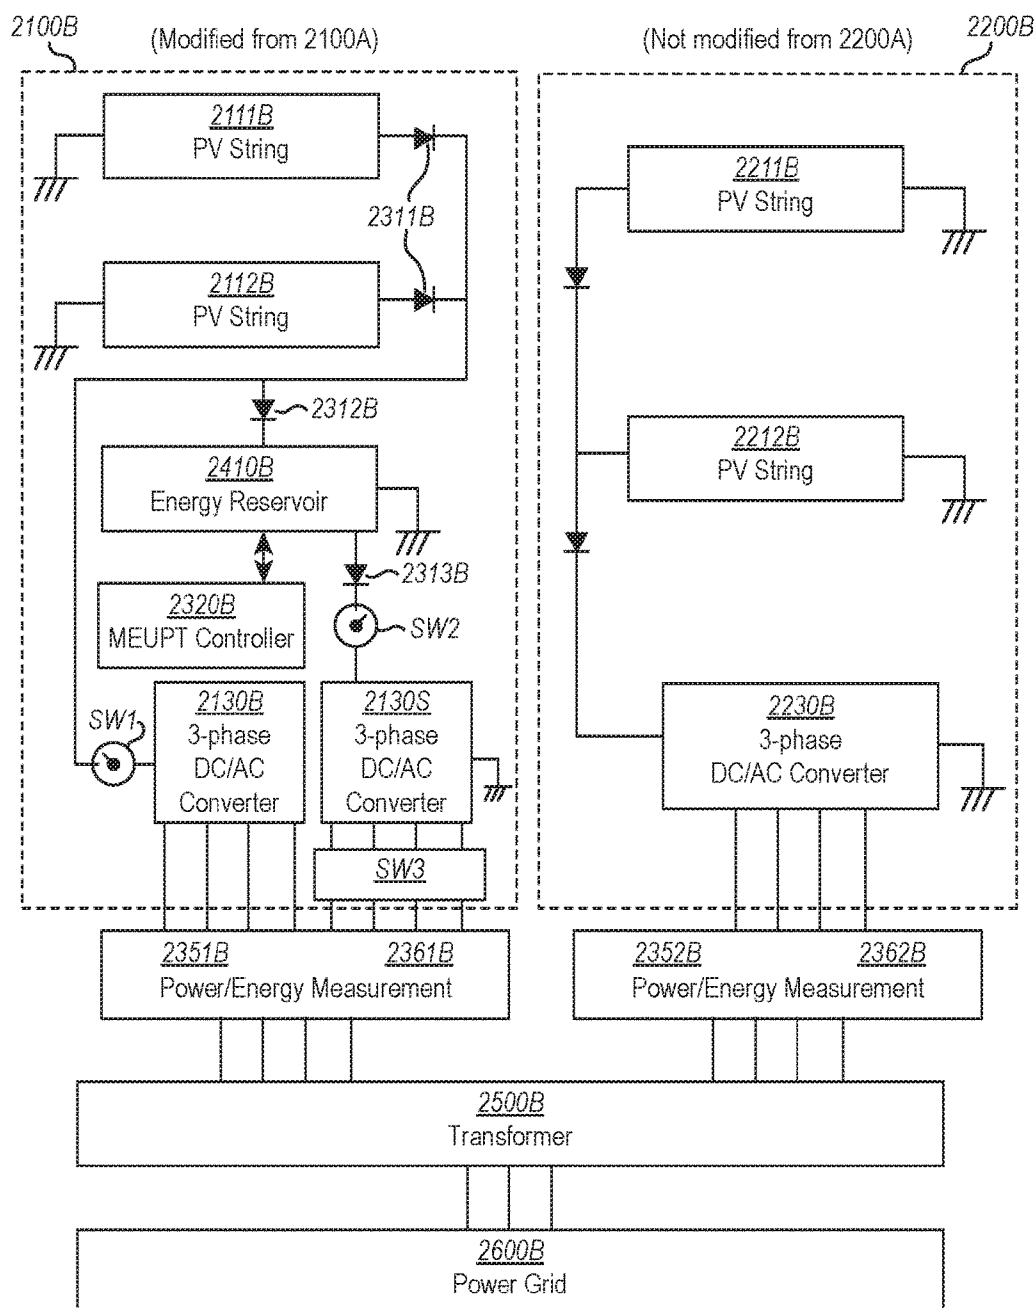


FIG. 2B

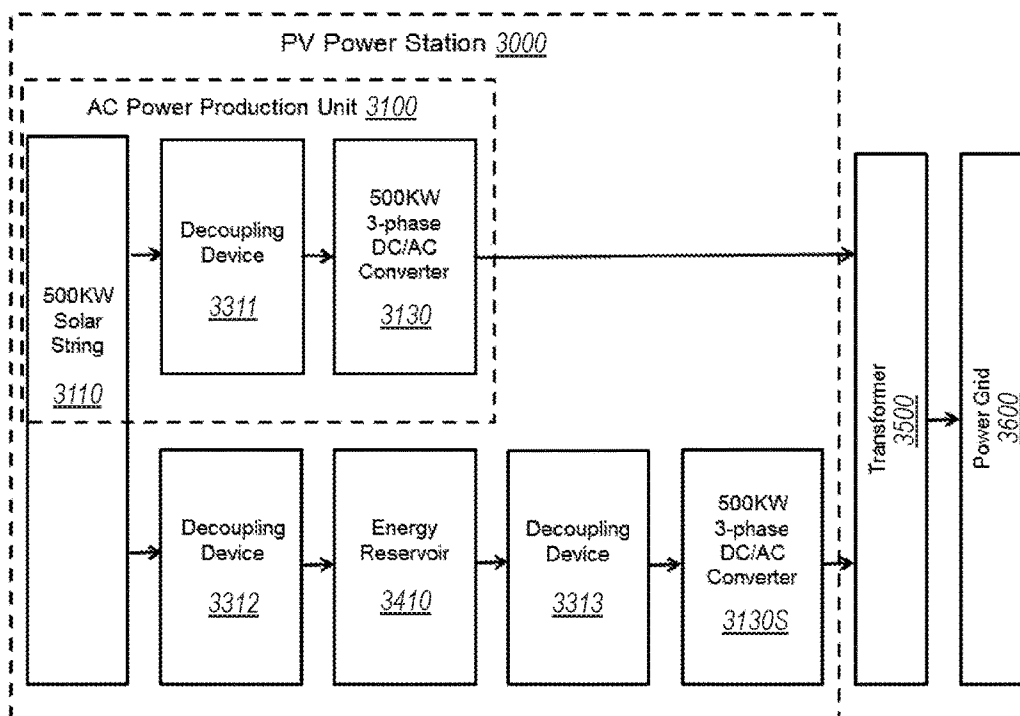


Fig. 3

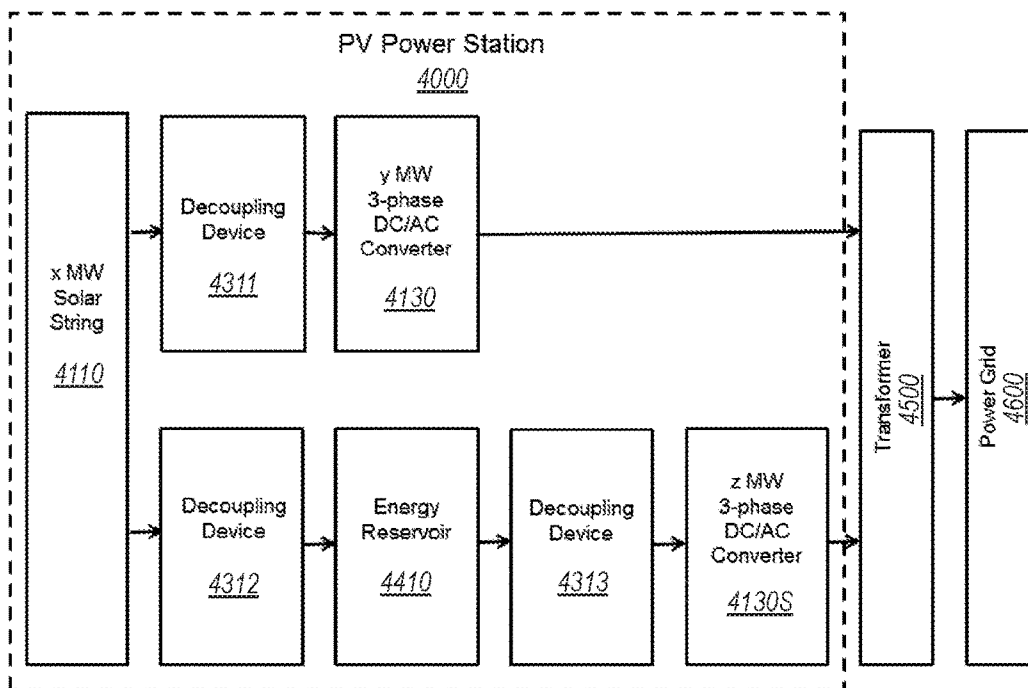


Fig. 4

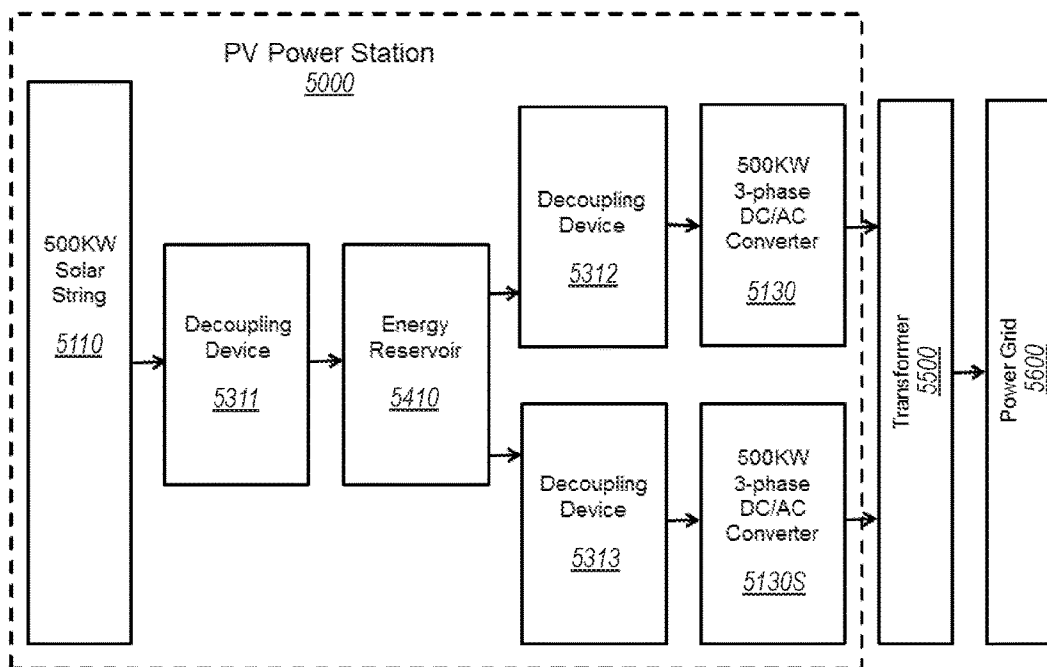


Fig. 5

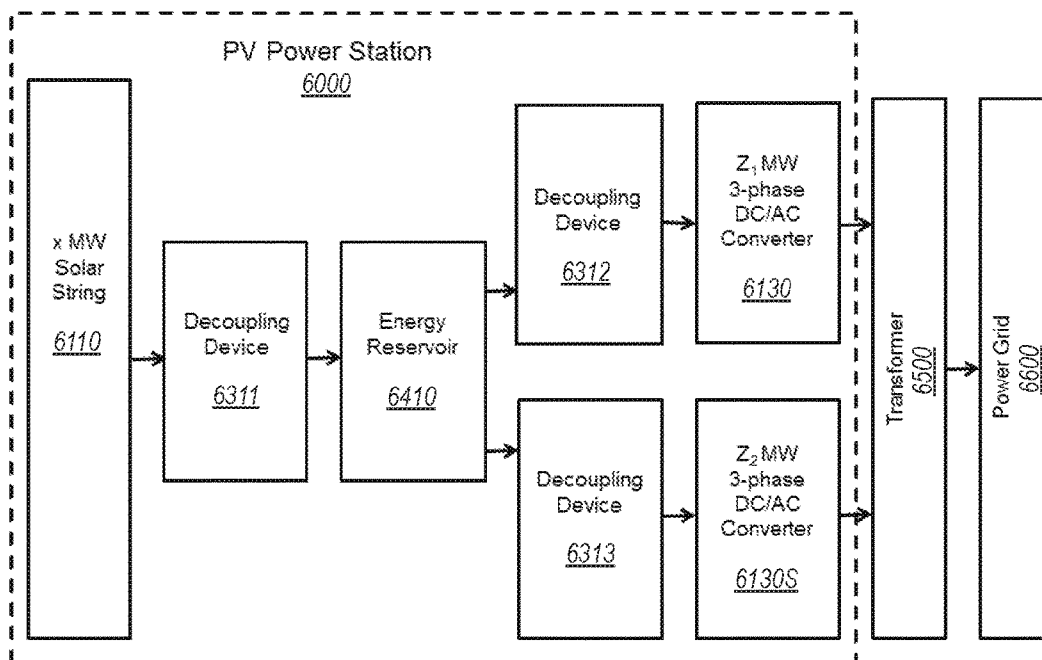


Fig. 6

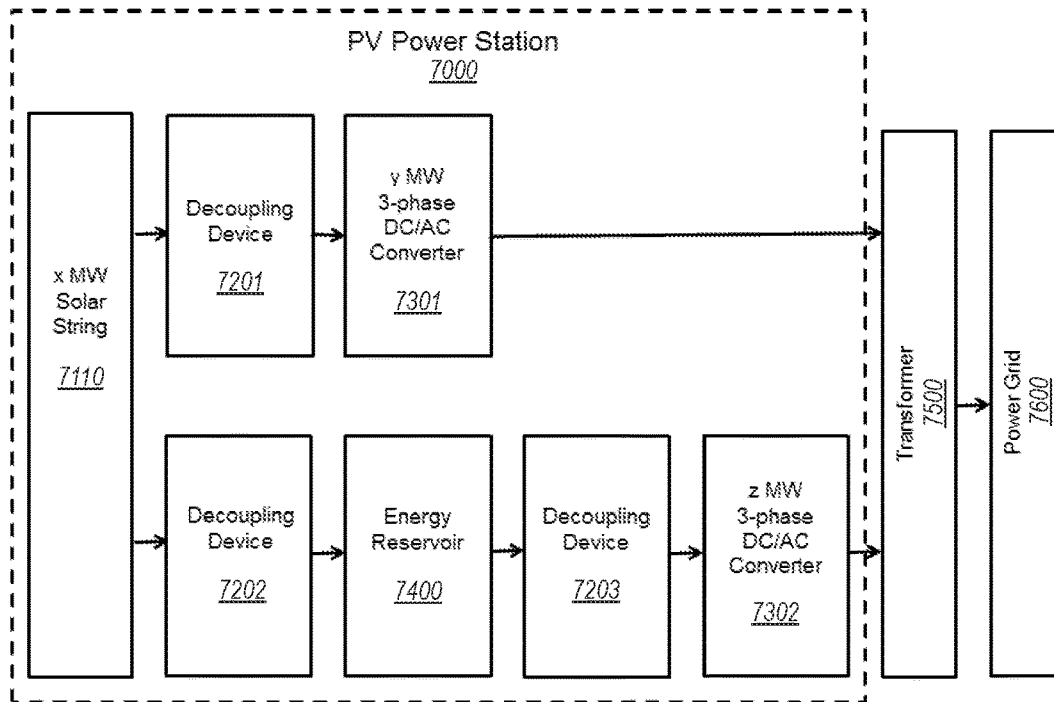


Fig. 7

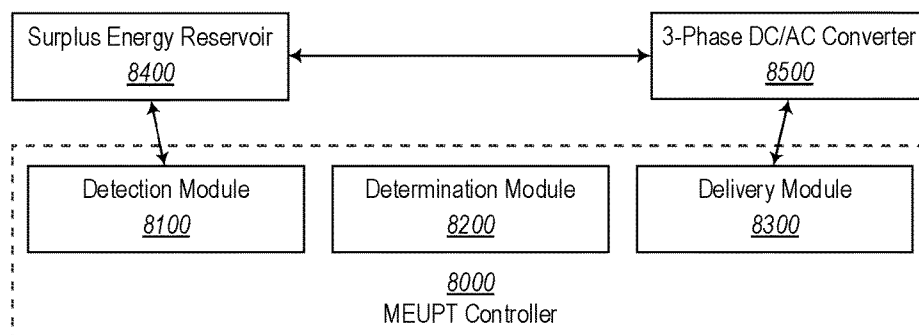


Fig. 8

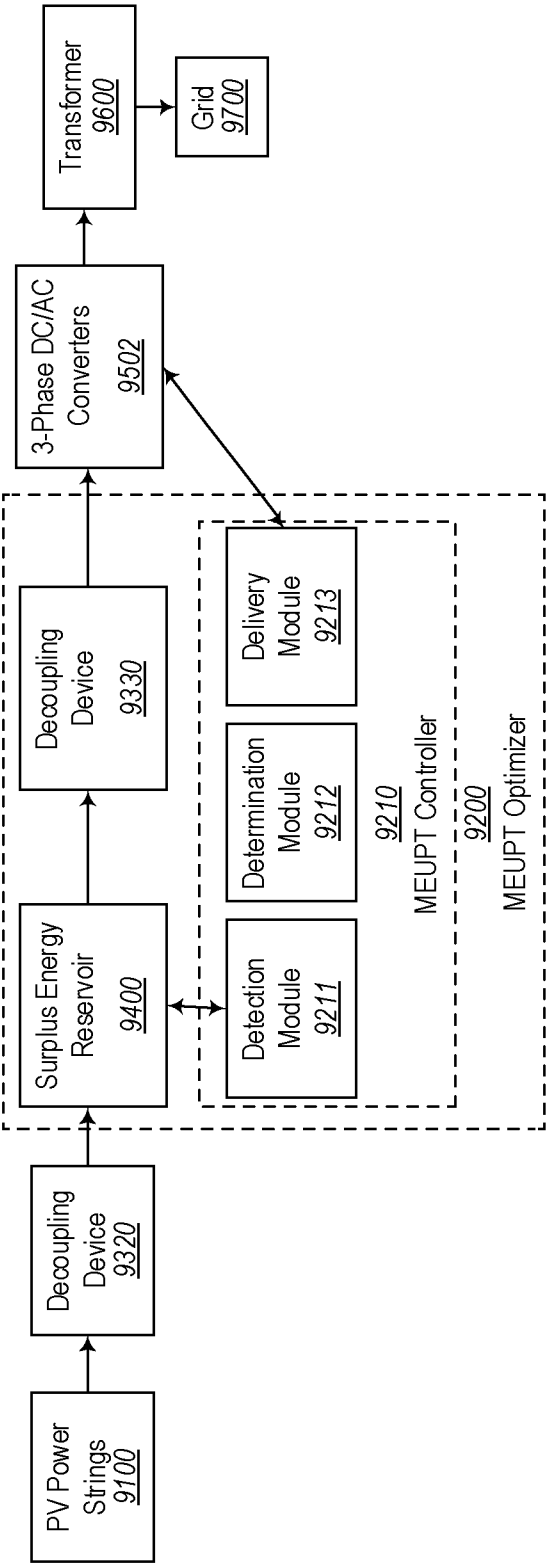


Fig. 9

1

PHOTOVOLTAIC POWER STATION**CROSS-REFERENCE TO RELATED APPLICATIONS**

This patent application is a continuation-in-part of U.S. patent application Ser. No. 15/424,566, filed Feb. 3, 2017, which patent application is incorporated herein by reference in its entirety. U.S. patent application Ser. No. 15/424,566 is continuation-in-part of U.S. patent application Ser. No. 14/880,101, filed Oct. 9, 2015, which patent application is incorporated herein by reference in its entirety.

BACKGROUND

Photovoltaic (PV) power stations generate electricity by converting solar energy to electricity. That generated electricity is then provided to an electric power grid. The solar energy source (i.e., the received rays of the sun) is characterized as having time varying intensity. Accordingly, PV power generators in such PV power stations incorporate a power generation optimization device (also referred to as an “optimizer”). One type of optimizer is named the “maximum power point tracker (MPPT)” (or “MPPT device”), which tracks an instantaneous maximum power production point (MPPP) voltage that the MPPT device uses to control operation of the PV power station. This practice is referred as the “blind MPPT conformation” herein. The MPPT device typically is software or firmware; and keeps track of the time varying voltage resulting in the maximum power production from the time varying solar energy source.

The subject matter claimed herein is not limited to embodiments that solve any disadvantages or that operate only in environments such as those described above. Rather, this background is only provided to illustrate one exemplary technology area where some embodiments described herein may be practiced.

BRIEF SUMMARY

Embodiments described herein related to a photovoltaic (PV) power station that includes at least one AC power production unit. In accordance with one embodiment of the PV power station, each AC power production unit comprises a DC power generator, first DC/AC 3-phase converter(s), an energy reservoir, and second DC/AC 3-phase converter(s). The DC power generator is composed of x MW solar strings, where x is a positive number. The first DC/AC 3-phase converter(s) have a total declared power rating of y MW. The first DC/AC 3-phase converter(s) receive DC power provided by the DC power generator, convert the received DC power into AC power, and provide that converted AC power through a transformer to a power grid. The energy reservoir receives at least some of a remaining portion of the DC power generated by the DC power generator. The second DC/AC 3-phase converter(s) having a total declared power rating of z MW, where z is a positive number, and the sum of y and z is greater than x. The second DC/AC 3-phase converter(s) receive DC power from the energy reservoir, convert the received DC power from the energy reservoir into AC power, and provide that converted AC power through a transformer to the power grid. Because the sum of y and z is greater than x, the power station in accordance with this embodiment delivers more power to the power grid.

In accordance with another embodiment described herein, each AC power product unit includes a DC power generator

2

composed of x MW solar strings, and energy reservoir, and DC/AC 3-phase converters having a total declared power rating of z MW, where z is greater than x. The energy reservoir receives at least some of a remaining portion of the DC power generated by the DC power generator. The DC/AC 3-phase converter(s) receive DC power from the energy reservoir, convert the received DC power from the energy reservoir into AC power and providing that converted AC power through a transformer to the power grid. Because z is greater than x, the power station in accordance with this embodiment delivers more power to the power grid.

In accordance with yet another embodiment described herein, each AC power production unit comprises a DC power generator composed of solar strings. The DC/AC 3-phase converter(s) receives DC power from the DC power generator through a decoupler, convert the received DC power into AC power, and provides that converted AC power through a transformer to the power grid. The use of the decoupler avoids the problems that the inventors discovered relating to the power annihilation phenomenon, thereby increasing the amount of power that the power station can deliver to the grid.

This Summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description. This Summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used as an aid in determining the scope of the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to describe the manner in which the above-recited and other advantages and features can be obtained, a more particular description of various embodiments will be rendered by reference to the appended drawings. Understanding that these drawings depict only sample embodiments and are not therefore to be considered to be limiting of the scope of the invention, the embodiments will be described and explained with additional specificity and detail through the use of the accompanying drawings in which:

FIGS. 1A through 1C illustrate block diagrams of various power stations in which decoupling devices are used in conjunction with an energy reservoir;

FIG. 2A illustrates a block diagram of a power station that was set up in an experiment, and in which there are two AC power production units that are set up conventionally, and with power and energy meters that measure output of each power production unit;

FIG. 2B illustrates a block diagram of the power station of FIG. 2A after modification to including decoupling devices and an energy reservoir, and that was used to verify improved energy output to the grid;

FIG. 3 illustrates a block diagram of a power station in which there are two channels of power delivery, one channel invoking the use of an energy reservoir, and one not invoking the user of the energy reservoir;

FIG. 4 illustrates a block diagram of a power station that represents a broader embodiment of FIG. 3;

FIG. 5 illustrates a block diagram of a power station in which power is delivered via the use of an energy reservoir;

FIG. 6 illustrates a block diagram of a power station that represents a broader embodiment of FIG. 5;

FIG. 7 illustrates a block diagram of a power station;

FIG. 8 illustrates a block diagram of a Maximum Energy Utilization Point Tracking (MEUPT) controller in accordance with the principles described herein; and

FIG. 9, illustrates a block diagram of the MEUPT controller of FIG. 8 in the context of a power station.

DETAILED DESCRIPTION

Patent publications, US2016/0036232 and US2017/0149250 A1 (the contents of which are incorporated by reference herein) disclose that the PV energy systems that practice of the blind MPPT conformation achieving suboptimal amounts of electricity provided to the grid. These patent publications teach that in order to efficiently extract electricity for energy utilization, one should match the characteristics of the energy extraction device to effectively and efficiently extract the produced electric energy. Furthermore, these patent applications teach that the related devices should also be matched to condition and/or deliver the extracted electricity for efficient energy utilization.

These patent publications further emphasize the fact that the energy utilization efficiency is inextricably dependent on power demand in addition to power production. Furthermore, they teach that in any energy system, typical power consumption is not necessarily equal to power production, even when complying with the energy and charge conservation laws.

In lieu of using the MPPT device as the optimizer for solar power stations, the referenced patent publications proposed to use a “maximum energy utilization point tracker”, or the “MEUPT device” as the PV power station optimizer. Such an optimizer will be referred to as an “MEUPT optimizer” herein. In according to the referred patent publications, the MEUPT optimizer is designed to capture what it refers to as “surplus energy”, which it defines as the electric energy that is produced but not extracted and/or delivered to the power grid for utilization. That definition of “surplus energy” is also used herein.

The MEUPT optimizer is also designed to temporarily store the captured surplus energy within an energy reservoir; and then prepare and deliver this electric energy to the power grid for utilization. Thus, the electricity sales revenue of the PV power station can be enhanced when incorporating the MEUPT optimizer.

Section One: Functionality of the MEUPT Optimizer

In according with the principles described in the US2016/0036232 and US2017/0149250 A1 (the “referenced patent publications”), the MEUPT optimizer of one embodiment disclosed herein comprises a surplus energy extractor, an energy reservoir, and an MEUPT controller. The MEUPT controller works in concert with energy extractors and DC/AC converters. The terms “power” and “energy” (while not exactly the same) are used interchangeably in the art. Thus, unless otherwise specified, each term has the same meaning.

An energy extractor extracts an initial oscillating power train from the produced DC electric power source. The extracted initial power chain conforms to the AC power grid requirements of the power grid. In other words, the extracted initial power chain has a time varying sinusoidal voltage that having a peak voltage that conforms to power grid voltage range. Furthermore, the electrical power (which is proportional to the square of the voltage) takes the form ($\sin^2(\omega t)$ or $\cos^2(\omega t)$), which is synchronized (with the same phase and same frequency) with the power grid.

On the other hand, a surplus energy extractor extracts a remaining oscillating power train that remains from subtracting out the initial oscillating power train from the produced DC power. In other words, this remaining oscillating power train is a left-over oscillating power train that

remains after providing the initial oscillating power train to the power grid. The remaining oscillating power train has a 90° phase shift as compared to the initial oscillating power train that was provided to the power grid. Due to the 90° phase shift, this remaining oscillating power train cannot be immediately converted into AC power for providing onto the same power grid. An energy reservoir is thus used to temporarily store the surplus energy of the remaining oscillating power train. Thereafter, the stored energy is supplied to a DC/AC converter; such that the stored surplus energy can be converted to AC power that is synchronized (with the same phase and frequency) with the same power grid.

The MEUPT controller measures the energy level of the reservoir; estimates the amount of the energy in reservoir that can be extracted; and delivers this information to the associated DC/AC converter(s) such that this energy amount can be extracted by the DC/AC converter(s). The DC/AC converter(s) then extract the stored energy from the reservoir for conversion into AC power in the form of a suitable pulsating power train and provides that AC power to the power grid. The PV power stations can thus provide almost all the produced electric energy to a power grid when incorporating the MEUPT optimizer. In contrast, without the MEUPT optimizer, the PV power station in according to the referred patent publications can only provide less than half of the produced power/energy to a power grid.

Section Two: Improve Conventional PV Power Station with MEUPT

Solar power stations are often rated in terms of some number of MegaWatts (MW). Conventionally, when a solar power station is declared to be rated at x MW (where x is some positive number), this means that the sum total of the DC power production rating of all solar strings is x MW. Such conventional solar power stations also have 3-phase DC/AC converters have a total maker declared DC/AC conversion capability that is no greater than x MW. This principle summarizes the convention power station’s operations in according to the conventional MPPT practice.

In other words, the conventional PV power station of rating x MW consists of strings of x MW PV solar panels, which convert solar energy to DC electricity. The generated DC electricity is then extracted and converted by 3-phase DC/AC converters to suitable AC electric power that conforms to all the AC power requirements of a power grid, and is then provided to the power grid. This AC electrical power provided to the power grid is also referred to herein as the “initial oscillating power train”. Recall that the total maker declared DC/AC conversion capability of the DC/AC converters is no greater than x MW, which is the total amount of the installed solar panels’ DC generation capability declared by the solar panel industry.

In according to the description of the referenced patent publications, US2016/0036232 and US2017/0149250 A1, there exists a remaining oscillating power train that results when subtracting out the initial oscillating power train (extracted by the energy extractor) from the total DC power produced by the solar panel strings. In other words, this power train is the remaining oscillating power train which has about a 90° phase-difference from the initial oscillating power train that was extracted by the energy extractor and provided to the power grid.

Because the remaining oscillating power train is about 90° out of phase from the power grid, this remaining oscillating power train cannot be directly conditioned and converted to AC power and provided to the same power grid. In according with the principles disclosed in the referenced patent publications, an energy reservoir temporarily stores the

energy containing in this 90° out of phase remaining oscillating power train (which when stored represented surplus energy). After this surplus energy is stored into the energy reservoir, the surplus energy can serve as a DC energy that can be supplied to a DC/AC converter. This surplus energy can then be converted to an AC power which conforms to all the power grid requirements (including synchronization with the power grid), such that the resulting AC power may be provided to the same grid.

Section Three: Prevent Energy Leakage from the Energy Reservoir

Before elaborating on the energy reservoir design consideration for the MEUPT optimizer, an important issue is first addressed herein. Specifically, the solar panel strings can have a very high resistance at dusk, but the solar panel string can conduct significant electric current in either direction when the sun is strong at mid-day. Therefore, the electric energy stored in the reservoir may leak through and heat the solar panels during the daytime. Accordingly, decoupling diodes may be added to each of solar panel strings such that electric energy can flow from each solar panel string to charge the reservoir, but the energy in the reservoir cannot back flow back from the reservoir into the solar panel strings. Various energy reservoir systems that accomplish this decoupling will now be described with respect to FIGS. 1A, 1B and 1C.

Section Four: Design Considerations for the Energy Reservoir

FIG. 1A depicts a block diagram that illustrates an energy reservoir 1300A that is designed to temporarily store the surplus power resulting from a power stream produced from a set of solar strings 1100A subtracting out the power drawn by a DC/AC converter 1200A when the DC/AC converter 1200A converts that power to AC power. The AC power is provided to an AC power grid 1600A through a transformer 1500A. The reservoir 1300A receives the remaining oscillating power train through a decoupling diode set 1400A. In one example, this energy reservoir 1300A is designed to temporarily store the surplus energy of a 1 MW PV power station for 2 minutes.

As an example only, assume that the primary energy source can hold at constant intensity (and that the power production of the PV strings 1100A holds so as to allow a constant 1 MW generator's power production) for 2 minutes. For the following analysis, both the initial and remaining oscillating power trains have the same repeating forms, but with a 90 degree phase difference. Firstly, let us examine how the energy reservoir might be designed using brute force. Keep in mind that the purpose of the energy reservoir is to temporarily store surplus energy so that DC/AC converters can later convert this stored energy.

As discussed in the referenced patent publications, the estimated ratio of the surplus energy to the produced DC electric energy is over 0.5 for typical conventional PV power stations. For analyses, let us assume that the PV power station has 1 MW PV solar panel strings; and the DC power is converted to AC power to provide to a grid that is 50 hertz and line voltage 380 V_{AC} 3-phase AC power. In this case, the duration time of one power cycle is equal to about 0.01 seconds and the total phase current is up to $1,000,000/(380/1.732)$, where 1.732 is the value of square root of 3. This ratio is the ratio of the peak voltage to line voltage (line-to-phase voltage, or "phase voltage", in 3-phase AC power). Storing the charge associate with the surplus energy in a power cycle for this power station would require an equivalent charge capacity of approximately 8 V Faradays

$(0.5 \times 0.01 \times 1,000,000 / (380 / 1.732))$, where "V" is the voltage difference of the designed reservoir before and after charging.

To maximize the energy utilization of this PV station, in some embodiments, the operating voltage of the MEUPT optimizer is to be within 75% of the PV maximum power production voltage. In other words, the voltage range of the 75% maximum power production is to be observed in those embodiments of the MEUPT optimizer. The measured I-V data indicates that typically this range is about 80 volts. When this voltage range is chosen as the charging/discharging voltage range (i.e., V=80 volts) for the energy reservoir, the charge capacity of an energy reservoir is about 0.1 Faradays per MW, per power cycle (where the power cycle lasts 0.01 second).

If the design consideration is to store this maximum amount of surplus energy accumulating over two (2) minutes, the required equivalent charge capacity is equal to 1200 Faradays ($100 \times 120 \times 0.1$) for the 1 MW PV power station. This required equivalent charge capacity is referred as the "full maximum charge capacity" and the amount of reservoir stored energy associated is referred as the "full maximum energy reservoir-capacity", or "full maximum surplus energy" herein.

If one used only thin film capacitors to fulfil this required charge capacity, the set of thin film capacitors required to achieve that charge capacity would be prohibitively large in volume and very costly in capital. Thus, it is not practical to design such an energy reservoir consisting of only thin film capacitors.

As a twist to this brute force design, one could incorporate Faraday devices (such as batteries) into the design to reduce the volume and size. The inventors' careful analyses reveals that the required charge capacitance is indeed technically manageable for an energy reservoir with thin film capacitors and Faraday devices. However, the cost of such a reservoir is still too high to be beneficial, unless the price of the battery can drop down at least by a factor of 3 while maintaining the same performance.

Using electrolytic capacitors can substantially reduce the required capital cost. However, such would increase the operating cost due to the relatively short life of such capacitors. Thus, at present, the use of electrolytic capacitors is not practical either. Therefore, the brute force way does not achieve economically beneficial designs with the required full maximum energy reservoir-capacity.

The principles described herein use the following facts observed by the inventors to resolve this issue:

- (1) Most existing DC/AC converters can easily ramp power up or down 3% in one second; and also the existing 500 kW DC/AC converters can easily ramp up or down more than 10 kW in one second during operation.
- (2) As a rough observation, a typical 1 MW PV power plant starts power production from zero power every morning, and rarely ramps up its power production faster than 10 kW/second in its normal daily operation.
- (3) A MW-level PV power station (rated greater than 1 MW) may occasionally experience a ramping-up rate larger than 10 kW per second during a short power burst. However, the energy contained in this short burst (or even in larger 100 kW per second burst) is insignificant when compared with the total daily energy produced in MW-level power stations.

From these three facts, the inventors determined that (1) the power generation in each of the solar panel strings starts from zero every morning; and (2) the PV generator does not generate full power instantly. Thus, the remaining oscillating

power train does not ramp up to its maximum value instantly. In other words, the remaining oscillating power train increases typically much more graceful than the ramp up rate of the DC/AC converters. Furthermore, the amount of energy in any short ramp-up burst is not a significant issue in energy collection for PV stations rated 1 MW or higher.

Therefore, in lieu of designing an energy reservoir capable of storing the maximum full amount of surplus energy, the principles described herein suggest to design a reservoir to store the net energy amount equal to (over say 2 minutes) the difference between the surplus energy input into the reservoir, and the energy that the DC/AC converter(s) extracted out of the reservoir. This amount of energy is referred as the “maximum differential surplus energy”, herein. This amount of maximum differential surplus energy is much smaller than the maximum full surplus energy. It is thus easier to design such a smaller energy reservoir, which is manageable in technology and also cost-effective.

FIG. 1B depicts a block diagram that symbolically illustrates an energy reservoir **1300B** that stores surplus power resulting from a power stream produced from a set of solar strings **1100B** subtracting out the power drawn by a DC/AC converter **1201B**. At the same time, another DC/AC converter **1202B** is directed by the MEUPT controller **1310B** to receive approximately the same amount of DC energy from the energy reservoir **1300B** (containing the surplus power). Both of the DC/AC converters **1201B** and **1202B** simultaneously convert received DC energy to AC power, and provide that AC power to the same grid **1600B** through the same transformer **1500B**. In doing so, the net energy storage burden to the reservoir **1300B** can be reduced to a very small capacity when compared with that of the reservoir **1300A** depicted in FIG. 1A.

FIG. 1C depicts a configuration that is modified from the configuration depicted in FIG. 1B, but has approximately the same performance of the configuration depicted in FIG. 1B. As depicted in FIG. 1C, an energy reservoir **1300C** stores the DC power stream produced by PV solar strings **1100C** through a diode set **1400C**. Two DC/AC converters **1201C** and **1202C** are directed by the MEUPT controller **1310C** to receive (in the aggregate) approximately the same total DC power from the energy reservoir **1300C** in an amount that approximately equals the DC energy input produced by the PV strings. Thus, there is only a very small net power input balance in the inputs and outputs of the reservoir **1300C**. Both **1201C** and **1202C** simultaneously convert the received DC power to AC power provided to the same grid **1600B** through the same transformer **1500C**.

In summary, as depicted in FIG. 1B (when properly decoupled) the energy reservoir can extract and store the surplus energy in the form of a remaining oscillating power train that remains after the produced DC power is extracted by an energy extractor (which can be built-in as a module of the DC/AC converter **1201B**). The other DC/AC converter **1201B** is designed to extract an approximately equal amount of energy out of the energy reservoir **1300B** to reduce the net amount of surplus energy stored into the reservoir. Thus, a relatively small reservoir is adequate.

Also as depicted in FIG. 1C, (when properly decoupled) the energy reservoir **1300C** can receive all the produced DC power from the PV strings **1100C**. An oscillating power train is then extracted by the DC/AC converters **1201C** and **1202C**, while the surplus energy (the left-over power) is also implicitly stored within the energy reservoir **1300C** in the form of a 90° out of phase remaining oscillating power train. As can be seen, this surplus energy is also implicitly automatically extracted and stored into the reservoir **1300C**.

Applying either design depicted in FIG. 1B (or FIG. 1C), the designed energy reservoir can serve as the energy reservoir purposed for an MEUPT optimizer; which temporarily stores small amount of net surplus energy that is 90° out of phase. The hard task of energy reservoir design is now shifted to the task of designing a proper MEUPT controller.

Section Five: Necessary Functions of the MEUPT Controller

The controller should be able to direct the associated DC/AC converter(s) to consistently draw a proper amount of energy from the reservoir that is substantially equal to the amount in the surplus power charging into the reservoir. In doing so, one can minimize the net amount of energy storage into the reservoir; and maintain adequate balanced energy storage in the reservoir to stabilize system operation. When so doing, the energy reservoir only needs to store (or to provide) the energy difference between the charging surplus power and the power drawn by the DC/AC converter(s) within a small time duration.

With a capable controller, the energy difference can be designed to be manageably small. The time duration can be designed to be long enough to ramp up or down for the DC/AC converter(s) in matching the surplus energy; and short enough to significantly reduce the capacity of the reservoir while still keeping the system operation stable. The estimated reservoir's capacity can thus reduce to be less than 0.001 times that of the maximum full surplus energy. This capacity is less than 2 Faradays per 1 MW PV power station; a manageable charge capacity even if using thin film capacitors. An example of a suitable MEUPT controller will be described below with respect to sections Twelve through Fourteen below.

Section Six: Capacitor/Battery Combined Energy Reservoir

Another issue is that a good thin film capacitor can last for 10 to 15 years while still keeping greater than 80 percent of its original capacitance, while a good battery can last less than 5 years and have approximately 70 percent of its charge capacity after that time. Therefore, a careful design balance is suggested to optimize the economic costs. Furthermore, the amount of energy in the reservoir should be big enough to stabilize operation at all time. Design simulations show that with the present prices of thin film capacitor and batteries, a typical 20 years' optimum energy reservoir design for 1 MW PV station is a design with 0.1 to 1 Faraday thin film capacitors combined with an approximate 50 ampere-hour auto battery string with a suitable operating voltage.

Section Seven: Preventing Mutual Power Annihilation in PV Strings

As described above, the decoupling technique applied in FIG. 1B and FIG. 1C allows the strings of solar panels to charge the energy reservoir; but prevents the power from flowing back from the reservoir into the PV solar strings. When apply the decoupling diode set properly, this technique not only prevents the energy leakage from the reservoir through the PV solar panel strings, but also can prevent a phenomenon discovered by the inventors. This phenomena is referred to herein as the “mutual power annihilation among PV strings phenomena”, the “mutual power annihilation phenomena”, or the “power annihilation phenomena”.

This phenomenon occurs when parallel-connected several PV strings collect the produced power. This phenomenon is especially pronounced when the parallel-connected PV strings having very different I-V characteristics, photoelectric conversion efficiencies, and/or maximum power production voltages.

For instance, when less than all of the solar panels in less than all of the strings are casted with shadows, the strings that are within the shadow will have lower photo-electric conversion efficiency than those that are outside of the shadow. In other words, these solar strings would have very different I-V characteristics even at the same time of day, due to different casting of shadows. When these solar strings are connecting in parallel, the high efficiency strings can discharge part of their produced electric power to the lower efficiency solar strings to disrupt the power production in the PV solar strings. The inventors have confirmed this phenomenon experimentally. Experiments also show that this phenomenon can be prevented when PV solar strings are properly decoupled.

Furthermore, the power annihilation phenomenon can also occur when parallel-connected PV strings have very different maximum power production voltages. For instance, suppose that there are two solar panel strings connected in parallel-connected—one having 15 stringed solar panels and another having 19 stringed solar panels. The power generated in the string with 19 panels will definitively flow through the string with 15 panels and the power annihilation phenomenon occurs. Experiments show that the power received from the above parallel-connected two strings can reduce to less than half of that produced by the string with 19 panels alone. When properly decoupled, the power received from the above two parallel-connected strings can recover to about 1.53 times that produced by the string with 19 panels alone. The above described experiment shows that (a) the mutual power annihilation phenomenon does exist; and (b) properly decoupling techniques can prevent the phenomenon.

In one other experiment, a PV plant was arranged to have two power production units; each unit consisting of 85 solar panels of the same maker and model. Each of the two power product units was configured with five (5) parallel-connected PV strings to collect the produced DC energy. Two PV strings were configured with series-connected 15 panels, two strings with series-connected 17 panels, and another string with series-connected 21 panels. When these 10 strings' maximum power production voltages are measured separately at high noon with clear skies, the maximum power production voltages ranged from 420 volts as the lowest to 610 volts at the highest. Thus, these parallel-connected PV solar strings have very different maximum power production voltages under the same clear sky.

Each of the power production units converts the collected DC power via a different DC/AC converter into AC power. To measure the energy and power produced in each production unit, a kilowatt-hour meter and a watt meter were connected to the AC output of each of the DC/AC converters of each production unit. These units were then connected to a transformer to provide the AC power to a grid. With 72 identical readings of the two power meters over a 36 day period, and with identical readings of the two kilowatt-hour meters at the end of the 36 day period, it is confirmed that all elements in these two power production units (including the two sets of measuring meters) were substantially identical.

One power production unit was then modified to be configured with 4 strings of 21 panels (and 1 panel not in use); while the other power production unit was left unchanged from the above described 5 strings. The measured power production of the modified power production unit was typically greater than 4.1 times that of the other power production unit at high noon and clear skies. We then measured sixty (60) days of cumulated energy provided,

which was derived from the readings of the two kilowatt-hour meters. The modified power production unit provided energy to the grid of 3.38 times that of the unmodified power production unit. The above experiments clearly and definitively proved that the mutual power annihilation phenomenon does indeed exist in parallel-connected PV strings; especially with strings having very different I-V characteristics or very different maximum power voltages.

To conclude, proper decoupling technique in accordance with the principle described herein can prevent energy leakage from the energy reservoir through solar strings; and also can prevent the discovered mutual power annihilation phenomenon among PV strings.

Section Eight: Experiments that Prove Existence of Surplus Energy

Before describing the designs of MEUPT optimizer, this section describes experiments to definitively proof the existence of surplus energy in such PV power stations; which is predicted by the referenced patent publications, US2016/0036232 and US2017/0149250 A1. To reiterate, the referenced patent publications define surplus energy as the electric energy produced but not extracted and/or utilized before being turned to heat. Specifically, in a PV power station, "surplus energy" includes left-over electric energy that exists after the produced DC energy is extracted and converted to AC power by 3-phase DC/AC converters. An MEUPT optimizer can be designed to capture/utilize this left-over electric energy, the surplus energy. The following describes the experimental set-ups and the step-by-step executions of the experiments.

FIG. 2A depicts the starting set up of a PV power station **2000A** comprising 2 AC power production units **2100A** and **2200A**. Each of the AC power production units **2100A** and **2200A** practices blind MPPT conformation; and provides 3-phase AC power to a power grid **2600A**. The AC power production unit **2100A** consists of a DC power generator **2110A** and a 3-phase DC/AC (15 kW) converter **2130A**. The AC power production unit **2200A** consists of a DC power generator **2220A** and a 3-phase DC/AC (15 kW) converter **2230A**. The power generator **2110A** uses 2 parallel-connected PV strings **2111A** and **2112A** to generate DC electricity. The power generator **2220A** uses another 2 parallel-connected solar strings **2221A** and **2222A** to generate DC electricity. Each of the 4 PV strings consists of 25 series-connected solar panels; each panel capable of producing 250 W of power at high noon and with clear skies.

The DC power generator **2110A** supplies DC power to the 3-phase DC/AC converter **2130A**; and the DC power generator **2220A** supplies DC power to the 3-phase DC/AC converter **2230A**. These two converters **2130A** and **2230A** then convert the supplied DC power into 3-phase AC power. In the experiment, the AC output power of the power production units **2100A** and **2200A** were measured by two 3-phase AC watt-meters (in kW) **2351A** and **2352A**, respectively. The AC energy production (in kW*hour) of these two power production units **2100A** and **2200A** were also measured by two kW-hour-meters **2361A** and **2362A**, respectively. The produced 3-phase AC power was then provided to the grid **2600A** via transformer **2500A**. The PV power station was operated; and the energy production of the two AC power production units **2100A** and **2200A** was measured for 7 days.

The readings of the two kW-hour-meters showed equal values every day during this time period. This provides high confidence that all elements of these two power production units **2100A** and **2200A** (including the two set of instruments for measurement) are substantially identical. After this step,

one of the two AC power production units **2200A** was kept unchanged, while the other AC power production units **2100A** was modified with a different configuration **2100B** as depicted in the left hand side of FIG. 2B.

The power production unit **2200B** of FIG. 2B is the power production unit **2200A** of FIG. 2A unmodified. Also, the elements **2351B**, **2361B**, **2352B**, **2362B**, **2500B**, **2600B** of FIG. 2B are the same as the elements **2351A**, **2361A**, **2352A**, **2362A**, **2500A**, **2600A**, respectively, of FIG. 2A. Furthermore, although the configuration of the power production unit **2100B** is different in FIG. 2B than the power production unit **2100A** of FIG. 2A, some of the elements of the power production unit **2100B** of FIG. 2B are the same as those that are included within the power production unit **2100A** of FIG. 2A. For instance, the PV strings **2111B** and **2112B** of FIG. 2 are the same as the PV strings **2111A** and **2112A**, respectively, of FIG. 2A. Likewise, the DC/AC converter **2130B** of FIG. 2B is the same as the DC/AC converter **2130A** of FIG. 2A.

The following six (6) steps describe how the power production unit **2100A** was modified into the configuration of **2100B**, and is described with respect to the left hand side in FIG. 2B. Step 1 was to add a set of decoupling diodes **2311B** in-between the solar strings **2111B** and **2112B** and the 3-phase DC/AC converter **2130B**, which is practicing the blind MPPT conformation. Step 2 was to add an energy reservoir **2410B** into the configuration. Step 3 was to connect the energy reservoir **2410B** to the DC terminals of the DC/AC converter **2130B** through another set of decoupling diodes **2312B** and through a switch SW1. Step 4 was to add another 3-phase DC/AC converter **2130S** (20 kW) into the configuration, which converter **2130S** was operated in according with the direction of a designed MEUPT controller **2420B**. Step 5 was to connect the DC/AC converter **2130S** to the energy reservoir **2410B** through another set of decoupling diodes **2313B** and through a switch SW2. Step 6 was to connect the output terminals of the converter **2130S** to the power and energy measurement instrument set **2351B** and **2361B** through a switch SW3. Note that the referenced “decoupling diode set” may be those diodes that are termed “blocking diodes” in the art. Note also that switches SW1, SW2, and SW3 are added as depicted in FIG. 1B, such that the relevant devices can be introduced to (or removed from) the experiments at a proper time in the designed experimental execution steps described below.

The first night after the above modification was made; the SW1 was turned on while the switches SW2 and SW3 were turned off. The converters **2130B** and **2230B** started to run early the next morning. The power meters **2351B** and **2352B** measuring the two outputs of the power production units **2100B** and **2200B** showed the same reading. The reservoir **2410B** also began charging up as indicated by measurement of the high terminal voltage of the reservoir **2410B**. The system operated as described for the whole day first day. The measured energy provided from the two power production units **2100B** and **2200B** were equal; as shown in the readings of the kW-hour-meters **2361B** and **2362B**. This experimental step demonstrated that the added decoupling diode sets **2311B** and the reservoir **2410B** did not change the power and energy productions of the power production unit **2100B**.

The switches SW1, SW2, and SW3 were turned on the night after first day operation (the second night). The converters **2130B** and **2230B** started to run early in the early morning (the second day), while the converter **2130S** started to run at lower power conversion level at about 15 minutes after the converters **2130B** and **2230B** started to run. Thereafter, the converter **2130** increased its conversion power

level about every 2 minutes; that is consistent with the controller design and increment of the reservoir energy level. The reading of the power meter **2351B** (for unit **2100B**) reached about double of reading of the power meter **2352B** (for unit **2200B**) for the entire day—until nearly sunset. The energy provided from the two power production units **2100B** and **2200B** by the end of the second day were derived from the two kW-hour-meters’ readings. The result showed that the energy provided from the modified power production unit **2100B** was more than double the energy provided from the unmodified power production unit **2200B**. For the following six consecutive days, the switches SW1, SW2 and SW3 remained on, and the energy provided from the modified power production unit **2100B** was consistently more than double that of the power production unit **2200B** each day.

The next night, the switches SW2 and SW3 were turned off. The measured energy provided from the power production units **2100B** and **2200B** returned to the same level for the followed 5 consecutive days during with switches SW2 and SW3 remained off. The next night, switches SW2 and SW3 were turned on again. The measured energy production of the power production unit **2100B** became again more than double that of the power production unit **2200B** every day for the following 5 consecutive days with switches SW2 and SW3 remaining on.

As described above, the step-by-step execution of this experiments definitively proves the existence of the referenced surplus energy in PV power station as the referenced patent publications (US2016/0036232 and US2017/0149250 A1) predicted. Specifically in a PV power station when the produced DC energy is extracted by a 3-phase DC/AC converter, left-over energy still exists. The MEUPT optimizer can capture and utilize this surplus energy to increase the electricity provided to the power grid.

Section Nine: Configurations of the Designed MEUPT Optimizer

The modified power generation unit **2100B** (as described above and depicted in FIG. 2B) can serve as an example of a PV power generation unit incorporating an MEUPT optimizer. In this case, the MEUPT optimizer comprises three decoupling diode sets **2311B**, **2312B**, and **2313B**; a reservoir **2140B**, and an MEUPT controller **2320B**. Notice that the decoupling diode set is referred as the “decoupling device”, hereinafter.

The connections of the MEUPT optimizer modules are depicted in FIG. 2B and described above. Note that the surplus energy is passively extracted by the energy reservoir **2410B** in this embodiment. Another power extractor is included as a module in the 3-phase DC/AC inverter **2130S**, which extracts the surplus energy that is stored in the reservoir **2410B**. The AC power conversion level of the converter **2130S** is regulated by the MEUPT controller **2320B** such that the power charges into the energy reservoir **2410B** is approximately balanced with the power discharged from the energy reservoir **2410B**. Therefore, the “net” power charged into the reservoir within a period can be as small as desired. Smaller net power charges have the benefit of allowing for a smaller energy reservoir **2410B**, at the expense more strict control by the MEUPT controller **2320B**.

Another embodiment is depicted in FIG. 3. This embodiment illustrates a configuration of the PV power station **3000** incorporating an MEUPT optimizer which comprises only one AC power production unit **3100** which uses 500 kW solar panels **3110** to convert solar power into DC electric power. In other words, the AC power production unit **3100**

consists of a DC power generator **3110** and a 3-phase DC/AC (500 kW) converter **3130**. The power generator **3110** uses 80 parallel-connected solar strings to generate DC electricity. Each of the 80 solar strings consists of 25 series-connected solar panels; each panel is declared to have 250 W DC power production capability at high noon and clear skies. Note that this DC generator **3110** is referred as a 500 kW electrical power generator ($80 \times 25 \times 250 \text{ W} = 500 \text{ kW}$); and this PV power station is referred to as a 500 kW PV power station.

As depicted in FIG. 3, the power generator **3110** supplies DC power to a 3-phase DC/AC converter **3130** (with declared 500 kW) through a decoupling device **3311**. The generator **3110** also supplies DC power to the energy reservoir **3410** through decoupling device **3312**, and serves as a DC energy source that charges the energy reservoir **3410**. Therefore, the surplus energy is passively extracted by the reservoir **3410**. The reservoir **3410** then supplies (or discharges) DC power to another 3-phase DC/AC converter **3130S** (with declared 500 kW) through decoupling device **3313**. The converter **3130** operates as an MPPT optimizer, while the converter **3130S** operates as an MEUPT controller. Converters **3130** and **3130S** convert the separately supplied DC power into 3-phase AC power and deliver to power a grid **3600** via the same transformer **3500**.

Notice that the DC/AC converters used in the above descriptions can be categorized into two types; namely, one type that receives its DC power directly from the PV solar strings, and another type that receives its DC power from the energy reservoir. When the type of converter distinction is necessary in the disclosure and in the following detail description, the one receiving DC power from PV solar strings is also referred as the “PS DC/AC converter”; while the other one receiving DC power from the energy reservoir is also referred as the “ER DC/AC converter” herein. When the distinction is necessary in the cases that use 3-phase DC/AC converters in this disclosure, converters will also be categorized and referred to herein as “PS 3-phase DC/AC converter” and “ER 3-phase DC/AC converter”, respectively.

To reiterate at a broader level; as the configuration depicted in FIG. 4 shows, this MEUPT optimizer provides optimization service to an x MW PV power station which has properly arranged solar panel strings with rated x MW power generation capability. The produced DC power is extracted by a maker declared y MW “PS 3-phase DC/AC converter” **4130** through a decouple device **4311**. The left-over power is charged into an energy reservoir **4410** through another decoupling device **4312**; thus extracting and storing the surplus energy. The stored surplus energy is then converted by another maker declared z MW “ER 3-phase DC/AC converter” **4130S** through another decoupling device. One of the converters **4130** is regulated by an MPPT optimizer while the other converter **4130S** is regulated by a MEUPT controller. Both converters convert proper amount of DC power into 3-phase AC power; and provide the 3-phase AC power to a power grid **4600** via the same transformer **4500**. Notice that $x=y=z=0.5$ in this configuration.

FIG. 5 depicted another embodiment of incorporating an MEUPT optimizer in a large PV power station. The power station is equipped with rated 0.5 MW solar panel strings **5110** and two declared 500 kW 3-phase DC/AC converters **5130** and **5130S**. This embodiment illustrates another configuration for the MEUPT optimizer. The PV power station **5000** can be thought of as comprising one AC power production units (hereinafter referred to also as “AC power

production unit **5100**). The AC power production unit **5100** consists of a DC power generator **5110** that is comprised of rated 500 kW solar panels, and two 3-phase DC/AC (each declared as 500 kW) converters **5130** and **5130S**. The power generator **5110** uses 80 parallel-connected solar strings that generate DC electricity. Each of the 80 solar strings consists of 25 series-connected solar panels; each solar panel rated to have 250 W power production capability. The energy reservoir **5410** receives the DC electric power from the generator **5110** through a decoupling device **5311**. The two 3-phase DC/AC converters **5130** and **5130S** receive DC power from the reservoir **5410** through two separate decoupling devices including decoupling device **5312** for the converter **5130**, and decoupling device **5313** for the converter **5130S**. Converters **5130** and **5130S** are regulated by the MEUPT controller to draw the appropriate amount of power from the reservoir **5410**, and convert the DC power to 3-phase AC power to provide to the power grid **5600** via transformer **5500**.

To more broadly elaborate on the configuration depicted in FIG. 5: the MEUPT optimizer provides optimization service to an x MW PV power station. This PV power station has one AC power production unit with solar panel strings having a total rated DC power generation capability x MW. The DC generator charges an energy reservoir through a decoupling device. The energy reservoir supplies DC electricity to two 3-phase DC/AC converters through two separate sets of decoupling devices. The total maker declared conversion capability of the two “ER 3-phase DC/AC converters” is $z_1 + z_2 = z$ MW. The two converters are regulated by a MEUPT controller to convert a proper amount of DC power into 3-phase AC power. The electricity produced by the two converters is provided to a power grid via the same transformer. The above described configuration is redrawing and depicted in FIG. 6. Please notice that $x=0.5, y=0, z=1$ in this configuration.

This description will now compare the two configurations depicted in FIGS. 4 and 6. In the configuration depicted in FIG. 4, the DC generator supplies DC power to a “PS 3-phase DC/AC converter” with maker declared capability of y MW; and charges the left-over power to an energy reservoir. In FIG. 4, the energy reservoir supplies DC power to an “ER 3-phase DC/AC converter” with maker declared capability of z MW. With no “PS 3-phase DC/AC converter” in the configuration depicted in FIG. 6 (i.e., $y=0$), all generated DC power charges into an energy reservoir through a decoupling device; and the energy reservoir supplies DC electricity into two “ER 3-phase DC/AC converters” through two separate sets of decoupling device. Therefore, $x=y=z=0.5$ in configuration of FIG. 3; while $x=0.5, y=0, z=1$ in the configuration of FIG. 6. In one further embodiment of FIG. 6, there is no energy reservoir **6410**. Instead, the solar strings **6110** provide DC power to the converters **6130** via decoupling device **6311**.

Now, the only remaining design issue for the MEUPT optimizer is to identify the optimum power matching relationship between the parameters representing the rated capability of the solar strings and that of the converters. Specifically, the task is to identify the relationship between the value of x, y, and z in the optimum situation. As a reminder, the value of the sum $y+z$ is no greater than the value x in a conventional PV power station as described in Section Two.

Notice also that the value x is designated for the MW value of rated DC power production capability of the PV strings; the value y is designated for the total MW value of maker declared capability of “PS 3-phase DC/AC converter” that converts the DC energy supplied by the PV strings;

while the value z is designated for the total MW value of maker declared capability of “ER 3-phase DC/AC converter” that converts the DC energy supplied by the energy reservoir.

For instance in FIG. 6, the x equals to 0.5, the 0.5 MW makers’ declared total PV capability; the y equals to 0 that means no “PS 3-phase DC/AC converter” is installed; the z equals to 1, which means the 1 MW total maker’s declared capability of the two “ER 3-phase DC/AC converters” is incorporated for receiving DC power from the energy reservoir and converting the DC energy into 3-phase AC power. Note that the value of $y+z$ is no less than 2 times the value of x value in both of the configurations described above. The term “capability” is also referred as the “power rating” of the device; and inter changeable hereinafter, unless otherwise indicated.

Section Ten: The Optimum Power Matching Relationship.

Due to different disciplines (industries), the definition of the power rating for solar panels is different from that of the DC/AC converters. The power rating of the solar panels is defined as the maximum DC power that a solar panel can produced at high noon with clear skies. The solar panel manufacturing industry uses a predetermined type of illuminating lamp (called herein a “standard lamp”) to simulate clear skies; and high noon is simulated by illuminating light flux perpendicularly through the solar panel surface. Therefore, the maker declared power production capability can be very close to the real DC generator’s capability. Experiments performed by the inventors also confirm the above statement. The total DC power generation capability of PV solar strings is therefore judged to be credible; and the title “maker declared capability” is omitted herein when describing the power rating of the solar strings. On the other hand, the DC/AC converter manufacturing industry defines the power-rating of DC/AC converters in according with the convention of power grid industry, referred as the “power grid convention” herein. This convention and the definition of the DC/AC converter capability are elaborated as follows.

The AC Power grid industry enforces a convention (referred as the power grid convention) to assure the constructed 3-phase AC power grid can fulfil the declared power delivery capability. The 3-phase AC power grid consists of 3 or 4 power lines which can deliver time varying sinusoidal functions of voltage and current in each pair of power lines as one phase. The power grid convention defines the voltage declared in the specification as the “standard” maximum voltage for the power lines to endure (referred to as the “line voltage”). Likewise the specified maximum current declared in the specification is the maximum current for the power lines to carry (referred to as the “maximum phase current”). When a device is manufactured to conform to the power grid convention, the voltage declared in the specification of the device is the maximum voltage that all the related components shall endure. Likewise, the maximum current declared in the specification is the maximum current-carrying capability for all the related components of one phase, connecting to one pair of power lines. The time varying functions of the device’s voltage and current also need to conform to the sinusoidal function of the each phase in the AC power grid.

To reiterate, the specified voltage of a 3-phase DC/AC converter is defined as the line voltage of the 3-phase power; the specified maximum current is defined as the maximum current carrying capability of the pair of power lines for each phase; and the specified maximum power is defined as the sum total of the maximum power capability that the three phases can endure. In other words, when conforming to the

power grid convention, the power lines of each phase and the connected power devices are to be capable of transmitting one third ($1/3$) of the specified maximum power, to state in other way, the “maker declared power rating” of the 3-phase DC/AC converter is $3*U*I$, where the U is the phase voltage and the I is the phase current. Each pair of power lines is capable of delivering $U*I$ power, or $1/3$ of “maker declared power rating”; and each module connecting to the pair of power line is also required to carry or deliver $1/3$ of the specified power rating declared, when conforming to the power grid convention.

For instance, take a 3-phase DC/AC converter specifying “AC voltage=315 VAC; maximum current=916 amperes; and the maximum power output=500 kW” as an example. The specification “AC voltage=315 VAC” should be read as: “the output line voltage of this converter is 315 volts”. Or, when the 3-phase is balanced, the phase voltage U of every phase is $U=315/1.732=181.9$ volts (where 1.732 is the square root of 3 which is the ratio of the line voltage to the phase voltage). The specified “maximum current=916 amperes” should be read as that the power lines and all the components in each phase are designed to assure the current carrying capability of $I=916$ amperes. The specified “maximum power output=500 kW” should be understood as the maximum power conversion and delivery capability of all components of each DC/AC conversion phase= $U*I=181.9*916=500/3$ KW; and the total maximum power conversion and delivery capability of the related modules in the 3 conversion phase is the sum of each phase, $3*U*I=3*181.9*916=500$ kW, which is the defined “maker declared power rating”= $3*U*I$ when conforming to the power grid convention stated in previous paragraph.

The 3 phases in a 3-phase DC/AC converter are strictly correlated to have 120° phase differences. In other words, one pair of power lines (phase) delivers time varying power of $U*I \sin^2(\omega t)$; while the second phase delivers time varying power of $U*I \sin^2(\omega t+120^\circ)$; and the third phase delivers time varying power of $U*I \sin^2(\omega t-120^\circ)$. Each pair of power lines of the three phases delivers three oscillating AC power trains related to each other with a strict correlation. Note that the power conversion capacity, $P(t)$, is not equal to the defined “maker declared power rating”. The power conversion capacity, $P(t)$, is expressed as a function of time and derived in accordance with the defined 3-phase AC power restrictions.

In other words, the DC/AC power conversion capacity, $P(t)$, is derived from the sum of the time varying power outputs of the 3 phases; with a strictly correlated phase difference of 120° ; and with power wave forms that conform to the square sinusoidal oscillations of $\sin^2(\omega t)$, or $\cos^2(\omega t)$; and synchronized with the power grid (same phase and frequency) which forces the angular frequency ω to be constant.

Now, let us derive the time varying power conversion capacity, $P(t)$ of the 3-phase DC/AC converter. The power conversion capacity of a 3-phase DC/AC converter as function of time is $P(t)=U*I*(\sin^2(\omega t)+\sin^2(\omega t+120^\circ)+\sin^2(\omega t-120^\circ))$. As defined above, U is the phase voltage, I is the phase current, and ω is the constant angular frequency of the power grid. Also, it can be shown that $\sin^2(\omega t+120^\circ)+\sin^2(\omega t-120^\circ)=\cos^2(\omega t)+1/2$. Therefore, the power conversion capacity, $P(t)$, of a 3-phase DC/AC converter as function of time is $P(t)=U*I*(\sin^2(\omega t)+\sin^2(\omega t+120^\circ)+\sin^2(\omega t-120^\circ))=U*I*(\sin^2(\omega t)+\cos^2(\omega t)+1/2)=U*I*(1+1/2)=3/2(U*I)$.

In other words, the sum total of these strictly correlated three pulsating power trains in the three phases is a constant. In other words, the sum total power delivery of these three

pair of power lines is a constant. Or the sum total of the three modules related to the three phases is a constant. However, this constant is only equal to half ($\frac{1}{2}$) of the “declared power capability”. This is the relationship between the power conversion capacity and the defined “declared power capability” of a 3-phase DC/AC converter when conforming to the power grid convention.

Please be reminded that as described previously the “maker declared power rating”, or the referred “maker declared power capability” of a 3-phase DC/AC converter is $3 \cdot U \cdot I$, when conforming to the power grid convention. Comparing this with the power conversion capacity derived above, $P(t) = \frac{3}{2}(U \cdot I)$; it is clear that the derived DC/AC power conversion capacity of a 3-phase DC/AC converter is only a half of the “maker declared power capability”.

As an example, take again the above described 3-phase DC/AC converter; which specifies “AC voltage=315 VAC; maximum phase current=916 amperes; and the maximum power output=500 kW”. In reality, the DC/AC power conversion capacity of this 3-phase DC/AC converter is only 250 kW. To derive the above conclusion, we first confirmed that the declared maximum power, 500 kW is indeed equal to $3 \cdot U \cdot I$ where U is the phase voltage derived from the specified line voltage, and I is the declared maximum current; the power conversion capacity of this converter is equal to $\frac{3}{2} \cdot U \cdot I = 250$ kW.

The optimum power matching relationship for the parameters x , y , and z (as defined) is that the value of $(y+z)$ shall be no less than that of $2x$. Where the related PV power station is composed of x MW PV solar strings; with the “PS 3-phase DC/AC converters” having total “maker declared power capability” of y MW; and with the “ER 3-phase DC/AC converters” having total “maker declared power capability” of z MW. The “PS 3-phase DC/AC converters” and the “ER 3-phase DC/AC converters” can either be operated by one or more MPPT controllers, or by one or more MEUPT controllers. To practice MEUPT optimization, it is preferred to operate all the DC/AC converters by MEUPT controller(s).

Section Eleven: Summaries

FIG. 7 abstractly illustrates the configuration of a PV solar power station 7000. The power station comprises x MW solar panels in total arranged in solar strings 7100. The DC power generated in solar strings 7100 provides DC power input to a group of 3-phase DC/AC converters 7301 through a decoupling device 7201; and charges the surplus power into a reservoir 7400 through a decoupling device 7202. The energy reservoir 7400 provides DC power input to a group of 3-phase DC/AC converters 7302 through a decoupling device 7203. Both 3-phase DC/AC converters 7301 and 7302 provide the converted 3-phase AC power to a power grid 7600 through a transformer 7500. The total “maker declared capability” of the converters 7301 is y MW. The total “maker declared capability” of the converters 7302 is z MW. The value of the sum $(y+z)$ is no less than the value of $2x$. Please be reminded that when using a similar configuration to describe a conventional PV power station as described in Section Two, the value of $(y+z)$ is no greater than the value of x . Therefore, when a design with value of $(y+z)$ is greater than x or even better 1.1 times x ; it means some of the surplus energy can be captured to enhance the electric energy provided to the power grid.

The converters 7301 and 7302 can all be operated by the MEUPT controller(s) described above. In some embodiments, some, one, or even none of the converters are operated by an MEUPT controller. Furthermore, in some embodiments, one or some of the decoupling devices 7201,

7202, and 7203 can be omitted in the configuration. The PV solar strings 7100 provide DC power input to the converters 7301. Therefore, they are referred as the “PS converters” herein. The energy reservoir 7400 provides DC power input to the converters 7302. Therefore, they are referred as the “ER converters” herein. The terms total “maker declared power rating” and total “maker declared power capability” shall be abbreviated as the “declared power” herein.

To reiterate the description of the configuration depicted in FIG. 7: a PV power station 7000 comprises x MW solar strings 7100 as DC power generator. The DC power generator 7100 provides input to the “PS converters” 7301 with “declared power” of y MW, through the decoupling device 7201; and charges the left-over power to the reservoir 7400 through another decoupling device 7202. The reservoir 7400 provides input to the “ER converters” 7302 with “declared power” of z MW through the decoupling device 7203. All the 3-phase DC/AC converters 7301 and 7302 provide the converted 3-phase AC power to a power grid 7600 through a transformer 7500. In some embodiment, the value of $(y+z)$ is no less than the value of $2x$. However, when the value of $(y+z)$ is greater than the value of x , the design can receive a partial benefit to enhance the electric energy sale to the power grid.

An MEUPT optimizer in accordance with the principles described herein can serve a small PV power station or a large PV power station comprising one or more AC power production unit(s). Furthermore, with properly designed decoupling device, energy leakage from the energy reservoir through the PV solar strings can be prevented. Furthermore, with properly designed decoupling device, the discovered “mutual power annihilation” phenomenon can be prevented. Also, the energy reservoir can be used to receive only the surplus energy after the energy extraction of the “PS converter”, or to receive all the produced DC energy before any extraction. Finally, the MEUPT optimizer can also provide service for PV power station equipped with a single-phase DC/AC converter(s).

Section Twelve: Design Constraints of the MEUPT Controller

FIG. 8 illustrates a MEUPT controller 8000 (also referred to as a “system controller”) that represents an example of the MEUPT controller 2320B of FIG. 2B. The MEUPT controller 8000 is comprised of 3 executable components: a detection component 8100, a determination component 8200, and a delivery component 8300.

The detection component 8100 measures the stored energy level in a reservoir 8400. An example of the reservoir is the reservoir 2410B of FIG. 2B, the energy reservoir 3410 of FIG. 3, the energy reservoir 4410 of FIG. 4, the energy reservoir 5410 of FIG. 5, the energy reservoir 6410 of FIG. 6, and the energy reservoir 7410 of FIG. 7.

A determination component 8200 determines the proper power drawing level to nearly balance the charge provided to and discharged from the energy reservoir 8400.

A delivery component 8300 delivers a coded message of the above determined proper power drawing level to the surplus DC/AC converter(s) 8500. The converters interpret the coded message, and comply with the coded message, such that the converter(s) can continuously operate at the directed power level to nearly balance the in-charging energy. An example of the converters 8500 that draw from the reservoir 8400 are the converters 2130S of FIG. 2B, the converters 3130S of FIG. 3, the converters 4130S of FIG. 4, the converters 5130S of FIG. 5, the converters 6130S of FIG. 6, the converters 7302 of FIG. 3.

In order to derive MEUPT economic beneficial optimizer, the design of the MEUPT controller takes into consideration the following parameters and variables, (1) the capacity of the energy reservoir **8400**; (2) the ramping up/down speed of DC/AC converters **8500**; (3) the I-V characteristics of the solar strings; (4) the climate at the location of PV power plant; and (5) the ability of MEUPT controller working with the surplus DC/AC converter minimize the difference between (or balance) the amount of charge provided to the energy reservoir, and the amount of charge drawn from the energy reservoir. A straight-forward design can only be derived when applying a custom designed controller for each and every PV power station taking into consideration these parameters and variables.

Section Thirteen: The MEUPT Controller Designs

It is impractical to custom design a MEUPT controller for each and every one PV power station that is to use an MEUPT controller. On the other hand, it is very difficult to pursue a straight forward design for the required MEUPT controller; especially when custom design controllers are not allowed. However, the terminal voltage of the energy reservoir can be viewed as a measure that is influenced by each of the 5 parameters and variables. Therefore, the above 5 design constraints can collapse into two parts when the terminal voltage of the MEUPT energy reservoir is chosen as the determining parameter.

When comparing the measured terminal voltage to a set of site specific "standard voltage intervals"; it became clear to the inventors that the power extraction and conversion level currently executing by the system can be quantized as the power extracting level is (1) too low, (2) too high, or (3) just right. Therefore the MEUPT controller design task can be decouple into 1) an ordinary industrial controller, plus 2) a custom constructed site-specific "standard voltage intervals" table (referred as the "voltage interval table" herein).

Once a site-specific voltage interval table is constructed for the PV power station; the voltage interval table can work in concert with an industrial controller to accomplish the required MEUPT controller functions. The industrial controller is then comprised of a detection component, a determination component, and delivery component as also illustrated in FIG. 8. However, in this case, the detection component **8100** measures the terminal voltage of the energy reservoir **8400**. The determination component **8200** compares the measured voltage with the voltage interval table; and determines the proper power drawing amount to nearly balance the in-charging energy. A delivery component **8300** again delivers the coded message of the above determined proper power drawing level to the surplus DC/AC converter(s); such that the converter(s) can continuously operate at the directed power level to nearly balance incoming and outgoing charge of the energy reservoir **8400**.

In one embodiment, the detection component **8100** of the MEUPT controller **8000** measures the terminal voltage of the surplus energy reservoir **8400** in real time. Even so, the determination component **8200** may still perform the comparison (of the measured voltage against the voltage interface table) every designated time interval compare. This comparison may result in one of the following three situations:

(1) If comparison of the measured voltage and voltage interval table indicates that the power level is too low, the controller **8000** can request (through the delivery component **8300**) that the 3-phase DC/AC converter **8500** increase by one level of power extraction and conversion for the next designated time interval;

(2) If comparison of the measured voltage and voltage interval table indicates that the power level is too high, the controller **8000** can request (through the delivery component **8300**) that the 3-phase DC/AC converter **8500** decrease by one level of power extraction and conversion for the next designated time interval;

(3) If comparison of the measured voltage and voltage interval table indicates that the power level is just-right, the controller **8000** can request the 3-phase DC/AC converter **8500** to stay at the same power extraction level for the next designated time interval, at least until the next occurrence of the comparison.

When power extraction/conversion adjustment levels of the DC/AC converter is small enough, the above design can work for all kinds of energy reservoir capacity; for all kind of DC/AC converter's up/down ramping speed; for all kind of solar strings' I-V characteristics; and for all climates of the PV site. Therefore, it is important that the controller can direct small adjustment steps for the 3-phase DC/AC converter which drawing power from the energy reservoir.

Typical conventional centralized 3-phase DC/AC converters can operate at very small adjustment steps when directed. However, the equipped communication channel, referred as the "dry connection box" in the art (and so referred herein) has typically only 6-bit communication channels via optical messages. For commanding more than 6 power extraction levels through the dry connection box, an encoding-decoding technique is employed. This technique allows passing up to $2^6=64$ messages to command the power extraction levels. With up to 64 adjustment power extraction levels, the required near zero net balancing in incoming energy and outgoing energy of the reservoir can be achieved technically.

Section Fourteen: PV Power Station Incorporating MEUPT Optimizer

As depicted in FIG. 9, a PV power station **9000** incorporating an MEUPT optimizer **9200** that consisting an MEUPT controller **9210**. The MEUPT controller **9200** comprises 3 executable components; namely, a detection component **9211** to measure the terminal voltage of the surplus energy reservoir **9400**; a determination component **9212** to compare the measured voltage with the voltage interval table of the PV station; and a delivery component **9213** to notify the 3-phase DC/AC converter **4502** to boot-up, to drop-down, or to stay the same via the delivery component **4213**. The components **9211**, **9212** and **9213** of FIG. 9 are examples of the components **8100**, **8200** and **8300**, respectively of FIG. 8. The energy reservoir **9400** of FIG. 9 is an example of the energy reservoir **8400** of FIG. 8. The converters **9502** are examples of the converters **8500** of FIG. 8.

The PV power station **9000** also comprises of PV solar-strings **9100**. The solar strings **9100** convert solar energy to electricity; and deliver the generated DC power to the surplus energy reservoir **9400** through decoupling device **9320**. The 3-phase DC/AC converter **9502** receives DC power input from the surplus energy reservoir **9400** through the decoupling device **9330**. The solar strings **9100** of FIG. 9 are collectively a DC energy source for charging the energy reservoir, and are examples of the solar strings **2111A** and **2111B** of FIG. 2B, the solar string **3110** of FIG. 3, the solar string **4110** of FIG. 4, the solar string **5110** of FIG. 5, the solar string **6110** of FIG. 6, and the solar string **7110** of FIG. 7. The decoupling device **9320** of FIG. 9 is an example of the decoupling device **2312B** of FIG. 2B, decoupling device **3312** of FIG. 3, decoupling device **4312** of FIG. 4, decoupling device **5311** of FIG. 5, decoupling device **6311** of FIG. 6, and decoupling device **7202** of FIG. 7. The

21

decoupling device **9330** of FIG. **9** is an example of the decoupling device **2313B** of FIG. **2B**, decoupling device **3313** of FIG. **3**, decoupling device **4313** of FIG. **4**, decoupling device **5313** of FIG. **5**, decoupling device **6313** of FIG. **6**, and decoupling device **7203** of FIG. **7**.

As stated above, the MEUPT controller **9210** directs the 3-phase DC/AC converter **9502** to draw appropriate amount of energy from the energy reservoir **9400** to balance the input energy charging from the solar-strings **9100**; which resulted in a near zero energy in-charging or out-drawing into the reservoir **9400**. Thus, a small energy reservoir **9400** is adequate for the PV station. The converted AC power from the DC/AC converter is provided to the connecting power grid **9700** through the transformer **9600**.

As used herein, the term “executable component” is used with respect to FIGS. **8** and **9**. The term “executable component” is the name for a structure that is well understood to one of ordinary skill in the art in the field of computing as being a structure that can be software, hardware, firmware or a combination thereof. For instance, when implemented in software, one of ordinary skill in the art would understand that the structure of an executable component may include software objects, routines, methods that may be executed on the computing system, whether such an executable component exists in the heap of a computing system, or whether the executable component exists on computer-readable storage media.

In such a case, one of ordinary skill in the art will recognize that the structure of the executable component exists on a computer-readable medium such that, when interpreted by one or more processors of a computing system (e.g., by a processor thread), the computing system is caused to perform a function. Such structure may be computer-readable directly by the processors (as is the case if the executable component were binary). Alternatively, the structure may be structured to be interpretable and/or compiled (whether in a single stage or in multiple stages) so as to generate such binary that is directly interpretable by the processors. Such an understanding of example structures of an executable component is well within the understanding of one of ordinary skill in the art of computing when using the term “executable component”.

The term “executable component” is also well understood by one of ordinary skill as including structures that are implemented exclusively or near-exclusively in firmware or hardware, such as within a field programmable gate array (FPGA), an application specific integrated circuit (ASIC), or any other specialized circuit. Accordingly, the term “executable component” is a term for a structure that is well understood by those of ordinary skill in the art of computing, whether implemented in software, hardware, or a combination.

The present invention may be embodied in other specific forms without departing from its spirit or essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention is, therefore, indicated by appended claims rather than by the foregoing description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

What is claimed is:

1. A PV power station comprising at least one AC power production unit, each of one or more of the at least one AC power production unit comprising:

a DC power generator composed of x MW solar strings, where x is a positive number;

22

one or more first DC/AC 3-phase converters with a total declared power rating of y MW,

the first DC/AC 3-phase converter(s) configured to receive DC power provided by the DC power generator, convert the received DC power into AC power, provide that converted AC power through a transformer to a power grid;

an energy reservoir that is configured to receive at an input of the energy reservoir at least some of a remaining portion of the DC power generated by the DC power generator;

one or more second DC/AC 3-phase converters having a total declared power rating of z MW, where z is a positive number, the second DC/AC 3-phase converter(s) configured to receive DC power from the energy reservoir at an input of the one or more second DC/AC 3-phase converters, convert the received DC power from the energy reservoir into AC power, and provide that converted AC power through the transformer to the power grid; and

a switching mechanism configured to turn on and off the input of the energy reservoir and the input of the one or more second DC/AC 3-phase converters, such that the input of the energy reservoir and the input of the one or more second DC/AC 3-phase converters are not simultaneously on,

wherein the sum of y and z being greater than x .

2. The PV power station in accordance with claim 1, the sum of y and z being greater than 2 times x .

3. The PV power station in accordance with claim 1, the sum of y and z being between 1.1 and 2 times x .

4. The PV power station in accordance with claim 1, y being less than x .

5. The PV power station in accordance with claim 1, z being greater than x .

6. The PV power station in accordance with claim 1, the at least one AC power production unit being a plurality of AC power production units, the ratio of $(y+z)/x$ being substantially the same for each of the plurality of AC power production units.

7. The PV power station in accordance with claim 1, further comprising at least one of the following:

a first decoupling device through which the DC power generator provides DC power to the first DC/AC 3-phase converter(s);

a second decoupling device through which the DC power generator provides DC power to the energy reservoir; and

a third decoupling device through which the energy reservoir provides DC power to the second DC/AC 3-phase converter(s).

8. The PV power station in accordance with claim 1, further comprising at least two of the following:

a first decoupling device through which the DC power generator provides DC power to the first DC/AC 3-phase converter(s);

a second decoupling device through which the DC power generator provides DC power to the energy reservoir; and

a third decoupling device through which the energy reservoir provides DC power to the second DC/AC 3-phase converter(s).

9. The PV power station in accordance with claim 1, further comprising the following:

a first decoupling device through which the DC power generator provides DC power to the first DC/AC 3-phase converter(s);

23

a second decoupling device through which the DC power generator provides DC power to the energy reservoir; and

a third decoupling device through which the energy reservoir provides DC power to the second DC/AC 3-phase converter(s).

10. The PV power station in accordance with claim 1, the first DC/AC 3-phase converter(s) operating using an MEUPT controller.

11. The PV power station in accordance with claim 10, the second DC/AC 3-phase converter(s) also operating using an MEUPT controller.

12. The PV power station in accordance with claim 1, the second DC/AC 3-phase converter(s) operating using an MEUPT controller.

13. The PV power station in accordance with claim 1, wherein the PV power station includes a first set of one or more decoupling diodes and a second set of one or more decoupling diodes, the second set of one or more decoupling diodes being different than the first set of one or more decoupling diodes, and wherein:

the one or more decoupling diodes in the first set each have a forward direction facing away from the DC power generator, and each of the x MW solar strings is associated with a corresponding one of the one or more decoupling diodes in the first set, and

the one or more decoupling diodes in the second set also have a forward direction facing away from the DC

24

power generator and are additionally positioned between the energy reservoir and the DC power generator.

14. The PV power station in accordance with claim 1, wherein the switching mechanism is configured to turn on and off the input of the energy reservoir and the input of the one or more second DC/AC 3-phase converters alternately, such that when the input of the energy reservoir is on, the input of the one or more second DC/AC 3-phase converters are off, and when the input of the energy reservoir is off, the input of the one or more second DC/AC 3-phase converters are on.

15. The PV power station in accordance with claim 14, wherein the switching mechanism comprising:

a first switch controlling the input of the energy reservoir; a second switch controlling the input of the one or more second DC/AC 3-phase converter;

a duty factor adjuster (DFA) configured to control the first switch to be on and off at a predetermined frequency, and;

an out-of-phase locking module configured to reverse the phase of the DFA and to control the second switch to be off and on at the predetermined frequency;

wherein the duty factor adjuster and the out-of-phase locking module cause the first switch and the second switch to be turned on and off alternately, such that when the first switch is on, the second switch is off, and when the first switch is off, the second switch is on.

* * * * *

WN No.: 19211.11
Solicitud No.: 15/796,506
Archivado: Octubre 27, 2017
Título: ~~CENTRAL FOTOVOLTAICA~~CENTRAL ELÉCTRICA FOTOVOLTAICA
Limpiar reclamaciones según lo permitido (a fecha de NOA abril 9, 2019)

Con formato: Español (Colombia)

1. (Modificado) Una central eléctrica fotovoltaica que comprende al menos una unidad de producción de energía de ACCA, cada una de una o más de las al menos una unidad de producción de energía de AC-CA que comprende:

un ~~generador de energía de DC~~generador de energía eléctrica CC compuesto por cadenas solares de x MW, donde x es un número positivo;

uno o más primeros convertidores trifásicos ~~DC/ACCC/CA-~~con una potenciaun régimen nominal ~~total declarada-declarado total~~ de y MW, los primeros convertidores trifásicos ~~DC/AC-CC/CA~~ configurados para recibir ~~potencia-energía eléctrica DC-CC~~ proporcionada por el generador de ~~potencia-energía eléctrica CCDC~~, convertir ~~la potencia DC~~la energía eléctrica CC -recibida en energía eléctrica CA-de-AC, y proporcionar esa energía ~~eléctrica-de CA-AC~~ convertida a través de un transformador a ~~una-la~~ red eléctrica;

un depósito de energía ~~que~~-está configurado para recibir en una entrada del depósito de energía al menos parte de la ~~parte-porción~~ restante de la ~~potencia-energía eléctrica de DCCC~~ generada por el generador de ~~potencia-energía eléctrica CCde DC~~;

uno o más segundos convertidores trifásicos DC/AC-CC/CA ~~trifásicos~~-con ~~una potencia nominal total declarada-un régimen nominal declarado total~~ de z MW, donde z es un número positivo, el segundo convertidor ~~trifásico DC/AC-CC/CA~~ ~~trifásico~~ configurado para recibir ~~potencia DC~~energía eléctrica CC del depósito de energía en una entrada de uno o más segundos convertidores trifásicos ~~-DC/ACCC/CA~~, convierte ~~la potencia DC~~la energía eléctrica CC recibida del depósito de energía en ~~potencia AC~~energía eléctrica CA y proporciona esa ~~potencia AC-energía eléctrica CA~~ convertida a través del transformador a la red eléctrica; y

un mecanismo de conmutación configurado para encender y apagar la entrada del depósito de energía y la entrada del uno o más segundos convertidores trifásicos DC/ACCC/CA ~~trifásicos~~, de modo que la entrada del depósito de energía y la entrada del uno o más segundos ~~DC/AC- Los~~-convertidores trifásicos de CC/CAAC no están encendidos simultáneamente,

en donde la suma de y y z es mayor que x.

2. (Original) La ~~central fotovoltaica~~central eléctrica fotovoltaica de acuerdo con la reivindicación 1, siendo la suma de y y z mayor que 2 veces x.

3. (Original) La ~~central fotovoltaica~~central eléctrica fotovoltaica de acuerdo con la reivindicación 1, siendo la suma de y y z entre 1,1 y 2 veces x.

4. (Original) La ~~central fotovoltaica~~central eléctrica fotovoltaica de acuerdo con la reivindicación 1, siendo y menor que x.

5. (Original) La ~~central fotovoltaica~~central eléctrica fotovoltaica de acuerdo con la reivindicación 1, siendo z mayor que x.

6. (Original) La ~~central fotovoltaica~~central eléctrica fotovoltaica de acuerdo con la reivindicación 1, siendo ~~la~~ al menos una unidad de producción de energía de ~~AC-CA~~ una pluralidad de unidades de producción de energía de ~~ACCA~~, siendo la relación la razón de (y + z) / x ~~es~~ sustancialmente la misma para cada una de la pluralidad de ~~u~~Unidades de producción de energía eléctrica ~~CAAC~~.

7. (Original) La ~~central fotovoltaica~~central eléctrica fotovoltaica de acuerdo con la reivindicación 1, que además comprende al menos uno de los siguientes:

un primer dispositivo ~~de desacoplamiento~~desacoplador ~~a través del~~mediante el cual el generador de energía de ~~eléctrica DC-CC~~ proporciona energía ~~de eléctrica DC-CC~~ al primer convertidor o convertidores trifásicos de ~~DC/ACCC/CA~~;

un segundo dispositivo ~~de desacoplamiento a través del~~desacoplador mediante el cual el ~~generador de energía de DC~~generador de energía eléctrica CC proporciona energía ~~eléctrica de DC-CC~~ al depósito de energía; y

un tercer dispositivo ~~de desacoplamiento a través del~~desacoplador mediante el cual el depósito de energía proporciona energía ~~eléctrica CC DC~~ al segundo convertidor o convertidores trifásicos ~~DC/ACCC/CA~~.

8. (Original) La ~~central fotovoltaica~~central eléctrica fotovoltaica de acuerdo con la reivindicación 1, que comprende además al menos dos de los siguientes:

un primer dispositivo ~~de desacoplamiento~~desacoplador ~~a través del~~mediante el cual el generador de energía ~~de DC~~eléctrica CC proporciona energía ~~eléctrica de DC-CC~~ al primer convertidor o convertidores trifásicos ~~de DC/ACCC/CA~~;

un segundo dispositivo ~~de desacoplamiento a través del~~desacoplador mediante el cual el ~~generador de energía de DC~~generador de energía eléctrica CC proporciona energía ~~eléctrica de DC-CC~~ al depósito de energía; y

un tercer dispositivo ~~desacoplador de desacoplamiento a través del~~mediante el cual el depósito de energía proporciona energía ~~eléctrica DC-CC~~ al segundo convertidor o convertidores trifásicos ~~DC/ACCC/CA~~.

9. (Original) La ~~central fotovoltaica~~central eléctrica fotovoltaica de acuerdo con la reivindicación 1, que comprende además lo siguiente:

un primer dispositivo ~~de desacoplamiento a través del desacoplador mediante el~~
cual el ~~generador de energía de DC~~generador de energía eléctrica CC proporciona ~~energía de DC~~energía eléctrica CC al primer convertidor o convertidores trifásicos de ~~DC/ACCC/CA~~;

un segundo dispositivo ~~de desacoplamiento a través del desacoplador mediante el~~
cual el ~~generador de energía de DC~~generador de energía eléctrica CC proporciona energía ~~eléctrica de CC~~eléctrica CC al depósito de energía; y

un tercer dispositivo ~~de desacoplamiento a través del desacoplador mediante el~~
cual el depósito de energía proporciona energía ~~eléctrica CC~~eléctrica CC al segundo convertidor o convertidores trifásicos ~~DC/ACCC/CA~~.

10. (Original) La ~~central fotovoltaica~~central eléctrica fotovoltaica de acuerdo con la reivindicación 1, donde el primer convertidor o convertidores trifásicos ~~DC/ACCC/CA~~ que funcionan ~~utilizando con~~con un controlador MEUPT.

11. (Original) La ~~central fotovoltaica~~central eléctrica fotovoltaica de acuerdo con la reivindicación 10, donde el segundo convertidor o convertidores trifásicos ~~DC/ACCC/CA~~ también funcionan ~~con usando~~con un controlador MEUPT.

12. (Original) La ~~central fotovoltaica~~central eléctrica fotovoltaica de acuerdo con la reivindicación 1, donde el segundo convertidor o convertidores trifásicos ~~DC/ACCC/CA~~ funcionan con un controlador MEUPT.

13. (Cancelada) Una ~~central eléctrica fotovoltaica~~estación de energía fotovoltaica que comprende al menos una unidad de producción de energía de AC, cada una de una o más de las al menos una unidad de producción de energía ~~eléctrica CC de AC~~ que comprende:

un ~~generador de energía de DC~~generador de energía eléctrica CC compuesto por cadenas solares de x MW, donde x es un número positivo;

un depósito de energía que recibe al menos parte de la ~~energía eléctrica CC potencia de~~
~~DC~~ generada por el generador de potencia de DC; y

uno o más convertidores trifásicos ~~DC/ACCC/CA~~ con ~~una potencia nominal total~~
~~declarada un régimen nominal declarado total~~ de z MW, donde z es un número positivo, el

Con formato: Sangría: Izquierda: 1,27 cm, Primera línea: 1,27 cm

Con formato: Fuente: Sin Negrita

Con formato: Fuente: Sin Negrita

convertidor o convertidores trifásicos ~~DC/ACCC/CA-~~ reciben ~~energía eléctrica CC potencia DC~~ del depósito de energía y convierten la ~~energía eléctrica CC DC recibida energía~~ del depósito de energía en ~~energía eléctrica CA energía de AC~~ y proporcionando esa energía de ~~AC CA~~ convertida a través de un transformador a la red eléctrica,
~~donde siendo z es~~ mayor que 1,1 veces x.

14. (Cancelada) La ~~central fotovoltaica~~ central eléctrica fotovoltaica de acuerdo con la reivindicación 13, siendo z mayor que 2 veces x.

15. (Cancelada) La ~~central fotovoltaica~~ central eléctrica fotovoltaica de acuerdo con la reivindicación 13, siendo la al menos una unidad de producción de energía ~~d eléctrica CA e AC~~ una pluralidad de unidades de producción de energía de ~~ACCA~~, siendo la relación de z / x sustancialmente la misma para cada una de la pluralidad de unidades de producción de energía ~~eléctrica CA de AC~~.

16. (Cancelada) La ~~central fotovoltaica~~ central eléctrica fotovoltaica de acuerdo con la reivindicación 13, que ~~comprende~~ comprende, además:
un dispositivo ~~de desacoplamiento a través del desacoplador mediante el~~ cual el depósito de energía proporciona ~~alimentación de DC~~ energía eléctrica CC al convertidor o convertidores trifásicos ~~DC/ACCC/CA~~.

17. (Cancelada) La ~~central fotovoltaica~~ central eléctrica fotovoltaica de acuerdo con la reivindicación 13, que ~~comprende~~ comprende, además:
un dispositivo ~~de desacoplamiento a través del desacoplador mediante el~~ cual el ~~generador de energía de DC~~ generador de energía eléctrica CC proporciona ~~energía eléctrica CC energía de DC~~ al depósito de energía.

18. (Cancelada) La ~~central fotovoltaica~~ central eléctrica fotovoltaica de acuerdo con la reivindicación 13, que ~~comprende~~ comprende, además:
un primer dispositivo ~~de desacoplamiento a través del desacoplador mediante el~~ cual el ~~generador de energía de DC~~ generador de energía eléctrica CC proporciona ~~energía eléctrica CC energía de DC~~ al depósito de energía;
un segundo dispositivo ~~de desacoplamiento a través del desacoplador mediante el~~ cual el depósito de energía proporciona ~~energía eléctrica CC energía DC~~ al convertidor o convertidores trifásicos ~~DC/ACCC/CA~~.

19. (Cancelado) ~~La central eléctrica fotovoltaica La estación de energía fotovoltaica~~ de acuerdo con la reivindicación 13, ~~donde~~ al menos uno de los convertidores trifásicos ~~DC/ACCC/CA- operando usando~~ funciona con un controlador MEUPT.

20. (Cancelada) Una ~~central eléctrica fotovoltaica estación de energía fotovoltaica~~ que comprende al menos una unidad de producción de ~~energía eléctrica CA energía de AC~~ y un generador de ~~energía eléctrica CC energía de DC~~, cada uno ~~o de una o más de la al menos una~~ ~~unidades~~ de producción ~~energía eléctrica CA de energía de AC~~ que comprende:

uno o más convertidores ~~trifásicos DC/ACCC/CA; - el o trifásicos~~, los convertidores ~~trifásicos DC/ACCC/CA- trifásicos~~ reciben energía ~~eléctrica DC-CC~~ del generador de energía ~~eléctrica CCDC~~, convierten la energía ~~DC-eléctrica CC~~ recibida en energía ~~eléctrica AC~~ y proporcionan esa energía ~~AC-CA~~ convertida a través de un transformador ~~para a~~ la red eléctrica; y

un dispositivo ~~de desacoplamiento a través del desacoplador mediante el~~ cual el ~~generador de energía de DC generador de energía eléctrica CC~~ proporciona energía ~~de eléctrica DC-CC~~ a los convertidores trifásicos de ~~DC/ACCC/CA~~.

21. (Agregado) La ~~central fotovoltaica~~ ~~central eléctrica fotovoltaica~~ de acuerdo con la reivindicación 1, en la que la ~~central fotovoltaica~~ ~~central eléctrica fotovoltaica~~ incluye un primer conjunto de uno o más diodos de desacoplamiento y un segundo conjunto de uno o más diodos de desacoplamiento, siendo diferente el segundo conjunto de uno o más diodos de desacoplamiento que el primer conjunto de uno o más diodos de desacoplamiento, y en el que:

los uno o más diodos de desacoplamiento en el primer conjunto tienen cada uno una dirección hacia adelante alejada del generador de energía ~~de DC~~ ~~eléctrica CC~~, y cada una de las cadenas solares de x MW está asociada con uno ~~correspondiente~~ de los uno o más diodos de desacoplamiento ~~e correspondientes~~ ~~a d~~ el primer conjunto, y

los uno o más diodos de desacoplamiento en el segundo conjunto también tienen una dirección de avance alejada del ~~generador de energía de DC generador de energía eléctrica CC~~ y además están colocados entre el depósito de energía y el generador de energía ~~eléctrica CC~~ ~~de DC~~.

22. (Agregado) La ~~central fotovoltaica~~ ~~central eléctrica fotovoltaica~~ de acuerdo con la reivindicación 1, en la que el mecanismo de conmutación está configurado para encender y apagar la entrada del depósito de energía y la entrada de uno o más segundos convertidores trifásicos ~~DC/ACCC/CA-~~ alternativamente, de modo que cuando la entrada del depósito de energía está encendida, la entrada de uno o más segundos convertidores trifásicos ~~DC/ACCC/CA~~ está apagada, y cuando la entrada del ~~reservorio~~ ~~depósito~~ de energía está apagada, la entrada de uno o más segundos ~~DC/AC- Los~~ convertidores trifásicos ~~CC/CA~~ están encendidos.

23. (Agregado) La ~~central fotovoltaica~~ ~~central eléctrica fotovoltaica~~ de acuerdo con la reivindicación 22, en la que el mecanismo de conmutación comprende:

un primer interruptor que controla la entrada del depósito de energía;

un segundo interruptor que controla la entrada del uno o más segundos convertidores trifásicos [DC/ACCC/CA](#);

un ajustador del factor de trabajo (DFA) configurado para controlar que el primer interruptor se encienda y apague a una frecuencia determinada, y;

un módulo de bloqueo fuera de fase configurado para invertir la fase del [ajustador del factor de trabajo \(DFA\)](#) y para controlar el segundo interruptor para que esté apagado y encendido a la frecuencia determinada;

donde el ajustador del factor de trabajo y el módulo de bloqueo fuera de fase hacen que el primer interruptor y el segundo interruptor se enciendan y apaguen alternativamente, de modo que cuando el primer interruptor está encendido, el segundo interruptor está apagado, y cuando el primer interruptor está apagado, el segundo interruptor está encendido.

WN No.: 19211.11
Solicitud No.: 15/796,506
Octubre 27, 2017

Título: CENTRAL ELÉCTRICA FOTOVOLTAICA
Limpiar reclamaciones según lo permitido (a fecha de NOA abril 9, 2019)

1. Una central eléctrica fotovoltaica que comprende al menos una unidad de producción de energía de CA, cada una de una o más de las al menos una unidad de producción de energía de CA que comprende:

un generador de energía eléctrica CC compuesto por cadenas solares de x MW, donde x es un número positivo;

uno o más primeros convertidores trifásicos CC/CA con un régimen nominal declarado total de y MW, los primeros convertidores trifásicos CC/CA configurados para recibir energía eléctrica CC proporcionada por el generador de energía eléctrica CC, convertir la energía eléctrica CC recibida en energía eléctrica CA, y proporcionar esa energía eléctrica CA convertida a través de un transformador a la red eléctrica;

un depósito de energía está configurado para recibir en una entrada del depósito de energía al menos parte de la porción restante de la energía eléctrica CC generada por el generador de energía eléctrica CC;

uno o más segundos convertidores trifásicos CC/CA con un régimen nominal declarado total de z MW, donde z es un número positivo, el segundo convertidor trifásico CC/CA configurado para recibir energía eléctrica CC del depósito de energía en una entrada de uno o más segundos convertidores trifásicos CC/CA, convierte la energía eléctrica CC recibida del depósito de energía en energía eléctrica CA y proporciona esa energía eléctrica CA convertida a través del transformador a la red eléctrica; y

un mecanismo de conmutación configurado para encender y apagar la entrada del depósito de energía y la entrada del uno o más segundos convertidores trifásicos CC/CA, de modo que la entrada del depósito de energía y la entrada del uno o más segundos convertidores trifásicos de CC/CA no están encendidos simultáneamente,

en donde la suma de y y z es mayor que x .

2. La central eléctrica fotovoltaica de acuerdo con la reivindicación 1, siendo la suma de y y z mayor que 2 veces x .

3. La central eléctrica fotovoltaica de acuerdo con la reivindicación 1, siendo la suma de y y z entre 1,1 y 2 veces x .

4. La central eléctrica fotovoltaica de acuerdo con la reivindicación 1, siendo y menor que x .

5. La central eléctrica fotovoltaica de acuerdo con la reivindicación 1, siendo z mayor que x .

6. La central eléctrica fotovoltaica de acuerdo con la reivindicación 1, siendo al menos una unidad de producción de energía de CA una pluralidad de unidades de producción de energía de CA, la razón de $(y + z) / x$ es sustancialmente la misma para cada una de la pluralidad de unidades de producción de energía eléctrica CA.

7. La central eléctrica fotovoltaica de acuerdo con la reivindicación 1, que además comprende al menos uno de los siguientes:

- un primer dispositivo desacoplador mediante el cual el generador de energía de eléctrica CC proporciona energía eléctrica CC al primer convertidor o convertidores trifásicos de CC/CA;

- un segundo dispositivo desacoplador mediante el cual el generador de energía eléctrica CC proporciona energía eléctrica CC al depósito de energía; y

- un tercer dispositivo desacoplador mediante el cual el depósito de energía proporciona energía eléctrica CC al segundo convertidor o convertidores trifásicos CC/CA.

8. La central eléctrica fotovoltaica de acuerdo con la reivindicación 1, que comprende además al menos dos de los siguientes:

- un primer dispositivo desacoplador mediante el cual el generador de energía eléctrica CC proporciona energía eléctrica CC al primer convertidor o convertidores trifásicos CC/CA;

- un segundo dispositivo desacoplador mediante el cual el generador de energía eléctrica CC proporciona energía eléctrica CC al depósito de energía; y

- un tercer dispositivo desacoplador mediante el cual el depósito de energía proporciona energía eléctrica CC al segundo convertidor o convertidores trifásicos CC/CA.

9. La central eléctrica fotovoltaica de acuerdo con la reivindicación 1, que comprende además lo siguiente:

- un primer dispositivo desacoplador mediante el cual el generador de energía eléctrica CC proporciona energía eléctrica CC al primer convertidor o convertidores trifásicos de CC/CA;

- un segundo dispositivo desacoplador mediante el cual el generador de energía eléctrica CC proporciona energía eléctrica CC al depósito de energía; y

- un tercer dispositivo desacoplador mediante el cual el depósito de energía proporciona energía eléctrica CC al segundo convertidor o convertidores trifásicos CC/CA.

10. La central eléctrica fotovoltaica de acuerdo con la reivindicación 1, donde el primer convertidor o convertidores trifásicos CC/CA que funcionan con un controlador MEUPT.

11. La central eléctrica fotovoltaica de acuerdo con la reivindicación 10, donde el segundo convertidor o convertidores trifásicos CC/CA también funcionan con un controlador MEUPT.

12. La central eléctrica fotovoltaica de acuerdo con la reivindicación 1, donde el segundo convertidor o convertidores trifásicos CC/CA funcionan con un controlador MEUPT.

13. La central eléctrica fotovoltaica de acuerdo con la reivindicación 1, en la que la central eléctrica fotovoltaica incluye un primer conjunto de uno o más diodos de desacoplamiento y un segundo conjunto de uno o más diodos de desacoplamiento, siendo diferente el segundo conjunto de uno o más diodos de desacoplamiento que el primer conjunto de uno o más diodos de desacoplamiento, y en el que:

los uno o más diodos de desacoplamiento en el primer conjunto tienen cada uno una dirección hacia adelante alejada del generador de energía eléctrica CC, y cada una de las cadenas solares de x MW está asociada con uno de los uno o más diodos de desacoplamiento correspondientes del primer conjunto, y

los uno o más diodos de desacoplamiento en el segundo conjunto también tienen una dirección de avance alejada del generador de energía eléctrica CC y además están colocados entre el depósito de energía y el generador de energía eléctrica CC.

14. La central eléctrica fotovoltaica de acuerdo con la reivindicación 1, en la que el mecanismo de conmutación está configurado para encender y apagar la entrada del depósito de energía y la entrada de uno o más segundos convertidores trifásicos CC/CA alternativamente, de modo que cuando la entrada del depósito de energía está encendida, la entrada de uno o más segundos convertidores trifásicos CC/CA está apagada, y cuando la entrada del depósito de energía está apagada, la entrada de uno o más segundos convertidores trifásicos CC/CA están encendidos.

15. La central eléctrica fotovoltaica de acuerdo con la reivindicación 22, en la que el mecanismo de conmutación comprende:

un primer interruptor que controla la entrada del depósito de energía;

un segundo interruptor que controla la entrada del uno o más segundos convertidores trifásicos CC/CA;

un ajustador del factor de trabajo (DFA) configurado para controlar que el primer interruptor se encienda y apague a una frecuencia determinada, y;

un módulo de bloqueo fuera de fase configurado para invertir la fase del ajustador del factor de trabajo (DFA) y para controlar el segundo interruptor para que esté apagado y encendido a la frecuencia determinada;

donde el ajustador del factor de trabajo y el módulo de bloqueo fuera de fase hacen que el primer interruptor y el segundo interruptor se enciendan y apaguen alternativamente, de modo que cuando el primer interruptor está encendido, el segundo interruptor está apagado, y cuando el primer interruptor está apagado, el segundo interruptor está encendido.