



Organizacion y
Digitalizacion CSA Ltda

Industria y Comercio

SUPERINTENDENCIA

PCT

Delegatura de Propiedad Industrial
División de Nuevas Creaciones



SOLICITUD

PATENTE DE INVENCION

10-79194

21. EXPEDIENTE No.

54. TÍTULO CARTUCHOS DE TONER PARA UN DISPOSITIVO DE FORMACION
DE IMAGENEROS

51. CLASIFICACIÓN INTERNACIONAL

71. SOLICITANTE LEXMARK INTERNATIONAL INC.

DOMICILIO LEXINGTON, KY 40550, ESTADOS UNIDOS DE AMERICA

74. APODERADO JAIME EDUARDO DELGADO VILLEGAS

22. BOGOTÁ, D.C.,

PETITORIO

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO

No. 10-079194- -00000-0000

Fecha: 2010-06-30 15:45:32

Tra: 11 PATENTEI/II

Act. 411 PRESENTACION

Dep. 2020 DIR.NUEVASCR

Eve: 378 FASENACIONALI

Folios: 98

FORMULARIO ÚNICO DE SOLICITUD DE PATENTE
PCT

1

ENTRADA EN FASE NACIONAL

2

☒ Patente de Invención

☐ Patente de Modelo de Utilidad

SOLICITUD DE:

☒ Capítulo I

☐ Capítulo II

3

SOLICITANTE

(71)

Nombre:

LEXMARK INTERNATIONAL INC.

Dirección:

740 West New Circle Road, LEXINGTON, KY 40550
ESTADOS UNIDOS DE AMERICA

Nacionalidad o domicilio:

ESTADOS UNIDOS DE AMERICA

Lugar de Constitución:

ESTADOS UNIDOS DE AMERICA

Teléfono:

Fax:

E-mail:

IDENTIFICACIÓN

C.C.

☐

NIT

☐

C.E.

☐

Otro

☐

Cual:

Número:

4

REPRESENTANTE

5

CONCEDERADO

6

Nombre:

JAIME EDUARDO DELGADO VILLEGAS

Dirección:

Avda. Carrera 24 No. 37 - 31 Of. 202
BOGOTA D.C., COLOMBIA

Teléfono:

2444096

Fax:

2442496

E-mail

IDENTIFICACIÓN

C.C.

☒

NIT

☐

C.E.

☐

Otro

☐

Cuál

Número:

19.270.955 T.P. 43.308 C.S.J.
BOGOTA

7

INVENTOR (ES)

(72)

Nombre:

VER HOJA ANEXA

Dirección:

Nacionalidad o Domicilio:

PCT (86)

Solicitud Internacional No. PCT/US08/085182

Fecha: 01-12-08

Publicacion Internacional No. WO 2009/070807 A1

Fecha: 04 - 06 - 09

8

Titulo (54):

CARTUCHOS DE TÓNER PARA UN DISPOSITIVO DE FORMACIÓN DE IMÁGENES

Clasificación internacional (51)

603 G 21/16

Prioridad

SI

☒

NO

☐

(33) Pais de Origen

US

(32) Fecha

30/11/2007

(31) Número de Solicitud

11/948,104

Comprobante de pago No.

Fecha:

Instrucciones para el diligenciamiento del presente formulario, ver reverso de esta página.

2020-F06 (02-04-01)

INVENTORES

- 1) **CHAUDHURI, Akash** ✓
124 Leatherwood Lane,
Lexington, KY 40511 USA
Nacionalidad: Estadounidense
- 2) **DAWSON, Jedediah, Taylor** ✓
2593 Ashbrooke Drive,
Lexington, KY 40513 USA
Nacionalidad: Estadounidense
- 3) **GAYNE, Jarrett, Clark** ✓
1041 Marco Lane,
Lexington, KY 40509 USA
Nacionalidad: Estadounidense
- 4) **GETTELFINGER, Darin, Michael** ✓
3105 Cottontail Lane,
Lexington, KY 40503 USA
Nacionalidad: Estadounidense
- 5) **KERLEY, Matthew, Thomas** ✓
4525 Palermo Lane,
Lexington, KY 40515 USA
Nacionalidad: Estadounidense

ANEXOS

- ☒ Comprobante de pago de la tasa de presentación de la solicitud.
- ☐ Documento que acredita la existencia y representación legal cuando el solicitante sea persona jurídica.
- ☐ Poderes, si fuere el caso.
- ☐ Documento de cesión del inventor al solicitante o a su causante.
- ☐ Declaraciones
- ☒ Copia de la solicitud internacional (Resumen, descripción, reivindicaciones, dibujos)
- ☒ Traducción de la solicitud internacional al castellano. (Resumen, descripción, reivindicaciones, dibujos)
- ☐ Copia del examen preliminar internacional efectuado por la Autoridad Internacional de Examen Preliminar (IPEA).
- ☐ Traducción del examen preliminar internacional efectuado por la IPEA.
- ☐ De ser el caso, copia del contrato de acceso.
- ☐ De ser el caso, documento que acredite la licencia o autorización de uso de conocimientos tradicionales de las comunidades indígenas.
- ☐ De ser el caso, certificado de depósito del material biológico
- ☒ Arte final 12X12 cm.
- ☐ De ser el caso, información de otras solicitudes de patente o títulos obtenidos en el extranjero por el mismo titular o su causante, relacionadas total o parcialmente con la invención de esta solicitud.
- ☐ De ser el caso, modificaciones efectuadas a la solicitud internacional, Nuevas Reivindicaciones
- ☒ Otros: Informe de Búsqueda de Antecedentes Internacional junto con la traducción
- ☒ Publicación Internacional No. WO2009/083177 A1

FIGURA CARACTERISTICA

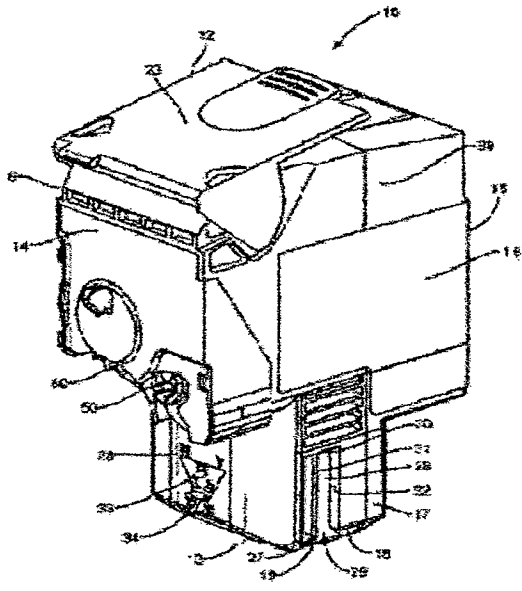


Fig. 2

Solicito la concesión de la patente,

NOMBRE: JAIME EDUARDO DELGADO VILLEGAS

FIRMA:

Jaime Delgado Villegas
C.C. 19.270.955 BOGOTÁ T.P. 43.308 C.S.J.



PCT

(10) International Publication Number
WO 2009/070807 A1

- (51) **International Patent Classification:**
G03G 21/16 (2006.01)

(21) **International Application Number:**
PCT/US2008/085182

(22) **International Filing Date:**
1 December 2008 (01.12.2008)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:**
11/948,104 30 November 2007 (30.11.2007) US

(71) **Applicant (for all designated States except US):** **LEX-MARK INTERNATIONAL, INC.** [US/US]; 740 West New Circle Road, Lexington, KY 40550 (US).

(72) **Inventors; and**

(75) **Inventors/Applicants (for US only):** **CHAUDHURI, Akash** [US/US]; 124 Leatherwood Lane, Lexington, KY 40511 (US). **DAWSON, Jedediah, Taylor** [US/US]; 2593 Ashbrooke Drive, Lexington, KY 40513 (US). **GAYNE, Jarrett, Clark** [US/US]; 1041 Marco Lane, Lexington, KY 40509 (US). **GETTELFINGER, Darin, Michael** [US/US]; 3105 Cottontail Lane, Lexington, KY 40503 (US). **KERLEY, Matthew, Thomas** [US/US]; 4525 Palermo Lane, Lexington, KY 40515 (US).

(74) **Agent:** **PEZDEK, John, V.**; Lexmark International, Inc., 740 West New Circle Road, Lexington, KY 40550 (US).

(81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH,

[Continued on next page]

(54) Title: TONER CARTRIDGES FOR AN IMAGE FORMING DEVICE

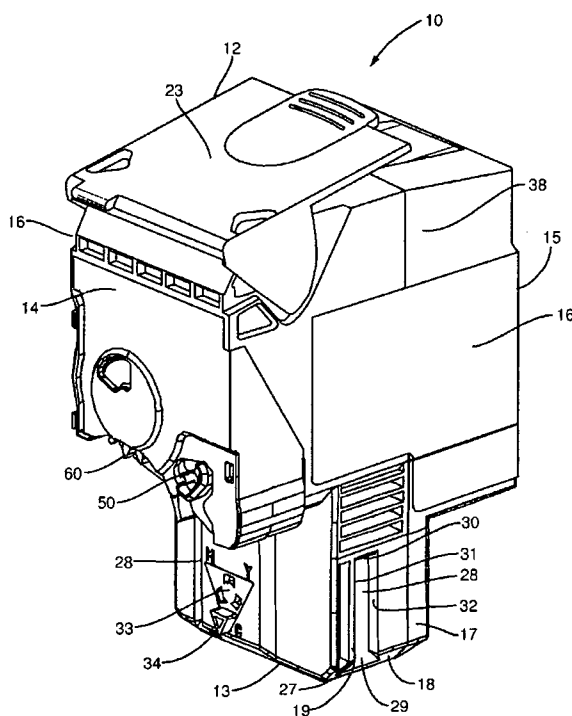


Fig. 2

(57) Abstract: The present application is directed to toner cartridges for use with image forming devices. The cartridge may include an interior to contain toner that is transferred to the image forming device and used during image formation. The cartridge may include one or more engagement features that interact with the image forming device during insertion. The engagement features may include one or more alignment features that align the cartridge during insertion into the image forming device. The engagement features may also include one or more functional features that allow the cartridge to effectively transfer the toner to the image forming device.

WO 2009/070807 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

TONER CARTRIDGES FOR AN IMAGE FORMING DEVICE

Background

5 [0001] The present application is directed to cartridges for use with image forming devices and, more particularly, to a cartridge with one or more engaging features that engage with the image forming device during insertion.

[0002] Toner cartridges contain a predetermined amount of toner. The cartridges are constructed to be inserted into and engage with the image forming device. This engagement provides for the toner in the cartridge to be transferred into the image forming device and ultimately to a media sheet during the image formation process. 10 The engagement between the cartridge and image forming device is important to ensure the cartridge operates properly within the image forming device to transfer the toner.

[0003] The cartridge should be constructed to prevent toner leakage prior to insertion into the device, and after insertion into the device. The cartridge may include a closure mechanism that prevents the toner from escaping prior to insertion into the image forming device. During insertion, the cartridge should engage with the image forming device in a manner to move the closure mechanism from a closed position to an open position that allows the toner to move from the cartridge and into 20 the image forming device.

[0004] The cartridge should be carefully aligned relative to the image forming device to ensure accurate insertion that prevents toner leakage. The cartridge may include one or more engagement features that engage with the image forming device that provide accurate alignment. The engagement features may be 25 positioned at various locations on the body of the cartridge.

Summary

[0005] The present application is directed to toner cartridges for use with image forming devices. The cartridge may include an interior to contain toner that is transferred to the image forming device and used during image formation. The 30 cartridge may include one or more engagement features that interact with the image forming device during insertion. The engagement features may include one or more alignment features that align the cartridge during insertion into the image forming

7

device. The engagement features may also include one or more functional features for the cartridge to effectively transfer the toner to the image forming device.

Brief Description of the Drawings

- 5 [0006] Figure 1 is a schematic diagram of a toner cartridge and an image forming device according to one embodiment.
- [0007] Figure 2 is a perspective view of a first side of a cartridge according to one embodiment.
- [0008] Figure 3 is a perspective view of a second side of a cartridge according to one embodiment.
- 10 [0009] Figure 4 is a side view of a cartridge according to one embodiment.
- [0010] Figure 5 is an exploded view of a shutter removed from a toner cartridge according to one embodiment.
- [0011] Figure 6A is a side view of a shutter in a closed position according to one embodiment.
- 15 [0012] Figure 6B is a side view of a shutter in an open position according to one embodiment.
- [0013] Figure 7 is a perspective view of an interior of a cartridge according to one embodiment.
- [0014] Figure 8 is a perspective view of a drive train on a cartridge according to one embodiment.
- 20 [0015] Figure 9 is side schematic view of an electrical connector on a cartridge according to one embodiment.
- [0016] Figure 10 is an exploded perspective view of an electrical connector according to one embodiment.
- 25 [0017] Figure 11 is a side schematic view of an image forming device according to one embodiment.
- [0018] Figure 12A is a perspective view of a first side of an imaging unit according to one embodiment.

8

[0019] Figure 12B is a perspective view of a second side of an imaging unit according to one embodiment.

[0020] Figure 13 is perspective view of a cartridge being inserted into an image forming device according to one embodiment.

5 [0021] Figure 14 is perspective view of a cartridge being inserted into an image forming device according to one embodiment.

[0022] Figure 15 is perspective view of a cartridge being inserted into an image forming device according to one embodiment.

10 [0023] Figure 16 is a side schematic view of an electrical connector on a cartridge engaging with an electrical connector on an image forming device according to one embodiment.

[0024] Figure 17 is perspective view of a cartridge fully inserted into an image forming device according to one embodiment.

Detailed Description

15 [0025] The present application is directed to toner cartridges for use within image forming devices. Figure 1 schematically illustrates one embodiment that includes a toner cartridge 10 with one or more engagement features 11. The image forming device 100 includes a receiving area 101 sized to receive the cartridge 10. One or more engagement features 102 are associated with the image forming device 100.

20 The engagement features 11 on the cartridge 10 interact with the engagement features 102 on the image forming device 100 during insertion of the cartridge 10 into the receiving area 101. The engagement features 11, 102 may perform a variety of functions, including positioning the cartridge 10 within the image forming device 100, causing toner within the cartridge 10 to move into the image forming

25 device 100, allowing the cartridge 10 to communicate with the image forming device 100, providing power from the image forming device 100 to the cartridge 10, and others. The engagement features 11, 102 are positioned such that the various functions are performed in an orchestrated manner during insertion of the cartridge 10.

30 [0026] Figures 2, 3, and 4 illustrate one embodiment of a cartridge 10. The cartridge 10 contains toner that is transferred to the image forming device 100. The

cartridge 10 includes a top 12, bottom 13, front 14, back 15, and sides 16. A handle 23 may be attached to the top 12 to facilitate grasping and manipulating the cartridge 10 during insertion and removal from the image forming device 100. In one embodiment, the handle 23 is pivotally attached to the cartridge 10.

5 [0027] Cartridge 10 includes a main section 38 and an extension 17. The extension 17 is positioned at the bottom 13 of the cartridge 10. As illustrated in Figure 4, a depth W' of the extension 17 measured between the front 14 and back 15 is smaller than a depth W of the main section 38 of the cartridge 10. In one embodiment, the extension 17 is positioned at a central point of the main section 38 forming a front shelf 25 and a back shelf 26. In one embodiment, the front and back shelves 25, 26 are substantially perpendicular to the extension 17. The cartridge 10 includes an overall height measured between the top 12 and the bottom 13. The extension 17 includes a smaller height than the main section 38.

15 [0028] One or more of the engagement features 11 align the cartridge 10 during insertion into the image forming device 10. Many of these are located on the extension 17 because the extension 17 is initially inserted into the device 10 during a vertical insertion of the cartridge 10. One engagement features 11 includes chamfers 18 that are positioned on the bottom 13. Chamfers 18 may be positioned on a single side or multiple sides of the extension. In one embodiment, the extension includes a substantially rectangular cross-sectional shape and chamfers 18 are positioned along each of the four edges.

25 [0029] Another engagement feature 11 for alignment includes one or more ribs 19 that extend in a substantially vertical orientation along the extension 17. In one embodiment, the ribs 19 include a leading end 27 that faces towards the bottom 13. In one embodiment, the leading end 27 is spaced away from the chamfer 18 and makes contact with the device 100 after contact is made by the chamfer 18. The leading end 27 may include a chamfer, or may extend substantially perpendicularly outward from the extension 17. The length may vary, with the embodiment illustrated including the ribs 19 extending along the length of the extension 17. In this embodiment, ribs 19 are positioned on each of the sides 16, although other embodiments may include positioning at other locations. In embodiments with multiple ribs 19, the ribs 19 may include the same or different shapes and sizes. In one embodiment, the cartridge 10 includes a single rib 19.

[0030] Another alignment engagement feature 11 includes one or more slots 28. Slots 28 may be positioned at a variety of locations along the cartridge 10, including facing towards the side 16 as illustrated in Figures 2 and 4. Slot 28 includes a first end 29 that opens towards the bottom 13, and an opposite second end 30. The first end 29 may include chamfers forming an enlarged width to facilitate engagement with the image forming device 10 during insertion of the cartridge 10. Slots 28 further include first and second walls 31, 32. In the embodiment of Figures 2 and 4, the first wall 31 faces towards the front 14 and the second wall 32 towards the back 15. The walls 31, 32 may be parallel causing a width of the slots 28 to be substantially constant. The slots 28 may include a height that extends a variety of distances inward from the bottom 13. In the embodiment illustrated in Figures 2 and 4, the slot 28 includes substantially the same height as the rib 19. Further, the slot 28 may be parallel to the rib 19.

[0031] Another alignment engagement feature 11 includes a lockout mechanism 33 to control the location of insertion of the cartridge 10 into the image forming device 100. The lockout mechanism 33 prevents a specific cartridge 10 from being inserted into an incorrect receiving area 101. By way of example, the lockout mechanism 33 may prevent a black toner cartridge 10 from being inserted into a receiving area 101 for a cyan, yellow or magenta cartridge 10. The lockout mechanism 33 may include a pointed first end 34 that faces towards the bottom 13. The pointed first end 34 is positioned above the chamfer 18. In one embodiment, the lockout mechanism 33 is positioned on the front face 14 of the extension 17. One embodiment of a lockout mechanism is disclosed in U.S. Patent Serial No. 11/388,848 herein incorporated by reference.

[0032] The engagement features 11 may also include functional features that cause the cartridge 10 to operate within the image forming device 100 and move the toner to the image forming device 100. One functional engagement feature 11 includes an outlet 50 and shutter 51. Outlet 50 is positioned to allow the toner to be moved from the interior 33 of the cartridge 10. As illustrated in Figure 5, the outlet 50 is positioned on the front 14 of the cartridge 10. The outlet 50 is formed by an outer wall and may also face towards the bottom 13. The shutter 51 is positioned within the outlet 50 to control the movement of the toner. Shutter 51 is constructed to rotate between a closed position to prevent the movement of toner, and an open

position to allow the movement of toner. Shutter 51 may include a face 52 and a tubular body 54. The face 52 is sized to extend across the outlet 50 and be exposed on the front 14 of the cartridge 10. Face 52 includes a notch 53 that contacts with an engagement feature 102 in the image forming device 100 to control rotation of the shutter 51 between the open and closed positions. The body 54 is sized to fit within the outlet 50 and includes a substantially cylindrical shape with a hollow interior. The body 54 further includes an opening 55. In the closed position, the opening 55 is positioned away from the outlet 50 to prevent toner movement. In the open position, the opening 55 is aligned with the outlet 50 to allow toner movement. In one embodiment, the toner is moved from the outlet 50 in a direction towards the bottom 13.

[0033] Figure 6A illustrates one embodiment of the shutter 51 in the closed orientation. A biasing member 56 is operatively attached to maintain the shutter 51 in the closed position. An engagement feature 102 in the image forming device 100 (specifically, a shutter actuation pin 256 as illustrated in Figure 13) engages with the notch 53. During insertion of the cartridge 10 in the direction of arrow X into the image forming device 100, the notch 53 contacts against the feature 102. As the cartridge 10 continues to be inserted in the direction of arrow X, the force of the insertion overcomes the force of the biasing member 56 and causes the shutter 51 to rotate to the open position as illustrated in Figure 6B. The shutter 51 remains in the open position until the cartridge 10 is removed from the device 100. The removal force causes the shutter 51 to contact the feature 102 and move to the closed position. One embodiment of a shutter is disclosed in U.S. Patent Serial No. 11/556,863 herein incorporated by reference.

[0034] Another functional engagement feature 11 is a drive gear 60 positioned on the front 14 of the cartridge 10. The drive gear 60 meshes with and receives rotational power from a corresponding gear in the image forming device 100. In the embodiment illustrated in Figure 2, the drive gear 60 is partially covered with only a few teeth exposed.

[0035] The outlet 50 with the shutter 51 and the drive gear 60 are each positioned on the main section 38 of the cartridge 10. The outlet 50 is positioned below a center of the drive gear 60.

[0036] The drive gear 60 transfers power from the image forming device 100 to various elements on the cartridge 10. One element includes an auger 70 as illustrated in Figure 7. The auger 70 is positioned within the interior 33 of the cartridge 10 to move the toner through the outlet 50. The auger 70 includes helical blades 71 that extend radially outwardly from a central shaft 72. Rotation of the auger 70 causes the toner to be moved by the blades 71 along the length and to the outlet 50.

[0037] One or more paddles 75 may also be positioned within the interior 33 to agitate the toner. Each of the paddles 75 includes a central shaft 76 that extends through the interior 33, and a blade (not illustrated) that extends outward from the central shafts 76. Rotation of the central shafts 76 causes the blades to rotate to prevent toner from becoming compressed together, and also move the toner towards the auger 70. In one embodiment, a wall is positioned within the interior 33 between the auger 70 and the paddles. Toner is moved from a first side of the wall by the paddles into a second side of the wall that includes the auger 70. The wall prevents the toner from moving away from the auger 70 to a lower section of the interior 33.

[0038] A shaft 61 extends through the interior 33 and is operatively connected to the drive gear 60. The shaft 61 extends through the interior and is operatively connected to a gear 78 as illustrated in Figure 8. Gear 78 is part of a drive train 77 that is positioned on the back 15 of the cartridge 10. The drive train 77 includes gears 78 that are attached to the drive shaft 61, paddle shafts 76, and auger shaft 72. The rotation of the drive gear 60 is thus transferred through the drive shaft 61, and to the gears 78 for rotating each of the paddles 75 and the auger 70. The drive train 77 may also include one or more additional gears to interconnect gears 78. One embodiment of a drive train, paddles, auger, and drive gear 60 is disclosed in U.S. Patent Serial No. 11/612,662 herein incorporated by reference.

[0039] Another functional engagement feature 11 on the cartridge 10 includes an electrical connector 80 as illustrated in Figures 9 and 10. The electrical connector 80 forms a communication path between the cartridge 10 and the image forming device 100. In this embodiment, the electrical connector 80 is positioned within a cavity 34 at the bottom 13 of the cartridge 10. In one specific embodiment, the electrical connector 80 is positioned within the extension 17. The electrical connector 80 may be positioned completely or partially within the cavity 34. A retainer 35 is positioned

13

within the cavity 34 to retain the electrical connector 80. The retainer 35 may be formed as a unitary part of the cartridge 10, or may be a separate element that is attached to the cartridge 10. The retainer 35 includes a slot 36 formed between a pair of spaced apart members 39.

5 [0040] Figure 10 illustrates an exploded view of an electrical connector 80 that includes a circuit board 81 and a housing 82. The circuit board 81 includes one or more electrical contacts 83. The circuit board 81 may further include computing hardware, schematically illustrated as 84, for storing cartridge parameters including but not limited to pages printed, toner color, first use date, and cartridge ID. The
10 computing hardware 84 may include one or more processors, logic devices, and memory. The computing hardware may further comprise integrated circuits, including for example application specific integrated circuits and digital signal processors, in which embedded program code may be stored and executed.

[0041] Housing 82 is constructed to position the circuit board 81 for engaging with
15 a connector 150 within the image forming device 100. Housing 82 includes a base 85 with one or more outwardly-extending arms 86. Base 85 includes an opening 87 sized to receive the circuit board 81. A member 88 may be positioned adjacent to the opening 87 to support the circuit board 81 when attached to the housing 82. In one embodiment, opening 87 includes a notch 92 sized to receive the computing
20 hardware 84 when the circuit board 81 is connected to the housing 82.

[0042] One or more arms 86 extend outward from the base 85 in a cantilever manner. The arms 86 may be rigid or may be flexible relative to the base 85. In one embodiment, four arms extend from the base 85 and each is flexible. In another
25 embodiment, multiple arms 86 extend from the base 85 with one or more of the arms 86 being flexible and the others being rigid. The arms 86 form a receptacle 90 sized to extend around the entirety or a portion of the connector 150. One or more of the arms 86 may further include a flared end 89 to facilitate engagement with the connector 150 of the image forming device 100. Arms 86 may include a variety of shapes and configurations. The housing 82 may further include wings 91 that
30 laterally extend outward to fit within the slot 36 in the retainer 35. The electrical connector 80 may be fixedly or movably attached to the cartridge 10. Embodiments of electrical connectors are disclosed in U.S. Patent Nos. 7,258,558 and 7,272,336, each herein incorporated by reference.

[0043] One or more datum points are positioned to provide the proper alignment of the cartridge 10 within the image forming device 10. The datum points align the cartridge 10 along multiple dimensions during insertion into the image forming device 100. A first datum point is formed at the second end 30 of the alignment slot 28. A
5 second datum point is formed along the edge 32 of the slot 28 on the side 16 of the extension 17. A third datum point includes a centerline of the alignment slot 28 on the front 14 of the extension 17.

[0044] The cartridge 10 is mounted within the image forming device 100 to transfer the toner for forming an image on a media sheet. After exiting the cartridge
10 10, the toner moves through a developer unit 250 and a photoconductive (PC) unit 260. As the toner is moving through these elements, a media sheet is being delivered to receive the toner. Figure 11 illustrates one embodiment of an image forming device 100 with toner cartridges 10.

[0045] A first toner transfer area 230 includes one or more imaging stations 240
15 that are aligned horizontally extending from the front 104 to the back 105 of the image forming device 100. Each imaging station 240 includes a cartridge 10, a developer unit 250, and a photoconductive unit 260. Each of the imaging stations 240 is mounted such that photoconductive (PC) drums 261 are substantially parallel. For purposes of clarity, the units 250, 260 are labeled on only one of the imaging
20 stations 240. In one embodiment, each of the imaging stations 240 is substantially the same except for the color of toner.

[0046] The developer unit 250 includes a toner reservoir 251 to contain the toner. One or more agitating members may further be positioned within the reservoir 251 to move the toner. Developer unit 250 further includes a toner adder roll 252 that
25 moves the toner supplied from the reservoir 251 to a developer roll 253. The photoconductive unit 260 includes in part a charging roll and the PC drum 261.

[0047] The charging roll 262 forms a nip with the PC drum 261, and charges the surface of the PC drum 261 to a specified voltage such as -1000 volts, for example. A laser beam from a printhead 106 is directed to the surface of the PC drum 261 and
30 discharges those areas it contacts to form a latent image. In one embodiment, areas on the PC drum 261 illuminated by the laser beam are discharged to approximately -300 volts. The developer roll 253, which is coated with toner, forms a nip with the

15
PC drum 261, then transfers toner to the PC drum 261 to form a toner image. A metering device such as a doctor blade assembly can be used to meter toner onto the developer roll prior to its transfer to the PC drum. The toner is attracted to the areas of the PC drum 261 surface discharged by the laser beam from the printhead
5 106.

[0048] An intermediate transfer mechanism (ITM) 230 is disposed adjacent to each of the imaging stations 240. In this embodiment, the ITM 230 is formed as an endless belt trained about drive roll 231, tension roll 232 and back-up roll 233. During image forming operations, the ITM 230 moves past the imaging stations 240
10 in a clockwise direction as viewed in Figure 11. One or more of the PC drums 261 apply toner images in their respective colors to the ITM 230. In one embodiment, a positive voltage field attracts the toner image from the PC drums 261 to the surface of the moving ITM 230.

[0049] The ITM 230 rotates and collects the one or more toner images from the
15 imaging stations 240 and then conveys the toner images to a media sheet at a second transfer area. The second transfer area includes a second transfer nip 235 formed between the back-up roll 233 and a second transfer roll 234.

[0050] Media sheets may originally be stored in a media input tray 220 positioned in a lower section of the device 100. The tray 220 is sized to contain a stack of
20 media sheets that will receive color and/or monochrome images. The media input tray 220 is preferably removable for refilling. A control panel 221 may be located on the front 104 of the device 100. Using the control panel 221, the user is able to enter commands and generally control the operation of the image-forming device 100. For example, the user may enter commands to switch modes (*e.g.*, color mode,
25 monochrome mode), view the number of images printed, take the device 100 on/off line to perform periodic maintenance, and the like.

[0051] A media path 222 extends through the device 100 for moving the media sheets through the imaging process. Media sheets are initially stored in the input tray 220 or introduced through a manual feed 223. The sheets in the input tray 220
30 are picked by a pick mechanism 224 and moved into the media path 222. In this embodiment, the pick mechanism 224 includes a roll positioned at the end of a pivoting arm. The roll rotates to move the media sheets from input tray 220 towards

the second transfer area. In one embodiment, the pick mechanism 224 is positioned in proximity (*i.e.*, less than a length of a media sheet) to the second transfer area with the pick mechanism 224 moving the media sheets directly from the input tray 220 into the second transfer nip 235. For sheets entering through the manual feed 223, one or more rolls are positioned to move the sheet into the second transfer nip 235.

[0052] The media sheet receives the toner image from the ITM 230 as it moves through the second transfer nip 235. The media sheets with toner images are then moved along the media path 222 and into a fuser area 225. Fuser area 225 includes fusing rolls or belts 226 that form a nip to adhere the toner image to the media sheet. The fused media sheets then pass through exit rolls 227 that are located downstream from the fuser area 225. Exit rolls 227 may be rotated in either forward or reverse directions. In a forward direction, the exit rolls 227 move the media sheet from the media path 222 to an output area 228 at a top 107 of the device 100. In a reverse direction, the exit rolls 227 move the media sheet into a duplex path 229 for image formation on a second side of the media sheet.

[0053] A monicolor image forming device 100 may include a single imaging station 240, as compared to a color image forming device 100 that may include multiple imaging stations 240. Figures 12A and 12B illustrate an imaging unit 200 that includes four imaging stations 240 that each includes a cartridge 10, a developer unit 250, and a PC unit 260. The imaging unit 200 includes a frame 201 sized to receive each of the imaging stations 240. In one embodiment, the frame 201 is manufactured out of stamped metal plates that result in precise control of the location of the PC drums 261 relative to one another and relative to the ITM belt 230, laser assembly 106, and drive modules within the device 100. Frame 201 includes a central opening sized to receive the developer units 250 and photoconductive units 260. One embodiment of the imaging units, imaging stations, developer units, and PC units is disclosed in U.S. Patent Application Serial No. 11/686,614, herein incorporated by reference.

[0054] Figures 13-17 illustrate embodiments of a cartridge 10 being inserted into an imaging unit 200. For purposes of clarity, only a single cartridge 10 is illustrated as being inserted into the imaging unit 200 with the other cartridges 10 removed for clarity. As illustrated in Figure 13, the cartridge 10 is inserted in a vertical direction

indicated by arrow X. The vertical direction provides for the cartridge 10 to be inserted from the top 107 of the image forming device 10. In one embodiment, the top 107 includes a door that provides access to each of the cartridges 10. Each cartridge 10 may be removed and replaced independently without removing any of the developer units 250, PC units 260, or the imaging unit 200.

[0055] Receiving areas 101 are aligned along the frame 201 of the imaging unit 200 each sized to receive one of the cartridges 10. In this embodiment, four receiving areas 101 are horizontally aligned along the frame 201. Each of the receiving areas 101 is positioned adjacent to one of the developer units 250 and PC units 260. A wall 112 may separate a portion of the receiving area 101 that receives the extension 17 from the developer unit 250 and PC unit 260. Once fully inserted, the front shelf 25 (See Figure 4) is positioned above the wall 112. The frame 201 further includes a cut-out section that is positioned under the back shelf 26.

[0056] The receiving area 101 includes one or more engagement features 102 to engage with the cartridge engagement features 11 during insertion. The engagement features 102 include: an inlet 255 positioned to receive the toner from the cartridge outlet 50; a gear 254 that extends upward to mesh with the cartridge drive gear 60; a shutter actuation pin 256 that extends outward from the developer unit 250 to engage with the notch 53 to rotate the shutter 51; the electrical connector 150 that connects with the cartridge electrical connector 80; one or more guideways 108 that engage with the ribs 19; and an angled surface 109.

[0057] Figure 13 illustrates the cartridge 10 at the beginning of insertion into the receiving area 101. At this point, the cartridge 10 is not in contact with any other elements and is spaced away from the developer unit 250 and the frame 201.

[0058] Figure 14 illustrates the cartridge 10 after a further amount of insertion into the image forming device 100. The cartridge 10 initially contacts the angled surface 109 positioned on the wall 112 to begin the alignment into the receiving area 101. Specifically, the chamfer edge 18 that faces the front 14 contacts against the angled surface 109. In one embodiment, this contact occurs when the cartridge 10 is about 32 mm from complete insertion. The lockout mechanism 33 engages after the chamfer edges 18 align the cartridge 10. The lockout mechanism 33 allows for

insertion of the cartridge 10 in the correct receiving area 101, and prevents further insertion in an incorrect receiving area 101.

[0059] Figure 15 illustrates the cartridge 10 after an additional amount of insertion into the image forming device 100. In one embodiment, Figure 15 illustrates the cartridge about 24 mm from complete insertion. Ribs 19 on the sides 16 of the extension 17 begin to engage with the guideways 108. The guideways 108 may include an enlarged opening to facilitate engagement with the extension 17. Slot 28 on the front 14 of the extension 17 may engage with ribs 113 that extend along the wall 112. In one embodiment, engagement and contact with the alignment features 11 align the cartridge 10 relative to the receiving area 101. This aspect occurs prior to engagement and contact with the functional features 11.

[0060] After a predetermined amount of insertion, the chamfer edge 18 that faces the front 14 contacts a retainer 111 on the frame 201. This contact causes the retainer 111 to slide relative to the frame 201 away from the receiving area 101 and extend over a section of the developer unit 250. In one embodiment, the retainer 111 moves over a post 257 that extends outward from the developer unit 250. Examples of a retainer are disclosed in U.S. Patent Serial No. _____ (attorney docket no. 2006-0579.01 / 4670-550).

[0061] As the cartridge 10 continues insertion, the notch 53 on the shutter 51 contacts against the actuation pin 256 on the developer unit 250. Continued insertion causes the shutter 51 to rotate from the closed position to the open position. Prior to the shutter 51 moving to the open position, the outlet 50 on the cartridge 50 aligns with an inlet 255 on the developer unit 250. When the shutter 51 moves to the open position, any toner expelled through the outlet 50 is received in the inlet 255.

[0062] Figure 16 illustrates one embodiment with the cartridge 10 nearing full insertion. In one embodiment, this includes the cartridge 10 being about 10 mm from full insertion. The electrical connector 80 on the cartridge 10 begins to engage with the electrical connector 150. The flared ends of the arms 86 initially contact against the connector 150 and align the connector 80. As insertion continues, the arms 86 center about the connector 150 and move vertically along the outer sides. The connector 80 maybe movably attached to the cartridge 10 to facilitate the alignment

relative to the connector 150. Upon full insertion, the circuit board 81 inserts within the opening 152 (see Figure 10). Insertion also causes the drive gear 60 to engage with a gear 254 on the developer unit 250. The teeth on the drive gear 60 intermesh with the teeth on the gear 254.

5 **[0063]** Figure 17 illustrates the cartridge 10 fully inserted into the image forming device 100. The shutter 51 is in the open position to allow toner to move through the outlet 50. The drive gear 60 is engaged with the gear 254 on the developer unit 250 to provide rotational power to the cartridge 10. The electrical connector is fully seated within the connector 150 to allow communication.

10 **[0064]** Spatially relative terms such as "under", "below", "lower", "over", "upper", and the like, are used for ease of description to explain the positioning of one element relative to a second element. These terms are intended to encompass different orientations of the device in addition to different orientations than those depicted in the figures. Further, terms such as "first", "second", and the like, are also
15 used to describe various elements, regions, sections, etc and are also not intended to be limiting. Like terms refer to like elements throughout the description.

[0065] As used herein, the terms "having", "containing", "including", "comprising" and the like are open ended terms that indicate the presence of stated elements or features, but do not preclude additional elements or features. The articles "a", "an" and "the" are intended to include the plural as well as the singular, unless the context
20 clearly indicates otherwise.

[0066] The present invention may be carried out in other specific ways than those herein set forth without departing from the scope and essential characteristics of the invention. The present embodiments are, therefore, to be considered in all respects
25 as illustrative and not restrictive, and all changes coming within the meaning and equivalency range of the appended claims are intended to be embraced therein.

[0067] What is claimed is:

20

Claims

- 1 1. A toner cartridge for use with an image forming device comprising:
- 2 a body with a top, bottom, front, first and second lateral sides, and a back, the
- 3 body also including an enclosed interior to contain toner;
- 4 at least one chamfer positioned at the bottom to align the cartridge during
- 5 insertion into the image forming device;
- 6 a rib positioned on the first lateral side to laterally position the cartridge during
- 7 insertion into the image forming device, the rib including a leading edge that faces
- 8 towards the bottom and is spaced away from bottom;
- 9 an outlet in the body to allow the toner to be moved from the interior and into
- 10 the image forming device, the outlet positioned a greater distance from the bottom
- 11 than the rib; and
- 12 a shutter operatively connected to the outlet and movable between a closed
- 13 position to prevent the toner from moving through the outlet and an open position to
- 14 allow the toner to move through the outlet.
- 1 2. The cartridge of claim 1, wherein the outlet is positioned on the front of the body.
- 1 3. The cartridge of claim 1, further comprising a drive gear positioned to engage with
- 2 the image forming device, a center of the drive gear positioned farther from the
- 3 bottom than the outlet.
- 1 4. The cartridge of claim 3, wherein the drive gear is positioned on the front of the
- 2 body.
- 1 5. The cartridge of claim 4, further comprising a cover that attaches to the front of
- 2 the body, the cover extending across a majority of the drive gear.
- 1 6. The cartridge of claim 5, wherein a lower section of the drive gear positioned
- 2 towards the bottom extends outward beyond the cover.
- 1 7. The cartridge of claim 1, further comprising a cavity that extends into the body
- 2 from the bottom and is sized to contain an electrical connector.
- 1 8. The cartridge of claim 1, further comprising a slot positioned in the front with an
- 2 open end that faces the bottom and first and second opposing side walls.

21

- 1 9. The cartridge of claim 8, further comprising a second slot positioned in one of the
2 first and second sides, the second slot being wider than the slot.
- 1 10. The cartridge of claim 1, further comprising a lockout mechanism positioned on
2 the front of the body adjacent to the bottom, the lockout mechanism preventing
3 improper insertion of the cartridge into the image forming device.
- 1 11. The cartridge of claim 3, further comprising a drive train positioned on the back
2 and operatively connected to the drive gear, the drive train comprising a plurality of
3 gears that drive elements positioned within the interior of the body.
- 1 12. The cartridge of claim 11, further comprising an auger positioned within the
2 interior and operatively connected to the drive train, the auger receiving rotational
3 power from the drive gear to move toner through the outlet.
- 1 13. The cartridge of claim 12, wherein the auger is positioned in closer proximity to
2 the bottom than the center of the drive gear.

22

- 1 14. A toner cartridge for use with an image forming device comprising:
2 a main section having an interior cavity to contain toner;
3 an extension that extends outward from the main section, the extension
4 including a smaller depth than the main section and a bottom that faces away from
5 the main section, the extension positioned towards the image forming device during
6 insertion of the toner cartridge;
7 at least one chamfer edge positioned at the bottom to align the cartridge
8 during insertion into the image forming device;
9 a rib positioned on the extension and in proximity to the bottom to position the
10 cartridge during insertion into the image forming device;
11 an outlet on the main section through which the toner is moved into the image
12 forming device; and
13 a shutter operatively connected to the outlet and movable between a closed
14 position to prevent the toner from moving through the outlet and an open position to
15 allow the toner to move through the outlet.
- 1 15. The cartridge of claim 14, further comprising a gear positioned on the main
2 section to engage with the image forming device.
- 1 16. The cartridge of claim 14, wherein the main section further includes a front shelf
2 and a back shelf that are each substantially perpendicular to the extension.
- 1 17. The cartridge of claim 14, wherein the extension is positioned at a central point
2 along the depth of the main section.
- 1 18. The cartridge of claim 14, further comprising a second cavity positioned within
2 the extension, the second cavity including a height that extends from the bottom to
3 an inner side of the main section.
- 1 19. The cartridge of claim 16, further comprising an electrical connector positioned
2 within the second cavity, the electrical connector including a housing operatively
3 connected to the extension and a circuit board.
- 1 20. The cartridge of claim 14, wherein the main section includes a greater height
2 than the extension.

23

- 1 21. The cartridge of claim 14, wherein the extension further includes a slot
2 positioned adjacent to the rib, the slot including a first and second parallel side walls
3 and an open end that faces towards the bottom.
- 1 22. The cartridge of claim 15, further comprising an auger positioned within the main
2 section and being operatively connected to the drive gear with rotation of the auger
3 moving toner through the outlet.

24

- 1 23. A toner cartridge for use with an image forming device comprising:
- 2 a body including an interior to contain toner and comprising a main section
- 3 and an extension that extends outward from the main section and includes a smaller
- 4 depth than the main section, the body including a top positioned on the main section,
- 5 a bottom positioned on the extension, and a front, back, and first and second lateral
- 6 sides positioned on each of the main section and the extension;
- 7 at least one chamfer positioned on the bottom of the extension to align the
- 8 body during insertion into the image forming device;
- 9 a rib positioned on the first lateral side of the extension and including a
- 10 leading edge that faces towards the bottom and is spaced away from bottom;
- 11 an outlet positioned on the front of the main section to allow the toner to be
- 12 moved from the interior and into the image forming device, the outlet positioned a
- 13 greater distance from the bottom of the extension than the rib;
- 14 a shutter operatively connected to the outlet and movable between a closed
- 15 position to prevent the toner from moving through the outlet and an open position to
- 16 allow the toner to move through the outlet; and
- 17 a drive gear positioned on the front of the main section to engage with the
- 18 image forming device, a center of the drive gear positioned farther from the bottom
- 19 than the outlet.

- 25
- 1 24. A toner cartridge for use with an image forming device comprising:
- 2 a main section;
- 3 an extension that extends outward from the body, the extension including a
- 4 smaller depth than the body and a bottom that faces away from the main section, the
- 5 extension positioned towards the image forming device during insertion of the toner
- 6 cartridge;
- 7 a plurality of alignment engagement features positioned on the extension to
- 8 align the cartridge during insertion into the image forming device, the plurality of
- 9 alignment engagement features comprising at least a rib, a slot, and a chamfer; and
- 10 a plurality of functional engagement features positioned on the main section to
- 11 engage with the image forming device, the plurality of functional engagement
- 12 features comprising at least a shutter and a drive gear.

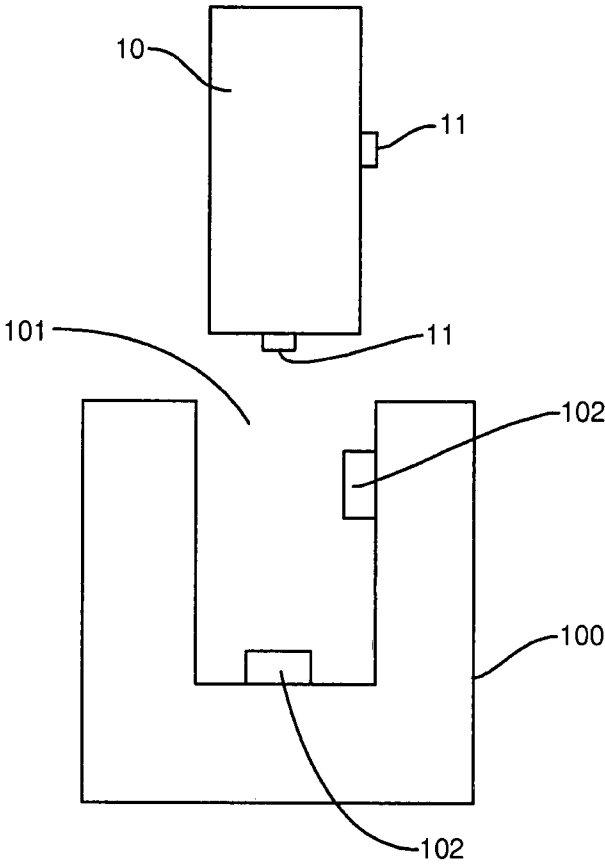


Fig. 1

27

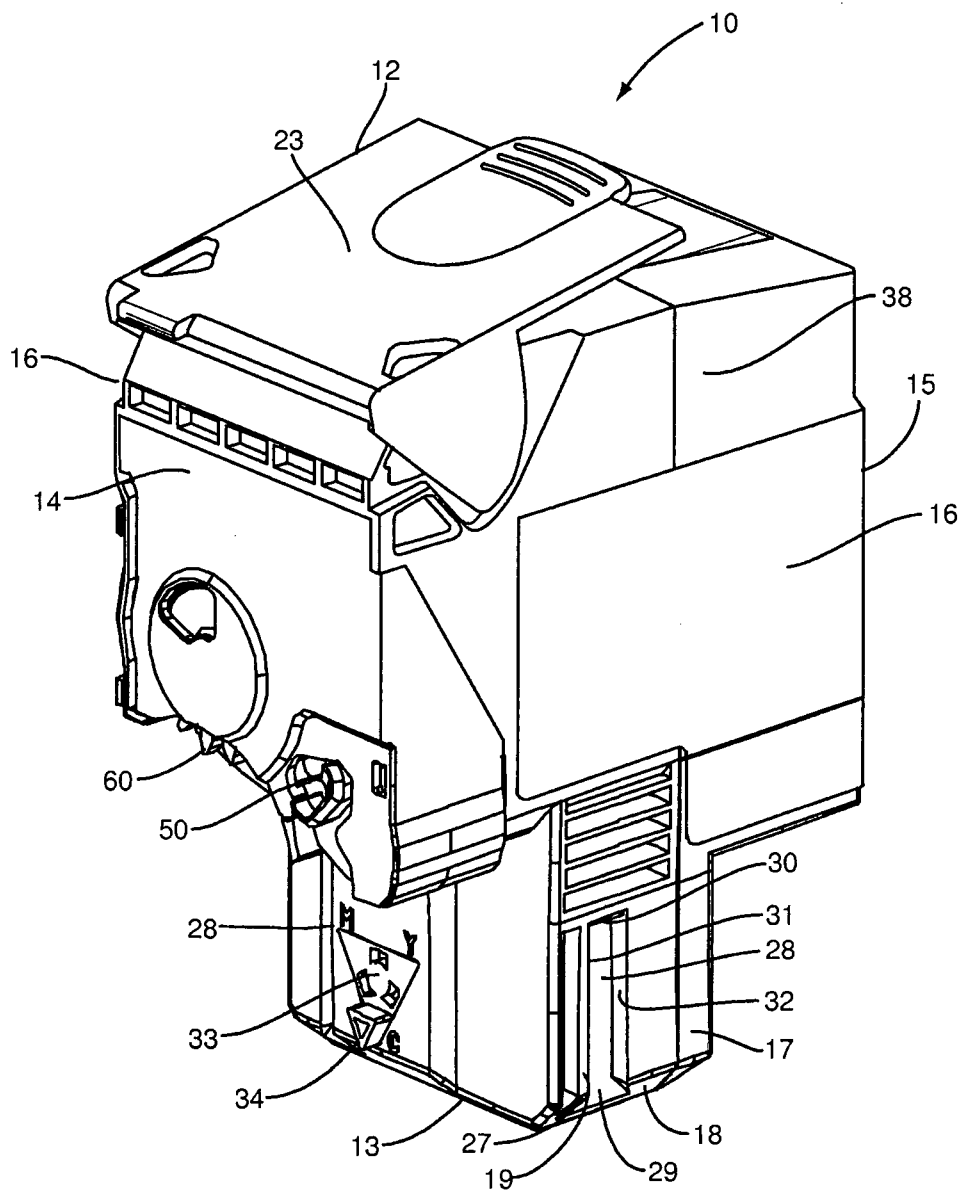


Fig. 2

28

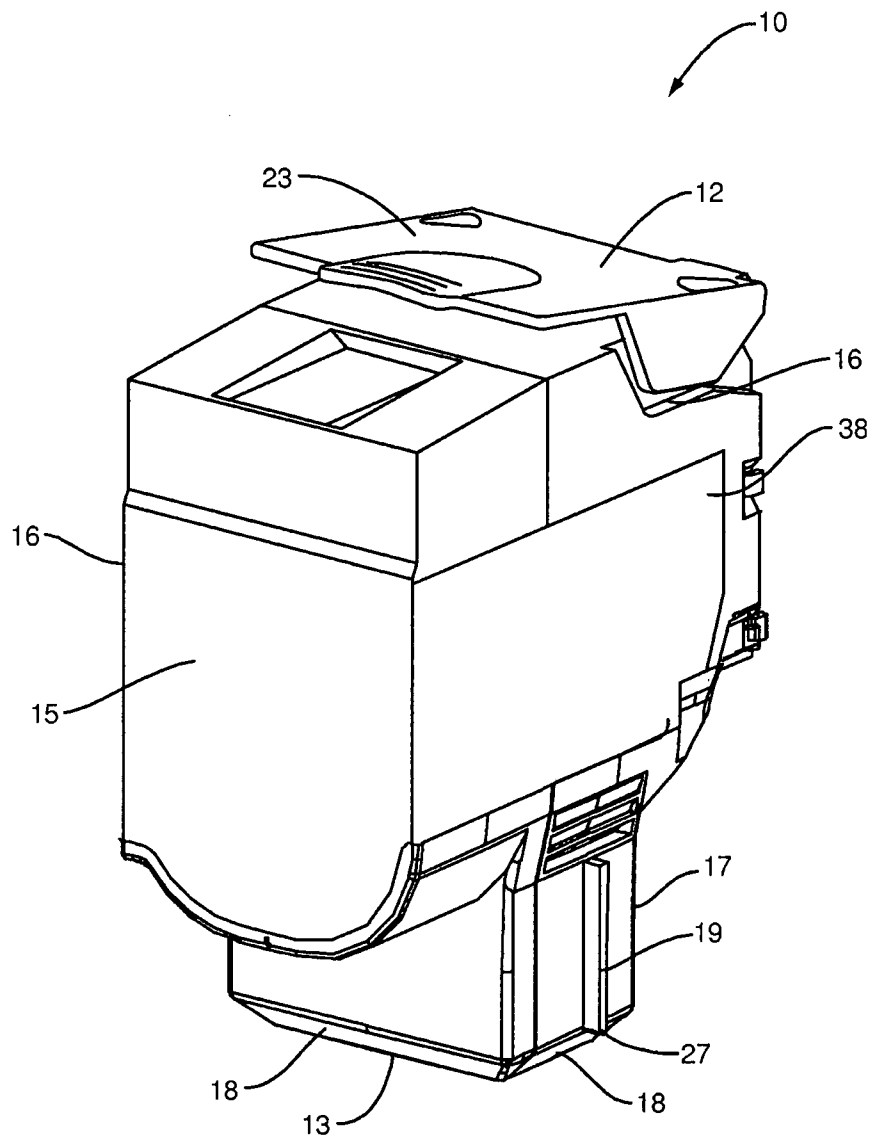


Fig. 3

30

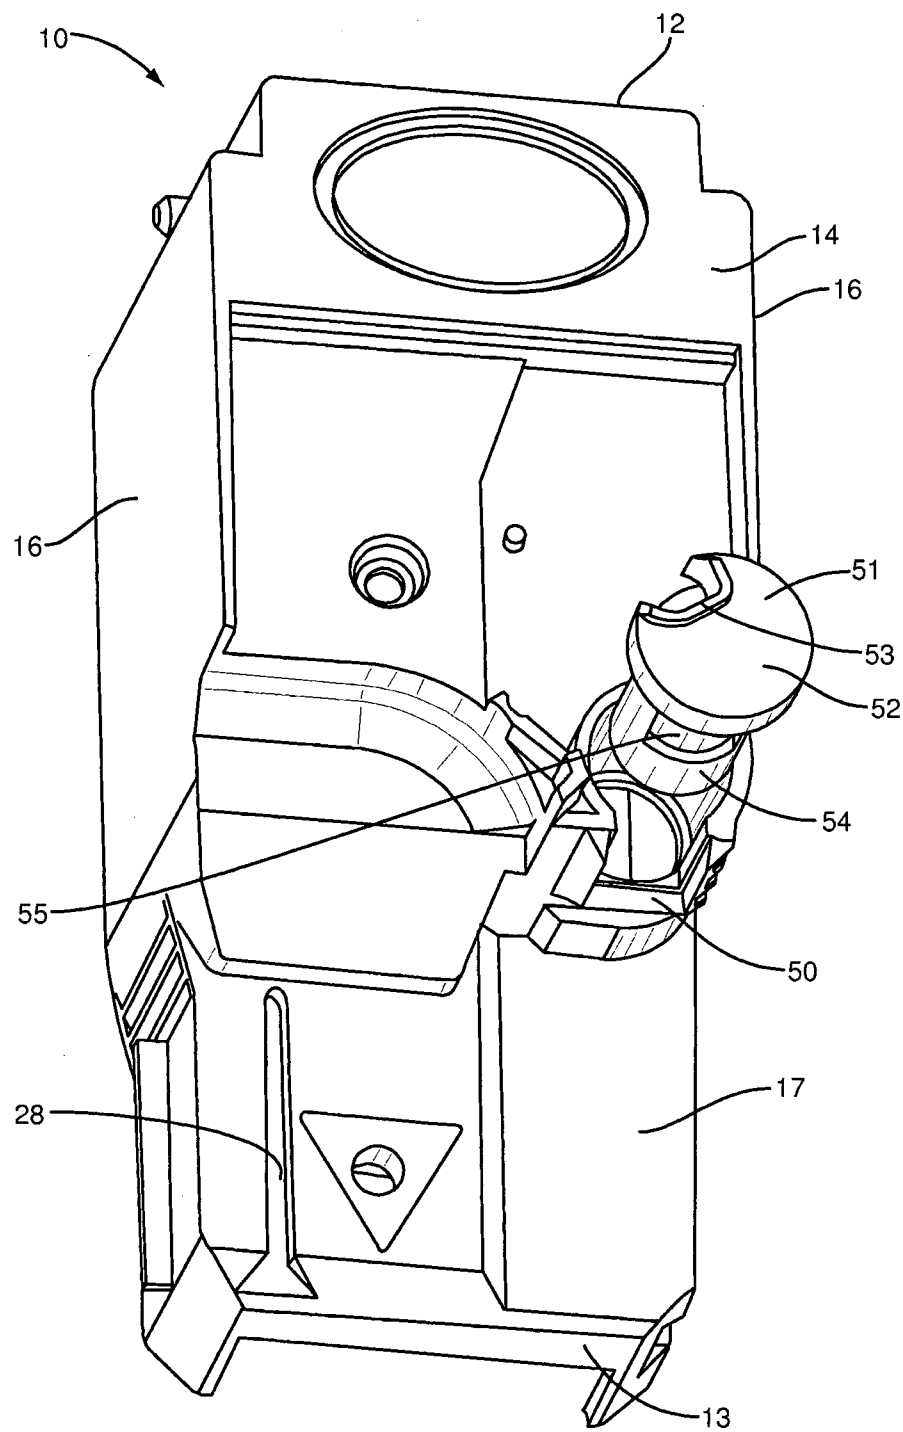


Fig. 5

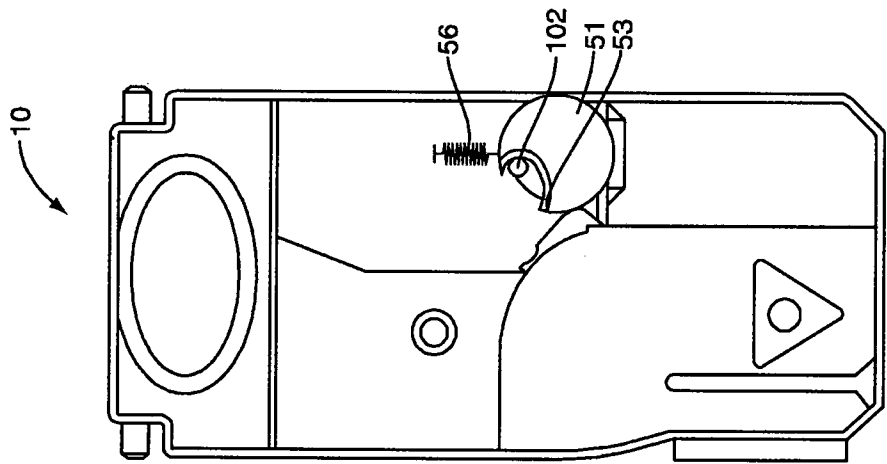


FIG. 6B

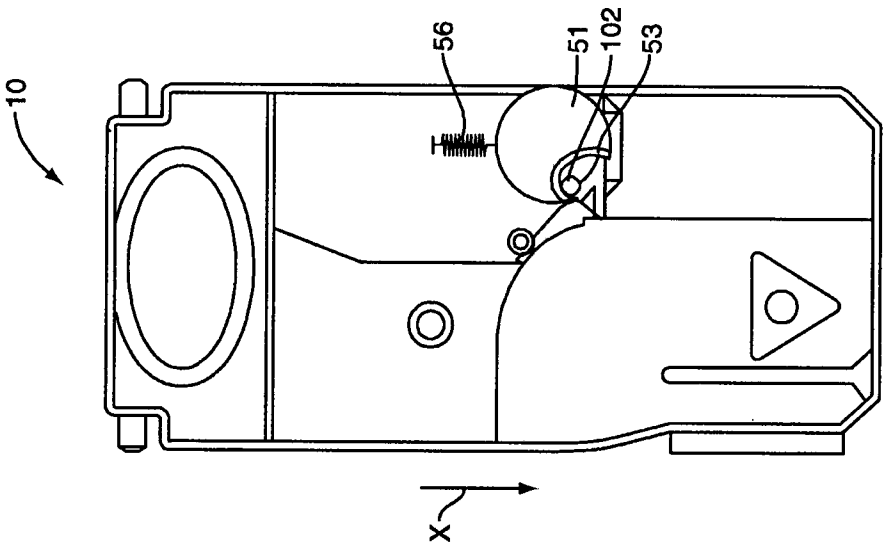


FIG. 6A

32

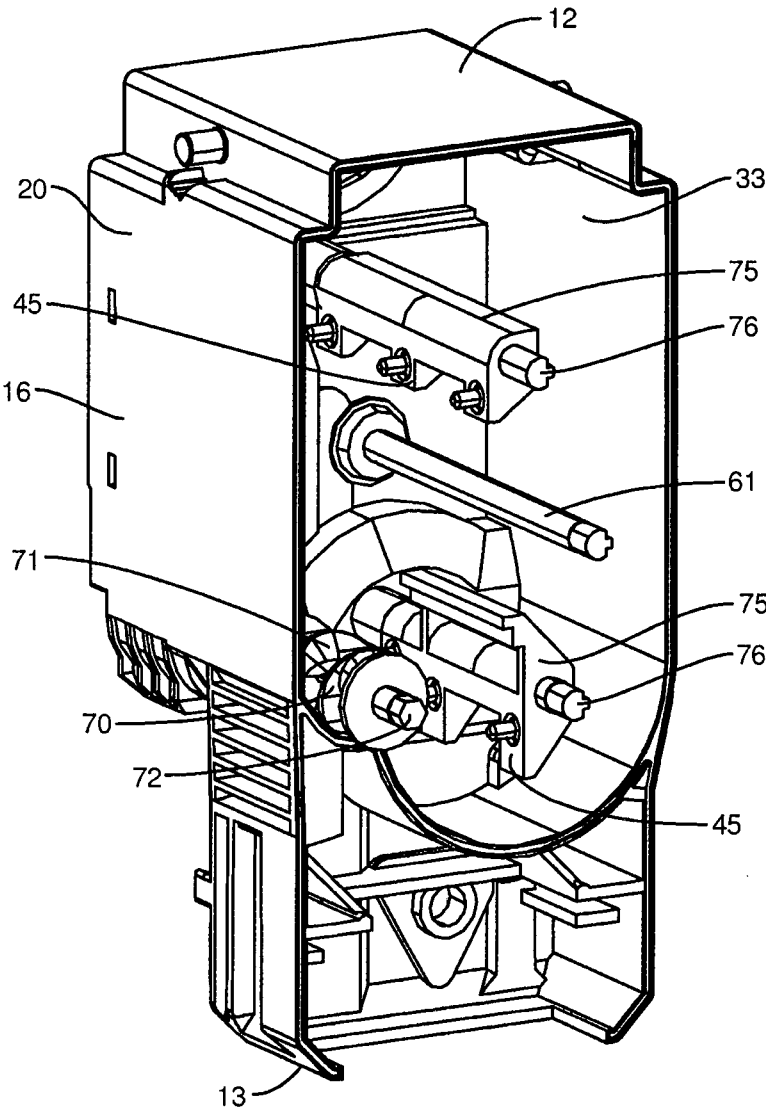


Fig. 7

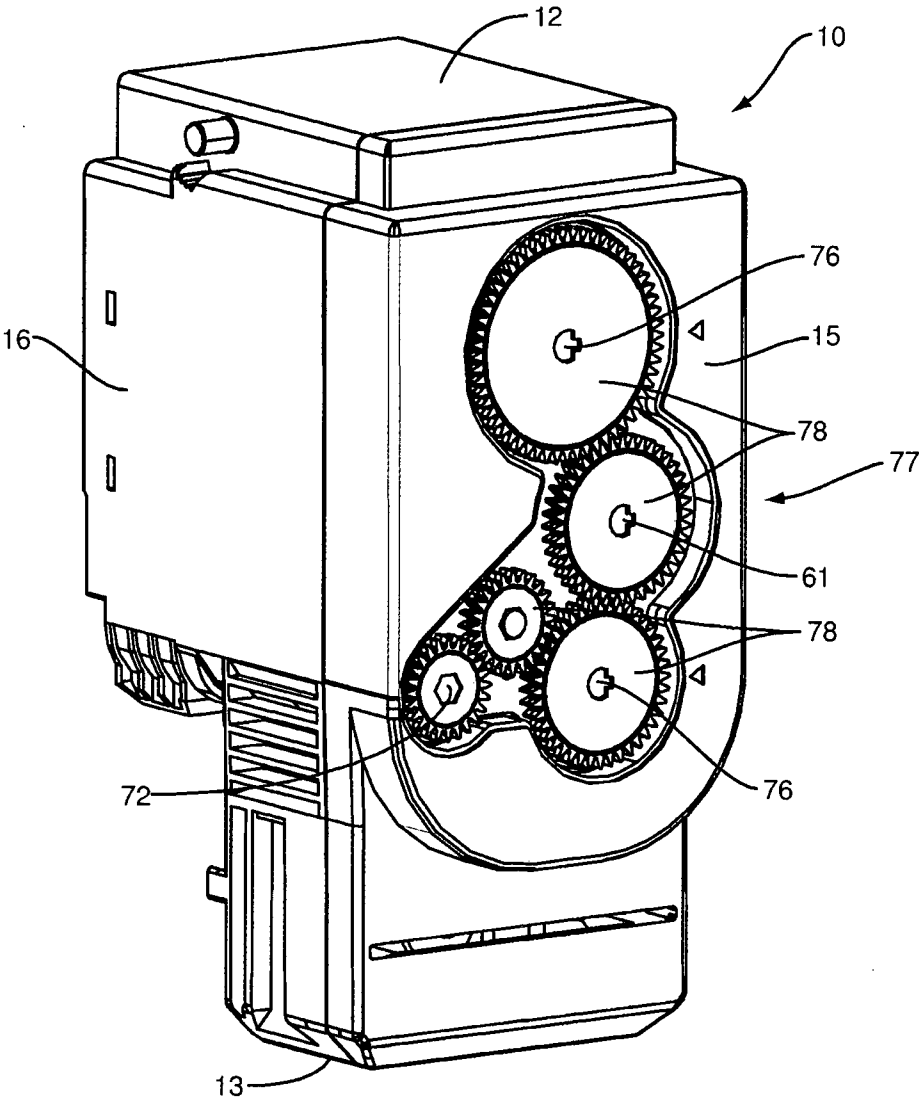


Fig. 8

34

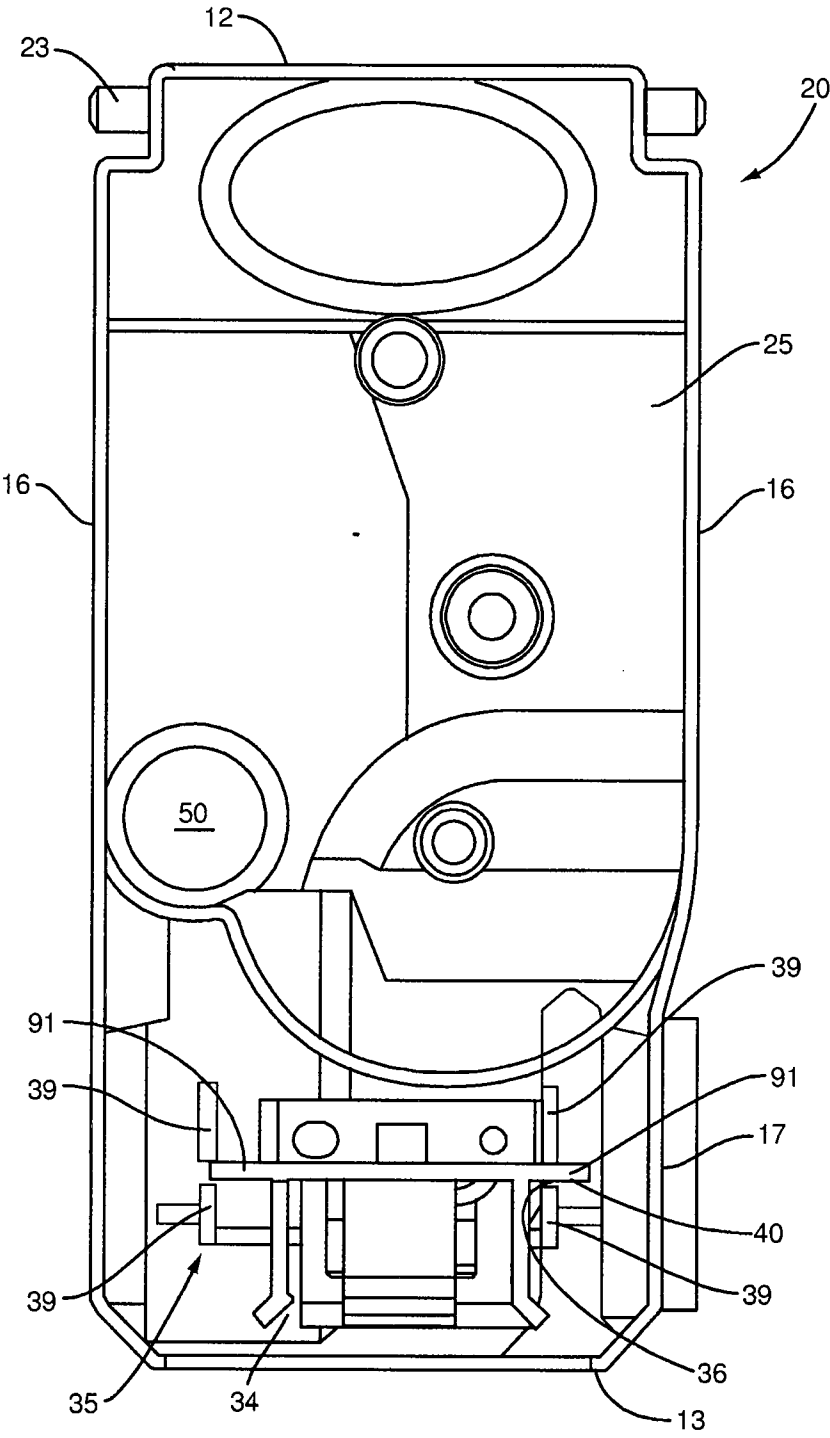


Fig. 9

35

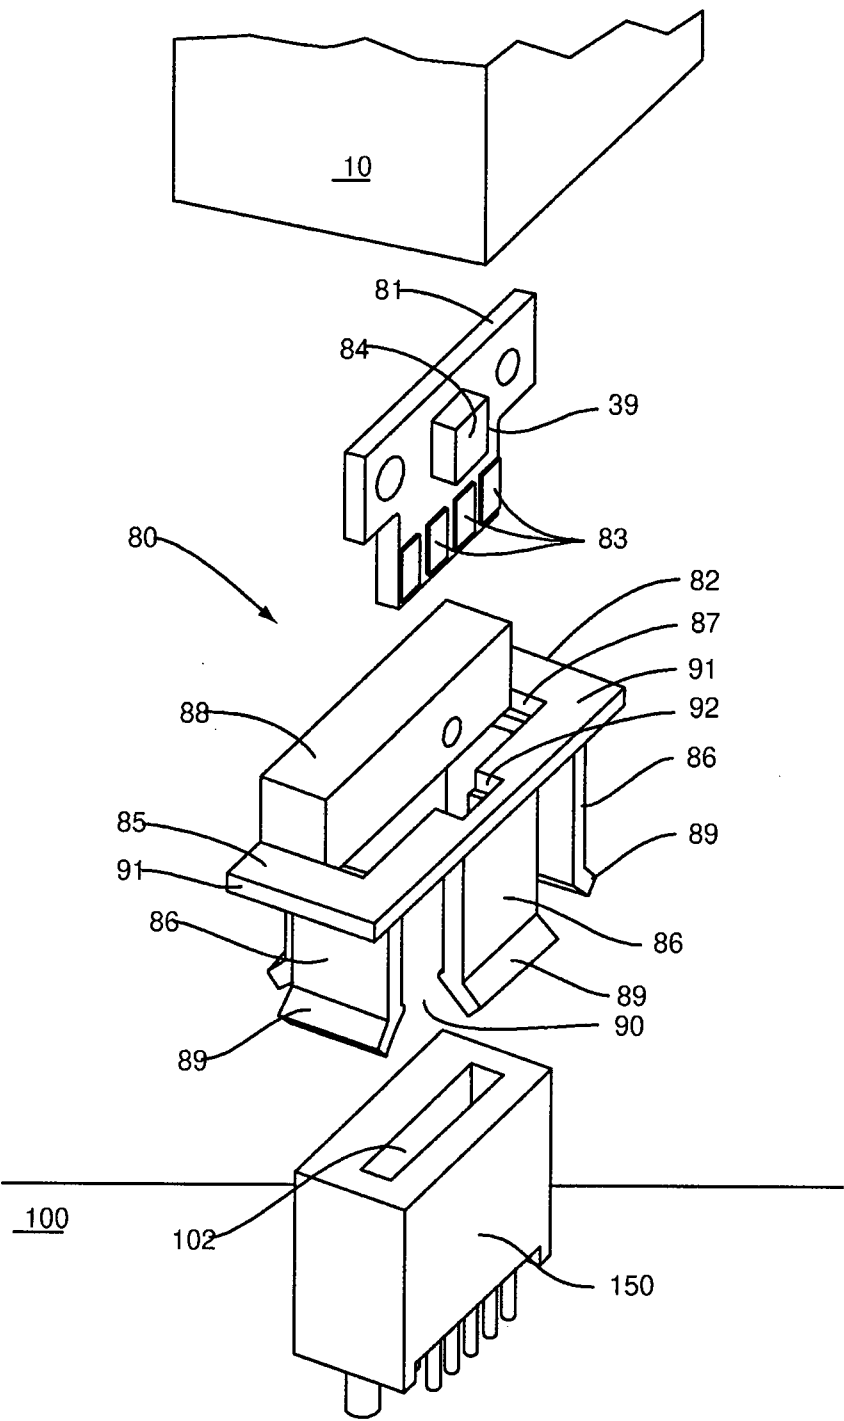


Fig. 10

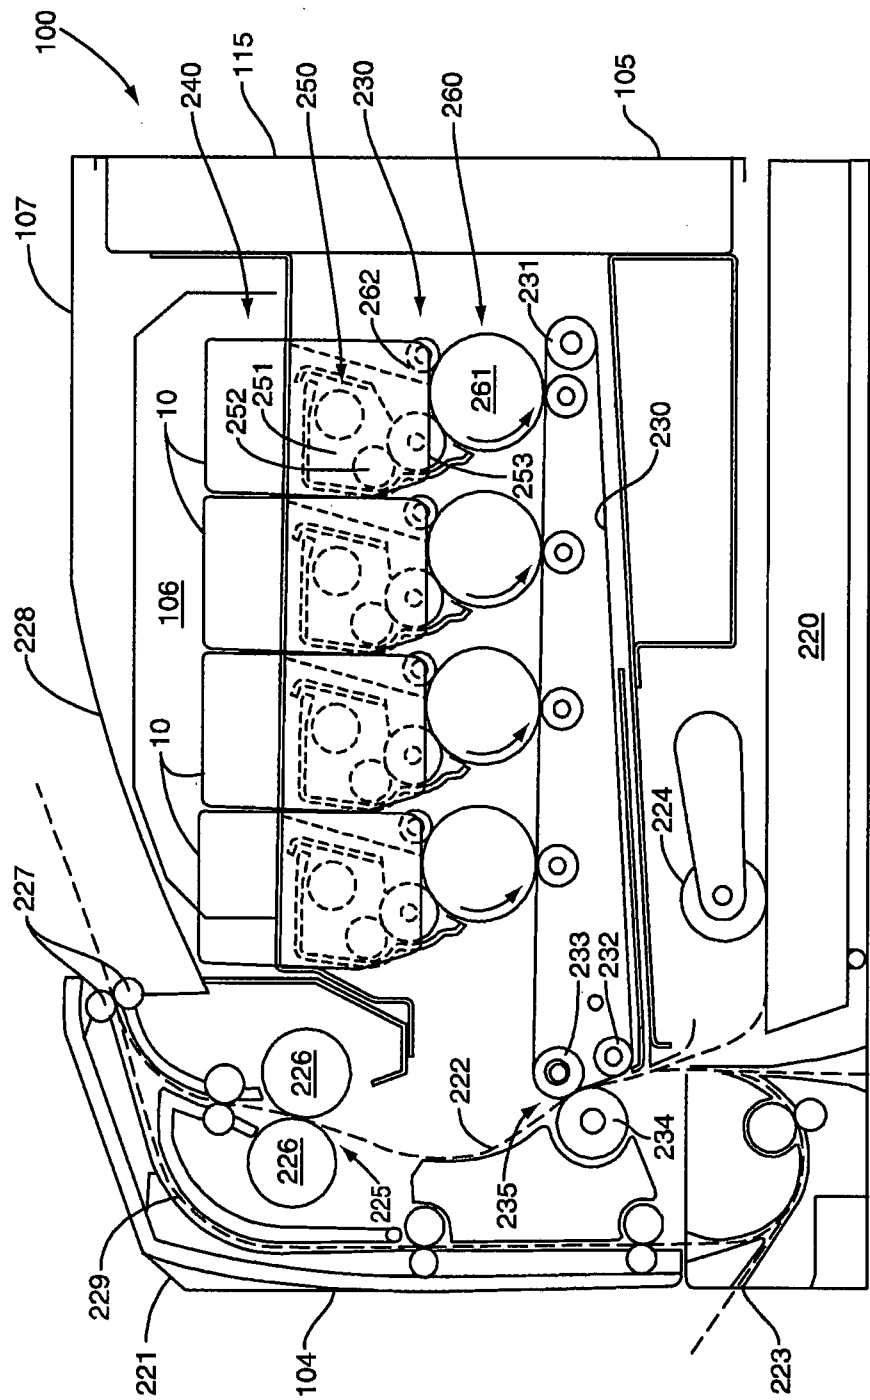


FIG. 11

37

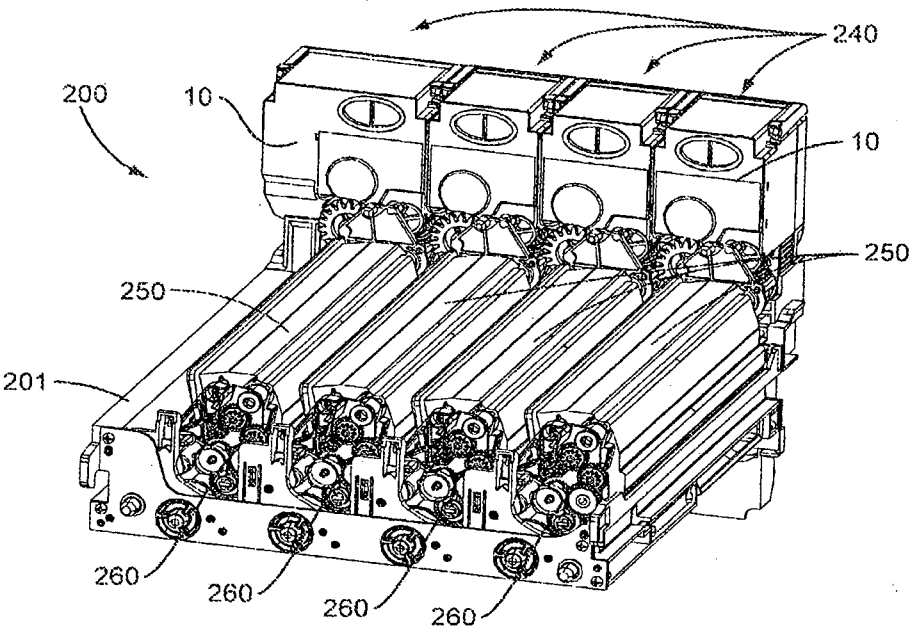


FIG. 12A

38

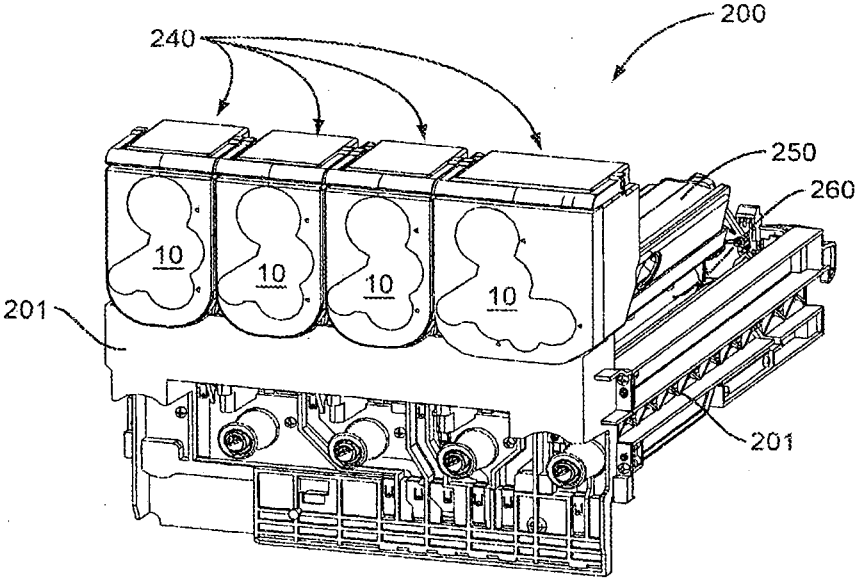


FIG. 12B

39



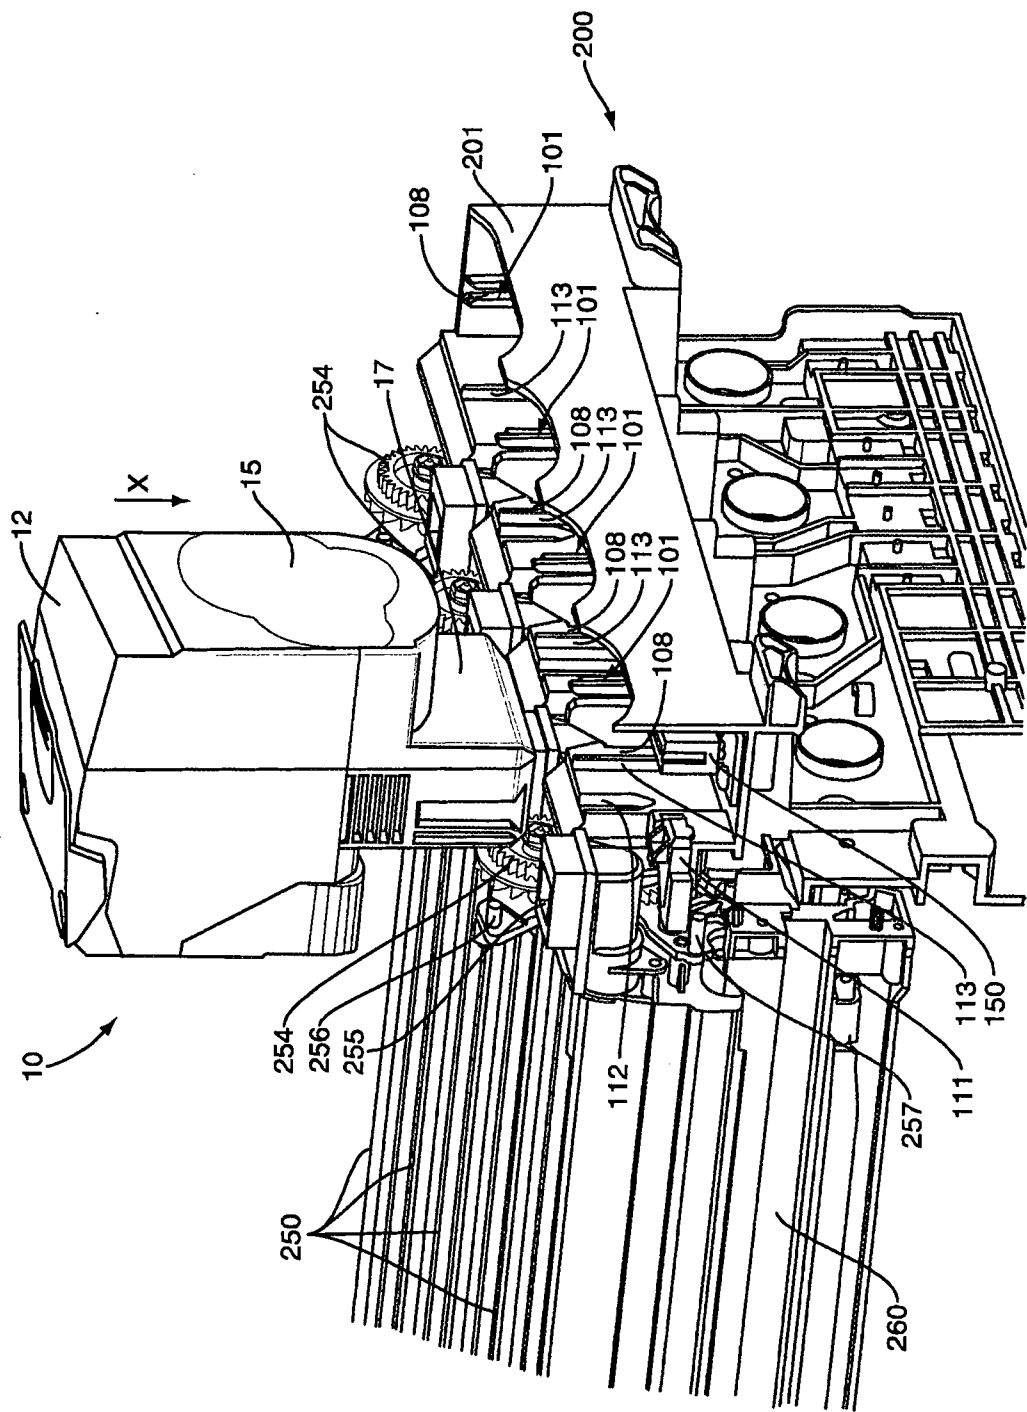


FIG. 13

40

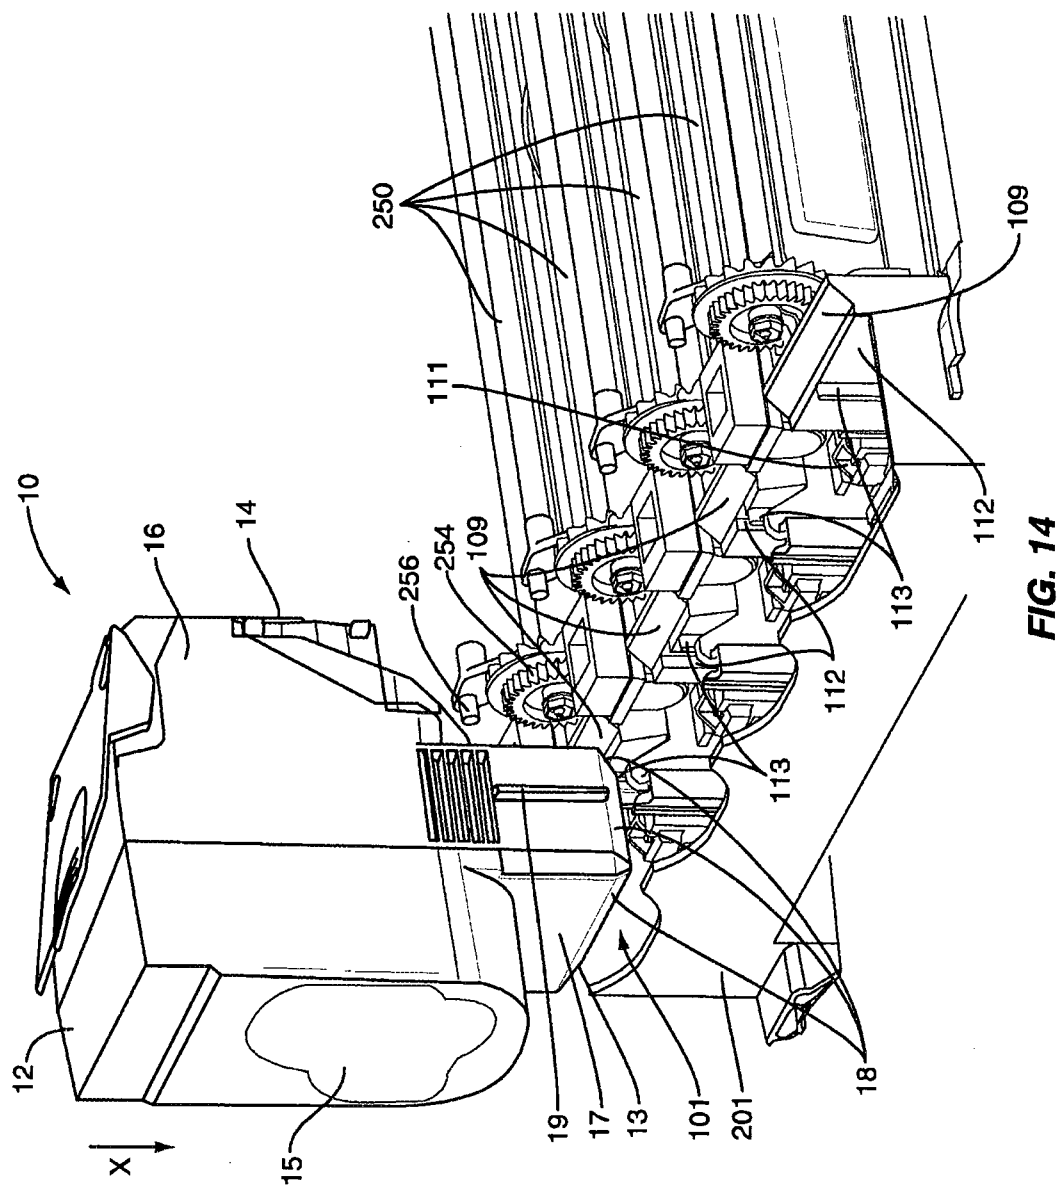

41

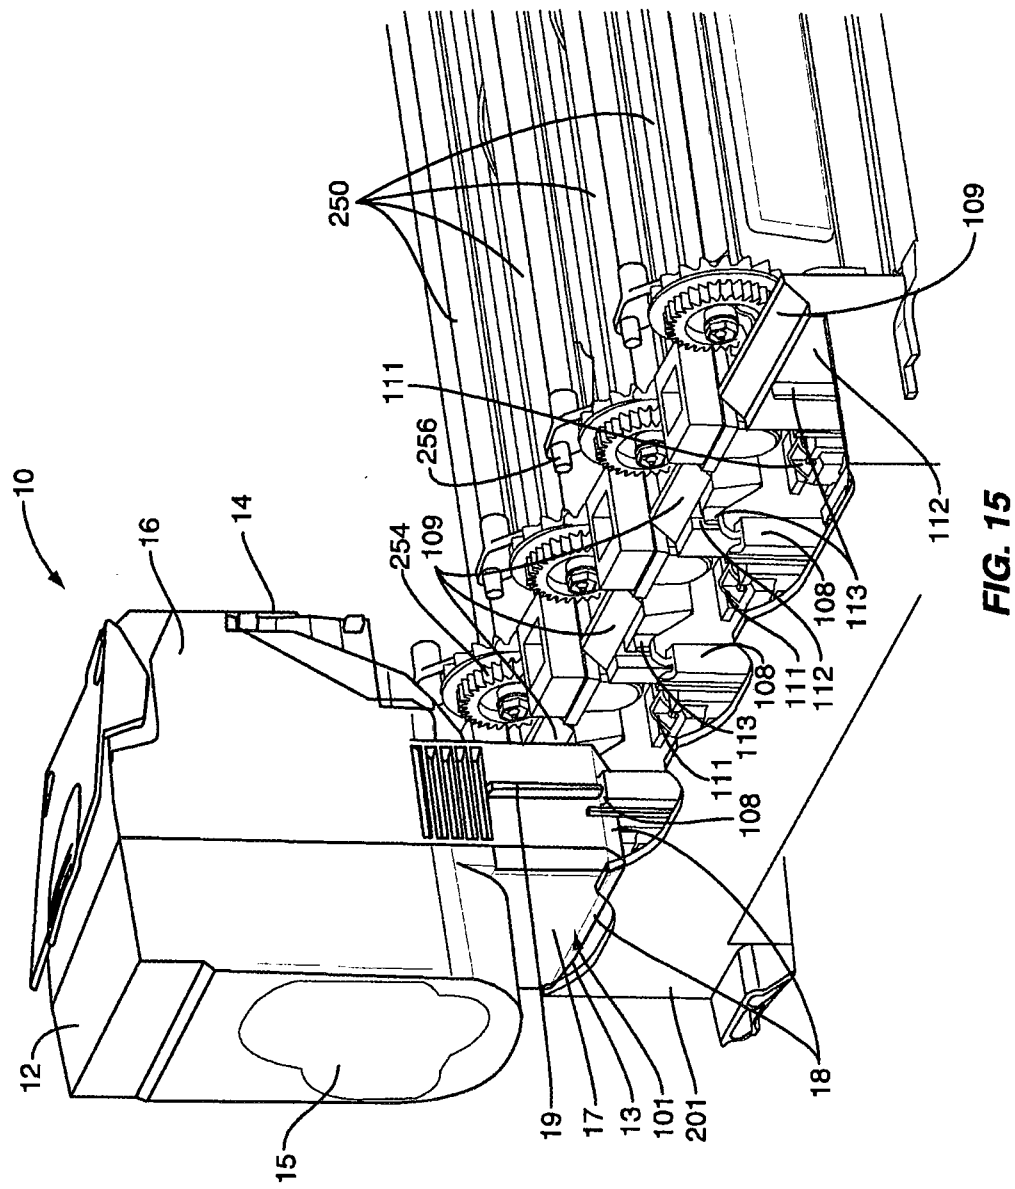

42

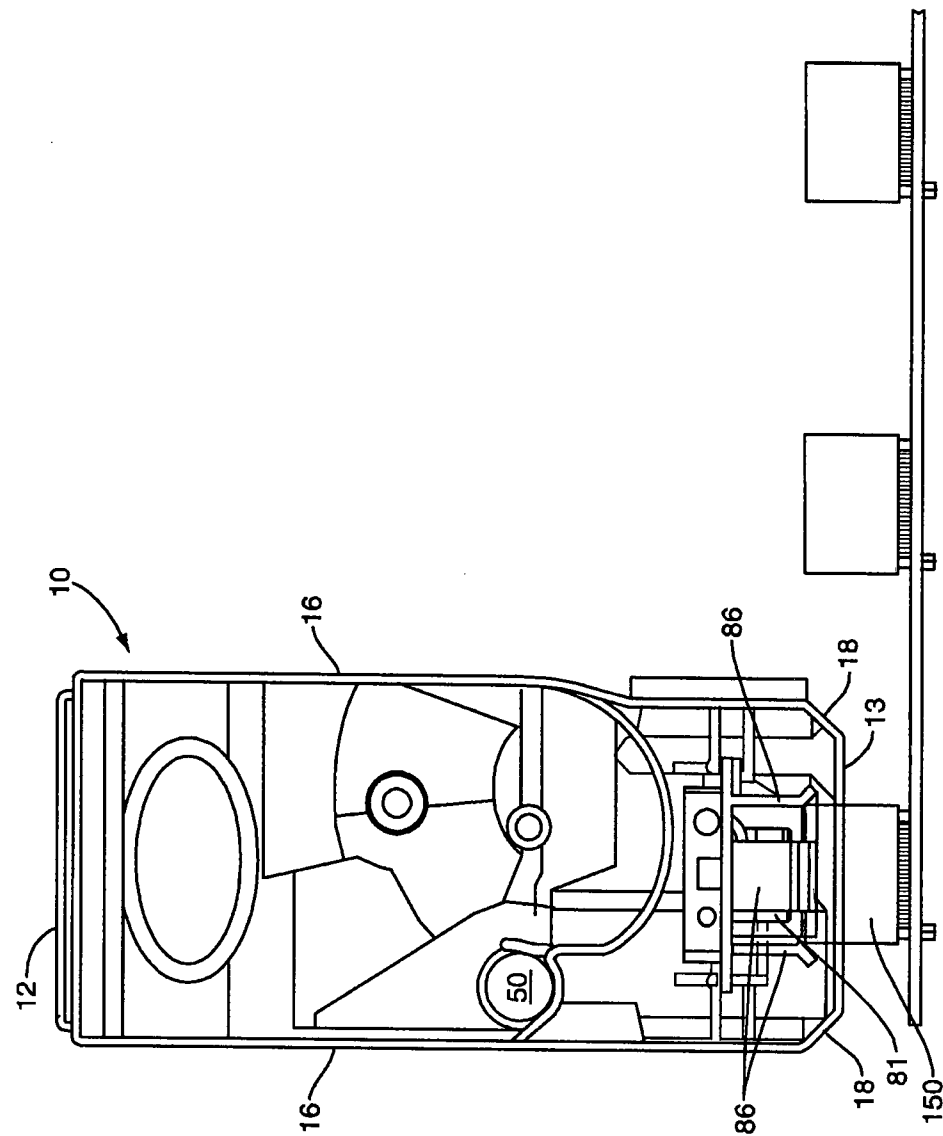


FIG. 16

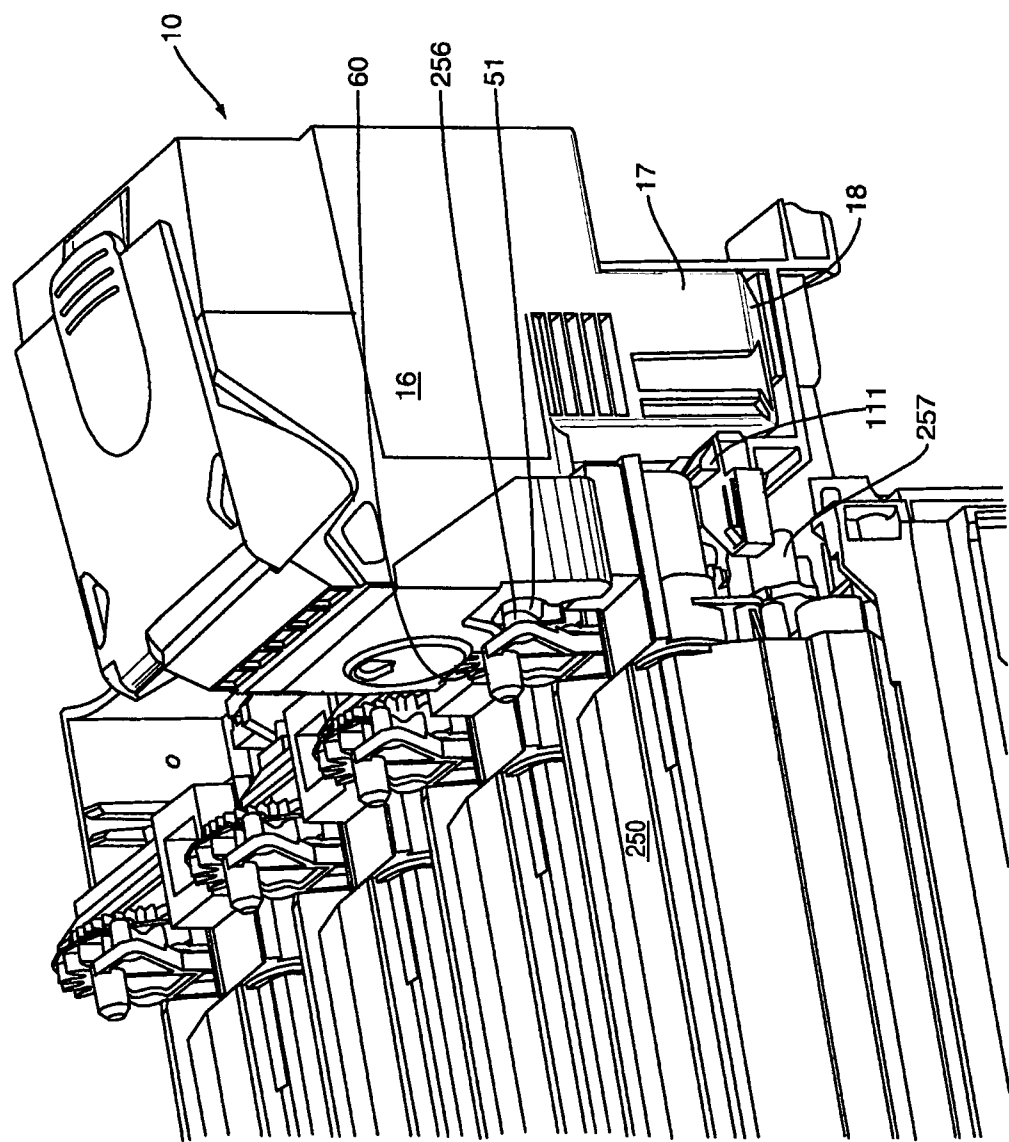


FIG. 17

44

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 08/85182

A. CLASSIFICATION OF SUBJECT MATTER IPC(8) - G03G 21/16 (2009.01) USPC - 399/111 According to International Patent Classification (IPC) or to both national classification and IPC												
B. FIELDS SEARCHED												
Minimum documentation searched (classification system followed by classification symbols) USPC: 399/111												
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched USPC: 399/106; 399/107; 347/158												
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) PubWEST(USPT,PGPB,EPAB,JPAB); DialogPRO; WIPO, EPO, CITESEER, Google patents, Google scholar Search Terms Used: toner cartridge, main section, extension, cavity, lockout, gear train, auger, shutter, chamfer, beveled edge, outlet, body and sides, alignment, align, drive gear, chamfer												
C. DOCUMENTS CONSIDERED TO BE RELEVANT												
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.										
X	US 2005/0169672 A1 (BAN et al.) 04 August 2005 (04.08.2005) entire document especially abstract, para [0012], para [0072]-[0073], para [0077]-[0080], para [0090], para [0104], para [0123]-[0125], para [0143], para [0147]-[0148], para [0154]-[0156], para [0189]-[0190].	1-24										
A	US 2005/0117919 A1 (ITO et al.) 02 June 2005 (02.06.2005) entire document	1-24										
☐ Further documents are listed in the continuation of Box C. ☐												
* Special categories of cited documents: <table border="0"><tr><td>"A" document defining the general state of the art which is not considered to be of particular relevance</td><td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td></tr><tr><td>"E" earlier application or patent but published on or after the international filing date</td><td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td></tr><tr><td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td><td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td></tr><tr><td>"O" document referring to an oral disclosure, use, exhibition or other means</td><td>"&" document member of the same patent family</td></tr><tr><td>"P" document published prior to the international filing date but later than the priority date claimed</td><td></td></tr></table>			"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family	"P" document published prior to the international filing date but later than the priority date claimed	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention											
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone											
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art											
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family											
"P" document published prior to the international filing date but later than the priority date claimed												
Date of the actual completion of the international search 12 January 2009 (12.01.2009)		Date of mailing of the international search report 29 JAN 2009										
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201		Authorized officer: Lee W. Young PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774										

CARTUCHOS DE TÓNER PARA UN DISPOSITIVO DE FORMACIÓN DE IMÁGENES

Antecedentes

La presente invención está relacionada con cartuchos para usar con dispositivos de formación de imágenes y, en forma más particular, con un cartucho con uno o más elementos de engranaje que engranen con el dispositivo de formación de imágenes durante la inserción.

Los cartuchos de tóner contienen una cantidad predeterminada de tóner. Los cartuchos están contruidos para ser insertados en y engranar con el dispositivo de formación de imágenes. Este engranaje hace que el tóner en el cartucho sea transferido al dispositivo de formación de imágenes y por último a una hoja de soporte de impresión durante el proceso de formación de imágenes. El engranaje entre el cartucho y el dispositivo de formación de imágenes es importante para asegurarse de que el cartucho funcione debidamente dentro del dispositivo de formación de imágenes para transferir el tóner.

El cartucho debe estar construido de modo de impedir la filtración de tóner antes de su inserción en el dispositivo, y después de su inserción en el dispositivo. El cartucho puede incluir un mecanismo de cierre que impida que el tóner escape antes de que sea insertado en el dispositivo de formación de imágenes. Durante la inserción, el cartucho debe engranar con el dispositivo de formación de imágenes en una forma que mueva el mecanismo de cierre de una posición cerrada a una posición abierta que permita que el tóner se mueva desde el cartucho hacia el interior del dispositivo de formación de imágenes.

Se debe alinear cuidadosamente el cartucho en relación con el dispositivo de formación de imágenes a fin de garantizar una inserción precisa que impida la filtración de tóner. El cartucho puede incluir uno o más elementos de engranaje que engranen en el dispositivo de formación de imágenes que proporcionen una alineación exacta. Los

elementos de engranaje pueden estar ubicados en diversos lugares en el cuerpo del cartucho.

Resumen

La presente solicitud está relacionada con cartuchos de tóner para usar con dispositivos de formación de imágenes. El cartucho puede incluir un interior para contener el tóner que es transferido al dispositivo de formación de imágenes y es usado en la formación de imágenes. El cartucho puede incluir uno o más elementos de engranaje que interactúan con el dispositivo de formación de imágenes durante la inserción. Los elementos de engranaje pueden incluir uno o más elementos de alineación que alineen el cartucho durante la inserción en el dispositivo de formación de imágenes. Los elementos de engranaje pueden incluir también uno o más elementos funcionales para que el cartucho transfiera en forma eficaz el tóner al dispositivo de formación de imágenes.

Breve descripción de los dibujos

La Figura 1 es un diagrama esquemático de un cartucho de tóner y un dispositivo de formación de imágenes de acuerdo a una modalidad.

La Figura 2 es una vista en perspectiva de un primer lado de un cartucho de acuerdo a una modalidad.

La Figura 3 es una vista en perspectiva de un segundo lado de un cartucho de acuerdo a una modalidad.

La Figura 4 es una vista lateral de un cartucho de acuerdo a una modalidad.

La Figura 5 es una vista de despiece de un obturador retirado de un cartucho de tóner de acuerdo a una modalidad.

La Figura 6A es una vista lateral de un obturador en una posición cerrada de acuerdo a una modalidad.

La Figura 6B es una vista lateral de un obturador en una posición abierta de acuerdo a una modalidad.

La Figura 7 es una vista en perspectiva de un interior de un cartucho de acuerdo a una modalidad

La Figura 8 es una vista en perspectiva de un tren de impulsión en un cartucho de acuerdo a una modalidad.

La Figura 9 es una vista esquemática lateral de un conector eléctrico en un cartucho de acuerdo a una modalidad.

La Figura 10 es una vista en perspectiva de despiece de un conector eléctrico de acuerdo a una modalidad.

La Figura 11 es una vista esquemática lateral de un dispositivo de formación de imágenes de acuerdo a una modalidad.

La Figura 12A es una vista en perspectiva de un primer lado de una unidad de formación de imágenes de acuerdo a una modalidad.

La Figura 12B es una vista en perspectiva de un segundo lado de una unidad de formación de imágenes de acuerdo a una modalidad.

La Figura 13 es una vista en perspectiva de un cartucho que es insertado en un dispositivo de formación de imágenes de acuerdo a una modalidad.

La Figura 14 es una vista en perspectiva de un cartucho que es insertado en un dispositivo de formación de imágenes de acuerdo a una modalidad.

La Figura 15 es una vista en perspectiva de un cartucho que es insertado en un dispositivo de formación de imágenes de acuerdo a una modalidad.

La Figura 16 es una vista esquemática lateral de un conector eléctrico en un cartucho que engrana con un conector eléctrico en un dispositivo de formación de imágenes de acuerdo a una modalidad.

La Figura 17 es una vista en perspectiva de un cartucho totalmente insertado en un dispositivo de formación de imágenes de acuerdo a una modalidad.

Descripción detallada

48

La presente solicitud está relacionada con cartuchos de tóner para usar dentro de dispositivos de formación de imágenes. La Figura 1 ilustra en forma esquemática una modalidad que incluye un cartucho de tóner 10 con uno o más elementos de engranaje 11. El dispositivo de formación de imágenes 100 incluye un área de recepción 101 dimensionada para recibir el cartucho 10. Uno o más elementos de engranaje 102 están asociados con el dispositivo de formación de imágenes 100. Los elementos de engranaje 11 en el cartucho 10 interactúan con los elementos de engranaje 102 en el dispositivo de formación de imágenes 100 durante la inserción del cartucho 10 en el área de recepción 101. Los elementos de engranaje 11, 102 pueden desempeñar una variedad de funciones, incluyendo el posicionamiento del cartucho 10 dentro del dispositivo de formación de imágenes 100, haciendo que el tóner dentro del cartucho 10 se mueva hacia el dispositivo de formación de imágenes 100, permitiendo que el cartucho 10 se comuniqué con el dispositivo de formación de imágenes 100, proporcionando fuerza desde el dispositivo de formación de imágenes 100 al cartucho 10, y otros. Los elementos de engranaje 11, 102 están ubicados de modo que las diversas funciones sean realizadas en una forma orquestada durante la inserción del cartucho 10.

Las Figuras 2, 3 y 4 ilustran una modalidad de un cartucho 10. El cartucho 10 contiene tóner que es transferido al dispositivo de formación de imágenes 100. El cartucho 10 incluye una parte superior 12, un fondo 13, una parte delantera 14, una parte posterior 15 y lados 16. Un asa 23 puede estar unida a la parte superior 12 para que sea más fácil agarrar el cartucho 10 y manipularlo durante su inserción y remoción del dispositivo de formación de imágenes 100. En una modalidad, el asa 23 está unida pivotalmente al cartucho 10.

El cartucho 10 incluye una sección principal 38 y una extensión 17. La extensión 17 está ubicada en el fondo 13 del cartucho 10. Según se ilustra en la Figura 4, una profundidad W' de la extensión 17 medida entre la parte delantera 14 y la parte