

SEÑORES

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO

DIVISIÓN DE NUEVAS CREACIONES

E. \_\_\_\_\_ S. \_\_\_\_\_ D. \_\_\_\_\_

Ref.: Expediente N° 05-058.758

Solicitud de Patente de Invención Titulada: "MODULOS DISPENSADORES DE EFECTIVO, PARA MAQUINAS AUTOMATIZADAS DE BANCA"

Solicitante: DIEBOLD INCORPORATED

**RESPUESTA AL OFICIO N°. 7126 NOTIFICADO**  
**POR FIJACION EN LISTA No. 327, DE FECHA 19 DE AGOSTO DE 2005,**  
**(EXAMEN DE FORMA)**

CARLOS R. OLARTE, mayor de edad y vecino de Bogotá, identificado tal como aparece al pie de mi firma, en mi carácter de apoderado de la sociedad en referencia, me permito dar respuesta al auto proferido por ese Despacho, dentro del término legal previsto en el artículo 39 de la Decisión 486, en los siguientes términos:

1. En respuesta a la primera observación del Examinador, me permito aportar copia completa de la Solicitud Internacional tal como fue publicada, ya que debido a un error en el momento de efectuar la solicitud, se remitieron a ese despacho copias incompletas del Capítulo Descriptivo y Capítulo Reivindicatorio.

228  
79

2. En respuesta a la segunda observación del Examinador, me permito adjuntar copia del Reporte del Examen Preliminar Internacional, tal como fue emitido por la autoridad Internacional de Examen Preliminar, el cual, valga aclarar, no contiene anexos.

3. En respuesta a la tercera observación del Examinador, me permito aportar junto al presente memorial, el documento de cesión debidamente legalizado, junto con su correspondiente traducción, según lo previsto en el Art. 26- k de la Decisión 486.

4. Finalmente, y para inmediata referencia el despacho, me permito adjuntar copia de la solicitud de adición de inventores presentada ante la oficina internacional, según la Regla 92 bis del Reglamento PCT.

Atentamente,



CARLOS R. OLARTE  
C.C. No. 79.782.747 de Bogotá  
T.P. 74.295

Anexo:      Copia de la Solicitud Internacional  
                 Examen Preliminar Internacional  
                 Documento de Cesión  
                 Copia de la solicitud de adición de inventores presentada ante la Oficina  
                 Internacional

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
15 July 2004 (15.07.2004)

PCT

(10) International Publication Number  
WO 2004/059419 A2

- (51) International Patent Classification: G06F (74) Agent: JOCKE, Ralph; 231 South Broadway, Medina, OH 44256 (US).
- (21) International Application Number: PCT/US2003/039968 (81) Designated States (national): AH, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GR, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PI, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 15 December 2003 (15.12.2003) (84) Designated States (regional): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/433,888 16 December 2002 (16.12.2002) US  
60/433,889 16 December 2002 (16.12.2002) US
- (71) Applicant: DIEBOLD, INCORPORATED [US/US]; 5995 Mayfair Road, North Canton, OH 44720 (US).
- (72) Inventors: JOHNSON, Michael, S.; 1003 Eagle Lane, Akron, OH 44612 (US). HARTY, Michael; 6265 Walnut Ridge Circle, NW, North Canton, OH 44720 (US).
- Published:  
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AUTOMATED BANKING MACHINE CURRENCY DISPENSER MODULES

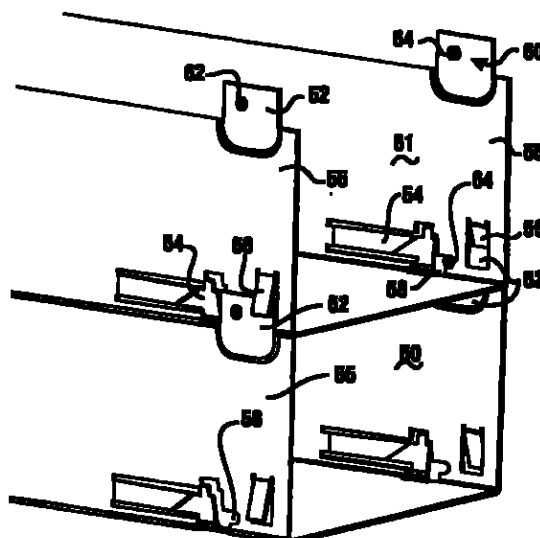

(57) Abstract: Dispenser modules (50, 51) include structure permitting their securement in stacked and aligned relation. The dispenser modules can contain sheet media such as notes and other items. The dispenser modules can be used in an automated banking machine operative to dispense multiple types of sheet media. Modules include a projection plate (52) and a biasing latch arm (54) on side walls thereof. The projection plate includes a pin adapted to be received in a side wall slot. A first module is locked to a second module through a first module latch preventing movement of a second module pin from a first module slot. Disassembly of the locked modules can occur with compressing of the latch to release the modules relative to each other.

88  
81

**AUTOMATED BANKING MACHINE CURRENCY**  
**DISPENSER MODULES**

**TECHNICAL FIELD**

5        This invention relates to automated banking machines. Specifically, this invention relates to currency dispensers for automated banking machines and the securement of dispenser modules in such machines.

**BACKGROUND ART**

10        Automated banking machines are known in the prior art. One type of automated banking machine, known as an automated teller machine (ATM), allows a consumer to conduct banking transactions without the necessity of a banking employee directly taking part. Such transactions might include making deposits to accounts, checking balances, transferring funds, obtaining a cash withdrawal, or obtaining other items. As used herein, the phrase automated banking machine is not intended to limit the scope of the  
15        disclosure, but may include any type of device that enables automating transactions involving transfers representative of value.

Other types of automated banking machines may be used to dispense currency to a customer, bank teller, cashier or other service provider. Automated banking machines may be used to dispense various types of items  
20        to users. Some types of automated banking machines may dispense items such as tickets, coupons, vouchers, or other items of value. Automated banking machines generally store a multitude of such items in a fashion enabling the machine to quickly deliver one or more items without error. Some automated banking machines may accept deposits in the form of  
25        envelopes, checks, cash, or other items. Some automated banking machines may be used for providing credit, making bill payments, or to debit or deposit funds in various accounts.

The devices enabling storage and delivery of the sheet items may at times require replenishing, maintenance, or repair. In automated banking

81  
82

machines such as those made by Diebold, Incorporated, the assignee of the present invention, sheet items that are dispensed are generally held in cassettes. The cassettes are enabled to be replaced by authorized personnel who have gained access to a secure chest portion of the machine which houses the cassettes. This enables authorized personnel to quickly replenish items to be dispensed. This can be done by replacing the cassettes or by removing the cassettes, adding sheets thereto and reinstalling the cassettes.

While replenishing sheet items may readily be accomplished, it is sometimes necessary to conduct more extensive maintenance or repair activities. In the event repair or replacement of certain components of the machine are necessary, the sheet dispenser assembly may need to be removed from the housing. The weight and delicate nature of some components of the sheet dispenser assembly can make removal and reinstallation of the dispenser mechanism difficult. The dispenser mechanism may also include a number of stacked dispenser modules for storing and selectively dispensing documents stored in the cassettes. The stacked dispenser modules may also need to be disassembled. Very accurate positioning and alignment of dispenser mechanism components are often required for proper operation of the machine, which necessitates care during reinstallation. The proper alignment and securement of stacked dispenser modules are also required. All of these requirements add to the difficulty in servicing the dispenser mechanism.

It may also be useful in some situations to add dispenser modules to an automated banking machine. Adding dispenser modules enables additional types of items or more of a particular type of item to be dispensed in transactions carried out through operation of the machine.

#### DISCLOSURE OF INVENTION

Thus there exists a need for an apparatus and method for more easily removing, disassembling, and reinstalling a sheet dispenser assembly of an automated banking machine to facilitate servicing of components of the

88  
03

machine. There further exists a need for more easily adding a sheet dispenser mechanism to an automated banking machine.

It is an object of an exemplary form of the present invention to provide a dispenser module for an automated banking machine.

5 It is a further object of an exemplary form of the present invention to provide a stackable dispenser module for an automated banking machine.

It is a further object of an exemplary form of the present invention to provide a stackable multimedia dispenser module for an automated banking machine.

10 It is a further object of an exemplary form of the present invention to provide a dispenser module which can be locked to another dispenser module in stacked relation.

It is a further object of an exemplary form of the present invention to provide a dispenser module which can be locked to another dispenser module in aligned relation.

15 It is a further object of an exemplary form of the present invention to provide a dispenser module which can be locked to another dispenser module in stacked and aligned relation.

It is a further object of an exemplary form of the present invention to provide a multimedia dispenser module which can be locked to another dispenser module in stacked and aligned relation for use in an automated banking machine.

20 It is a further object of an exemplary form of the present invention to provide an apparatus which enables a sheet dispenser of an automated banking machine to be more readily serviced.

It is a further object of an exemplary form of the present invention to provide a method of servicing an automated banking machine.

It is a further object of an exemplary form of the present invention to provide a method of assembling dispenser modules into locked and stacked relation for a sheet dispenser arrangement of an automated banking machine.

30

JP 08

It is a further object of an exemplary form of the present invention to provide a method of disassembling dispenser modules from a locked and stacked relation.

5 It is a further object of an exemplary form of the present invention to provide a method of servicing a sheet dispenser of an automated banking machine that reduces the time and cost of removing and reinstalling dispenser modules.

10 It is a further object of an exemplary form of the present invention to provide a method of adding a sheet dispenser to an automated banking machine.

Further objects of exemplary forms of the present invention will be made apparent in the following Best Modes for Carrying Out Invention and the appended claims.

15 The foregoing objects are accomplished in an exemplary embodiment of the invention which involves servicing an automated banking machine. The machine includes dispenser modules which can be selectively operated to dispense valuable documents or sheets (e.g., items). The items may include for example, currency, coupons, tickets, scrip, vouchers, and phone cards. The dispenser modules include structure which permits their securement to  
20 each other in stacked and aligned relation. Each module includes a pair of side walls. Each module includes a projection plate and a biasing latch arm on each side wall. The projection plates can be attached to the side walls. The latches can be cut out from the sidewalls. Each projection plate includes a pin in supporting connection therewith. Each side wall includes a slot adapted to  
25 receive a pin.

Biasing tabs can also be cut out from the sidewalls. The tabs are operative to guide and retain the projection plates during the secured stacking of the modules.

30 During a stacking assembly the projection plates are operative to compress the latches. The latches are arranged to snap outward once a plate

5

has slid beyond latch compression and toward alignment of the module. Once a latch has snapped outward the plate is no longer enabled to move in the opposite direction unless a servicer deliberately moves the latch inward against the biasing force thereof.

5 Adjacent modules can be locked so as to be secured to each other due to latches preventing the movement of pins from slots. That is, the projection plates are prevented from movement in a first direction, by engagement of the pins with the side walls, and from movement in a second opposite direction, by engagement of the projection plates with the latches. The tabs can also be  
10 used to retain the pins in the slots.

Modules can be unlocked and separated by compressing the latches, such as with a tool, to allow movement of the modules relative to each other.

Having easier ability to securely align and stack dispenser modules can facilitate repairs and/or replacement of dispenser mechanism components  
15 and/or automated banking machine components by service personnel. Sometimes it is desirable or necessary to entirely remove one or more dispenser mechanisms from the machine for service or replacement. The present invention provides a method of disassembling and/or assembling stacked dispenser modules to facilitate repair or replacement. The exemplary  
20 method also facilitates installation of new or refilled dispenser modules in the machine. Existing dispenser mechanisms for automated banking machines may also be retrofit with dispenser modules of an exemplary embodiment of the invention.

#### BRIEF DESCRIPTION OF DRAWINGS

25 Figure 1 is an isometric view of an automated banking machine used in connection with an exemplary embodiment of the invention.

Figure 2 is an isometric view of a secure chest portion with an access door open and a dispenser mechanism having locked dispenser modules extended through the opening.

Figure 3 shows a partial view of two removably connected dispenser modules.

Figure 4 shows a step in an exemplary process of connecting dispenser modules.

5        Figure 5 also shows a step in the process of connecting dispenser modules.

Figure 6 shows a partial end view of adjacent side walls of connected dispenser modules.

10       Figure 7 shows an end view of an alternative form of side walls of connected dispenser modules.

Figure 8 shows a dispenser module with a plurality of releasable locking arrangements.

Figure 9 shows a partial view of removably connected alternative dispenser modules.

15       **BEST MODES FOR CARRYING OUT INVENTION**

Referring now to the drawings and particularly to Figure 1 there is shown therein an automated banking machine, generally indicated by numeral 10, used in connection with an exemplary embodiment of the present invention. The automated banking machine 10 can be an automated teller machine (ATM). The automated banking machine 10 includes a customer interface portion and a document delivery portion.

20       The customer interface portion is supported on an upper housing 11. The interface portion can include a display 12, such as a CRT screen or other output devices for providing outputs such as visual messages and prompts to a customer or user. The interface can also include input devices, such as a keypad 13, function buttons 14, and a card reader 15. The customer interface portion can also include a receipt outlet 16 and may include other or different transaction function devices.

10 26 27

7

A document delivery portion of the machine 10 can be contained within a secure chest 20. An opening 21 is provided for delivery of sheets, such as currency, or other items to a user of the machine.

5 Other embodiments of automated banking machines used in connection with the invention may have a different type of user interface portion. For example, other embodiments may not include an interface portion on or adjacent to the chest portion. Such alternative machines may be operated as a document delivery device only. Such embodiments may be used to deliver sheets or documents to a cashier, bank teller, or other service  
10 provider. Such alternative embodiments may include a remotely positioned operator interface which selectively causes documents to be delivered through the opening 21.

In Figure 2, the chest portion 20 of the banking machine is shown in more detail. The chest encloses a secure area 22. Chest 20 includes an upper  
15 wall 23 which can support the upper housing 11 and the customer interface portion of the banking machine in the exemplary embodiment shown in Figure 1. Chest 20 also has a service opening 24, and a door 25 which can selectively close the opening 24. When the banking machine is in use, the area 22 is closed by the door 25 and is secured and locked through use of a locking  
20 device 26. Any of a number of devices may be used as a locking device 26 to secure the door in a closed position.

The secure area 22 of the chest 20 can be used to house numerous components of the banking machine. One of these components can be a sheet dispenser, generally indicated by numeral 27. The dispenser 27 includes  
25 removable cassettes 28, 29, 30, and 31. The cassettes can hold valuable documents or other sheet materials or media, such as currency, travelers checks, coupons, scrip, vouchers, wagering slips, stamps, tickets, and phone cards. Thus, a dispenser may be a multimedia dispenser. Each cassette has an associated picker which is selectively operative to remove items, such as  
30 currency sheets, from the cassette. The construction of the exemplary

ND 97  
60

embodiment shown is such that a cassette is removably mounted in supporting connection with a dispenser module 33. However, a dispenser module may have more or fewer cassettes. The dispenser 27 is shown as having four dispenser modules 33. However, a dispenser may have more or fewer dispenser modules. Any number of dispenser modules may be included in a banking machine used in connection with the invention. Of course the number of dispenser modules may be limited by the physical size of the chest 20 or other enclosure. Although an exemplary embodiment of the invention has one cassette and document picker per dispenser module, other embodiments of the invention may have other numbers or arrangements of dispenser modules, cassettes, and pickers.

Dispenser modules 33 may be secured together in stacked relation. A document presenter 35 can be attached to the top of a stack of dispenser modules. Exemplary dispenser modules are shown in U.S. Patent No. 6,293,540, the disclosure of which is incorporated herein by reference. Exemplary cassette and picker structures are shown in U.S. Patent Nos. 6,629,694, 5,099,423 and 5,141,127, the disclosures of which are incorporated herein by reference. The stacked relation allows documents from the cassettes to be picked from the cassettes and delivered to the presenter 35. Documents may be selectively moved by the presenter through the opening 21 to a user of the machine.

In an exemplary embodiment each of the cassettes 28, 29, 30, 31 inside the dispenser 27 can be independently removable therefrom. Each cassette holding location in the dispenser 27 can include a document picker mechanism and belt feed which can operate to deliver documents to the presenter 35. The dispenser of the exemplary embodiment can include a plurality of feed rolls, belts, and other movable members for selectively engaging and moving documents. Motors and other drive devices can operate to move these movable members. The drive devices can operate in response to signals from

Handwritten initials and a large number '9'.

a terminal controller, which can include one or more computers, which can control the dispensing of documents from the machine.

The dispenser 27, which includes the document presenter (or feeder) 35 and the dispenser modules 33, can be releasably engaged to a pair of slides 40. The slides can be mounted in supporting connection with the inside of the chest 20. This construction enables the slides and thus the dispenser 27 to be extended and retracted through the opening 24 into and out of the chest 20. In the operative position of the banking machine the dispenser 27 is supported by the slides 40. In an exemplary embodiment the dispenser 27 is releasably engaged with the slides and is removable therefrom when the dispenser is extended on the slides outside of the chest. In an exemplary embodiment the dispenser 27 is disengageable from the slides by moving the dispenser upward relative to the slides. Of course other approaches may be used for supportably mounting a dispenser in the machine.

When the banking machine is in use, the door 25 is closed. The slides 40 can be retracted resulting in the document presenter 35 and the dispenser modules 33 being generally positioned within the secure chest 20. The door 25 can be secured in a closed position with the lock device 26. Documents or other items can be dispensed responsive to signals from the terminal controller and delivered by the presenter 35 through the opening 21 which extends through the door 25. An exemplary form of a control system for use in connection with an automated banking machine is shown in U.S. Patent No. 6,539,361 the disclosure of which is incorporated herein by reference.

It may be easily understood that the multitude of cooperating drives, feeders, movable members, and devices used in the dispenser to deliver documents from the machine, could malfunction. Periodic replacement or maintenance of certain components within the dispenser is also desirable to assure reliable operation. It may also be desirable in some circumstances to change the number of cassettes and picker mechanisms to accommodate different denominations of currency, coupons, stamps, or other documents. It

73-89  
90

may also be desirable to replace or upgrade a dispenser. It may also be desirable to add or to remove a dispenser from the machine. All of these activities can require procedures to be performed on the machine dispenser. Alternatively, it may be desirable to gain access to components in the chest of the banking machine which are rendered difficult to access by the presence of the dispenser and/or one or more components thereof.

The slides 40 of an exemplary embodiment enable service personnel to extend the dispenser 27 through the opening 24 once the door 25 has been opened. Extending the dispenser outward provides enhanced access to components of the dispenser for servicing. However, in some instances access to certain components of the dispenser or components in the chest cannot be easily obtained even with the dispenser extended through the opening 24. In these cases, it would be desirable to disengage the dispenser 27 from the slides 40 and move the dispenser in order for work to be performed, or even to possibly replace the dispenser. In other cases, the dispenser may need to be disassembled, including the unstacking of dispenser modules. The dispenser may then need to be reassembled, including the stacking of dispenser modules. In other embodiments the dispenser components may need to be disassembled and reassembled within the housing of the machine.

An exemplary embodiment provides for the aligning, stacking, and securing together of dispenser modules, yet also permits the dispenser modules to be easily separated. In some embodiments the dispenser modules can be assembled in stacked relation and disassembled quickly therefrom without the use of tools. Dispenser modules can be assembled in a stacked relation either initially (e.g., new dispenser module, new dispenser, etc.) or during a reassembling or reconfiguration process. As described hereinafter in further detail, a releasable locking arrangement can be used to position, align, and secure stacked dispenser modules together. A similar locking arrangement may also be used to secure the uppermost dispenser module to the document presenter. Figure 2 shows an exemplary releasable locking

X/A 91

arrangement, generally indicated by numeral 48, for adjacent dispenser modules 33.

Figure 3 shows two exemplary dispenser modules 50, 51 secured together in a stacked relation or arrangement. Each dispenser module 50, 51 of the embodiment of Figure 3 includes at least one projection 52, latch 54, and tab 56. The dispenser modules can be identical or they can differ, such as in dimensions (e.g., height). In other embodiments a designated top dispenser module may be without a projection. Likewise, in further embodiments a designated lowermost dispenser module may be without a latch and/or a guide. For ease of description, only one side wall 55 of a module need be described. The opposite side wall of a module can be symmetrical with the described side wall.

Dispenser module 50 can have a body, or a portion thereof, of material structurally sufficient to support the media cassette contained therein. For example, a module body may be comprised of metal, plastic, polymer, fiberglass, resin, wood, or glass, or combinations thereof. A module body may also have a clear material that permits viewing therethrough.

A dispenser module 50 can include a cutout portion, opening, recess, passage, or slot 58 in connection with a wall thereof. In the exemplary embodiment shown in Figure 3 the slot 58 has the shape of an inverted L. Alternatively, a slot may have other shapes.

A projection member 52 can comprise a member or portion, such as a plate, which functions to extend from a module. A projection member 52 permits a first module 51 to be removably latched or locked to an adjacent module 50 when the modules are in properly stacked alignment. A projection member 52 can be attached to a module or be integrally formed with the module. Attaching or fastening may include known techniques, such as welding, screwing, bolting, use of nuts, etc.

As shown in more detail in Figures 7 and 8, a projection member can project or extend from a module relatively flush with the module side wall.

91  
92

The projection may be biased toward remaining flush with the module side wall. Alternatively, a projection may extend outward away from a module side wall at a predetermined angle. For example, a projection may have an outwardly bias. In such case a tab can act to hold, pull, or retain a projection member adjacent a side wall. A projection member may also be tapered at the top thereof to assist in slidingly engaging an adjacent module.

The exemplary projection member 52 includes an inwardly projecting pin portion 60 which is referred to herein as a pin. The projecting pin 60 can comprise a dowel pin, bolt, shaft or other member. The pin 60 is of a length enabling its extension through an opening in a side wall 55 of an adjacent module. The pin 60 can be flanged at one or both ends. In an exemplary embodiment the pin has an enlarged, flanged end 62 in fixed connection with the projection member 52. Alternatively the pin 60 may be freely movable relative to the projection plate member 52. The pin 60 is adapted to extend both vertically and horizontally in the slot 58 of a module 50, 51. A flanged inner end 64 of the pin 60 is adapted to engage the side wall bounding slot 58 of an adjacent module.

A latch, retainer or arm 54 can be cut out from a wall bounding module body 50, 51. A guide or tab 56 can also be cut out from a wall of the module body. Alternatively, a latch and/or a guide can be separately fastened to a module body. Both latch 54 and guide 56 can serve as biasing members. For example, both a latch 54 and a tab 56 can serve as springs (e.g., latch spring and tab spring) in a manner similar to leaf springs. Both a latch 54 and a guide 56 can have an unbiased undeformed position, such as the position shown in the lower module 50 of Figure 3. As discussed in more detail herein, a latch 54 can be used to latch or lock a dispenser module projection member 52 in stacked position, and thus lock the adjacent modules in stacked relation. A tab 56 can be used to guide or align a dispenser module projection member, and thus the modules, during stacking securement. A tab 56 can also be used to retain a projection 52 from (outward) movement away from its side wall.

JP 92  
a3

An exemplary operation of assembling secured stacked dispenser modules will now be described. In the exemplary operation the engagement and movement of securing components can (symmetrically) simultaneously occur on each side of the modules.

5           A first dispenser module 51 can be placed relatively into supporting connection with a second dispenser module 50, as shown in Figure 4. In this step a latch arm 54 of the first dispenser module 51 is biased or compressed so as to be deformed inwardly relative to the module into the side wall 55 of the first dispenser module 51. This biased position may be achieved by the first  
10           module being lowered onto the second module at the position shown. Alternatively, the first module 51 may be placed relatively into supporting connection with the second module 50 upstream of the shown position (i.e., the projection 52 being further away from the tab 56) and then slid toward the shown position. The initial starting position may also vary based on how far a  
15           projection 52 is angled away from its side wall. For example, a projection 52 attached flush with its side wall may have to start in a position (further upstream) so that the projection 52 avoids abutting immovable engagement with an outwardly biased latch arm 54. That is, a module may have to be lowered (or raised) at a location that permits its lowering, i.e., the projection  
20           52 is clear of contact with a latch arm 54. Alternatively, a module may be placed relatively into supporting connection with another module without any lowering, e.g., the modules can be horizontally slid relative to each other.

          In a next step, as shown in Figure 5, the first module 51 can be slid further toward an aligned stacked relation with the second module 50. In this  
25           position the projections 52 of the second dispenser module 50 have respectively entered the gap that extends between the tabs 56 and the side walls 55 of the first module 51. Similarly, the pins 60 have entered into engaged relation with the slots 58. The tabs 56 can be used to guide, align, or biasingly retain a projection 52 during the stacking operation to secure the  
30           modules together. For example, the tabs 56 can be used to bias the projections

70 93  
94

52 inward toward a flush arrangement with the side walls 55. Also, arrangements in other embodiments may be configured so the pins enter the slots before or after the projections enter behind the tabs. Of course these approaches are exemplary.

5 In a final step, as shown in Figure 3, the first module 51 is slid further into aligned stacked relation with the second module 50. In this position the projections 52 of the second dispenser module 50 remain behind the tabs 56 of the first module 51. Furthermore, the pins 60 have slid (horizontally) to be engaged in the slots 58 and their inner flanged ends 64 are in retaining  
10 engagement with the side walls of the first module 51 bounding slots 58. Additionally, the projections 52 have slid past the latch arms 54. Thus, the latch arms 54 (which are no longer compressed by being biased inward) have again moved outwardly. That is, the latch arms 54 have snapped outwardly to prevent the projections 52 from disengaging by movement in the direction  
15 toward the latch arms. Thus, in this position the latch arms prevent the movement of the pins from the slots 58. It follows that the pin/slot arrangements and the latch/projection arrangements serve as interengaging projections and recesses that securely lock the adjacent modules 50, 51 in aligned and stacked relation.

20 In an exemplary embodiment of module stacking, a second dispenser module is placed on and locked to a first dispenser module to create a dispenser module stack portion. Thereafter, a third dispenser module may be placed on and secured to the already created dispenser module stack portion. The process can be repeated until the desired secured and aligned module  
25 stack containing a desired number of picking mechanisms is complete.

An exemplary operation of disassembling secured stacked dispenser modules will now be described. After the latch arms 54 are biased inwardly (i.e., compressed) then the projections 52 can again be moved outside of or into a position overlapping the compressed latch arms 54. The exemplary  
30 latch arms may be compressed by hand. In other embodiments use of a tool

94  
95

may be more convenient or necessary to compress the latch arms. The dispenser modules can then be moved parallel (e.g., horizontally) relative to each other until the pins 60 are aligned in a position for (e.g., vertical) removal from the slot 58 (e.g., the position shown in Figure 5). Thereafter, the  
5 dispenser modules can be moved (e.g., vertically) relative to (away from) each other to disengage the modules. The pins can be removed by passing vertically through a lower portion of the slot, which portion extends (horizontally) inwardly.

Alternatively, the exemplary stacked modules may be disassembled by  
10 reversing the previously discussed assembly steps. For example, the latch 54 can be compressed far enough to permit the plate 52 (and the pin 60 therewith) to slide past.

Figure 6 shows a partial end view of adjacent exemplary side walls 70, 72 of connected dispenser modules. A relationship of a projection member  
15 74, an inner flanged pin end 76, a tab 78, and adjacent side walls 70, 72 is also shown.

Figure 7 shows a partial end view of alternative side walls 80, 82 of . alternative connected dispenser modules. A projection plate 84 is shown fastened to a side wall 80 via a screw 86. The projection plate 84 is also  
20 shown having a tapered end 88 and an extended pin 89.

Figure 8 shows a portion of an exemplary dispenser module 90 including a plurality of releasable locking arrangements. Each of the arrangements includes a projection 92, latch arm 94, slot 96, tab 98, and pin  
25 99.

Figure 9 shows a portion of removably connected alternative dispenser modules 100, 102. The modules are similar to those of Figure 3, except tabs are absent and (correspondingly) the projections 104, 106 are of smaller size. It should be understood that the sizes and locations of the projections, latches, tabs, pins, and slots may vary for different modules. For example, a stack of  
30 modules may have vertically alternating (relatively) small and large sized

1/15  
96

projections. That is, the lowermost module may have small sized projections and the next level module may have large sized projections. The other module structure (e.g., latches, slots, etc.) may also be sized to correspond to the sized projections of the adjacent modules.

5 Furthermore, in some embodiments the locking arrangements of the modules in a stack may vary so that the stack may only be assembled one way. That is, the order of the modules in a stack can be determined by their predetermined locking arrangements. Thus, service personnel can be prevented from incorrectly stacking modules.

10 The exemplary embodiments may also facilitate the addition of additional dispenser modules to a dispenser. In situations where an ATM is desired to be configured to dispense additional types of documents, additional dispenser modules may be added. Additional dispenser modules may also be added in situations where it is desired to add additional document dispensing capacity for a type of document already dispensed by the machine. Of course, 15 as can be appreciated the exemplary embodiments also enable removing dispenser modules to eliminate document types or to reduce capacity.

While in an exemplary embodiment the dispenser modules are used as a supporting structure for sheet dispensers, in other embodiments the module 20 structure can be used for housing structures associated with sheet acceptors and/or sheet recycling mechanisms. Such mechanisms may be of the type shown in U.S. Patent No. 6,331,000 the disclosure of which is incorporated herein by reference.

An exemplary embodiment provides for the capability of using 25 removably lockable multimedia dispenser modules to facilitate the servicing of automated banking machine dispenser mechanisms. The exemplary embodiment can permit easier, faster, and less expensive access to dispenser mechanism components to facilitate repairs and/or replacement thereof by service personnel. The present invention can also provide a method of 30 separating and removing stacked modules of a dispenser assembly to facilitate

2004/039419  
97

repair or replacement. An exemplary method of the present invention also facilitates aligning and releasably locking together the modules of a dispenser mechanism in an automated banking machine, such as an ATM.

5 While the exemplary embodiments include particular structures to achieve the desirable results, those having skill in the art may devise numerous other embodiments with other structures which employ the same inventive principles described herein and which are encompassed by the subject matter as claimed. For example and without limitation, other  
10 embodiments may include other types and shapes of modules, projections, pins, latches, slots, tabs, fasteners, material, or other structures. Further, the structures described herein are not intended to limit the method of the invention to the particular structures described herein.

Thus the exemplary embodiments of the present invention achieve one or more of the above stated objectives, eliminate difficulties encountered in  
15 the use of prior devices and methods, solves problems, and attain the desired results described herein.

In the foregoing description certain terms have been used for brevity, clarity and understanding, however, no unnecessary limitations are to be implied therefrom because such terms are intended for descriptive purposes  
20 only and are intended to be broadly construed. Moreover, the descriptions and illustrations herein are by way of examples and the invention is not limited to the exact details shown and described.

In the following claims, any feature described as a means for performing a function shall be construed as encompassing any means known  
25 to those skilled in the art to be capable of performing the recited function and shall not be deemed limited to the particular structure shown herein or equivalents thereof.

Having described the features, discoveries and principles of the invention, the manner in which it is constructed and operated, and the  
30 advantages and useful results attained; the new and useful structures, devices,

PA  
90

18

elements, arrangements, parts, combinations, systems, operations, methods  
and relationships are set forth in the appended claims.

[P] 98/99

19

CLAIMS**We claim:****1. Apparatus comprising:****a stackable automated banking machine dispenser module,**

**5** wherein the module is operative to store sheet items dispensable by the machine,

wherein the module includes a pair of side walls, wherein each side wall includes a face,

**10** at least one projection member portion, wherein a projection member portion extends away from a side wall face in a direction generally parallel to the face, wherein the projection member portion is positioned adjacent a first end of the side wall,

**15** at least one biasing member portion, wherein a biasing member portion in an undeformed condition extends away from the side wall face in a direction generally perpendicular to the face, wherein the biasing member portion is adjacent an end of the side wall opposite of the first end,

**20** wherein the biasing member portion is operative to engage a projection member portion of an adjacent module to releasibly secure adjacent dispenser modules in stacked relation.

200  
100

20

2. The apparatus according to claim 1 wherein the projection member portion is operative to deform a biasing member portion of an adjacent dispenser module as such modules are positioned in stacked engagement.
3. The apparatus according to claim 2 wherein the projection member portion is in operative connection with a pin portion extending generally perpendicular to the face.
4. The apparatus according to claim 3 wherein the pin portion is in operative connection with a flanged end portion.
5. The apparatus according to claim 4 wherein the side wall includes a slot therein, wherein the slot includes a first slot portion and a second slot portion, wherein the first slot portion is sized to enable the flanged end portion to pass therethrough, and wherein the second slot portion is sized to enable the pin portion to extend therein but to prevent the flanged end portion from passing therethrough.
6. The apparatus according to claim 5 wherein the second slot portion extends generally perpendicular relative to the first slot portion.
7. The apparatus according to claim 6 wherein a biasing member portion of a first module is operative to engage a projection member portion of a second module to prevent first directional movement of the second module relative to the first module, wherein the pin portion of the second module is operative to engage a side wall of the first module to prevent second directional movement of a second module relative to a first module, wherein the flanged end portion of the second module is operative to engage a side wall of the first module to prevent third directional movement of a second module relative to a first module, and wherein the biasing member portion and

101

projection member portion relationship, the pin portion and side wall relationship, and the flanged end portion and side wall relationship are together operative to lock the first and second modules in stacked and aligned relation.

- 5        8.        The apparatus according to claim 1 wherein the projection member portion comprises a plate, wherein the plate is fastened to the side wall adjacent an edge thereof.
9.        The apparatus according to claim 1 wherein the biasing member portion is integral with the side wall.
- 10       10.       The apparatus according to claim 1 wherein the biasing member portion is one piece with the side wall.
11.       The apparatus according to claim 10 wherein the biasing member portion is formed from a cutout of the side wall.
12.       The apparatus according to claim 11 wherein the biasing member portion is operatively attached to the side wall at two disposed locations on the
- 15       biasing member portion.
13.       The apparatus according to claim 12 wherein the biasing member portion includes a first elongated length portion and a second elongated length portion, wherein the first elongated length portion is generally perpendicular
- 20       to the second elongated length portion, and wherein each of the first elongated length portion and second elongated length portion are attached to the side wall.

PS 1st  
102

22

14. The apparatus according to claim 5 wherein the biasing member portion is formed from a cutout of the side wall.
15. The apparatus according to claim 14 wherein the slot is a part of the cutout.
- 5 16. The apparatus according to claim 1 wherein the at least one side wall includes a biasing tab portion, wherein the biasing tab portion is adapted to retain a projection member portion positioned intermediate of the tab and the face.
- 10 17. The apparatus according to claim 16 wherein the biasing tab portion is formed from a cutout in the side wall.
- 15 18. The apparatus according to claim 17 wherein the biasing member portion is operatively attached to the side wall along a first elongated length, wherein the biasing tab portion is attached to the side wall along a second elongated length, wherein the first elongated length is generally parallel to the second elongated length.
19. The apparatus according to claim 18 wherein the second elongated length is generally intermediate the first elongated length and the projection member portion.
- 20 20. The apparatus according to claim 19 wherein the projection member portion is generally intermediate the biasing member portion and the tab portion.
21. Apparatus comprising:

103

23

an automated banking machine including a plurality of sheet handling modules, wherein at least two of the sheet handling modules are adapted to be releasably engaged in stacked aligned relation by moving the modules in engaged relation relative to one another such that interengaging projections and recesses in supporting connection with the modules hold the modules in engaged relation.

5

22. The apparatus according to claim 21 wherein the sheet handling modules are adapted to at least one of dispense and store currency sheets.

10

23. The apparatus according to claim 22 wherein the sheet handling modules are adapted to receive therein sheet holding cassettes.

15

24. The apparatus according to claim 22 wherein the interengaging projections and recesses include a projection operatively attached to a first module that is accepted in a recess operatively attached to a second module, and responsive to movement of the projection relative to the recess to a holding position, the modules are held together in an engaged operative position by action of biased latching member.

20

25. The apparatus according to claim 24 wherein during movement of the projection relative to the recess, the latching member is deformed by a projecting member portion operatively attached to the first module.

26. The apparatus according to claim 25 wherein the second module comprises a wall, wherein the recess comprises at least one slot extending in the wall.

27. The apparatus according to claim 26 wherein the latching member is integrally formed with the wall.

24

28. The apparatus according to claim 27 wherein the latching member is formed through a cut out in the wall.

29. The apparatus according to claim 24 wherein the modules are held together in engaged operative position by movement of the modules generally horizontally relative to one another.

30. The apparatus according to claim 29 wherein the second module is operatively attached to a projecting member portion, and wherein placing the first and second modules in adjacent relation prior to engagement is operative to cause the projecting member portion to operatively cause the latching member to biasingly deform, and wherein horizontal movement thereafter causes the latching member to move to hold the first and second modules releasably engaged in the operative position.

31. The apparatus according to claim 30 wherein the recess comprises an L shaped slot in attached connection with the second module.

32. The apparatus according to claim 31 wherein the latching member comprises an outwardly biased wall portion in attached connection with the second module.

33. The apparatus according to claim 32 where the projection comprises a pin portion operatively attached to the first module, wherein the pin portion includes an enlarged portion.

34. The apparatus according to claim 33 and further comprising a tab portion operatively attached to the second module, wherein in the engaged operative position of the first and second modules the tab portion extends in overlying relation of the projecting member portion.

20  
105

25

35. A method comprising:

- 5 (a) placing a first dispenser module adjacent a second dispenser module, wherein the modules are operative to store sheet items dispensable by an automated banking machine;
- 10 (b) deforming at least one biasing member portion operatively connected to the first module by engagement with at least one projection member portion operatively connected to the second module;
- 15 (c) subsequent to (b), moving the first module relative to the second module with the at least one biasing member portion biasingly deformed, wherein the first module is moved in an alignment direction toward an operative aligned position with the second module;
- 20 (d) further moving the first module relative to the second module in the alignment direction until the at least one deformed biasing member portion moves responsive to biasing force, wherein the at least one moved biasing member portion operatively prevents movement of the first module relative to the second module in a direction opposite the alignment direction.

36. The method according to claim 35 wherein the modules each include at least one side wall having at least one face, and

wherein (a) includes positioning at least one projection member portion operatively connected to the second module adjacent

9/11/03  
106

26

and outwardly disposed relative to at least one side wall face of the first module, and

5 wherein (b) includes deforming at least one biasing member operatively connected to the first module inwardly relative to the at least one side wall of the first module.

37. The method according to claim 36 wherein the at least one projection member portion includes a pin portion extending generally perpendicular to the side wall face, wherein the side wall face of the first module includes a recess in operative connection therewith, and step (c) includes:

10 moving the pin portion in the recess.

38. The method according to claim 37 wherein the pin portion includes an enlarged portion, wherein the enlarged portion is unable to pass through an engaging portion of the recess, and wherein (d) includes:

15 moving the pin portion in the recess so that the enlarged portion of the pin portion is unable to pass through the engaging portion of the recess.

39. The method according to claim 38 wherein (d) includes releasibly locking the first and second modules in the operative aligned relation.

20 40. The method according to claim 37 wherein a side wall face of the first module is operatively connected to a biasing tab portion, and wherein (c) includes:

27

relatively moving the projection member portion intermediate of the tab portion and the side wall face of the first module.

41. The method according to claim 40 wherein (d) includes:

5 retaining the projection member portion operatively connected to the second module, intermediate of the tab portion and the side wall face of the first module.

42. The method according to claim 35 and further comprising subsequent to step (d):

10 (e) biasingly deforming the biasing member portion to enable movement of the first module relative to the second module in a direction opposite the alignment direction.

43. The method according to claim 35 wherein (d) includes

15 locking the first and second modules in stacked operatively aligned position,

and subsequent to (d) further comprising:

deforming the biasing member portion to unlock the modules from each other.

44. A method comprising:

207  
100

28

placing a first dispenser module in removably secured stacked relation with a second dispenser module, wherein the modules are operative to store sheet items dispensable by an automated banking machine, wherein each module includes:

- 5                   a pair of side walls, wherein each side wall includes a face,
- at least one projection member portion, wherein a projection member portion extends relatively away from a side wall face in a direction generally parallel to
- 10               the face, wherein the projection member portion is adjacent a first end of the side wall,
- at least one biasing member portion, wherein a biasing member portion in an undeformed condition extends away from the side wall face in a direction generally perpendicular to the face,
- 15               wherein the biasing member portion is adjacent an end of the side wall opposite of the first end,
- wherein the biasing member portion is operative to engage a projection member portion of an adjacent module to releasibly secure the modules in operative
- 20               stacked relation to enable at least one of the dispensing of sheets from and storing of sheets in each of the modules.

45.   A method comprising:



in a sheet dispensing automated banking machine comprising a plurality of modules operative to at least one of dispense currency sheets from or receive currency sheets in the module,

5 (a) moving at least one biasing member portion operatively attached to a first module, wherein moving the at least one biasing member portion enables the first module to move relative to a second module away from an operative and aligned position of the first and second modules, wherein in the operative and aligned position, each of the modules are enabled  
10 to be operative in the machine to at least one of dispense currency sheets from and receive currency sheets in the module;

(b) responsive to (a) moving the first module relative to the second module to disengage the first and second modules.

15 46. The method according to claim 45 wherein in (b), relative movement of the modules disengages a plurality of interengaging projections and recesses holding the first and second modules in engagement in the operative and aligned position.

20 47. The method according to claim 46 wherein the second module includes a pair of disposed projecting portions, and wherein in the operative and aligned position of the first and second modules, the disposed projection portions are operative to hold the first and second modules in locked and engaged relation, and wherein moving the at least one biasing member portion  
25 in (a) enables each of the pair of projecting portions to be moved relative to the first module.

4/10/04

48. The method according to claim 47 wherein each of the projecting portions include a pin portion, and wherein each of the pin portions extend in an inward direction relative to the second module when the first and second modules are in the operative and aligned position, and wherein each pin portion is engaged in a recess operatively attached to the first module, and wherein (b) includes moving each of the pin portions relative to each respective recess.

49. The method according to claim 48 wherein each recess includes a generally L shaped portion and wherein (b) includes moving the first and second modules relative to one another first in a first direction and thereafter in a second direction generally perpendicular to the first direction.

50. The method according to claim 49 wherein the first module has operatively connected thereto a pair of biasing member portions, each of the biasing member portions operatively engaging and preventing relative movement of a respective projecting portion in the operative and aligned position of the first and second modules, and wherein (a) includes moving each of the pair of biasing member portions inwardly relative to the first module.

51. The method according to claim 50 wherein the second module includes two disposed walls, and wherein each biasing member portion is integrally formed with a respective one of the walls, and wherein (a) includes inwardly moving each of the biasing member portions relative to each of the walls.

52. The method according to claim 51 wherein each of the pair of disposed walls includes a tab portion operatively connected thereto, and wherein (b) includes moving each projecting portion from intermediate relation between a respective tab portion and a respective wall.

31

53. The method according to claim 52 wherein the machine includes a third module, wherein the third module remains in an operative and aligned position with the first module after (b), and further comprising subsequent to (b):

5 (c) disengaging the first module and the third module.

54. The method according to claim 53 wherein (c) includes:

10 (i) moving at least one further biasing member portion operatively attached to the third module, wherein moving the at least one further biasing member portion enables the first module to move relative to the third module;

15 (ii) moving the first module relative to the third module to disengage a plurality of interengaging projections and recesses operatively connected to the first and third modules.

55. The method according to claim 45 and further comprising:

(c) disconnecting at least one of the first module and second module from a presenter mechanism operative to present currency sheets from the machine.

20 56. The method according to claim 45 and subsequent to (b):

!

25  
112

- (c) moving the first module relative to the second module to reengage the first and second modules in the operative and aligned position.

57. A method comprising:

- 5 in a sheet dispensing automated banking machine comprising at least one first module operative to at least one of dispense currency sheets from and receive currency sheets in the module,
- (a) moving at least one second module in adjacent relation to the at least one first module;
- 10 (b) moving the at least one second module relative to the at least one first module to engage a plurality of projections and recesses each operatively attached to at least one of the at least one first module and at least one second module, and to lock the at least one first module and at least one second module in
- 15 an aligned and operative position through deformable biasing movement of at least one biasing member portion.

58. The method according to claim 57 wherein (a) includes moving the at least one first module and at least one second module into generally vertically aligned relation.

- 20 59. The method according to claim 58 wherein (b) includes moving the at least one first module and at least one second module generally horizontally relative to one another.



33

60. The method according to claim 59 wherein in (a) the at least one deformable biasing member portion is deformed by the at least one first module and at least one second module being moved in generally vertically aligned relation, and in (b) the at least one deformable biasing member portion  
5 moves responsive to horizontal movement of the at least one first module relative to the at least one second module to hold the modules in the aligned and operative position.

61. The method according to claim 60 and subsequent to (b):

- (c) moving the at least one deformable biasing member;
- 10 (d) subsequent to (c) moving the at least one first module generally horizontally relative to the at least one second module whereby the at least one first module and at least one second module are enabled to be separated.

62. The method according to claim 57 and prior to (a) unlocking a door of  
15 a chest portion, wherein unlocking the door enables accessing the at least one first module.

63. The method according to claim 57 and further comprising:

- (c) disconnecting the at least one first module from a sheet presenter mechanism of the machine.
- 20 64. The method according to claim 63 wherein (c) includes

34

- 5
- (i) moving at least one biasing member portion operatively connected to at least one of the at least one first module and presenter mechanism,
  - (ii) moving the at least one first module relative to the presenter mechanism to disengage a plurality of interengaging projections and recesses each operatively attached to at least one of the at least one first module and at least one presenter mechanism.

65. The method according to claim 60 and further comprising:

- 10
- (c) dispensing currency sheets from the at least one second module.

66. The method according to claim 60 and further comprising:

- (c) receiving currency sheets into the at least one second module.

15

67. The method according to claim 65 and prior to (c) positioning at least one sheet holding cassette in the at least one second module, wherein in (c) the currency sheets are dispensed from the at least one cassette.

68. The method according to claim 66 and prior to (c) positioning at least one cassette in the at least one second module, wherein in (c) the currency sheets are received within the at least one cassette.

# PATENT COOPERATION TREATY

From the  
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY

To:  
RALPH E. JOCKE  
WALKER & JOCKE  
231 SOUTH BROADWAY  
MEDINA, OH 44256

## PCT

### NOTIFICATION OF TRANSMITTAL OF INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Rule 71.1)

Date of Mailing  
(day/month/year) **02 JUN 2005**

Applicant's or agent's file reference

D-1187 PCT

#### IMPORTANT NOTIFICATION

International application No.

PCT/US03/39968

International filing date (day/month/year)

15 December 2003 (15.12.2003)

Priority date (day/month/year)

16 December 2002 (16.12.2002)

Applicant

DIEBOLD, INCORPORATED

1. The applicant is hereby notified that this International Preliminary Examining Authority transmits herewith the international preliminary examination report and its annexes, if any, established on the international application.
2. A copy of the report and its annexes, if any, is being transmitted to the International Bureau for communication to all the elected Offices.
3. Where required by any of the elected Offices, the International Bureau will prepare an English translation of the report (but not of any annexes) and will transmit such translation to those Offices.
4. REMINDER

The applicant must enter the national phase before each elected Office by performing certain acts (filing translations and paying national fees) within 30 months from the priority date (or later in some Offices)(Article 39(1))(see also the reminder sent by the International Bureau with Form PCT/IB/301).

Where a translation of the international application must be furnished to an elected Office, that translation must contain a translation of any annexes to the international preliminary examination report. It is the applicant's responsibility to prepare and furnish such translation directly to each elected Office concerned.

For further details on the applicable time limits and requirements of the elected Offices, see Volume II of the PCT Applicant's Guide.

Name and mailing address of the IPHA/US

Mail Stop PCT, Attn: IPHA/US  
Commissioner for Patents  
P.O. Box 1430  
Alexandria, Virginia 22313-1430

Facsimile No. (703) 305-3230

Authorized officer

Kimberly D. Nguyen

Telephone No. 571-272-2402

Ann Proctor  
Paralegal Sr.

Form PCT/IPHA/416 (July 1992)

## PATENT COOPERATION TREATY

## PCT

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                               |                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| Applicant's or agent's file reference<br><b>D-1187 PCT</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416) |                                                                        |
| International application No.<br><b>PCT/US03/39968</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | International filing date (day/month/year)<br><b>13 December 2003 (15.12.2003)</b>                                            | Priority date (day/month/year)<br><b>16 December 2002 (16.12.2002)</b> |
| International Patent Classification (IPC) or national classification and IPC<br><b>IPC(7): G 06 F 17/60 and US Cl.: 235/379</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                               |                                                                        |
| Applicant<br><b>DIEBOLD, INCORPORATED</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                               |                                                                        |
| <p>1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.</p> <p>2. This REPORT consists of a total of <u>3</u> sheets, including this cover sheet.</p> <p><input type="checkbox"/> This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).</p> <p>These annexes consist of a total of <u>---</u> sheets.</p>                                                                                                                                       |                                                                                                                               |                                                                        |
| <p>3. This report contains indications relating to the following items:</p> <p>I <input checked="" type="checkbox"/> Basis of the report</p> <p>II <input type="checkbox"/> Priority</p> <p>III <input type="checkbox"/> Non-establishment of report with regard to novelty, inventive step and industrial applicability</p> <p>IV <input type="checkbox"/> Lack of unity of invention</p> <p>V <input checked="" type="checkbox"/> Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability, citations and explanations supporting such statement</p> <p>VI <input type="checkbox"/> Certain documents cited</p> <p>VII <input type="checkbox"/> Certain defects in the international application</p> <p>VIII <input type="checkbox"/> Certain observations on the international application</p> |                                                                                                                               |                                                                        |
| Date of submission of the demand<br><b>26 March 2004 (26.03.2004)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Date of completion of this report<br><b>04 May 2005 (04.05.2005)</b>                                                          |                                                                        |
| Name and mailing address of the IPEA/US<br>Mail Stop PCT, Attn: IPEA/US<br>Comptroller for Patents<br>P.O. Box 1450<br>Alexandria, Virginia 22313-1450<br>Facsimile No. (703) 305-3230                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Authorized officer<br>Kimberly D. Nguyen<br>Telephone No. 571-272-2402<br>Jesse Proctor<br>Personal Specialist                |                                                                        |

Form PCT/IPEA/409 (cover sheet)(July 1998)

116 HS.  
JG

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/US03/39968

119  
46  
110

## I. Basis of the report

## 1. With regard to the elements of the international application:\*

- ☒ the international application as originally filed.
- ☒ the description:  
pages 1-18 as originally filed  
pages NONE filed with the demand  
pages NONE filed with the letter of \_\_\_\_\_.
- ☒ the claims:  
pages 19-34 as originally filed  
pages NONE as amended (together with any statement) under Article 19  
pages NONE filed with the demand  
pages NONE filed with the letter of \_\_\_\_\_.
- ☒ the drawings:  
pages 1-8 as originally filed  
pages NONE filed with the demand  
pages NONE filed with the letter of \_\_\_\_\_.
- ☐ the sequence listing part of the description:  
pages NONE as originally filed  
pages NONE filed with the demand  
pages NONE filed with the letter of \_\_\_\_\_.

## 2. With regard to the language, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language \_\_\_\_\_ which is:

- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).

## 3. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in printed form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. ☐ The amendments have resulted in the cancellation of:

- ☐ the description, pages NONE
- ☐ the claims, Nos. NONE
- ☐ the drawings, sheets/fig NONE

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)).\*\*

\* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

\*\* Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.  
PCT/US03/39968

V. Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. STATEMENT

|                               |                    |     |
|-------------------------------|--------------------|-----|
| Novelty (N)                   | Claims <u>1-68</u> | YES |
|                               | Claims <u>NONE</u> | NO  |
| Inventive Step (IS)           | Claims <u>NONE</u> | YES |
|                               | Claims <u>1-68</u> | NO  |
| Industrial Applicability (IA) | Claims <u>1-68</u> | YES |
|                               | Claims <u>NONE</u> | NO  |

2. CITATIONS AND EXPLANATIONS

Claims 1-68 lack novelty under PCT Article 33(2) as being anticipated by Gilinka et al (US 4,380,316).

Gilinka teaches an apparatus comprising a stackable automated banking machine dispenser module, wherein the module is operative to store sheet items dispensable by the machine, wherein the module includes a pair of side walls, wherein each side wall includes a face, at least one projection member portion, wherein a projection member portion extends away from a side wall face in a direction generally parallel to the face, wherein the projection member portion is positioned adjacent a first end of the side wall, at least one biasing member portion, wherein a biasing member portion in an undeformed condition generally perpendicular to the face, wherein the biasing member portion is adjacent an end of the side wall opposite of the first end, wherein the biasing member portion is operative to engage a projection member portion of an adjacent module to releasibly secure adjacent dispenser modules in stacked relation.

Claims 1-68 meet the criteria set out in PCT Article 33(4), and thus have the industrial applicability because the subject matter claimed can be made or used in industry.

NEW CITATIONS

ESTADOS UNIDOS DE AMÉRICA

A QUIEN PUEDA INTERESAR:

Departamento de Comercio de los Estados Unidos

Oficina de Marcas y Patentes

07 de junio de 2005

POR MEDIO DEL PRESENTE SE CERTIFICA QUE ADJUNTA SE  
ENCUENTRA UNA COPIA FIEL DE LOS REGISTROS DE ESTE DESPACHO,  
QUE CORRESPONDE A UN DOCUMENTO REGISTRADO EL 3 DE MAYO DE  
2004.

Por autoridad del Comisario de Marcas y Patentes

(Fdo.) M. K. HAWKINS

Funcionario Certificador

Sello de la Oficina de Marcas y Patentes

119  
HAWKINS

Al Honorable Comisionado de Marcas Registradas y Patentes.  
Favor registrar los documentos originales adjuntos o copia  
de los mismos.

120  
719  
2/3

1. Nombre de las partes que otorgan la cesión:

H. Thomas Graef, Michael S. Johnson, Michael Harty,  
Jonathan M. Peritt y Kenneth Kontor

Nombres de cedentes adicionales? [no]

2. Nombre y dirección de la parte beneficiaria de la  
cesión:

Diebold, Incorporated

Dirección: 5995 Mayfair Road,

Cuidad: North Canton. Estado: OH ZIP: 44720

Se adjuntan nombres o direcciones adicionales? [no]

3. Naturaleza del Traspaso: [x] Cesión

Fecha de la firma: 23 de abril de 2003

4. Número de solicitud o de registro:

A. Solicitud de Patente Nos. 60/433,888, 60/433,889

B. Patente No.(s)

Se adjuntan números adicionales? [no]

5. Nombre y dirección de la parte a quien se debe dirigir  
la correspondencia en relación con el documento:

Nombre: Ralph E. Jocke

Dirección: 231 South Broadway, Ciudad: Medina

Estado: OH Zip: 44256

6. Total de Solicitudes y Patentes: [2]

7. Total derechos pagados: (37CFR 3.41): US\$80.00

Se autoriza cargo a la cuenta de depósito? [si]

8. Número de la Cuenta donde se hace el cargo: 09-0428  
(InterBold)

9. Declaración y firma:

Según mi leal saber y entender, la información precedente  
es verídica y cualquier copia adjunta corresponde al  
documento original.

(Fdo.) Ralph E. Jocke, Fecha: 03/05/2003

No. Total de páginas incluyendo hoja introductoria: [7]

Registro de Patente No. 014607      Marco: 0251

*Handwritten signature and date:*  
JRP 2/20  
12/1

Expediente No. D-1187 P

Para: Los Derechos Extranjeros  
Con respecto a: Aplicación U.S.  
Por parte de: Los Inventores

8/13/21  
12/22

**CESION DEL INVENTO**

En contraprestación al pago por parte del cesionario al cedente la suma de un dólar (US 1.00), cuyo recibo se acusa en este documento, y a otras contraprestaciones onerosas,

LOS CEDENTES (INVENTORES): H. Thomas Graef, Michael S. Johnson, Michael Harty, Jonathan M. Peritt y Kenneth Kontor

Por el presente venden, ceden y transfieren a:

LA CESIONARIA:

Diebold, Incorporated  
5995 Mayfair Road  
North Canton, OH 44720  
Nacionalidad: Norteamericana

Y los sucesores, cesionarios y representantes de la cesionaria, la totalidad del derecho, título e interés en los países extranjeros, incluyendo todos los derechos a reclamar prioridad en y cualesquiera mejoras que se revelan en el invento titulado:

**MODULOS DISPENSADORES DE EFECTIVO,  
PARA MAQUINAS AUTOMATIZADAS DE BANCA**

Y que se encuentra en (37 C.F.R. § 3.21) las Aplicaciones Provisionales de los Estado Unidos No. 60/433,888 y

60/433,889 presentadas el 16 de diciembre de 2002, y cualquier equivalencia en su respecto en un país internacional, incluyendo el derecho a reivindicar prioridad y en todas las patentes que se obtengan para ese invento basadas en la solicitud antedicha o en cualquier continuación, división, renovación o sustitución de la misma, así como en cualquier patente que se vuelva a expedir o a examinar a ese respecto.

22  
123

Los cedentes por el presente afirman que no se ha efectuado ninguna cesión, venta, acuerdo o gravamen que podría estar en conflicto con esta cesión, y se comprometen a que esto no sucederá.

Los cedente se comprometen además a que, a solicitud de la cesionaria suministrará oportunamente todos los hechos y documentos pertinentes relacionados con el invento y con las patentes equivalentes legales que sean de su conocimiento o a los cuales tengan acceso y se comprometen a atestiguar sobre los mismos en cualquier interferencia, litigio o proceso relacionado con dicho invento y a firmar y entregar prontamente a la cesionaria, o a sus representantes legales, todos y cualesquiera documentos, instrumentos o declaraciones juradas que se requieran para obtener, mantener expedir y hacer valer la solicitud de patente, el invento, y las patentes o equivalentes de las

mismas que sean necesarias o convenientes para lleva a cabo los propósitos allí contemplados.

128  
124

EN FE DE LO CUAL, firmo de mi puño y letra y estampo mi sello a los 23 días del mes de abril de 2004.

H. Thomas Graef

Firma del Inventor: (Fdo) H. Thomas Graef

Domicilio: Bolivar Ohio

Dirección Oficina Postal: Box 287

Bolivar, Ohio 44612

Nacionalidad: Norteamericano

(Cesión del invento pagina 2 de 6)

Registro de Patente No. 014607 Marco: 0253

Los cedentes por el presente afirman que no se ha efectuado ninguna cesión, venta, acuerdo o gravamen que podría estar en conflicto con esta cesión, y se comprometen a que esto no sucederá.

Los cedente se comprometen además a que, a solicitud de la cesionaria suministrará oportunamente todos los hechos y documentos pertinentes relacionados con el invento y con las patentes equivalentes legales que sean de su conocimiento o a los cuales tengan acceso y se comprometen a atestiguar sobre los mismos en cualquier interferencia, litigio o proceso relacionado con dicho invento y a firmar y entregar prontamente a la cesionaria, o a sus representantes legales, todos y cualesquiera documentos, instrumentos o declaraciones juradas que se requieran para obtener, mantener expedir y hacer valer la solicitud de patente, el invento, y las patentes o equivalentes de las mismas que sean necesarias o convenientes para lleva a cabo los propósitos allí contemplados.

EN FE DE LO CUAL, firmo de mi puño y letra y estampo mi sello a los 23 días del mes de abril de 2004.

Michael S. Johnson

Firma del Inventor:

(Fdo) Michael S. Johnson

124  
125

Domicilio: Akron, Ohio  
Dirección oficina postal: 5779 Starview Drive  
Clinton, Ohio 44216  
Nacionalidad: Norteamericano

WA 125  
126

(Cesión del invento pagina 3 de 6)

Registro de Patente No. 014607 Marco: 0254

Los cedentes por el presente afirman que no se ha efectuado ninguna cesión, venta, acuerdo o gravamen que podría estar en conflicto con esta cesión, y se comprometen a que esto no sucederá.

*Handwritten signature and initials*

Los cedente se comprometen además a que, a solicitud de la cesionaria suministrará oportunamente todos los hechos y documentos pertinentes relacionados con el invento y con las patentes equivalentes legales que sean de su conocimiento o a los cuales tengan acceso y se comprometen a atestiguar sobre los mismos en cualquier interferencia, litigio o proceso relacionado con dicho invento y a firmar y entregar prontamente a la cesionaria, o a sus representantes legales, todos y cualesquiera documentos, instrumentos o declaraciones juradas que se requieran para obtener, mantener expedir y hacer valer la solicitud de patente, el invento, y las patentes o equivalentes de las mismas que sean necesarias o convenientes para lleva a cabo los propósitos allí contemplados.

EN FE DE LO CUAL, firmo de mi puño y letra y estampo mi sello a los 26 días del mes de abril de 2004.

-

Michael Harty

Firma del Inventor:

(Fdo) Michael Harty

Domicilio:

North Canton, Ohio

Dirección oficina postal: 6265 Walnut Ridge Circle NW  
North Canton, Ohio 44720  
Nacionalidad: Norteamericano

SA 128  
420

(Cesión del invento pagina 4 de 6)

Registro de Patente No. 014607 Marco: 0255

Los cedentes por el presente afirman que no se ha efectuado ninguna cesión, venta, acuerdo o gravamen que podría estar en conflicto con esta cesión, y se comprometen a que esto no sucederá.

*Handwritten signature and date: 4/28/04*

Los cedente se comprometen además a que, a solicitud de la cesionaria suministrará oportunamente todos los hechos y documentos pertinentes relacionados con el invento y con las patentes equivalentes legales que sean de su conocimiento o a los cuales tengan acceso y se comprometen a atestiguar sobre los mismos en cualquier interferencia, litigio o proceso relacionado con dicho invento y a firmar y entregar prontamente a la cesionaria, o a sus representantes legales, todos y cualesquiera documentos, instrumentos o declaraciones juradas que se requieran para obtener, mantener expedir y hacer valer la solicitud de patente, el invento, y las patentes o equivalentes de las mismas que sean necesarias o convenientes para lleva a cabo los propósitos allí contemplados.

EN FE DE LO CUAL, firmo de mi puño y letra y estampo mi sello a los 28 días del mes de abril de 2004.

Jonathan M. Peritt

Firma del Inventor:

(Fdo) Jonathan M. Peritt

Domicilio:

Clinton, Ohio

Dirección oficina postal: 5718 Deer Pines Trail  
Clinton, Ohio 44216  
Nacionalidad: Norteamericano

SP 129  
130

(Cesión del invento pagina 5 de 6)

Registro de Patente No. 014607 Marco: 0256

Los cedentes por el presente afirman que no se ha efectuado ninguna cesión, venta, acuerdo o gravamen que podría estar en conflicto con esta cesión, y se comprometen a que esto no sucederá.

Handwritten signature and the number 131.

Los cedente se comprometen además a que, a solicitud de la cesionaria suministrará oportunamente todos los hechos y documentos pertinentes relacionados con el invento y con las patentes equivalentes legales que sean de su conocimiento o a los cuales tengan acceso y se comprometen a atestiguar sobre los mismos en cualquier interferencia, litigio o proceso relacionado con dicho invento y a firmar y entregar prontamente a la cesionaria, o a sus representantes legales, todos y cualesquiera documentos, instrumentos o declaraciones juradas que se requieran para obtener, mantener expedir y hacer valer la solicitud de patente, el invento, y las patentes o equivalentes de las mismas que sean necesarias o convenientes para lleva a cabo los propósitos allí contemplados.

EN FE DE LO CUAL, firmo de mi puño y letra y estampo mi sello a los 23 días del mes de abril de 2004.

Kenneth Kontor

Firma del Inventor:

(Fdo) Kenneth Kontor

Domicilio:

Chesterland, Ohio

Dirección oficina postal: 9170 Cedar Road  
Chesterland, Ohio 44026  
Nacionalidad: Norteamericano

7/13/22  
S

(Cesión del invento pagina 6 de 6)

Registro de Patente No. 014607 Marco: 0257

APOSTILLA

(Convención de La Haya del 5 de octubre de 1961)

Handwritten signature and number 133.

1. País: Estados Unidos de América

El presente documento público

2. fue firmado Por: M. K. Hawkins

3. Actuando en su calidad de Funcionario de  
Certificaciones.

4. Lleva el sello de la Oficina de Marcas y Patentes de  
los Estados Unidos

Se certificó:

5. En Washington, D.C. .

6. El diecisiete de junio de 2005

7. Por parte del funcionario de autenticaciones del  
Departamento de Estados Unidos

8. Bajo el número 05022742-12

9. Aparece sello del Departamento de Estados Unidos de  
América

10. Firmado por Fernesia T. Crawford

13A-283

ST

**APOSTILLE**  
(Convention de La Haye du 5 octobre 1961)

1. Country: United States of America

This public document

2. has been signed by M. K. Hawkins

3. acting in the capacity of Certifying Officer

4. bears the seal/stamp of Patent and Trademark Office

**Certified**

5. at Washington, D.C.

6. the seventeenth of June, 2005

7. by Assistant Authentication Officer, United States Department of State

8. No. 05022742-12

9. Seal/Stamp:



10. Signature:

Fernesia T. Crawford  
Fernesia T. Crawford

135  
7/24

A 1328464



# THE UNITED STATES OF AMERICA

**TO ALL TO WHOM THESE PRESENTS SHALL COME:**


**UNITED STATES DEPARTMENT OF COMMERCE**

**United States Patent and Trademark Office**

**June 07, 2005**

**THIS IS TO CERTIFY THAT ANNEXED IS A TRUE COPY FROM THE  
RECORDS OF THIS OFFICE OF A DOCUMENT RECORDED ON  
MAY 03, 2004.**

**By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS**

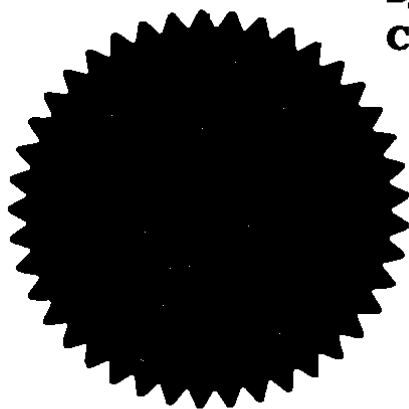

**M. K. HAWKINS  
Certifying Officer**

03/03/2004 10:57 FAX 3307220440

Walker &amp; Jocke

0002

130 + 25  
SA

| RECORDATION FORM COVER SHEET<br>PATENTS ONLY                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                              | U.S. DEPARTMENT OF COMMERCE<br>Patent and Trademark Office |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| <b>To the Honorable Commissioner of Patents and Trademarks: Please record the attached original documents or copy thereof.</b>                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                              |                                                            |
| <b>1. Name of conveying party(ies):</b><br>H. Thomas Grief, Michael S. Johnson, Michael Harty,<br>Jonathan M. Paris, and Kenneth Kontor<br><br><b>Additional receipt(s) of conveying party(ies) attached?</b> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No                                                                                                              | <b>2. Name and address of receiving party(ies):</b><br>Name: Diebold, Incorporated<br>Internal Address: _____<br>_____<br>_____<br>Street Address: 5995 Mayfield Road<br>_____<br>City: North Canton State: OH ZIP: 44720<br><b>Additional receipt(s) &amp; address(es) attached?</b> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No                                                    |                                                            |
| <b>3. Nature of conveyance:</b><br><input checked="" type="checkbox"/> Assignment <input type="checkbox"/> Merger<br><input type="checkbox"/> Security Agreement <input type="checkbox"/> Change of Name<br><input type="checkbox"/> Other _____<br>Execution Date: April 23, 2003                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                              |                                                            |
| <b>4. Application number(s) or patent number(s):</b><br>If this document is being filed together with a new application, the execution date of the application is: _____<br>A. Patent Application No.(s)<br>60/433,888<br>60/433,889<br>B. Patent No.(s)<br>_____<br><b>Additional numbers attached?</b> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No                   |                                                                                                                                                                                                                                                                                                                                                                                                              |                                                            |
| <b>5. Name and address of party to whom correspondence concerning document should be mailed:</b><br>Name: Ralph E. Jocke<br>Internal Address: _____<br>_____<br>_____<br>Street Address: 231 South Broadway<br>_____<br>City: Medina State: OH ZIP: 44256                                                                                                                                      | <b>6. Total number of applications and patents involved:</b> <input checked="" type="checkbox"/> 1<br><b>7. Total fee (37 CFR 2.41) ..... \$</b> 80<br><input type="checkbox"/> Enclosed<br><input checked="" type="checkbox"/> Authorized to be charged to deposit account<br><b>8. Deposit account number:</b><br>09-0428 (InterBold)<br>(Attach duplicate copy of this page if paying by deposit account) |                                                            |
| DO NOT USE THIS SPACE                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                              |                                                            |
| <b>9. Statement and signature.</b><br>To the best of my knowledge and belief, the foregoing information is true and correct and any attached copy is a true copy of the original document.<br>Ralph E. Jocke _____ 5/3/2004<br>Name of Person Signing Signature Date<br><b>Total number of copies including cover sheet, attachments, and documents:</b> <input checked="" type="checkbox"/> 7 |                                                                                                                                                                                                                                                                                                                                                                                                              |                                                            |

This document is to be recorded with required cover sheet information for  
Commissioner of Patents & Trademarks, Box Assignments  
Washington, D.C. 20540

(Form PTO-1585-Recordation Form Cover Sheet - page 1 of 2)

700082139

PATENT  
REEL: 014607 FRAME: 0261

137  
610 126

03/03/2004 18:57 FAX 3307220440

Walker & Jockin

2003

Practitioner's Docket No. D-1187 P

PATENT

For: Foreign Rights  
For: U.S. Application  
By: Investors

#### ASSIGNMENT OF INVENTION

In consideration of the payment by ASSIGNEE to ASSIGNORS of the sum of One Dollar (\$1.00), the receipt of which is hereby acknowledged, and for other good and valuable consideration,

ASSIGNORS: H. Thomas Graef, Michael S. Johnson, Michael Harty, Jonathan M. Eggen, and Kenneth Kontor, hereby sell, assign and transfer to

ASSIGNEE:

Diebold, Incorporated  
5995 Mayfair Road  
North Canton, OH 44720  
Nationality: U.S.

and the successors, assigns and legal representatives of the ASSIGNEE the entire right, title and interest for all countries outside the United States and its territorial possessions, including all rights to claim priority, in and to any and all improvements which are disclosed in the invention entitled:

#### AUTOMATED BANKING MACHINE CURRENCY DISPENSER MODULES

and which is found in (37 C.F.R. § 3.21), Provisional Applications 60/433,888 and 60/433,889 filed December 16, 2002, and any legal equivalent thereof in a foreign country, including the right to claim priority and, in and to, all Letters Patent to be obtained for said invention by the above application or any continuation, division, renewal, or substitute thereof, and as to letters patent any renewal or re-examination thereof.

(Assignment of Invention—page 1 of 4)

PATENT  
REEL: 014607 FRAME: 0262

03/23/2004 10:37 FAX 3307220440

Walker & Jocke

0004

EA 130 728

ASSIGNOR hereby covenants that no assignment, sale, agreement or encumbrance has been or will be made or entered into which would conflict with this assignment.

ASSIGNOR further covenants that ASSIGNEE will, upon its request, be provided promptly with all pertinent facts and documents relating to said invention and said Letters Patent and legal equivalents as may be known and accessible to ASSIGNOR and will testify as to the same in any interference, litigation or proceeding related thereto and will promptly execute and deliver to ASSIGNEE or its legal representatives any and all papers, instruments or affidavits required to apply for, obtain, maintain, issue and enforce said application, said invention and said Letters Patent and said equivalents thereof which may be necessary or desirable to carry out the purposes thereof.

IN WITNESS WHEREOF, I have hereunto set hand and seal this 23 day of April 2004.

H. Thomas Graf

Inventor's Signature: H. Thomas Graf

Residence: Bolivar, Ohio

Post Office Address: Box 217  
Bolivar, Ohio 44612

Nationality: U.S.

(Assignment of invention—page 2 of 6)

PATENT  
REEL: 014607 FRAME: 0253

03/03/2004 16:58 FAX 3307220448

Walker & Jocke

Q008

139  
138

ASSIGNOR hereby covenants that no assignment, sale, agreement or encumbrance has been or will be made or entered into which would conflict with this assignment.

ASSIGNOR further covenants that ASSIGNEE will, upon its request, be provided promptly with all pertinent facts and documents relating to said invention and said Letters Patent and legal equivalents as may be known and accessible to ASSIGNOR and will testify as to the same in any interference, litigation or proceeding related thereto and will promptly execute and deliver to ASSIGNEE or its legal representatives any and all papers, instruments or affidavits required to apply for, obtain, maintain, issue and enforce said application, said invention and said Letters Patent and said equivalents thereof which may be necessary or desirable to carry out the purposes thereof.

IN WITNESS WHEREOF, I have hereunto set hand and seal this 23 day of April 2004.

Michael E. Johnson

Inventor's Signature: *Michael E. Johnson*

Residence: Akron, Ohio

Post Office Address: 1003 Eagle Drive 5779 Starview Drive  
Akron, Ohio 44312 Clinton, Ohio 44216

Nationality: U.S.

(Assignment of Invention—page 3 of 6)

PATENT  
REEL: 014607 FRAME: 0254

05/03/2004 16:55 FAX 3307226446

Walker & Jocke

Q006

228  
140

ASSIGNOR hereby covenants that no assignment, sale, agreement or encumbrance has been or will be made or entered into which would conflict with this assignment.

ASSIGNOR further covenants that ASSIGNEE will, upon its request, be provided promptly with all pertinent facts and documents relating to said invention and said Letters Patent and legal equivalents as may be known and accessible to ASSIGNOR and will testify as to the same in any interference, litigation or proceeding related thereto and will promptly execute and deliver to ASSIGNEE or its legal representatives any and all papers, instruments or affidavits required to apply for, obtain, maintain, issue and enforce said application, said invention and said Letters Patent and said equivalents thereof which may be necessary or desirable to carry out the purposes thereof.

IN WITNESS WHEREOF, I have hereunto set hand and seal this 26 day of April 2004.

Michael Hurty

Inventor's Signature

Michael Hurty

Residence: North Canton, Ohio

Post Office Address: 6265 Walnut Ridge Circle NW  
North Canton, Ohio 44720

Nationality: U.S.

(Assignment of Invention—page 4 of 6)

PATENT  
REEL: 014607 FRAME: 0255

05/03/2004 10:50 FAX 3307226448

Walker & Jocke

0007

*[Handwritten initials and number 141]*

ASSIGNOR hereby covenants that no assignment, sale, agreement or encumbrance has been or will be made or entered into which would conflict with this assignment.

ASSIGNOR further covenants that ASSIGNEE will, upon its request, be provided promptly with all pertinent facts and documents relating to said invention and said Letters Patent and legal equivalents as may be known and accessible to ASSIGNOR and will testify as to the same in any interference, litigation or proceeding related thereto and will promptly execute and deliver to ASSIGNEE or its legal representatives any and all papers, instruments or affidavits required to apply for, obtain, maintain, issue and enforce said application, said invention and said Letters Patent and said equivalents thereof which may be necessary or desirable to carry out the purposes thereof.

IN WITNESS WHEREOF, I have hereunto set hand and seal this 22 day of April 2004.

*Peritt JP*  
Jonathan M. Peritt

Inventor's Signature *[Signature]*

Residence: Clinton, Ohio

Post Office Address 5718 Deer Pines Trail  
Clinton, Ohio 44216

Nationality: U.S.

(Assignment of Invention—page 3 of 6)

PATENT  
REEL: 014607 FRAME: 0256

05/03/2004 16:38 FAX 3307226446

Walker & Jocke

2000

CP 747 142

ASSIGNOR hereby covenants that no assignment, sale, agreement or encumbrance has been or will be made or entered into which would conflict with this assignment.

ASSIGNOR further covenants that ASSIGNEE will, upon its request, be provided promptly with all pertinent facts and documents relating to said invention and said Letters Patent and legal equivalents as may be known and accessible to ASSIGNOR and will testify as to the same in any interference, litigation or proceeding related thereto and will promptly execute and deliver to ASSIGNEE or its legal representatives any and all papers, instruments or affidavits required to apply for, obtain, maintain, issue and enforce said application, said invention and said Letters Patent and said equivalents thereof which may be necessary or desirable to carry out the purposes thereof.

IN WITNESS WHEREOF, I have hereunto set hand and seal this 23 day of April 2004.

Kenneth Koutor

Inventor's Signature:

Kenneth C. Koutor

Residence: Chesterland, Ohio

Post Office Address: 9170 Cedar Road  
Chesterland, Ohio 44026

Nationality: U.S.

(Assignment of Invention—page 6 of 6)

RECORDED: 05/03/2004

PATENT  
REEL: 014607 FRAME: 0257

143

**REPUBLICA DE COLOMBIA**  
**SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO**

Folio 142

2020  
Bogotá D.C.,

Doctor(a)  
OLARTE GARCIA CARLOS REINALDO  
Apoderado(a) y/o Representante de  
DIEBOLD INCORPORATED

|            |                            |               |
|------------|----------------------------|---------------|
| REFERENCIA | Radicación No.             | 05 58758      |
|            | Solicitud internacional    | US2003/039968 |
|            | Fecha inicio fase nacional | 16/07/2005    |
|            | Trámite                    | 11            |
|            | Evento                     | 379           |
|            | Actuación                  | 416           |
|            | Oficio No.                 | 2101          |
|            | Folios                     | 1             |

Teniendo en cuenta que la solicitud de privilegio de patente que se tramita bajo el expediente indicado en la referencia, reúne los requisitos de forma establecidos en la Decisión 486 de la Comisión de la Comunidad Andina, el Tratado de Cooperación en Materia de Patentes (PCT), el Reglamento y la Circular Única de la Superintendencia de Industria y Comercio, se envía el extracto de la solicitud a la Oficina de Comunicaciones para efecto de su publicación en la Gaceta de Propiedad Industrial.

Cúmplase  
Dado en Bogotá DC,

05 DIC. 2006

ALIX CARMENZA CESPEDES DE VERGEL  
Jefe de la división de Nuevas Creaciones

adpa10