

Clarke, Modet & C^o
COLOMBIA

ESCOBAR - URIBE ASOCIADOS
Intellectual Property


109
126

As. 2904/P.

**SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO
DIVISIÓN DE NUEVAS CREACIONES**

E. S. D.

Ref.: Expediente No. 05-116.095
Solicitud de Patente a nombre de
Johnson & Johnson Industrial Ltda.

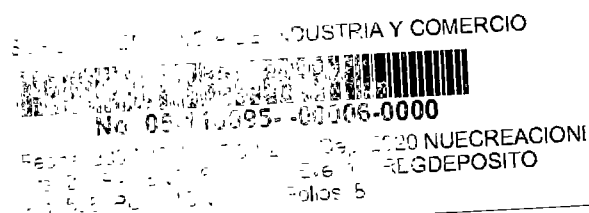

Yo, **JIMENA ESCOBAR URIBE**, identificada como aparece al pie de mi firma, domiciliada en Bogotá, en la Carrera 11 No. 86-53, piso 6, obrando como apoderada de la sociedad **Johnson & Johnson Industrial Ltda.**, con domicilio en São Jose dos Campos, São Paulo, Brasil, solicitante de la patente de la referencia, pido a usted que se proceda a examinar si la invención, cuya patente se tramita en el expediente de la referencia, es patentable.

Adjunto al presente memorial los recibos Nos. 07 - 84,108 de 11 de octubre de 2007, 07 - 81,204 de 2 de octubre de 2007, 07 - 81,198 de 2 de octubre de 2007, 07 - 76,550 de 21 septiembre de 2007, 07 - 76,549 de 21 de septiembre de 2007, 07 - 76,548 de 21 septiembre de 2007 y 07 - 76,547 de 21 de septiembre de 2007 por la suma de \$404.000.00, con lo cual queda cubierta la tasa oficial correspondiente a dicho estudio.

Señor Superintendente,


JIMENA ESCOBAR URIBE
C.C.39.779.452 de Usaquén
T.P. 68.228





US 20020115974A1

118

(19) **United States**(12) **Patent Application Publication**
Hermansson et al.(10) **Pub. No.: US 2002/0115974 A1**(43) **Pub. Date: Aug. 22, 2002**(54) **ABSORBENT ARTICLE****Publication Classification**(75) **Inventors: Kent Hermansson, Vastra Frolunda**
(SE); Sofia Roxendal, Pixbo (SE)(51) **Int. Cl.⁷ A61F 13/15**(52) **U.S. Cl. 604/385.01****Correspondence Address:****YOUNG & THOMPSON****745 SOUTH 23RD STREET 2ND FLOOR****ARLINGTON, VA 22202**(57) **ABSTRACT**(73) **Assignee: SCA HYGIENE PRODUCTS AB,**
GOTEBORG (SE)(21) **Appl. No.: 10/074,006**(22) **Filed: Feb. 14, 2002****Related U.S. Application Data**(60) **Provisional application No. 60/268,919, filed on Feb.**
16, 2001.(30) **Foreign Application Priority Data****Feb. 16, 2001 (SE)..... 0100532-1**

Absorbent article such as a diaper, an incontinence guard, a pantyliner or a sanitary napkin, including a liquid-pervious topsheet (3), a liquid-impermeable backsheet (2), and an absorbent body (4) enclosed therebetween, wherein said topsheet (3) and absorbent body (4) either directly or via at least one intermediate layer are joined by means of partly a first adhesive (5) and partly by means of a second adhesive (6). The surface which is constituted of said topsheet (3) and which is adhesively joined with said first adhesive (5) and said second adhesive (6) is formed into a three-dimensional structure having alternating raised (8) and recessed regions (7), wherein said first adhesive (5) is arranged in the recessed regions (7) and said second adhesive (6) is arranged in said raised regions (8).

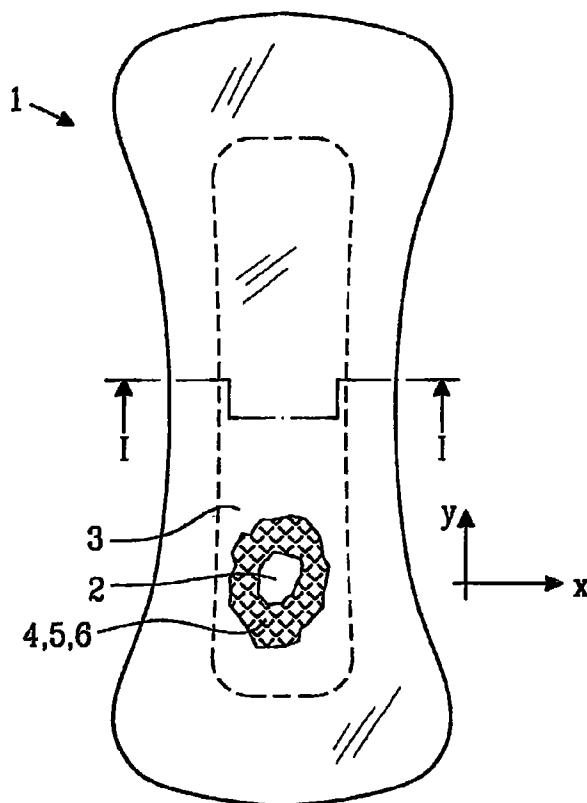

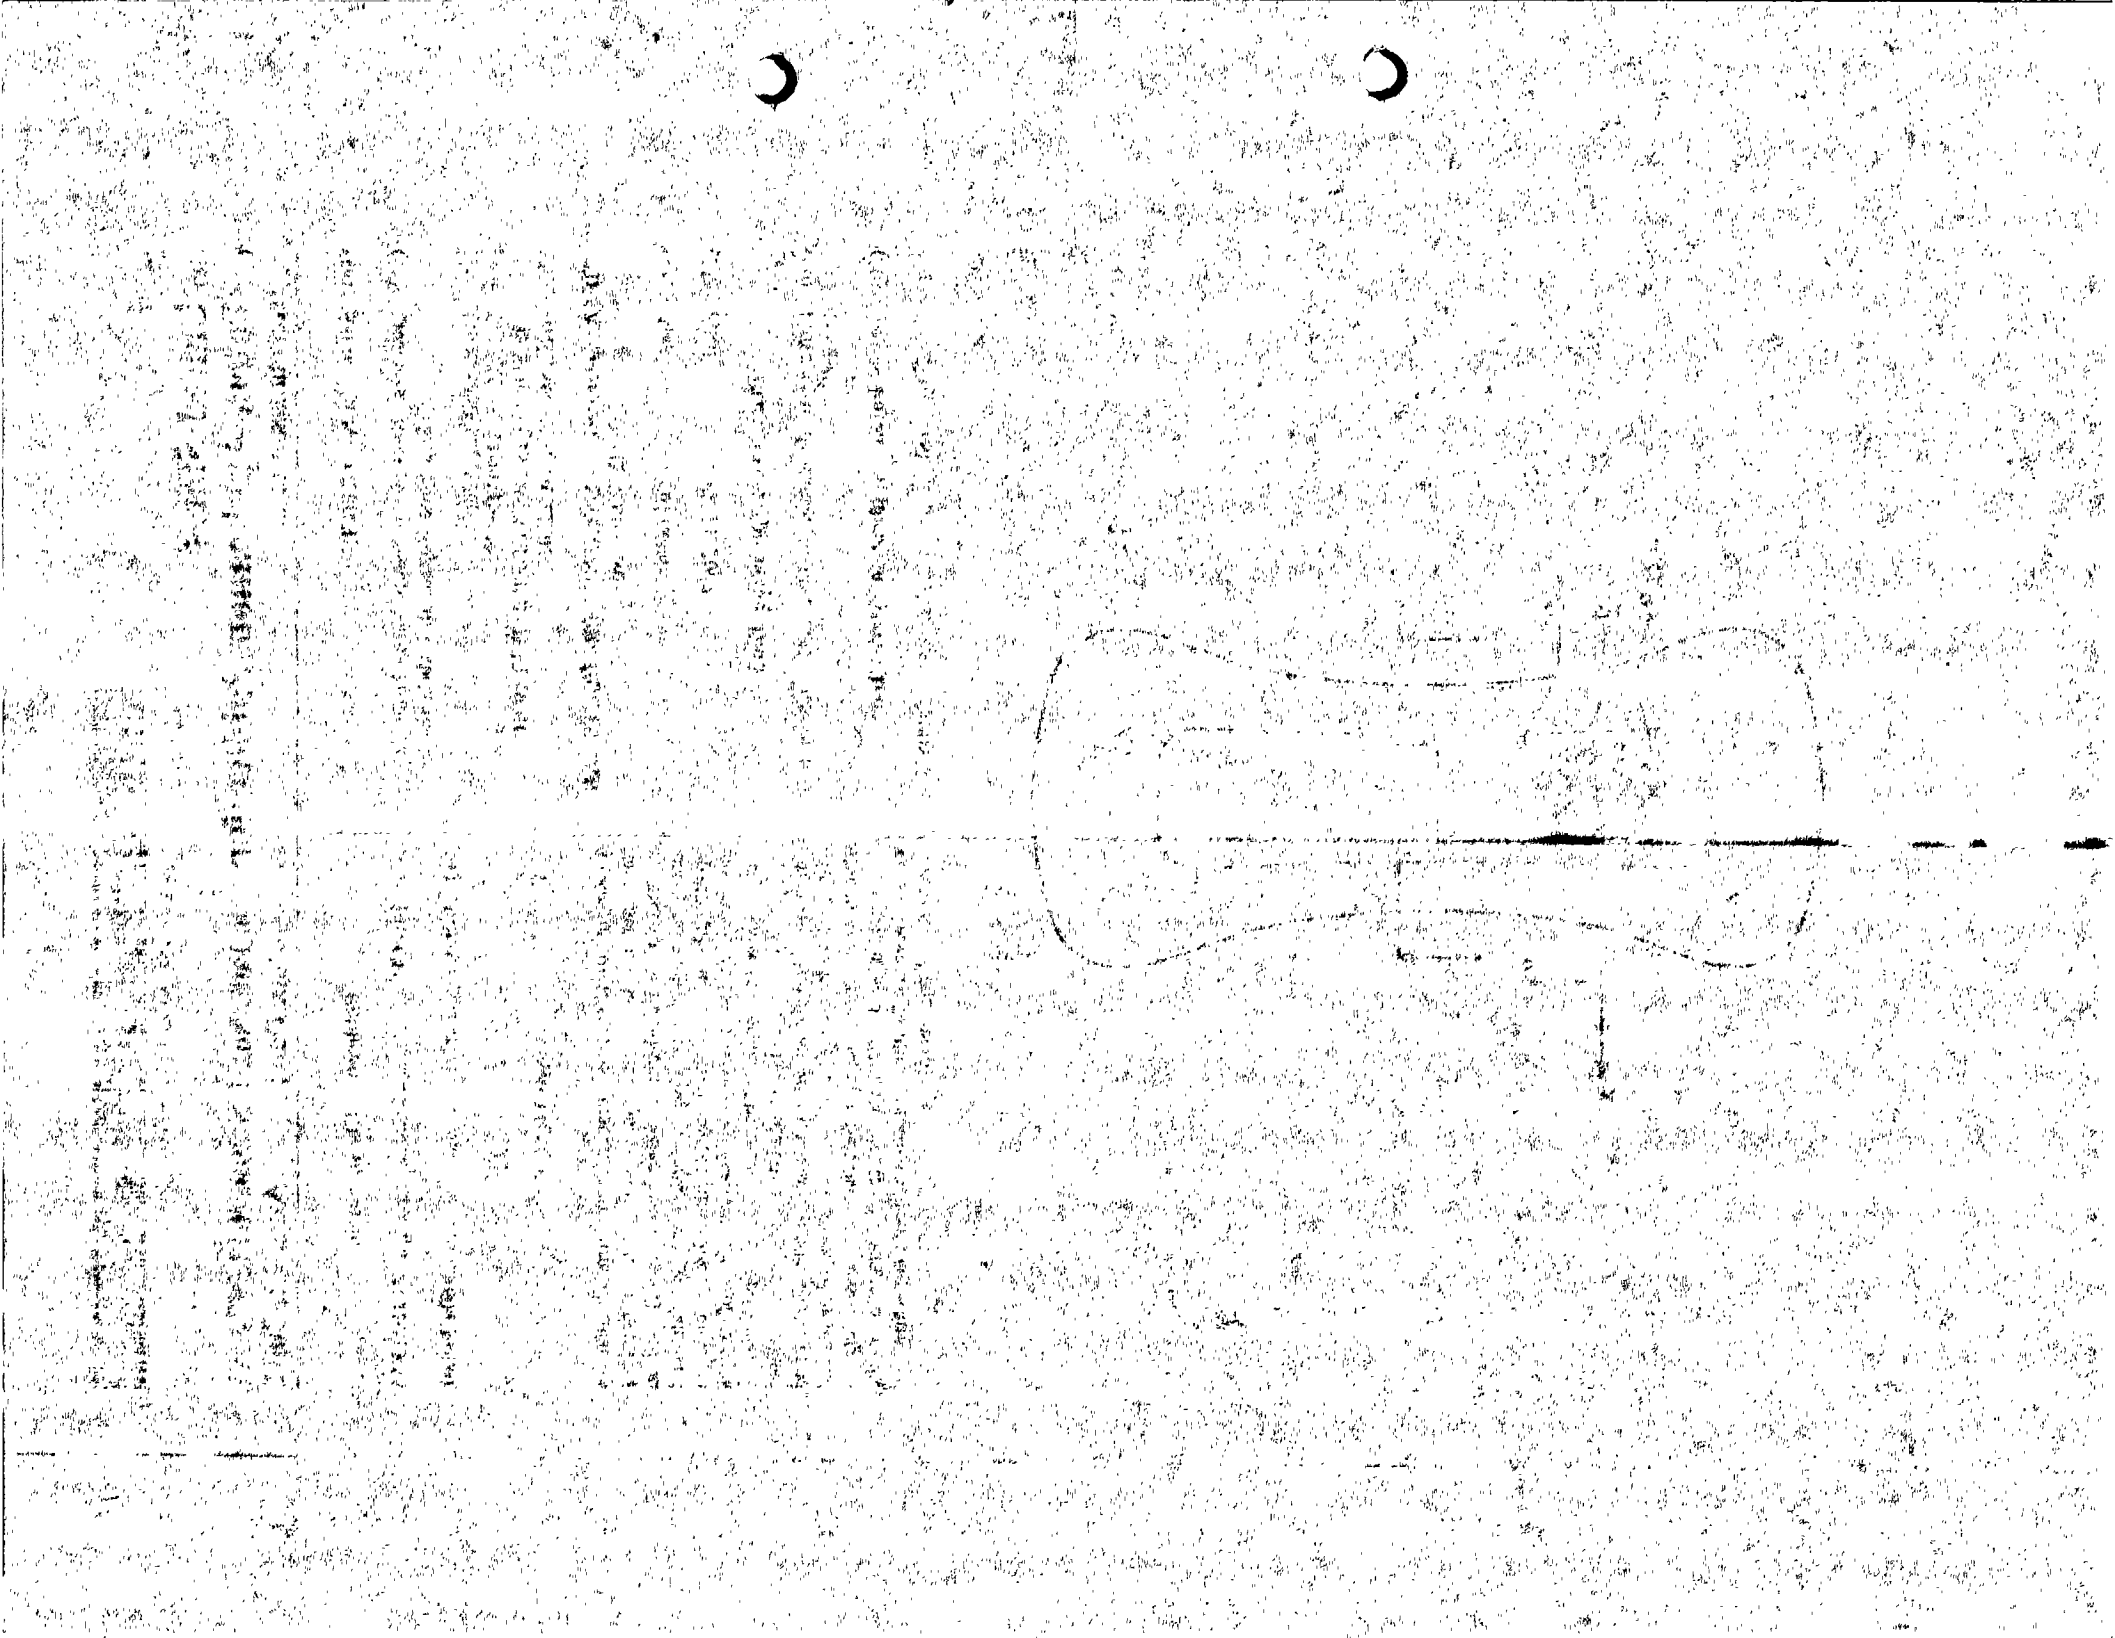

ABSORBENT ARTICLE**TECHNICAL FIELD**

[0001] The present invention relates to an absorbent article such as a diaper, an incontinence guard, a pantyliner, or a sanitary napkin comprising a liquid-pervious topsheet, a liquid-impermeable backsheet and an absorbent body enclosed therebetween, wherein said topsheet and absorbent body either directly or via at least one intermediate layer are joined by means of a first adhesive.

BACKGROUND OF THE INVENTION

[0002] An absorbent article, such as a diaper, an incontinence guard or a sanitary napkin, normally comprises a liquid-pervious topsheet, a liquid-impermeable backsheet, and an absorbent body enclosed therebetween. Typically, the topsheet is glued to the backsheet by means of a hydrophobic adhesive.

[0003] In order to achieve a surface facing towards the user, which has an improved liquid-absorption, different treatments have been proposed for enabling the topsheet to let liquid pass through more rapidly to the underlying absorbent body. Nonwoven materials, which often are utilised as topsheets are, as a rule, substantially hydrophobic. These materials can be treated, for example, with surfactants in order to render the material more hydrophilic. However, after wetting of the material, the surfactant is washed away and the topsheet becomes hydrophobic once again. Thereby, the liquid transport through the material is deteriorated.

[0004] EP 0 822 794 discloses a method for achieving a three-dimensional structure having ridges and valleys on an article which consists of a liquid-impermeable backsheet, an absorbent core, and a liquid-impermeable topsheet. The topsheet with the underlying absorbent body are provided with a pattern by means of embossed rolls and which create a pattern comprising said ridges and valleys. This topology is intended to guide the liquid down into the absorbent core. In a second rolling treatment, a penetrating agent is applied in order to neutralize the hydrophobic fibres in the topsheet and create contact, in the form of hydrophilic flow lines, with the hydrophilic fibres in the absorbent body.

[0005] However, a prerequisite for a good transport of liquid from the topsheet to the absorbent body is that said layer really is in contact with the absorbent body, either directly or via an underlying liquid transfer layer. An air gap may be created between the topsheet and the absorbent body or, alternatively, there may be air between the three different layers constituted of the topsheet, the underlying liquid transfer layer and the absorbent body, something that considerably impairs the liquid acquisition into the absorbent body. In order to ensure that the absorbent body really contacts and remains in contact with the topsheet, the topsheet and the absorbent body can be joined by means of an adhesive. For this purpose, either a hydrophobic or a hydrophilic adhesive can be utilised.

[0006] SE 503 798 discloses an absorbent article where the topsheet is glued to the absorbent body by means of a hydrophilic adhesive in order to achieve a surface, which more easily lets liquid through. However, the surface may be perceived as somewhat moist by the wearer during usage.

[0007] WO 98/42290 discloses an article, which exhibits a three-dimensional structure having slightly raised flat

regions, and recessed regions. Across the raised regions, a hydrophobic material has been applied on top of the topsheet, which causes the liquid to pass down into the recessed regions. This product, however, has the disadvantage that the hydrophobic material has to be applied on the topsheet, something that requires an additional step in the production of absorbent articles when the choice of material and equipment is concerned.

[0008] Accordingly, there is a need for a product which provides a rapid liquid acquisition and which the user perceives as having a dry surface.

SUMMARY OF THE INVENTION

[0009] The object of the present invention is to provide a product which has good liquid absorption ability, and which still exhibits a dry surface facing towards the user. This object is achieved by means of using a second adhesive, which is more hydrophobic than said first adhesive, for joining said topsheet and absorbent body, either directly or via at least one intermediate layer. The liquid which is to be absorbed is guided from the more hydrophobic regions created in this way, which repel an aqueous solution, to the comparatively more hydrophilic regions, where the liquid is directed further down to and is absorbed into the absorbent body.

[0010] Preferably, the first and the second adhesive are arranged in patterns, wherein the pattern of the first adhesive, at least to a substantial extent, does not coincide with the pattern of the second adhesive, but is displaced in relation to this.

[0011] According to another aspect of the invention, the adhesively joined portion of the topsheet, alternatively together with at least one intermediate layer, which overlaps the absorbent body, can be formed into a three-dimensional structure. This results in a product, which preferably has raised hydrophobic regions and recessed hydrophilic regions. The liquid that is to be absorbed is guided down onto the hydrophilic recessed regions where the liquid will be absorbed into the underlying absorbent body, whereas the hydrophobic raised regions will contain less liquid. Consequently, those raised regions that are in closest contact with the skin of the user will be perceived as more dry.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] In the following, the invention will be described in greater detail with reference to embodiments shown in the attached drawings.

[0013] FIG. 1 shows a schematic perspective view, seen from above, of an absorbent article according to the present invention.

[0014] FIG. 2 shows a cross-section along the line I-I in FIG. 1.

[0015] FIG. 3 shows the cross-section in FIG. 2, which has obtained a three-dimensional structure after embossing.

[0016] FIG. 4 shows a schematic illustration of a contact angle θ measurement.

[0017] FIG. 5 shows results from experiments for determining the contact angle of adhesives according to Example 1.

the 1990s, the number of people in the United States who are 65 years of age or older is projected to increase from 20 million to 35 million, and the number of people 75 years of age or older is projected to increase from 10 million to 17 million (U.S. Census Bureau, 1997).

the 1990s, the number of people in the world who are under 15 years of age is expected to increase by 1.5 billion, from 1.1 billion in 1990 to 2.6 billion in 2010. The number of people aged 65 and over is expected to increase by 1 billion, from 350 million in 1990 to 1.4 billion in 2010. The number of people aged 15-64 is expected to increase by 1.5 billion, from 2.5 billion in 1990 to 4.0 billion in 2010. The number of people aged 65 and over is expected to increase by 1 billion, from 350 million in 1990 to 1.4 billion in 2010. The number of people aged 15-64 is expected to increase by 1.5 billion, from 2.5 billion in 1990 to 4.0 billion in 2010.

DETAILED DESCRIPTION OF THE
INVENTION

[0018] The drawing shows an embodiment of an absorbent article, which can be a diaper, an incontinence guard, a pantyliner or a sanitary napkin 1, comprising a liquid-impermeable backsheet 2, a liquid-pervious topsheet 3, and an absorbent body 4 enclosed therebetween. The liquid-pervious topsheet 3 can consist of a nonwoven material, e.g. a spunbond-material of continuous filaments, a meltblown-material, a bonded, carded fibre material, or a tow-material. The liquid-impermeable backsheet 2 can consist of a plastic film, a nonwoven material, which has been coated with a liquid-barrier material, or a hydrophobic nonwoven material, which resists liquid penetration.

[0019] The backsheet 2 and the topsheet 3 have a somewhat larger extension in the plane than the absorbent body 4, and extend beyond its edges. The layers 2 and 3 are mutually inter-connected within the protruding portions, for example by means of gluing or welding by means of heat or ultrasonics.

[0020] The absorbent body 4 can be of any conventional type. Examples of commonly occurring absorption materials are cellulose fluff pulp, tissue layers, highly absorbent polymers (so-called superabsorbents), absorbent foam materials, absorbent nonwoven materials and the like. It is common to combine cellulose fluff pulp with superabsorbents in an absorbent body. It is also common with absorbent bodies constituted of layers of different materials having different properties when liquid acquisition ability, distributing ability and storage capacity are concerned. This is well known to the skilled person within the field, and is therefore not necessary to describe in detail. The thin absorbent cores, which are common for example in baby diapers, incontinence guards and sanitary napkins, usually consist of a compressed mixed or layered structure of cellulose fluff pulp and superabsorbent.

[0021] The topsheet 3 does not have to be directly bonded to the absorbent body 4. It is e.g. possible to create a laminate of a topsheet and an underlying liquid transfer layer such as a wadding, a bulky nonwoven, or the like. Thereafter, such a laminate can be attached to the absorbent body in a conventional way, e.g. by means of gluing. Liquid transfer layers constitute a component of absorbent articles which both can be counted to the topsheet and to the absorbent body. Commonly utilised materials in liquid transfer layers are polyester waddings, porous nonwoven materials, tow-materials, air-laid bonded cellulose layers, etc. Accordingly, when describing the different embodiments, the present invention is intended to include also a possible occurrence of at least one such underlying liquid transfer layer between the topsheet 3 and the absorbent body 4.

[0022] In the article according to the invention, the contacting surfaces of the liquid-pervious topsheet 3 and the absorbent body 4 are joined by means of a first adhesive 5 and a second adhesive 6. Preferably, said first adhesive 5 consists of a substantially hydrophilic adhesive. Said second adhesive 6 can consist of a substantially hydrophobic adhesive. The main thing, however, is that said second adhesive 6 has a more hydrophobic nature than said first adhesive 5.

[0023] The hydrophobic or hydrophilic nature of the adhesives can be determined by means of a so-called contact

angle test. An adhesive can be regarded as hydrophobic if it exhibits a contact angle θ , which exceeds 90° . See Example 1 for details concerning the test. The first adhesive 5 should exhibit a contact angle θ , which is smaller than the contact angle θ of the second adhesive 6. It is preferred that the first adhesive 5 exhibits a contact angle θ which is at least 10° smaller than the second adhesive 6. Preferably, the first adhesive 5 exhibits a contact angle θ , which is at least 20° smaller than the second adhesive 6. It is even more preferred that the first adhesive 5 exhibits a contact angle θ which is at least 30° smaller than the second adhesive 6. In another embodiment, the first adhesive 5 exhibits a contact angle θ which is smaller than 90° , and the second adhesive 6 exhibits a contact angle which exceeds 90° .

[0024] FIG. 2 shows a cross-section through the article. This shows how the first adhesive 5 and the second adhesive 6, which is arranged between the topsheet 3 and the absorbent body 4, are arranged in a pattern, wherein the pattern of the first adhesive 5, at least to a substantial extent, does not coincide with the pattern of the second adhesive 6 but is displaced in relation to this. The pattern can be constituted of e.g. stripes or squares, where the different adhesives assume alternating positions, seen along the x- and/or y-direction. Thereby, the term x-direction means transversely to the longitudinal direction of the article, which is defined as a front portion, a rear portion and a crotch portion located therebetween. The term y-direction means along the longitudinal direction of the article.

[0025] FIG. 3 shows, in cross-section, how the article has obtained a three-dimensional structure after embossing. This structure exhibits recessed regions 7 and raised regions 8. Said first adhesive 5 is arranged in the recessed regions 7 and said second adhesive 6 is arranged in the raised regions 8.

[0026] The embossing can be accomplished by means of grooves, which are placed in the positions where the first adhesive is located. These areas will then constitute the recessed regions 7 in the three-dimensional structure. Furthermore, the structure can be a waffle structure where the two adhesives substantially are arranged in a checkered pattern. Furthermore, the positions of the recessed regions 7 and the raised regions 8 in one row can be displaced in the x-direction in relation to the next row. The adhesives could also be applied in a substantially wave-like structure along the longitudinal direction of the article.

[0027] In case the topsheet 3 is constituted of a material which in itself has a three-dimensional structure with alternating raised and recessed portions, for example which is bonded in a certain binding pattern where the binding points constitute the recessed portions 7, the more hydrophilic adhesive can be applied at the binding points and the more hydrophobic one at the raised portions 8 between the binding points.

[0028] Said three-dimensional structure could also be achieved by means of adhesives, which for example during curing or heat treatment shrink differently, something that will create a three-dimensional structure having raised and recessed regions.

[0029] According to another embodiment, the article can have a liquid acquisition zone with a more dense distribution of recessed hydrophilic areas that, for example, can be located in the central portion of the article. This can be

