

Clarke, Modet & C^o

COLOMBIA

P-3477

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO
DIVISION DE NUEVAS CREACIONES

E. S. D.

Ref.: Expediente No. 12.163.081
Solicitud de Patente a nombre de
MC NEIL-PPC, INC.

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO



No. 12-163081-00003-0000

Fecha: 2013-01-18 16:00:04 Dep. 2020 DIR.NUEVASCR
Tra. 2 PATENTES Eve: 1 REGDEPOSITO
Act. 329 CTOINFORMACION Folios: 46

Yo, DILIA MARÍA RODRÍGUEZ D'ALEMAN, identificada como aparece al pie de mi firma, domiciliada en la Carrera 11 No. 86-53, piso 6, obrando como apoderada de la sociedad **MC NEIL-PPC, INC.** domiciliada en New Jersey, Estados Unidos de América, solicitante de la patente de la referencia, atentamente me permito presentar copia certificada de la solicitud de Patente número 13/236,777 de 20 de septiembre de 2011, con la debida traducción de lo pertinente.

Señor Superintendente,

DILIA MARÍA RODRÍGUEZ D'ALEMAN

C.C. 41.654.882 de Bogotá.

T.P. 20824 CSJ

notificaciones@clarkemodet.com.co

ESTADOS UNIDOS DE AMERICA
A TODOS AQUELLOS A QUIENES EL PRESENTE LLEGUE:

DEPARTAMENTO DE COMERCIO DE LOS ESTADOS UNIDOS
Oficina de Patentes y Marcas de los Estados Unidos

Septiembre 06 de 2012

La presente es para certificar que el anexo es una copia fiel de los registros de la Oficina de Patentes y Marcas de los Estados Unidos, de los documentos de la solicitud de patente identificada más adelante, que cumplieron con los requerimientos para concederse una fecha de presentación de acuerdo con 35 USC 111.

Número de Solicitud: **13/236,777**

Fecha de Presentación: Septiembre 20 de 2011

EL CÓDIGO DEL PAÍS Y EL NÚMERO DE SU SOLICITUD DE PRIORIDAD, PARA SER USADA EN LA PRESENTACIÓN EXTRANJERA BAJO EL CONVENIO DE PARÍS ES **US 13/236,777**

Por la autoridad de

Bajo el Secretario de Comercio para la Propiedad Intelectual y el Director de la Oficina de Patentes y Marcas de los Estados Unidos de América


(fdo) **P. SWAIN**

Oficial Certificador

Sello oficial de la Oficina de Patentes y Marcas de los Estados Unidos de América

P-3477

PA 1895934

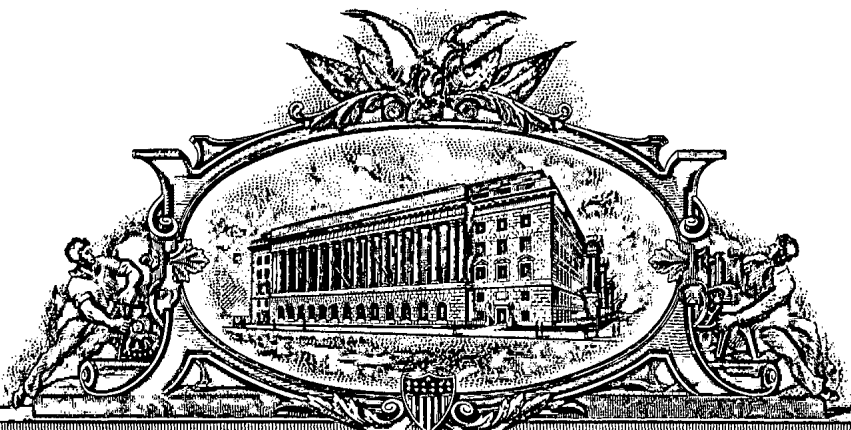

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

**UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office**

September 06, 2012

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.


APPLICATION NUMBER: 13/236,777

FILING DATE: September 20, 2011

THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS CONVENTION, IS US13/236,777

By Authority of the
Under Secretary of Commerce for Intellectual Property
and Director of the United States Patent and Trademark Office

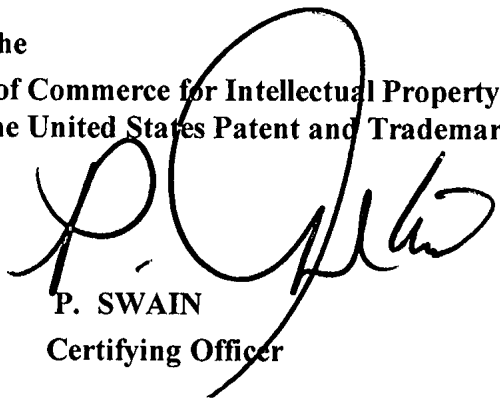


P. SWAIN
Certifying Officer

Electronic Acknowledgement Receipt

EFS ID:	10985967
Application Number:	13236777
International Application Number:	
Confirmation Number:	5809
Title of Invention:	RESILIENT ABSORBENT COMPOSITE MATERIAL
First Named Inventor/Applicant Name:	Morris Yang
Customer Number:	27777
Filer:	Paul J. Higgins./Dana Deinstadt
Filer Authorized By:	Paul J. Higgins.
Attorney Docket Number:	PPC5364USNP
Receipt Date:	20-SEP-2011
Filing Date:	
Time Stamp:	11:07:16
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	Deposit Account
Payment was successfully received in RAM	\$1090
RAM confirmation Number	18180
Deposit Account	100750
Authorized User	
The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows: Charge any Additional Fees required under 37 C.F.R. Section 1.16 (National application filing, search, and examination fees) Charge any Additional Fees required under 37 C.F.R. Section 1.17 (Patent application and reexamination processing fees)	

4

Charge any Additional Fees required under 37 C.F.R. Section 1.19 (Document supply fees)					
Charge any Additional Fees required under 37 C.F.R. Section 1.20 (Post Issuance fees)					
Charge any Additional Fees required under 37 C.F.R. Section 1.21 (Miscellaneous fees and charges)					
File Listing:					
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Transmittal of New Application	Trans.pdf	212920	no	1
			b09ab34a9fa58ec343a370260dd091476f8e170b		
Warnings:					
Information:					
2		Spec.pdf	171333	yes	26
			c8d84433336e75d9478e74c65cf35edf4734ca53		
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Specification		1	21	
	Claims		22	25	
	Abstract		26	26	
Warnings:					
Information:					
3	Drawings-only black and white line drawings	FIGS.pdf	670426	no	10
			c4633076bd71e30242aca242f8249ac66b8216d7		
Warnings:					
Information:					
4	Oath or Declaration filed	Declaration.pdf	343015	no	3
			1f23da9545555f5c424d0c3e1ab623fe18c0a31c		
Warnings:					
Information:					
5	Fee Worksheet (SB06)	fee-info.pdf	32847	no	2
			273fe6bf928318cce09488c937a52d4648471e20		
Warnings:					
Information:					
Total Files Size (in bytes):			1430541		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

UTILITY PATENT APPLICATION TRANSMITTAL		Attorney Docket No.	PPC5364USNP									
		First Inventor	Morris Yang									
		Title	RESILIENT ABSORBENT COMPOSITE MATERIAL									
(only for new nonprovisional applications under 37 CFR 1.53(b))		I hereby certify that this correspondence is being transmitted via The Office electronic filing system in accordance with 37 CFR 1.6(a)(4)										
APPLICATION ELEMENTS <i>See MPEP Chapter 600 concerning utility patent application contents.</i>		ADDRESS TO: Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450										
1. ☒ Fee Transmittal Form (e.g., PTO/SB/17) (submit an original and a duplicate for fee processing) 2. ☒ Specification [Total Pages 26] (Preferred arrangement set forth below) - Descriptive Title of the Invention - Cross Reference to Related Applications - Statement Regarding Fed sponsored R&D - Reference to sequence listing, a table, or a computer program listing appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure 3. ☒ Drawing(s)(35 USC 113) [Total Sheets 10] 4. Oath or Declaration [Total Pages 3] a. ☒ Unexecuted (original or copy) b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 18 completed) i. ☐ DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b). 5. ☐ Application Data Sheet. See 37 CFR 1.76		6. ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix) 7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. ☐ Computer Readable Form (CRF) b. ☐ Specification Sequence Listing on: i. ☐ CD-ROM or CD-R (2 copies); or ii. ☐ paper c. ☐ Statement verifying identity of above copies ACCOMPANYING APPLICATION PARTS 8. ☐ Assignment Papers 9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney (when there is an assignee) 10. ☐ English Translation Document (if applicable) 11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations 12. ☐ Preliminary Amendment 13. ☐ Return Receipt Postcard (MPEP 503) (Should be specifically itemized) 14. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed) 15. ☐ Request and Certifications under 35 U.S.C. 122 (b)(2)(B)(i). Applicant must attach form PTO/SB/35 or its equivalent. 16. ☐ Other										
17. ☐ If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76: ☐ Continuation ☐ Divisional ☐ Continuation-in-Part (CIP) of prior application No.: filed . Prior application information: Examiner Group Art Unit: For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation <u>can only</u> be relied upon when a portion has been inadvertently omitted from the submitted application parts.												
18. CORRESPONDENCE ADDRESS ☒ Customer Number or Bar Code Label 000027777 or ☐ Correspondence Address below Name: Philip S. Johnson, Esq. Address: Johnson & Johnson One Johnson & Johnson Plaza New Brunswick, NJ 08933-7003 USA												
19. TELEPHONE CONTACT Please direct all telephone calls or telefaxes to Brett T. Freeman at: Telephone: (732) 524-3428 Fax: (732) 524-2808												
20. SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED <table border="1"><tr><td>NAME</td><td>Paul J. Higgins</td><td>REG. NO. 44,152</td></tr><tr><td>SIGNATURE</td><td colspan="2">/Paul J. Higgins/</td></tr><tr><td>DATE</td><td colspan="2">September 20, 2011</td></tr></table>				NAME	Paul J. Higgins	REG. NO. 44,152	SIGNATURE	/Paul J. Higgins/		DATE	September 20, 2011	
NAME	Paul J. Higgins	REG. NO. 44,152										
SIGNATURE	/Paul J. Higgins/											
DATE	September 20, 2011											

RESILIENT ABSORBENT COMPOSITE MATERIAL**FIELD OF INVENTION**

The present invention generally relates to an absorbent composite material and an
5 absorbent article including such absorbent composite material. More particularly, the
present invention relates to an absorbent composite material for use in sanitary absorbent
articles such as sanitary napkins, pantliners, diapers, adult incontinence products, and the
like.

BACKGROUND OF THE INVENTION

10 Lofty, resilient, non-woven webs, that is nonwoven webs that have a high degree
of loft and the tendency to retain such loft in both the dry and wet state, are well known.
In addition, it is well known that such lofty, resilient, nonwoven webs may be used in
disposable sanitary products such as sanitary napkins, pantliners, tampons, diapers, adult
15 incontinence products, and the like. A perceived benefit of such lofty, resilient,
nonwoven webs is that such materials may deliver enhanced comfort to a user of such
disposable sanitary products since the lofty, resilient, nonwoven webs may tend to
conform to, and move with, the user's body during use.

20 A problem with lofty, resilient, nonwoven webs is that due to the loft of such
materials (i.e. their low density) such webs are not particularly absorbent. In addition,
such materials may exhibit poor rewet properties. That is, such materials may release or
"wet back" fluid when subjected to an external pressure.

In view of the foregoing there is a need for an absorbent composite material that includes an exceptionally soft, cushiony, nonwoven web and simultaneously provides superior fluid handling characteristics.

SUMMARY OF THE INVENTION

In view of the foregoing, the present invention provides an absorbent composite material including a fibrous material including a plurality of individual fibers forming a
5 fiber matrix and a binder material present in an amount from about 20% by to about 60%
by weight of the fibrous material, the fibrous material having first and second opposed
surfaces, superabsorbent polymer dispersed within the fiber matrix, an absorbent mixture
arranged adjacent to the first surface of the fibrous material, the absorbent mixture
including superabsorbent polymer and adhesive.

10

BRIEF DESCRIPTION OF THE DRAWINGS

Examples of embodiments of the present invention will now be described with reference to the drawings, in which:

5 Fig. 1 is a sectional schematic view of an absorbent composite material according to a first embodiment of the present invention;

 Fig. 2 is a schematic view of an apparatus for making the absorbent composite material shown in Fig. 1;

10 Fig. 3 is a sectional schematic view of an absorbent composite material according to a second embodiment of the present invention

 Fig. 4 is a schematic view of an apparatus for making the absorbent composite material shown in Fig. 3;

15 Fig. 5 is a schematic view of the encircled portion of the apparatus shown in Fig. 4 depicting a needle employed in the apparatus, a top surface of a fibrous material, and absorbent fibers arranged on the top surface of the fibrous material;

 Fig. 6 is a detailed view of the encircled portion of the needle shown in Fig. 5;

 Figs. 7-10 depict the manner in which the needle impregnates the absorbent fiber within the fibrous material;

20 Fig. 11 is a perspective view of an absorbent article according to the present invention;

 Fig. 12 is an exploded perspective view of the article shown in Fig. 11 revealing the constituent layers thereof;

Fig. 13 is sectional view taken along line x-x in Fig. 11 showing one embodiment of the absorbent article shown in Fig 11; and

Fig. 14 is sectional view taken along line x-x in Fig. 11 showing an alternate embodiment of the absorbent article shown in Fig. 11.

DETAILED DESCRIPTION OF THE INVENTION

The present invention generally relates to an absorbent composite material for use in disposable absorbent articles such as sanitary napkins, pantliners, absorbent products for incontinence, and other disposable sanitary absorbent articles worn close to a wearer's
5 body. Although the absorbent composite material according to the present invention will be described herein with reference to a sanitary napkin, the absorbent composite material may be utilized in other disposable sanitary absorbent articles.

The absorbent composite material according to the present invention, as described in detail below, is structured and arranged such that it provides superior fluid absorbing
10 properties and at the same time is "resilient". The term "resilient" as used herein means that the absorbent composite material tends to retain its shape both in the dry and wet states and when subjected to a compression force tends to recover its original shape when such force is removed. Absorbent articles according to the present invention including the inventive absorbent composite material are thin, flexible, resilient in the x, y and z
15 directions, and exhibit superior fluid handling characteristics. "Resilient in the x, y and z direction" as used herein means the absorbent article exhibits resiliency properties in the transverse direction of the article, in the longitudinal direction of the article, and the direction extending into the article.

Reference is made to Fig. 1 which illustrates a sectional view of an absorbent
20 composite material 10 according to a first embodiment of the present invention. As shown, the absorbent composite material 10 includes, in part, a fibrous material 12 including a plurality of individual fibers 14 that form a fiber matrix 16. The fibrous

material 12 generally includes a top (or first) surface 18 and an opposed bottom (or second) surface 20.

The fibrous material 12 is preferably a fibrous nonwoven material made by a known nonwoven manufacturing technique such as an airlaid process, a card and bind process or a resin and adhesive bond process. Preferably the nonwoven material is a “high loft” nonwoven. Specifically, the nonwoven preferably has a density lower than 0.05 g/cc, and preferably between about 0.01 g/cc and 0.03 g/cc. The individual fibers 14 forming the fibrous nonwoven material may be selected from fibers including synthetic, nonabsorbent fibers that may or may not be wettable. Specific fiber types include, but are not limited to, polyester, nylon, co-polyester, polyethylene, polypropylene, polylactic acid, and bicomponent fibers including these materials. Of course the fibrous nonwoven material may be formed from a single nonabsorbent fiber type listed above or alternatively may be formed from a mixture of the fiber types listed above.

The surface of the nonabsorbent fibers 14 forming the fibrous material 12 may be rendered wettable by treating such fibers with a suitable surface treatment, such as a surfactant or like. The fibrous material 12 preferably further includes a binder material, such as a latex binder. The binder material is preferably present in the fibrous material 12 in an amount that corresponds to between about 20% by weight to about 60% by weight of the fibrous material 12. The individual fibers 14 forming the fibrous material preferably have a denier in the range from about 5 to about 25, preferably from about 6 to about 10. Each of the fibers 14 forming the fibrous material preferably has a fiber diameter within the range of 11 μm and 100 μm . In preferred embodiments of the invention, the fibrous material 12 is completely free of cellulosic material.

The fibrous material 12 preferably has a basis weight in the range of about 50 gsm (g/m^2) to about 150 gsm, preferably from about 60 gsm to about 90 gsm (including the binder material). The fibrous material 12 preferably has a thickness of between about 2 mm to about 6 mm as measured by a Ames Micrometer (Ames Waltman Mass., Model ADP1132, 175 g on the 1 1/8" foot = 0.384 psi). A fibrous material 12 particularly suitable for use in the present invention is a material made from a randomized web sprayed with binder from both sides of the web, having a basis weight of 86 gsm, formed from 100% 6 denier polyester fibers, having a thickness of about 3 mm, and including about 40% latex binder by weight, commercially available under product code SCN09-038 from Kem-Wove, Inc., Charlotte, NC.

As shown in Fig. 1, the absorbent composite material 10 further includes superabsorbent polymer 22 dispersed within the fiber matrix 16. The superabsorbent polymer 22 is preferably present in the fibrous material 12 in an amount that corresponds to between about 100% to about 150% by weight of the fibrous material 12, e.g. between about 80 gsm and about 120 gsm.

For the purposes of the present invention, the term "superabsorbent polymer" (or "SAP") refers to materials which are capable of absorbing and retaining at least about 10 times their weight in body fluids under a 0.5 psi pressure. The superabsorbent polymer particles of the invention may be inorganic or organic crosslinked hydrophilic polymers, such as polyvinyl alcohols, polyethylene oxides, crosslinked starches, guar gum, xanthan gum, and the like. The particles may be in the form of a powder, grains, granules, or fibers. Preferred superabsorbent polymer particles for use in the present invention are crosslinked polyacrylates, such as the products offered by Sumitomo Seika Chemicals

Co., Ltd. of Osaka, Japan, under the designation of SA70 and BA40B. The superabsorbent polymer 22 present in the absorbent composite 10 may consist of a single superabsorbent such as SA70 or alternatively the superabsorbent polymer 22 may consist of a mixture of superabsorbent polymers such as a mixture of SA70 and BA40B. In addition, different superabsorbent polymers may be arranged in a layered arrangement, for example the faster rate BA40B may be arranged above the SA70.

Referring again to Fig. 1, the absorbent composite material 10 further includes an absorbent mixture 24 arranged adjacent to the top surface 18 of the fibrous material 12. The absorbent mixture 24 includes superabsorbent polymer 26 and adhesive 28.

- 10 Preferably the absorbent mixture 24 consists of a mixture of superabsorbent polymer 26 and adhesive 28. The mixture 24 preferably includes between about 90% and about 98% superabsorbent by weight and between 10% and about 2% adhesive by weight. Preferred superabsorbents for use in the mixture include Sumitomo SA70 and Sumitomo BA40B, commercially available from Sumitomo Seika Chemicals, Co., Ltd., Osaka, Japan.
- 15 Preferably a hot melt adhesive is used as the adhesive in the mixture 24. A particularly suitable adhesive is HB Fuller NW1023 hot melt adhesive, commercially available from HB Fuller Company, St. Paul, MN. The mixture 24 is preferably applied to the top surface 18 of the fibrous material 12 in an add on amount of between about 80 gsm and 100 gsm. This add on amount of the mixture 24 corresponds to between about 100% to 20 150% by weight of the fibrous material 12.

In lieu of the absorbent mixture 24 described above, a simple layer of adhesive could alternatively be applied adjacent to the top surface 18 of the fibrous material 12. In such an embodiment the adhesive would not provide additional absorbency to the

composite material 10 but would rather simply help prevent the superabsorbent polymer 22 from “dusting out” of the fiber matrix 16.

Referring again to Fig. 1, the absorbent composite material 10 further includes a superabsorbent retention layer 30. As shown in Fig. 1, the superabsorbent retention layer 30 is arranged adjacent to a top surface 32 of the mixture 24 and is held in place by the mixture 24. The superabsorbent retention layer 30 functions to prevent the superabsorbent polymer 22 from “dusting out” of the fiber matrix 16.

The superabsorbent retention layer 30 may also be adapted to wick fluid in a longitudinal and transverse direction of the composite material 10 so that the composite material 10 can fully utilize its absorbent attributes.

In one embodiment of the invention, the superabsorbent retention layer 30 may consist of a wetlaid tissue having a basis weight in the range of about 10 gsm to about 20 gsm, such as a 17 gsm wetlaid tissue commercially available as Little Rapids type 2004 wetlaid tissue, Little Rapids Corp., Green Bay, Wisconsin.

In another embodiment of the invention, the superabsorbent retention layer 30 may consist of fibrous material including wood pulp fibers, polyester fibers, rayon fibers, or combinations thereof. The superabsorbent retention layer 30 may also comprise thermoplastic fibers for the purpose of stabilizing the layer and maintaining its structural integrity. Examples of materials suitable for the superabsorbent retention layer 30 are through air bonded pulp sold by Buckeye Technologies, Inc. of Memphis, Tenn. under the designation Vizorb 3008 which has a basis weight of 100 gsm and Vizorb 3010 which has a basis weight of 90 gsm.

Another example of a material suitable for use as the superabsorbent retention layer 30 is a calendared airlaid material of the type commercially available from EAM Corporation, Jessup, GA under the designation Novathin. When calendared airlaid materials are used as the superabsorbent retention layer 30 such materials preferably have a basis weight in the range of about 40 gsm to about 90 gsm. The superabsorbent retention layer 30 is preferably free of superabsorbent polymer.

Another example of a materials suitable for use as the superabsorbent retention layer 30 are commercially available paper towel materials.

A method of making the absorbent composite material 10 will now be described with reference to Fig. 2 which depicts a schematic representation of an apparatus 40 for making the absorbent composite material 10. As shown in Fig. 2, a web of fibrous material 12 is fed from a supply roll 42 and conveyed in a machine direction by a plurality of rolls 44, 46 and 48 to a superabsorbent application station 50. The superabsorbent application station 50 comprises a metering device 52 structured and arranged to apply a selected amount of superabsorbent polymer 22 to a top surface 18 of the fibrous material 12. Metering devices for applying particulate material to a substrate are well known to those of skill in the art. Of course, any suitable means known to those of skill in the art, such as a pressure fed nozzle, a brush metering roll, or the like, may be used to apply the superabsorbent polymer material 22 to the top surface 18 of the fibrous material 12. After the superabsorbent polymer material 22 is applied to the top surface 18 of the fibrous material 12, the fibrous material 12 is conveyed over a high frequency vibrator 54 that functions to mechanically force the superabsorbent polymer 22 into the fibrous matrix 16 of the fibrous material 12. Alternatively, a vacuum arranged below the

bottom surface 20 of the fibrous material 12 may be used to draw the superabsorbent polymer 22 into the fibrous matrix 16.

Thereafter, the fibrous material 12 is further conveyed in a machine direction by a plurality of rolls 56, 58 and 60 to an absorbent mixture application station 62. The

5 absorbent mixture application station 62 includes a metering device 64 for applying a stream of superabsorbent polymer 26 to the top surface 18 of the fibrous material 12.

The absorbent mixture application station 62 further includes a hot melt adhesive applicator 66 which is directed at the fibrous material 12 and adapted to apply a stream of adhesive 28 to the top surface 18 of the fibrous material 12. Preferably the adhesive 28

10 stream and superabsorbent polymer 26 stream mix in mid air, thereby forming the absorbent mixture 24, and then the absorbent mixture 24 is deposited on the top surface 18 of the fibrous material 12.

Thereafter, the fibrous material 12 is further conveyed in a machine direction by a plurality of rolls 66, 68 and 70. The superabsorbent retention layer 30 is then arranged

15 adjacent to the top surface 32 of the mixture 24 by means of rolls 72 and 74. Then the substrate 12 and superabsorbent retention layer 30 are passed through nip rolls 75 and 76 to thereby adhere the superabsorbent retention layer 30 to the absorbent mixture 24.

Thereafter the completed absorbent composite material 10 is further conveyed in a machine direction by rolls 77 and 78 and may be arranged in a rolled form for storage or

20 may be further conveyed for incorporation into a disposable sanitary absorbent product such as a sanitary napkin, pantiliner, tampon, diaper, adult incontinence product, or the like.

Reference is made to Fig. 3 which illustrates a sectional view of an absorbent composite material 10a according to a second embodiment of the present invention.

Absorbent composite material 10a includes the same features as described above with regard to composite material 10, however absorbent composite material 10a further

5 includes a plurality of absorbent fibers 17. As shown, the absorbent fibers 17 are impregnated within the fiber matrix 16. The absorbent fibers 17 are preferably present in the fibrous material 12 in an amount between 5% to about 100% by weight of the fibrous material 12, corresponding to about 3 gsm to about 60 gsm. The absorbent fibers 17 are preferably selected from cellulosic fiber types, such as, but not limited to, hard wood
10 pulp, soft wood pulp, rayon, and cotton. The absorbent material 10 may include a single absorbent fiber type of those listed above or in the alternative may include multiple fiber types of those listed above (i.e. a mixture of absorbent fibers). Each of the absorbent fibers 17 preferably has fiber diameter within the range of 10 μm and 40 μm . The individual fibers 14 forming the fibrous material 12 and the absorbent fibers 17 are
15 selected such that each of the individual fibers 14 has a fiber diameter that is at least 1 μm greater than a fiber diameter of each of the absorbent fibers 17.

A method of making the absorbent composite material 10a will now be described with reference to Fig. 4 which depicts a schematic representation of an apparatus 40a for making the absorbent composite material 10. As shown in Fig. 4, a web of fibrous
20 material 12 is fed from a supply roll 42 and conveyed in a machine direction by a plurality of rolls 44, 46 and 48 to a superabsorbent application station 50. The superabsorbent application station 50 comprises a metering device 52 structured and arranged to apply a selected amount of superabsorbent polymer 22 to a top surface 18 of

the fibrous material 12. Metering devices for applying particulate material to a substrate are well known to those of skill in the art. Of course, any suitable means known to those of skill in the art, such as a pressure fed nozzle, a brush metering roll, or the like, may be used to apply the superabsorbent polymer material 22 to the top surface 18 of the fibrous material 12. After the superabsorbent polymer material 22 is applied to the top surface 18 of the fibrous material 12, the fibrous material 12 is conveyed over a high frequency vibrator 54 that functions to mechanically force the superabsorbent polymer 22 into the fibrous matrix 16 of the fibrous material 12. Alternatively, a vacuum arranged below the bottom surface 20 of the fibrous material 12 may be used to draw the superabsorbent polymer 22 into the fibrous matrix 16.

Thereafter the fibrous material is further conveyed in a machine direction by rolls 100, 102 and 104 to a gravity fed hopper 106, or the like, that is utilized to apply a selected amount of absorbent fibers 17 to a top surface 18 of the fibrous material 12. If required, the material forming the absorbent fibers may be fed through a lickerein or a hammermill prior to the absorbent fibers being fed into the gravity fed hopper (not shown in the drawings). Thereafter, the fibrous material 12 is further conveyed in a machine direction and passed through a conventional needlepunch apparatus 108 of the type known to those of skill in the art. The needlepunch apparatus 108 functions to impregnate the absorbent fibers 17 within the fibrous material 12 by means of a plurality of needles 110.

As is known to those of skill in the art, a conventional needlepunch apparatus includes a plurality of needles that are normally adapted to mechanically orient and interlock the fibers of a spunbonded or carded web. In the present invention, the needles

110 of the needlepunch apparatus 108 are used to impregnate absorbent fibers 17 within the fibrous material 12. A needle 110 suitable for use in the method described herein is depicted in Fig. 5 and Fig. 6. As shown in Fig. 6, the needle 110 generally includes a blade 112, a barb 114, and a throat section 116. The total barb depth of the barb 114 is indicated by letter "d" in the Fig. 6.

For purposes of the present invention, it is critical that the barb depth "d" is selected such that a radius of each of the absorbent fibers 17 is smaller than the barb depth "d". The radius of each absorbent fiber 17 is at least 0.5 μm smaller, for example 1 μm smaller than the barb depth. In addition the barb depth "d" should be selected such that each of the individual fibers 14 of the fibrous material 12 has a radius that is larger than the barb depth "d". The radius of each individual fiber 14 of the fibrous material 12 is at least 0.5 μm larger, for example 1 μm larger than the barb depth. If you have a multiple denier fibrous material 12, the diameter of the smallest diameter fiber 14 must be larger than the diameter of each of the absorbent fibers 17.

By selecting barb depth "d" as described above, the plurality of needles 110 in the needlepunch apparatus effectively grasp the absorbent fibers 17 and thus can impregnate such absorbent fibers 17 within the fibrous material 12, as shown in Figs 7-10. On the other hand, the plurality of needles 110 will not grasp the individual fibers 14 of the fibrous material 12 and thus will not destroy the "high loft" properties of the fibrous material 12. In this manner the final absorbent composite material 10 is provided with superior fluid handling properties while still retaining the high loft properties of the fibrous material 12. Needles particularly useful in the present method are commercially

available from the Foster Needle Co., Inc., Manatowoc, Wisconsin, under product designation "The Foster Formed Barb".

Thereafter, the fibrous material 12 is further conveyed in a machine direction by a plurality of rolls 56, 58 and 60 to an absorbent mixture application station 62. The

5 absorbent mixture application station 62 includes a metering device 64 for applying a stream of superabsorbent polymer 26 to the top surface 18 of the fibrous material 12.

The absorbent mixture application station 62 further includes a hot melt adhesive applicator 66 which is directed at the fibrous material 12 and adapted to apply a stream of adhesive 28 to the top surface 18 of the fibrous material 12. Preferably the adhesive 28

10 stream and superabsorbent polymer 26 stream mix in mid air, thereby forming the absorbent mixture 24, and then the absorbent mixture 24 is deposited on the top surface 18 of the fibrous material 12.

Referring again to Fig. 4, the fibrous material 12 is further conveyed in a machine direction by a plurality of rolls 66, 68 and 70. The superabsorbent retention layer 30 is

15 then arranged adjacent to the top surface 32 of the mixture 24 by means of rolls 72 and 74. Then the substrate 12 and superabsorbent retention layer 30 are passed through nip

rolls 75 and 76 to thereby adhere the superabsorbent retention layer 30 to the absorbent mixture 24. Thereafter the completed absorbent composite material 10 is further

conveyed in a machine direction by rolls 77 and 78 and may be arranged in a rolled form

20 for storage or may be further conveyed for incorporation into a disposable sanitary absorbent product such as a sanitary napkin, pantiliner, tampon, diaper, adult

incontinence product, or the like.

Absorbent composite materials 10 according to the to the present invention, as described herein above, are thin, lofty and exhibit superior resiliency properties in both the dry and wet state. Surprisingly, absorbent composite materials 10 according to the present invention exhibit the above properties while at the same time exhibiting superior fluid handling characteristics.

Reference is made to Figs. 11-14 which depict an absorbent article, and in particular a sanitary napkin 80, in accordance with the present invention. As shown in Fig. 12, the sanitary napkin 80 generally includes a liquid permeable cover layer 82, a liquid impermeable barrier layer 84 and the absorbent composite material 10 arranged therebetween. The sanitary napkin 80 may further optionally include a fluid distribution layer 85 arranged between the cover layer 82 and the absorbent composite material 10.

The cover layer 82 may be a relatively low density, bulky, high-loft non-woven web material. The cover layer 82 may be composed of only one type of fiber, such as polyester or polypropylene or it may include a mixture of more than one fiber. The cover may be composed of bi-component or conjugate fibers having a low melting point component and a high melting point component. The fibers may be selected from a variety of natural and synthetic materials such as nylon, polyester, rayon (in combination with other fibers), cotton, acrylic fiber and the like and combinations thereof. Preferably, the cover layer 82 has a basis weight in the range of about 10 gsm to about 75 gsm.

Bi-component fibers may be made up of a polyester layer and a polyethylene sheath. The use of appropriate bi-component materials results in a fusible non-woven fabric. Examples of such fusible fabrics are described in U.S. Pat. No. 4,555,430 issued

Nov. 26, 1985 to Chicopee. Using a fusible fabric increases the ease with which the cover layer may be mounted to the absorbent layer and/or to the barrier layer.

The cover layer 82 preferably has a relatively high degree of wettability, although the individual fibers comprising the cover may not be particularly hydrophilic. The cover material should also contain a great number of relatively large pores. This is because the cover layer 82 is intended to take-up body fluid rapidly and transport it away from the body and the point of deposition. Therefore, the cover layer contributes little to the time taken for the napkin to absorb a given quantity of liquid (penetration time).

Advantageously, the fibers which make up the cover layer 82 should not lose their physical properties when they are wetted, in other words they should not collapse or lose their resiliency when subjected to water or body fluid. The cover layer 82 may be treated to allow fluid to pass through it readily. The cover layer 82 also functions to transfer the fluid quickly to the underlying layers of the napkin. Thus, the cover layer 82 is advantageously wettable, hydrophilic and porous. When composed of synthetic hydrophobic fibers such as polyester or bi-component fibers, the cover layer 82 may be treated with a surfactant to impart the desired degree of wettability.

Nonwoven cover materials particularly suitable for use in the present invention are hot-through air bonded cover materials commercially available from Shalag Industries, Ltd., Upper Galilee, Israel, under product codes STA4ETW27, STA5ETW27, STAFEPW27, STA5EPW27, STAPPER22 and STAFETW22.

Alternatively, the cover layer 82 can also be made of polymer film having large pores. Because of such high porosity, the film accomplishes the function of quickly transferring body fluid to the inner layers of the underlying absorbent layers.

The cover layer 82 may be attached to the underlying absorbent composite material 10 and/or the barrier layer 84, by adhesion and/or other suitable means known to those of skill in the art. The cover layer 82 may also be attached to the underlying fluid distribution layer 85 if such layer is employed.

5 Underlying the cover layer 82 is the optional fluid distribution layer 85. The fluid distribution layer 85 functions to receive body fluid from the cover layer 82 and hold the same until the absorbent composite 10 has an opportunity to absorb the fluid. The fluid distribution layer 85 is preferably more dense than and has a larger proportion of smaller pores than the cover layer 82. These attributes allow the fluid distribution layer 85 to
10 contain the body fluid and hold it away from the outer side of the cover layer 82, thereby preventing fluid from rewetting the cover layer 82.

The fluid distribution layer 85 may consist of fibrous material including wood pulp fibers, polyester fibers, rayon fibers, or combinations thereof. The fluid distribution layer may also comprise thermoplastic fibers for the purpose of stabilizing the layer and
15 maintaining its structural integrity. Examples of materials suitable for the fluid distribution layer 85 are through air bonded pulp materials sold by Buckeye Technologies, Inc. of Memphis, Tenn. under the designation Vizorb 3008 which has a basis weight of 100 gsm and Vizorb 3010 which has a basis weight of 90 gsm.

Another example of a material suitable for use as the fluid distribution layer 85 is
20 a calendared airlaid material of the type commercially available from EAM Corporation, Jessup, GA under the designation Novathin. The fluid distribution layer 85 is preferably free of superabsorbent polymer.

Underlying absorbent composite material 10 is a barrier layer 84 comprising a liquid-impervious film material so as to prevent liquid that is entrapped in the absorbent composite layer 10 from egressing the sanitary napkin and staining the wearer's undergarment. The barrier layer 84 is preferably made of polymeric film, although it
5 may be made of liquid impervious, air-permeable material such as repellent-treated non-woven or micropore films or foams.

The barrier layer 84 may be breathable, i.e., permits vapor to transpire. Known materials for this purpose include nonwoven materials and microporous films in which microporosity is created by, inter alia, stretching an oriented film. Single or multiple
10 layers of permeable films, fabrics, melt-blown materials, and combinations thereof that provide a tortuous path, and/or whose surface characteristics provide a liquid surface repellent to the penetration of liquids may also be used to provide a breathable backsheet. The cover layer 82 and the barrier layer 84 are preferably joined along their marginal portions so as to form an enclosure or flange seal that maintains the absorbent composite
15 layer 10 captive. The joint may be made by means of adhesives, heat-bonding, ultrasonic bonding, radio frequency sealing, mechanical crimping, and the like and combinations thereof.

Positioning adhesive may be applied to a garment facing surface of the barrier layer 84 for securing the napkin 80 to a garment during use. The positioning adhesive
20 may be covered with removable release paper so that the positioning adhesive is covered by the removable release paper prior to use.

Absorbent articles of this invention may or may not include wings, flaps or tabs for securing the absorbent article to an undergarment. Wings, also called, among other

things, flaps or tabs, and their use in sanitary protection articles is described in U.S. Patent. No. 4,687,478 to Van Tilburg; U.S. Patent No. 4,589,876 also to Van Tilburg, U.S. Patent No. 4,900,320 to McCoy, and U.S. Patent No. 4,608,047 to Mattingly. The disclosures of these patents are incorporated herein by reference in their entirety. As
5 disclosed in the above documents, wings are generally speaking flexible and configured to be folded over the edges of the underwear so that the wings are disposed between the edges of the underwear.

Reference is now made to Figs. 13 and 14 which depict sectional views taken along line x-x in Fig. 11 and depict alternative embodiments of the sanitary napkin 80
10 shown in Fig. 11. As shown in Fig. 13, the absorbent composite material 10 may be arranged in the sanitary napkin 80 such that the superabsorbent retention layer 30 is arranged in adjacent surface to surface contact with the barrier layer 84. The embodiment of the napkin 80 shown in Fig. 13 includes a fluid distribution layer 85. Of course, however the fluid distribution layer 85 could be omitted such that the second
15 surface 20 of the fibrous material 12 is arranged in surface to surface contact with the cover layer 82.

Alternatively, as shown in Fig. 14, the absorbent composite material 10 may be arranged in the sanitary napkin 80 such that the superabsorbent retention layer 30 is arranged in adjacent surface to surface contact with the cover layer 82.

20 Absorbent articles according to the present invention, as described above, are thin, cushiony, soft, exhibit superior resiliency properties in both the dry and wet state, and also exhibit superior fluid handling characteristics.

CLAIMS

I claim:

1. An absorbent composite material comprising:

- 5 a fibrous material including a plurality of individual fibers forming a fiber matrix
and a binder material present in an amount from about 20% by to about 60% by weight of
the fibrous material, the fibrous material having first and second opposed surfaces;
superabsorbent polymer dispersed within the fiber matrix;
an absorbent mixture arranged adjacent to the first surface of the fibrous material,
10 the absorbent mixture comprising superabsorbent polymer and adhesive.

2. The absorbent composite material according to claim 1, wherein the fibrous material is
a nonwoven material having a density lower than 0.05 g/cc.

15 3. The absorbent composite material according to claim 2, wherein the fibrous material is
a high loft nonwoven material having a density between 0.01 g/cc and 0.03 g/cc.

4. The absorbent composite material according to claim 3, wherein each of the individual
fibers is nonabsorbent.

20

5 The absorbent composite material according to claim 3, wherein each of the individual
fibers are selected from the group consisting of polyester, nylon, co-polyester,

polyethylene, polypropylene, polylactic acid, and bicomponent fibers including these materials.

6. The absorbent composite material according to claim 1, wherein each of the individual
5 fibers has a denier in the range of from about 5 to about 25.

7. The absorbent composite material according to claim 1, wherein each of the individual
fibers has a denier in the range of from about 6 to about 10.

10 8. The absorbent composite material according to claim 7, wherein the fibrous material is
completely free of cellulosic material.

9. The absorbent composite material according to claim 8, wherein the fibrous material
has a basis weight of between about 50 gsm and 150 gsm.

15

10. The absorbent composite material according to claim 1, wherein the superabsorbent
polymer dispersed within the fiber matrix is present in the fibrous material in an amount
between about 50% to about 150 % by weight of the fibrous material.

20 11. The absorbent composite material according to claim 10, wherein the superabsorbent
polymer dispersed within the fiber matrix is present in an amount of from about 80 gsm
to about 150 gsm.

12. The absorbent composite material according to claim 1, wherein the absorbent mixture consists of superabsorbent polymer and adhesive.

13. The absorbent composite material according to claim 1, wherein the absorbent mixture includes between about 90% and about 98% superabsorbent by weight and about 10% and 2% adhesive by weight.

14. The absorbent composite material according to claim 1, further comprising a superabsorbent retention layer.

15. The absorbent composite material according to claim 14, wherein the superabsorbent retention layer is arranged adjacent to a top surface of the absorbent mixture.

16. The absorbent composite material according to claim 15, wherein the superabsorbent retention layer is a tissue material.

17. The absorbent composite material according to claim 15, wherein the superabsorbent retention layer is a through air bonded pulp material.

18. The absorbent composite material according to claim 15, wherein the superabsorbent retention layer is a calendared airlaid material.

19. The absorbent composite material according to claim 1, further comprising a plurality of absorbent fibers arranged within the fiber matrix.

20. The absorbent composite material according to claim 19, wherein the absorbent
5 fibers are present in the fibrous material in an amount between about 5% and about 100% by weight of the fibrous material.

ABSTRACT

The present invention relates to an absorbent composite material and an absorbent article including such absorbent composite material. More particularly, the present invention relates to an absorbent composite material for use in sanitary absorbent products such as sanitary napkins, pantliners, diapers, adult incontinence products, and the like.

Please type a plus sign (+) inside this box ☐

PTO/SB/01 (10-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION AND POWER OF ATTORNEY FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) ☒ Declaration Submitted with Initial Filing ☐ Declaration Submitted after Initial Filing (Surcharge (37 CFR 1.16(e)) required)	Attorney Docket Number	PPC5364USNP
	First Named Inventor	Morris Yang
	COMPLETE IF KNOWN	
	Application Number	
	Filing Date	
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, mailing address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

RESILIENT ABSORBENT COMPOSITE MATERIAL

(Title of the Invention)

the specification of which

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			☐ ☐ ☐ ☐	☐ ☐ ☐ ☐	☐ ☐ ☐ ☐

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

DECLARATION - Utility or Design Patent Application		
I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.		
Application Number(s)	Filing Date (MM/DD/YYYY)	☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.
I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:		
Application Serial No.	Filing Date	Status
		Patented Patented Patented
AUTHORIZATION TO PERMIT ACCESS TO APPLICATION BY PARTICIPATING OFFICES		
☒ If checked, the undersigned hereby grants the USPTO authority to provide the European Patent Office (EPO), the Japan Patent Office (JPO), and any other intellectual property offices in which a foreign application claiming priority to the above-identified application is filed access to the above-identified patent application. See 37 CFR 1.14(c) and (h). This box should not be checked if the applicant does not wish the EPO, JPO, or other intellectual property office in which a foreign application claiming priority to the above-identified application is filed to have access to the application.		
In accordance with 37 CFR 1.14(h)(3), access will be provided to a copy of the application-as-filed with respect to: 1) the above-identified application, 2) any foreign application to which the above-identified application claims priority under 35 USC 119(a)-(d) if a copy of the foreign application that satisfies the certified copy requirement of 37 CFR 1.55 has been filed in the above-identified US application, and 3) any U.S. application form which benefit is sought in the above-identified application.		
In accordance with 37 CFR 1.14(c), access may be provided to information concerning the date of filing the Authorization to Permit Access to Application by Participating Offices.		
I hereby appoint:		
☒ Practitioners at Customer Number 000027777 →	Place Customer Number Bar Code Label Here	
AND		
☐ Practitioner(s) named below:		
<u>Name</u>	<u>Registration Number</u>	
as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.		
Address all telephone calls to Paul J. Higgins at telephone number (732) 524-1728.		
Direct all correspondence to: ☒ Customer Number 000027777 or ☐ Bar Code Label		

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.			
NAME OF SOLE OR FIRST INVENTOR:		☐ A petition has been filed for this unsigned inventor	
Given Name (first and middle [if any]) Morris		Family Name or Surname Yang	
Inventor's Signature		Date	
Residence: City Princeton Junction	State NJ	Country USA	Citizenship USA
Mailing Address 9 Bridgewater Drive			
City Princeton Junction	State NJ	ZIP 08550	Country USA
I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.			
NAME OF SECOND INVENTOR:		☐ A petition has been filed for this unsigned inventor	
Given Name (first and middle [if any])		Family Name or Surname	
Inventor's Signature		Date	
Residence: City	State	Country	Citizenship
Mailing Address			
City	State	ZIP	Country
I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.			
NAME OF THIRD INVENTOR:		☐ A petition has been filed for this unsigned inventor	
Given Name (first and middle [if any])		Family Name or Surname	
Inventor's Signature		Date	
Residence: City	State	Country	Citizenship
Mailing Address			
City	State	ZIP	Country

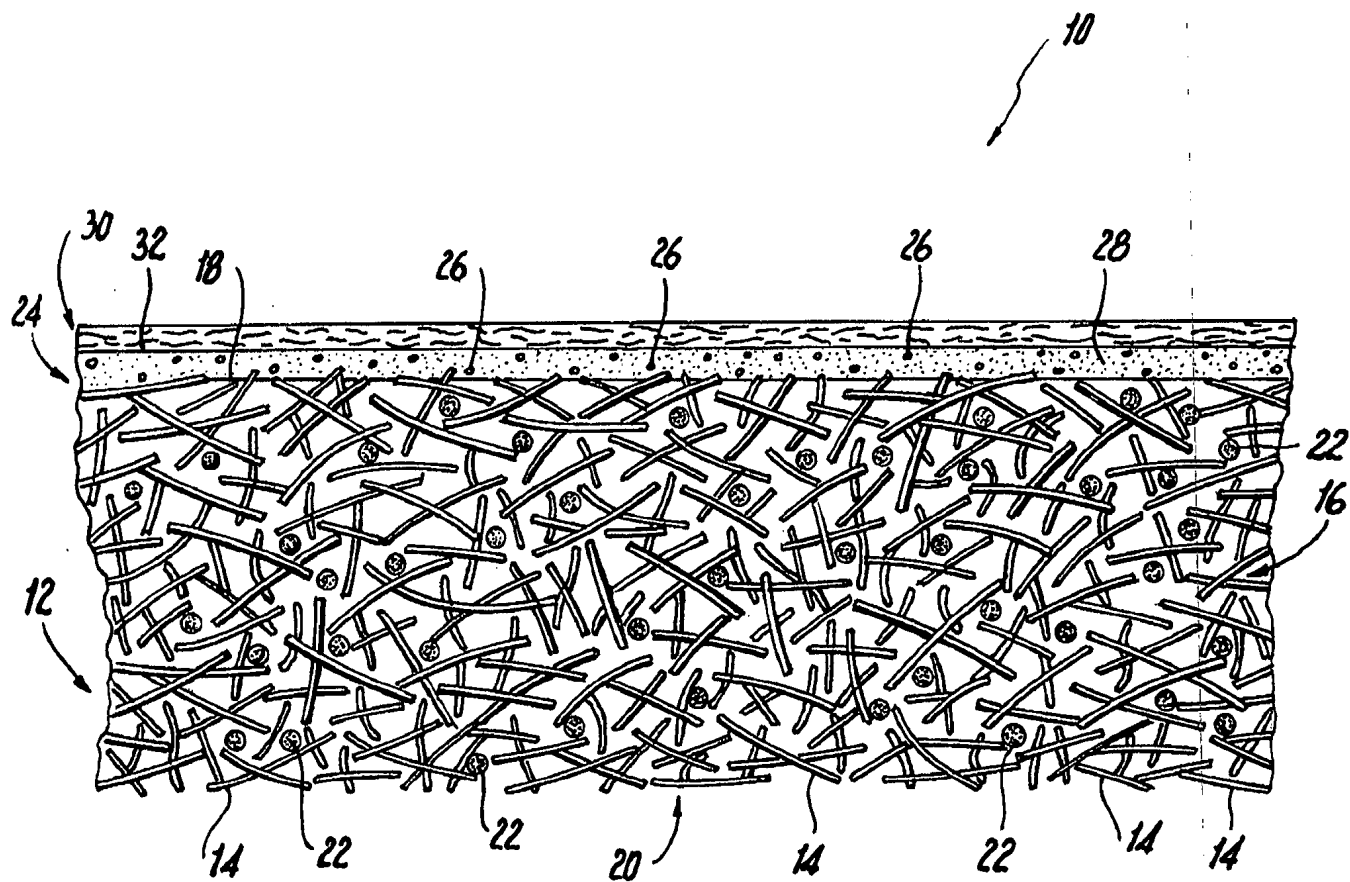


Fig. 1

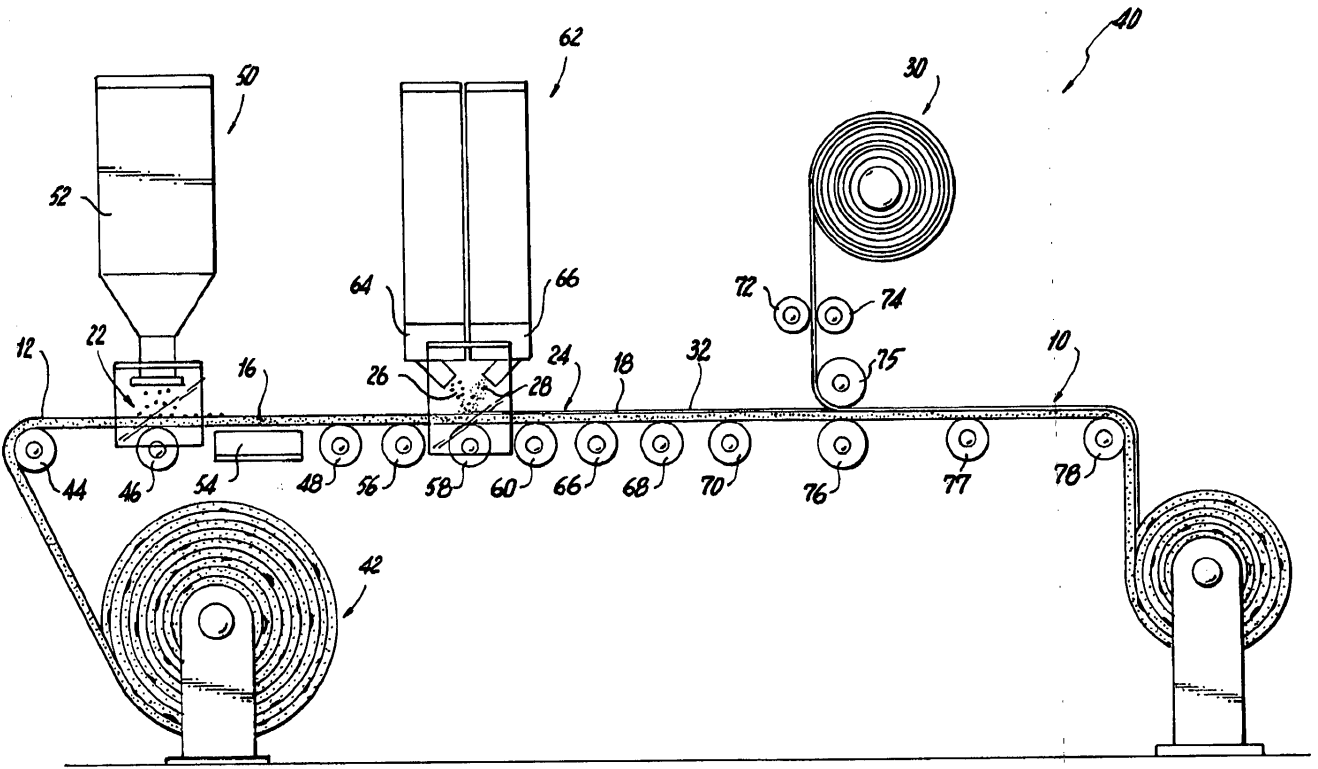


Fig. 2

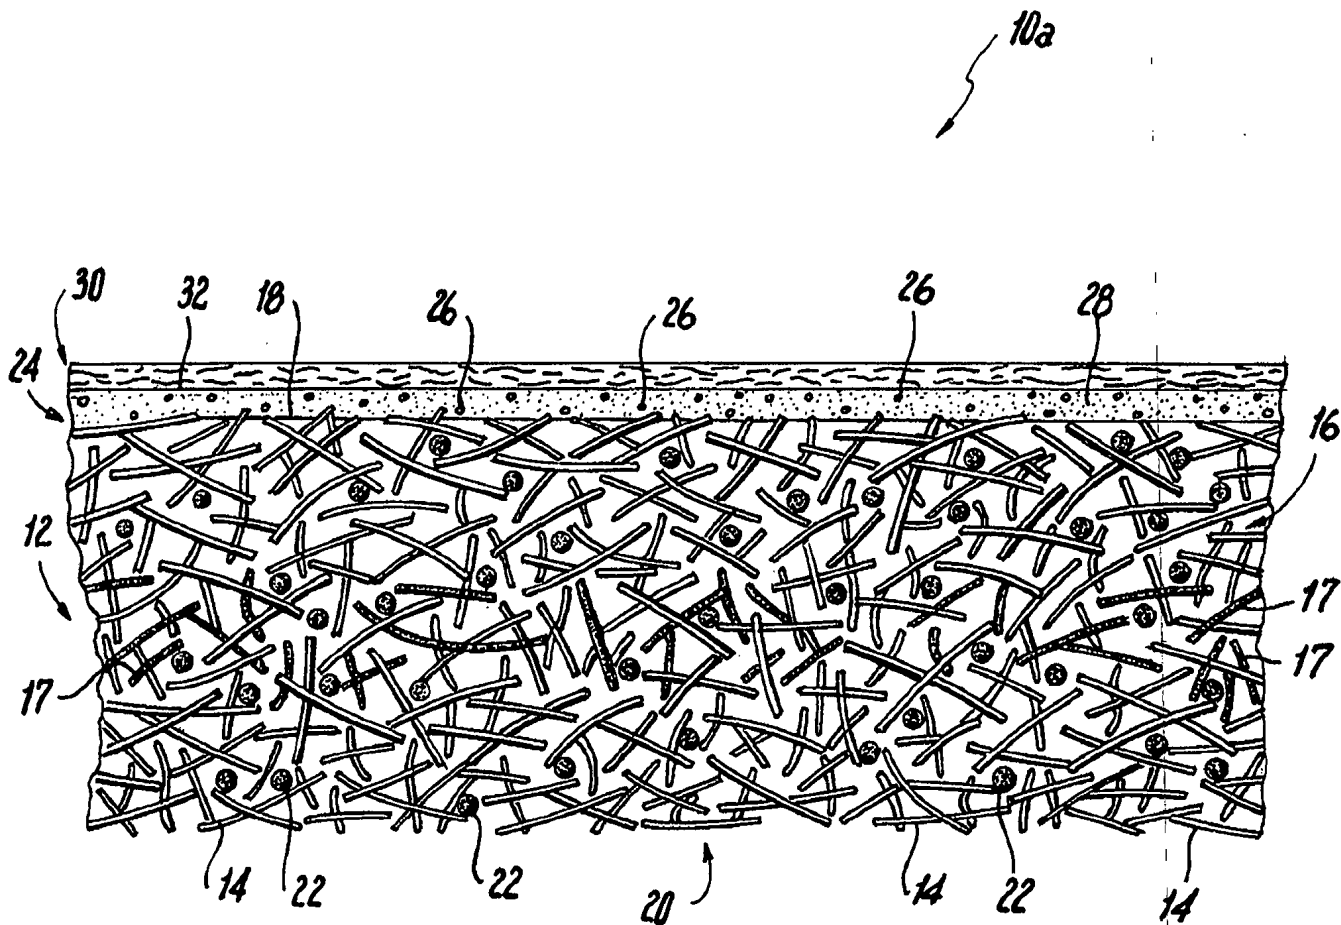


Fig. 3

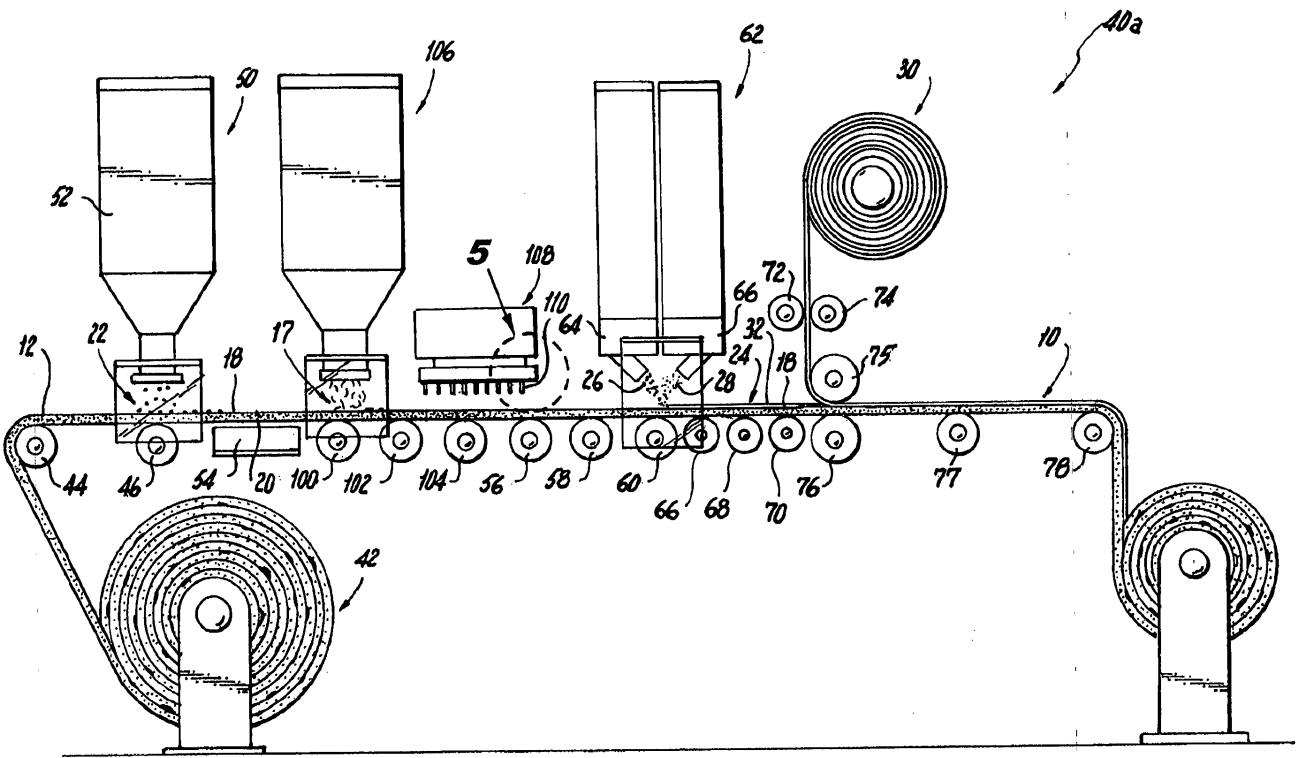


Fig. 4

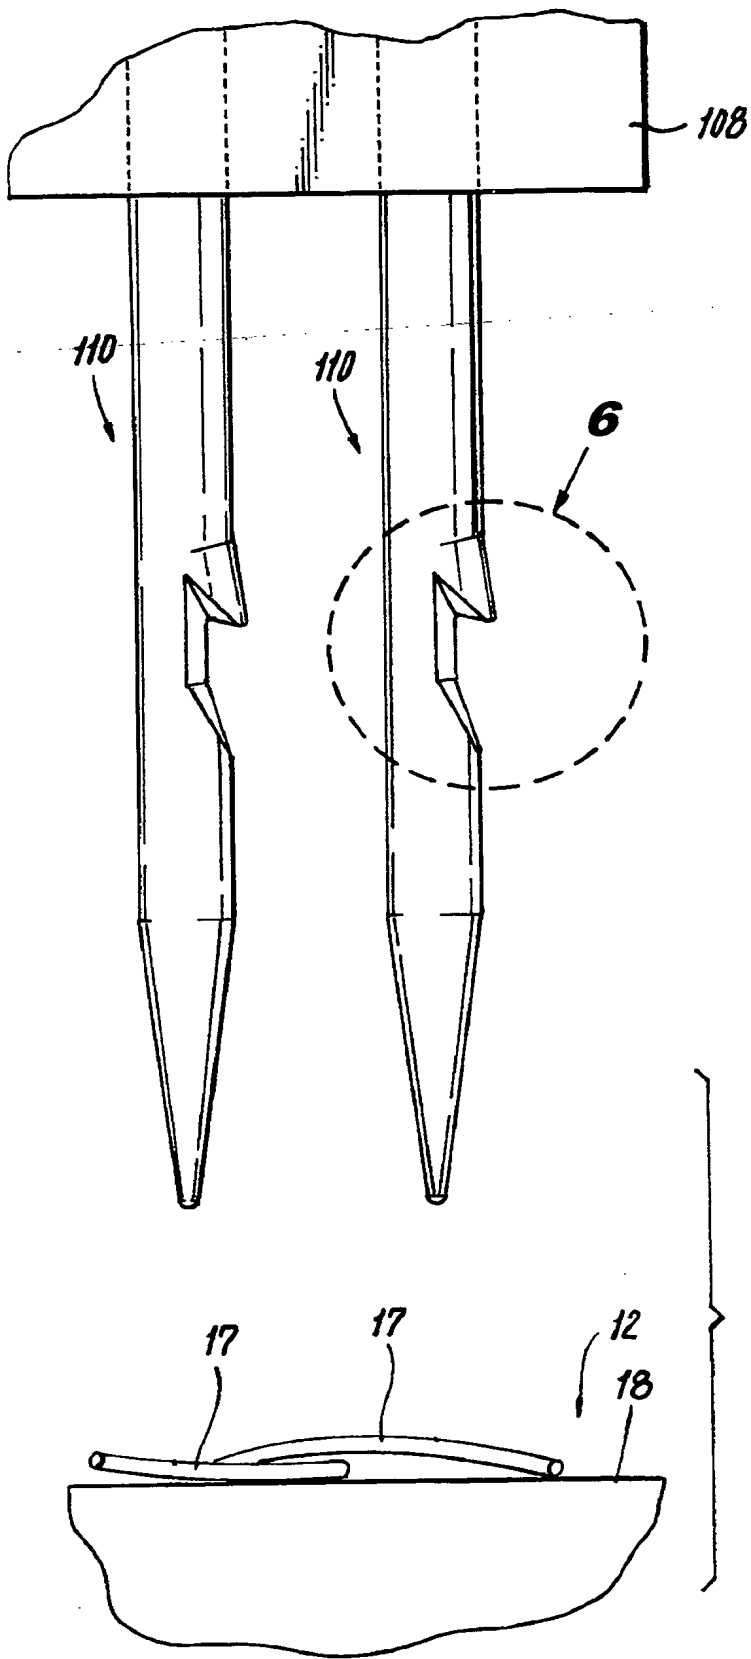


Fig. 5

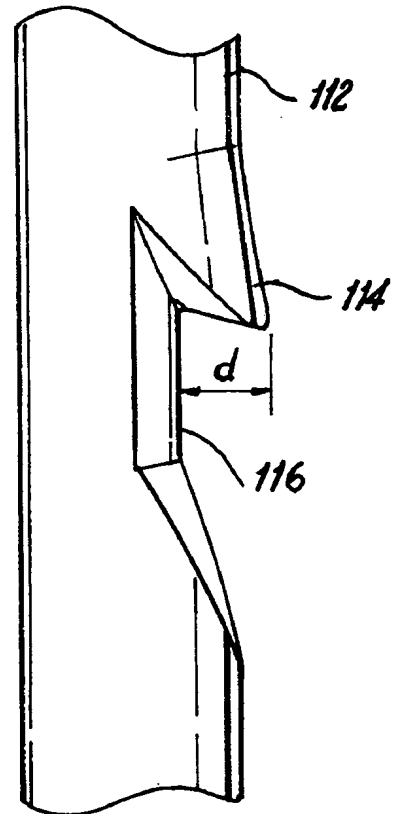


Fig. 6

41

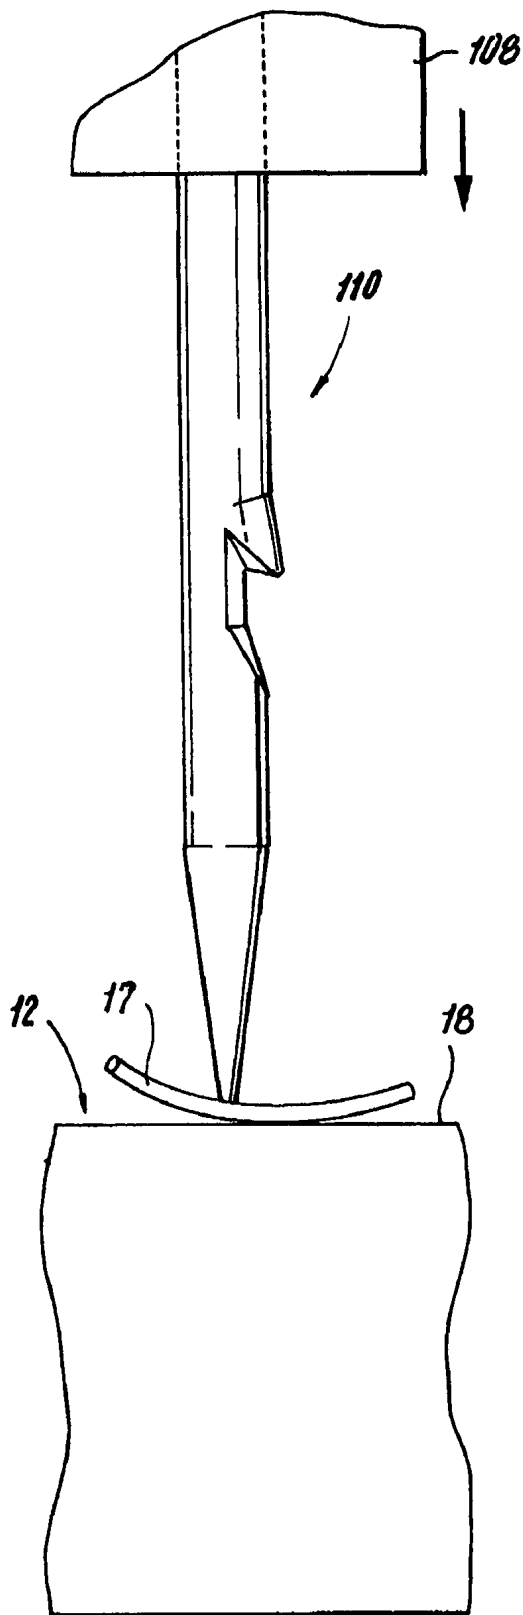


Fig. 7

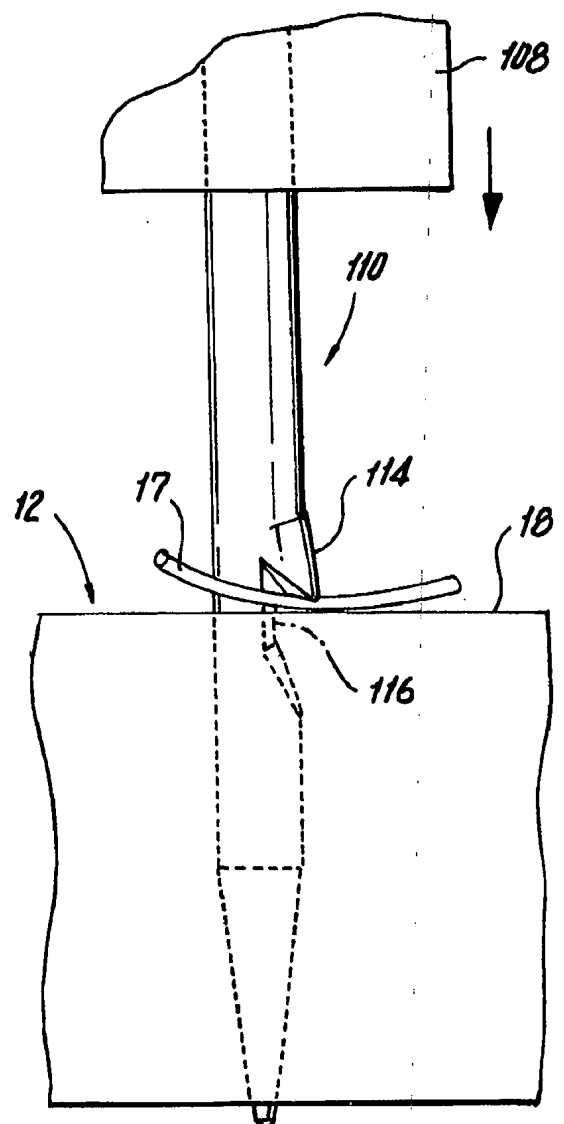


Fig. 8

42

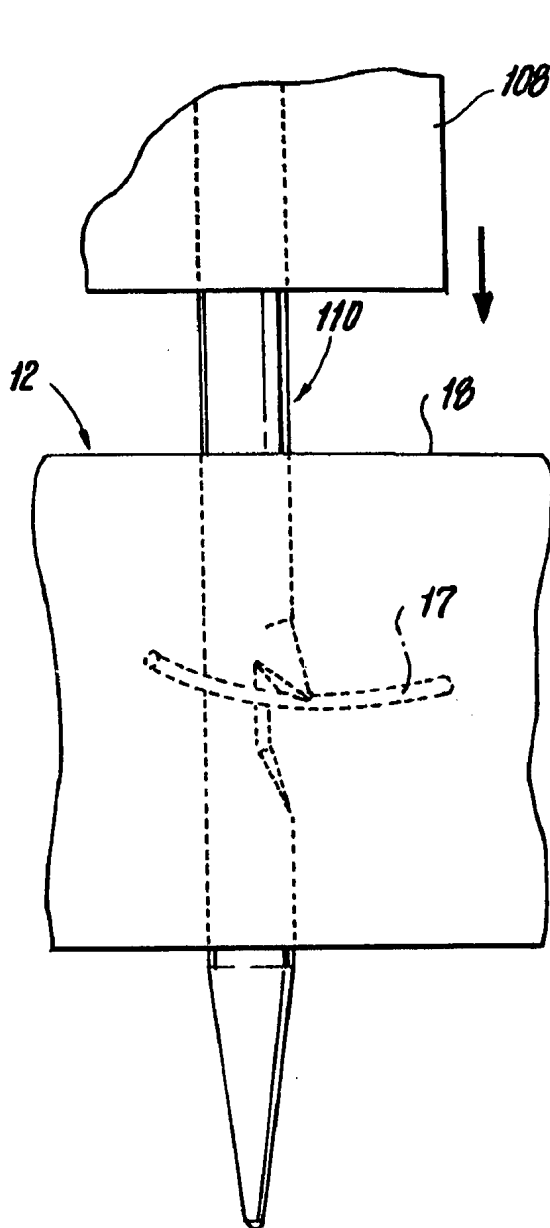


Fig. 9

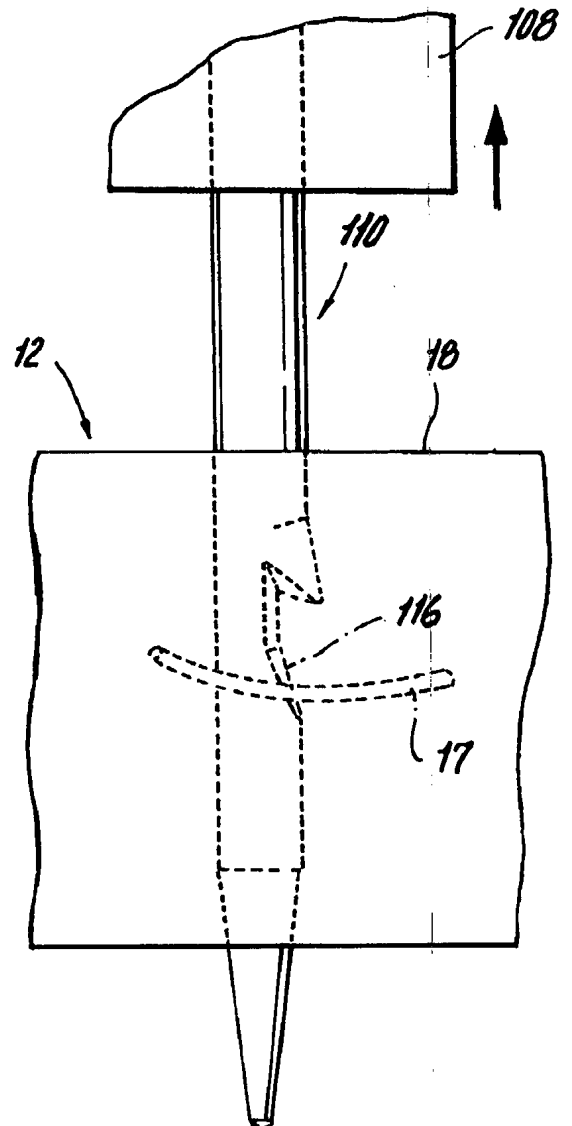


Fig. 10


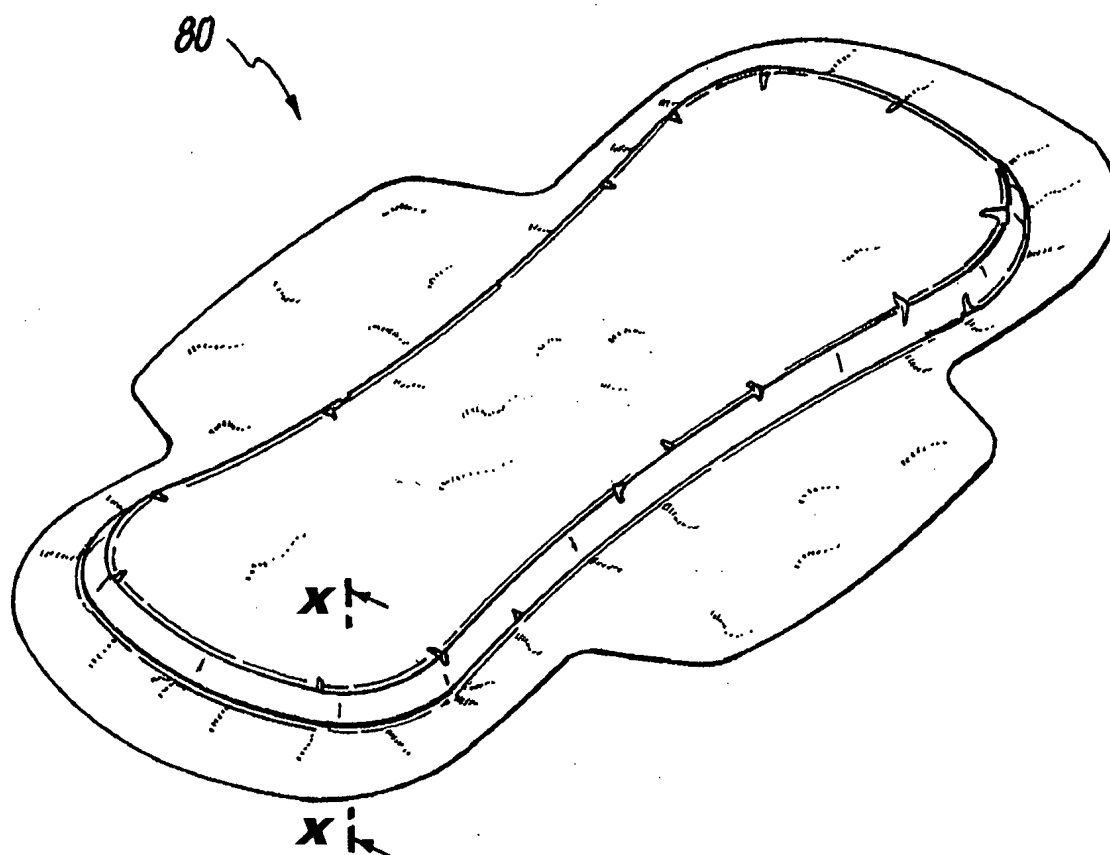


Fig. 11

44

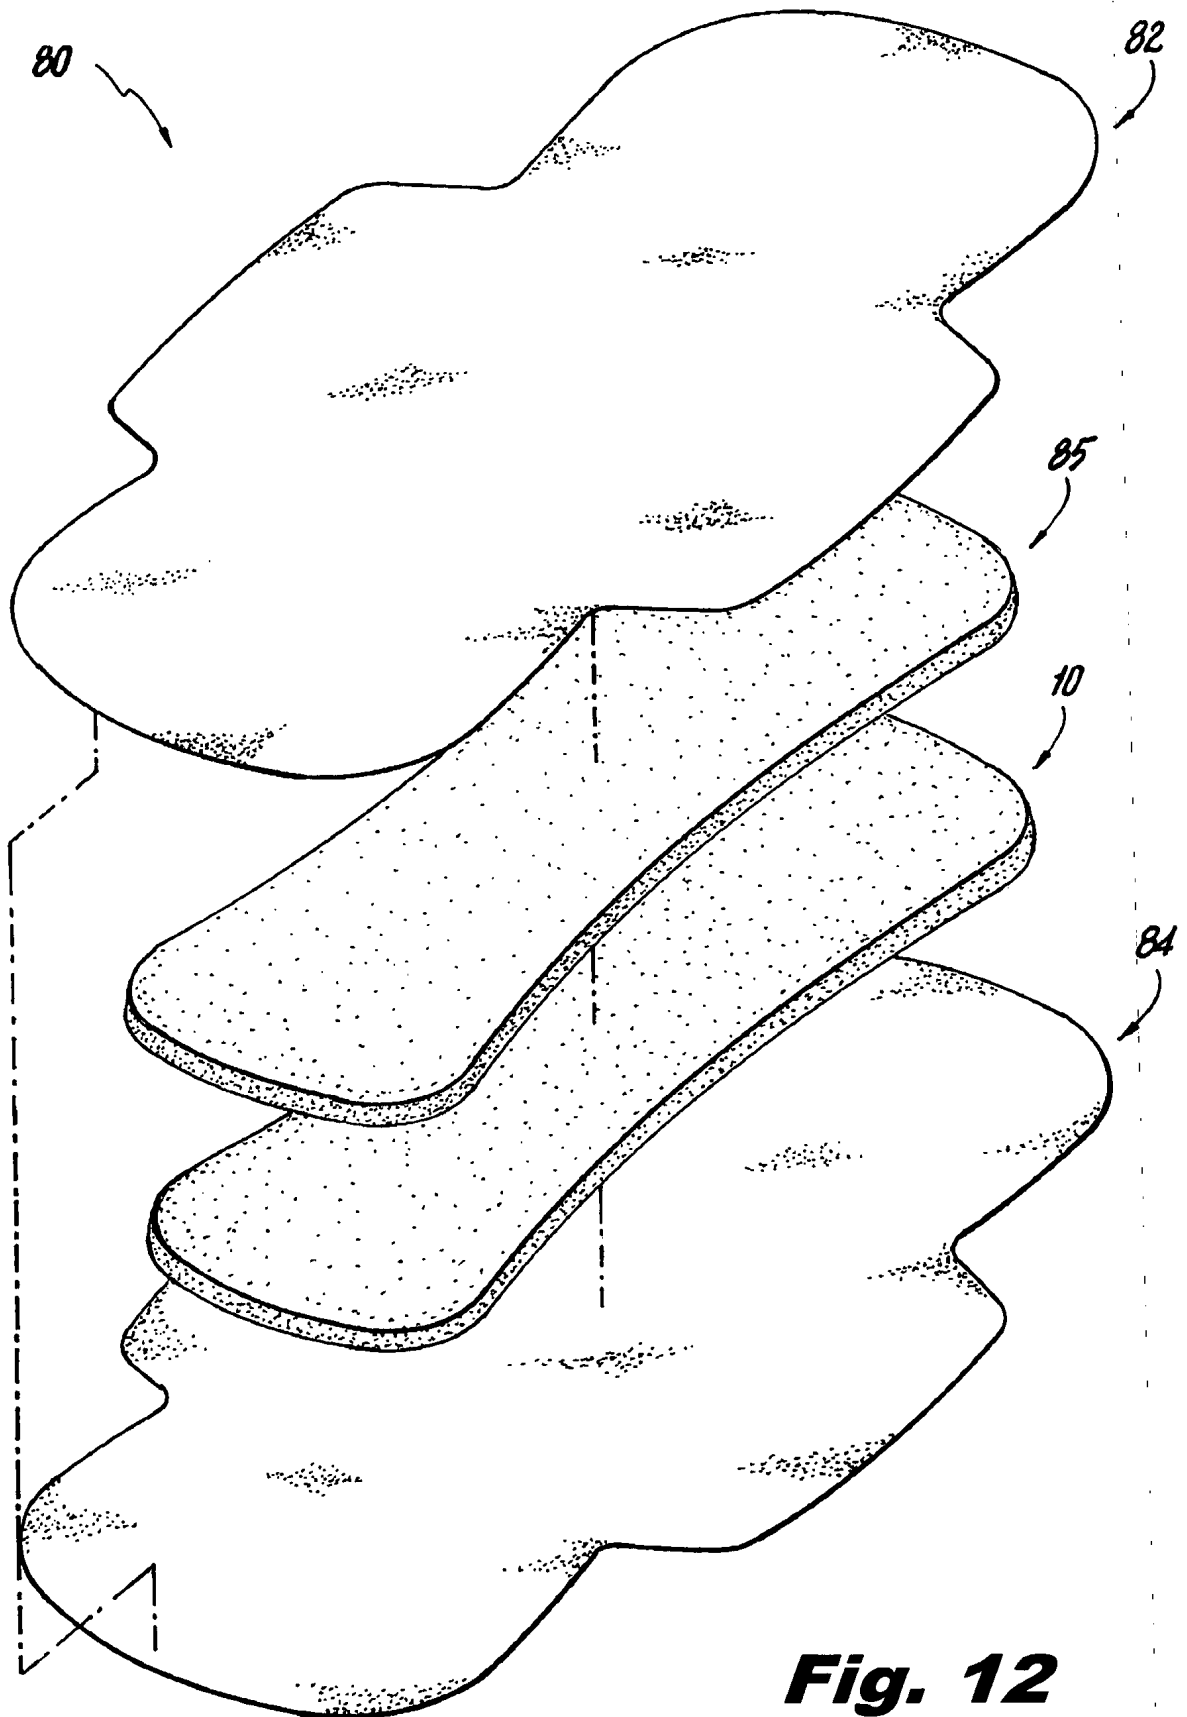

145

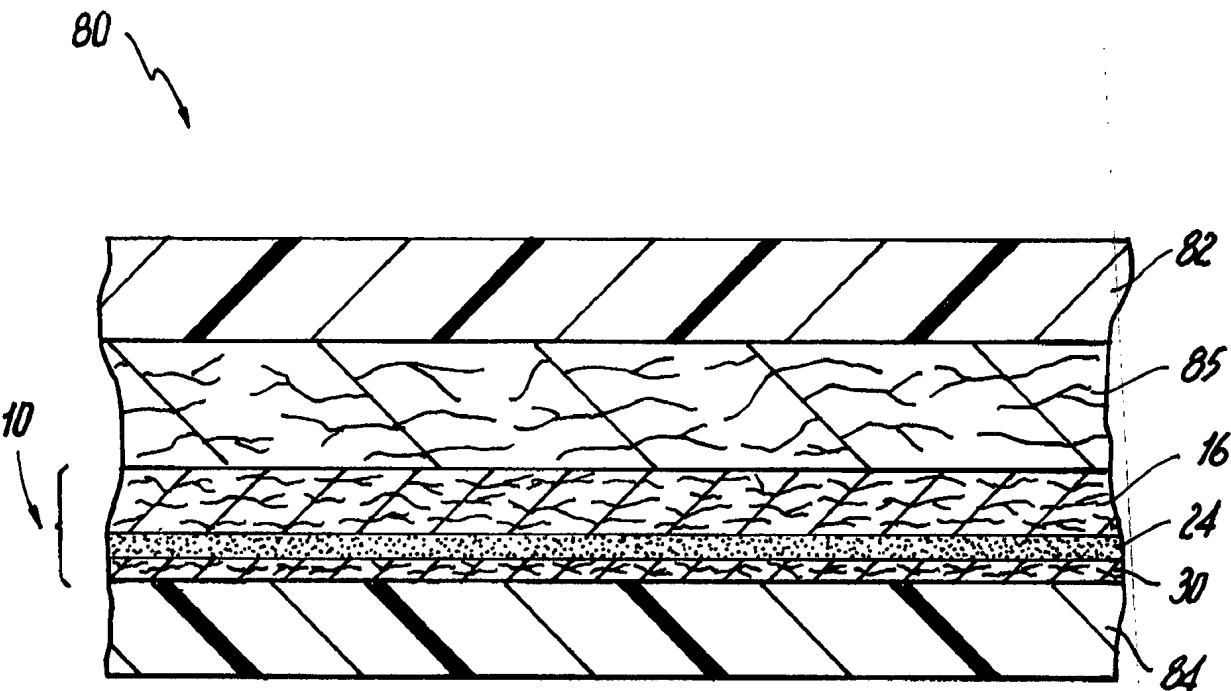


Fig. 13

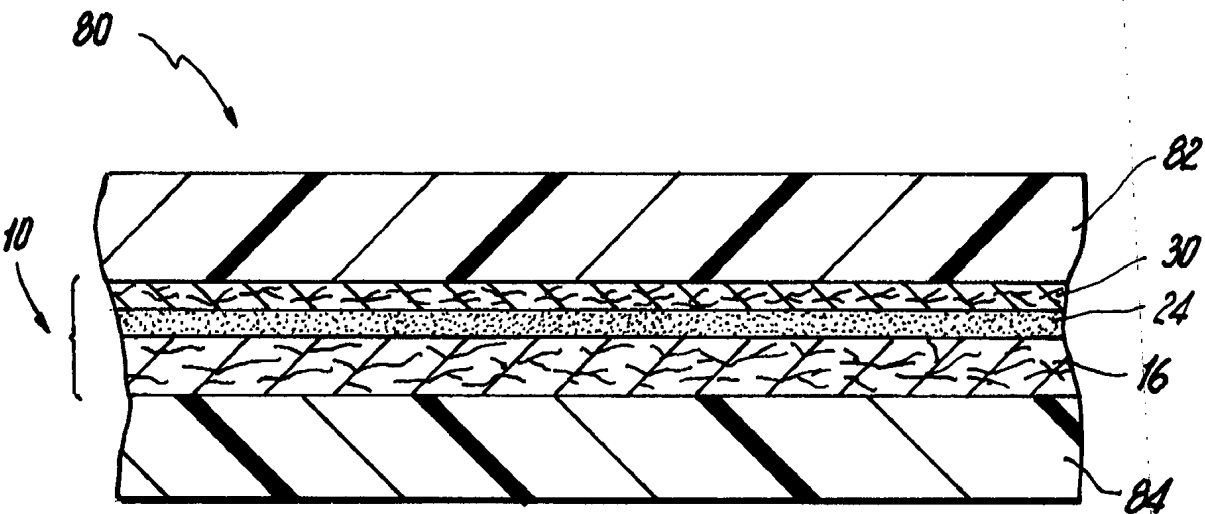


Fig. 14

46