

CAVELIER

ABOGADOS

www.cavelier.com
cavelier@cavelier.com

EDIFICIO SISKI
CARRERA 4 No. 72 - 35
BOGOTÁ 8, COLOMBIA

Teléfono: (57-1) 347 3611
Telefax: (57-1) 211 8650
(57-1) 700 4814
Fax in U.S.A.: (1-305) 675 7743

Señor Director

DIRECCION DE NUEVAS CREACIONES

Superintendencia de Industria y Comercio

E. S. D.

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO



No. 12-188617-00001-0000

Fecha: 2012-12-13 18:04:05 Dep. 2020 DIR.NUEVASCR
Tra. 11 PATENTEIYII Eve 378 FASENACIONALI
Act 329 CTOINFORMACION Fotos 48/117

Trámite : 011

Evento : 378

Actuación : 329

Referencia : Expediente No. 12.188.617
Asunto : Solicitud de patente para: **FABRICACIÓN DE CAPSULAS NUCLEO/CUBIERTA DE DIFERENTES GEOMETRIAS Y TRATAMIENTO SUBSECUENTE**
Solicitante : **PHILIP MORRIS PRODUCTS S.A.**
Fecha solicitud : 23 de octubre de 2012

1. Yo, Luz Clemencia de PÁEZ, obrando como apoderada del solicitante en el asunto identificado en la referencia, acompaño con el presente escrito, copia certificada de la solicitud de patente Estadounidense No. 61/318,216 del 26 de marzo de 2010, cuya prioridad se invocó en el trámite de la Solicitud Internacional No. **PCT/IB2011/000824** correspondiente a la solicitud de fase nacional de la referencia.

2. El anterior documento es presentado dentro del término legal estipulado en el numeral 5.2.6. de la Circular Externa No. 03 del 28 de abril de 2003, que instruye la aplicación del Tratado de Cooperación en Materia de Patentes (PCT), esto es dentro de los dos (2) meses siguientes a la fecha de presentación de la solicitud de la referencia.

3. Así mismo presento con este escrito el recibo por concepto de la tasa oficial por invocación de una prioridad por \$170.000,00.

4. Solicito a ese Despacho tener en cuenta los anteriores documentos y continuar con el trámite correspondiente.

Señor Director,

Luz Clemencia Sobrera

LUZ CLEMENCIA DE PÁEZ

C.C. No. 35.456.344 de Usaquén

T.P.A. No. 23.555

COLO-12770-0841-076-7
JGG\JGG\ID-232354\WPC12770
No. M-2012-232354\JGG

NIT. 860.041.367-3



THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

October 10, 2012

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 61/318,216

FILING DATE: March 26, 2010

THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS CONVENTION, IS US61/318,216

By Authority of the
Under Secretary of Commerce for Intellectual Property
and Director of the United States Patent and Trademark Office



P. R. GRANT
Certifying Officer

Electronic Acknowledgement Receipt	
EFS ID:	7299496
Application Number:	61318216
International Application Number:	
Confirmation Number:	4909
Title of Invention:	FABRICATION OF CORE/SHELL CAPSULES OF DIFFERENT GEOMETRIES AND TREATMENT THEREAFTER
First Named Inventor/Applicant Name:	Georgios D. Karles
Customer Number:	21839
Filer:	Peter Keith Skiff
Filer Authorized By:	
Attorney Docket Number:	1021238-000836
Receipt Date:	26-MAR-2010
Filing Date:	
Time Stamp:	20:12:59
Application Type:	Provisional

Payment information:

Submitted with Payment	yes
Payment Type	Credit Card
Payment was successfully received in RAM	\$ 220
RAM confirmation Number	6881
Deposit Account	024800
Authorized User	SKIFF,PETER K
The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows: Charge any Additional Fees required under 37 C.F.R. Section 1.16 (National application filing, search, and examination fees) Charge any Additional Fees required under 37 C.F.R. Section 1.17 (Patent application and reexamination processing fees)	

Charge any Additional Fees required under 37 C.F.R. Section 1.19 (Document supply fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.20 (Post Issuance fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.21 (Miscellaneous fees and charges)

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1		PROVAPPLN.pdf	1610745 d813560f83864d1cebfb3e580d713e65e09b5de3	yes	38
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Provisional Cover Sheet (SB16)		1	1	
	Specification		2	26	
	Claims		27	31	
	Abstract		32	32	
	Drawings-other than black and white line drawings		33	38	
Warnings:					
Information:					
2	Fee Worksheet (PTO-875)	fee-info.pdf	29641 e0de8c35bf74326a3308753ba24e9c62f0a97f49	no	2
Warnings:					
Information:					
Total Files Size (in bytes):			1640386		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 C.F.R. § 1.53(c).

		Docket No. 1021238-000836	Type a plus sign (+) inside this box	+
INVENTOR(S)/APPLICANT(S)				
LAST NAME	FIRST NAME	MIDDLE	RESIDENCE (CITY AND EITHER STATE OR FOREIGN COUNTRY)	
Lui	Hongwei		4226 E. Appleview Drive, Appleton, WI 54913 CITIZENSHIP CHINA	
Karles	Georgios	D.	4025 Huntsteed Way, Richmond, VA 23233 CITIZENSHIP USA	
Zhuang	Shuzhong		9504 Meadowview Road, Richmond, VA 23294 CITIZENSHIP CHINA	
Nepomuceno	Jose		16052 Daybreak Lane, Beaverdam, VA 23015 CITIZENSHIP USA	
TITLE OF THE INVENTION (500 characters maximum)				
FABRICATION OF CORE/SHELL CAPSULES OF DIFFERENT GEOMETRIES AND TREATMENT THEREAFTER				
CORRESPONDENCE ADDRESS				
Buchanan Ingersoll & Rooney PC Customer Number 21839				
ENCLOSED APPLICATION PARTS (check all that apply)				
☒ Specification/Claims/Abstract # of Pages 30 ☐ CD(s) Number _____				
☒ Drawing(s) # Sheets 6 ☐ Other (specify): _____				
Total Pages in Spec/Drawings 36				
☐ Application Data Sheet. See 37 CFR 1.76				
METHOD OF PAYMENT OF FILING FEES (check one)			FILING FEE AMOUNT	
☐ Applicant claims small entity status. See 37 CFR 1.27			Filing Fee (1005)	\$ 220
☐ A check or money order is enclosed to cover the filing fees.			Total Page Fee (101+ pages)	
☒ The Director is hereby authorized to charge any deficiencies or credit any overpayment to Deposit Account No. 02-4800.			Total Fee	\$ 0
☒ Payment by credit card. Form PTO-2038 is attached.			Small Entity - subtract 50%	\$ 220
			Total App. Filing Fee	\$ 220
This invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.				
☒ No.				
☐ Yes, the name of the U.S. Government agency and the Government contract number are: _____				
SIGNATURE		DATE		March 26, 2010
TYPED or PRINTED NAME		Regis. No.		31917
		703 836 6620		

SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450

**PROVISIONAL APPLICATION FOR
UNITED STATES LETTERS PATENT**

FOR

**FABRICATION OF CORE/SHELL CAPSULES OF DIFFERENT
GEOMETRIES AND TREATMENT THEREAFTER**

by

**Hongwei Lui
4226 E. Appleview Dr.
Appleton, WI 54913
Citizen of China**

**Georgios Karles
4025 Huntsteed Way
Richmond, VA 23233
Citizen of United States**

**Shuzhong Zhuang
9504 Meadowview Road
Richmond, VA 23294
Citizen of China**

**Jose Nepomuceno
16052 Daybreak Lane
Beaverdam, VA 23015**

**PM Docket No. D2224
Attorney's Docket No. 1021238-000836
BUCHANAN INGERSOLL & ROONEY PC
P.O. Box 1404
Alexandria, VA 22313-1404**

Buchanan Ingersoll & Rooney PC
Attorneys & Government Relations Professionals

**FABRICATION OF CORE/SHELL CAPSULES OF DIFFERENT
GEOMETRIES AND TREATMENT THEREAFTER**

BACKGROUND

[0001] Flavorants, e.g., compounds and compositions that provide pleasing tastes and aromas to other articles, are often incorporated into consumer products, such as smoking and smokeless articles, to increase the aesthetic enjoyment thereof.

However, some flavorants are easily volatilized, escaping during storage and before the article is used.

~~[0002] It is desirable, therefore, to reduce or minimize migration and loss of~~
flavorants in consumer products, and in particular in tobacco products, such as smoking articles and smokeless tobacco, so that a larger proportion of the applied flavorant is available to the consumer, even after the product has been stored for a period of time. In addition, it is desirable to provide flavorants to consumer products in such a way that multiple flavors can be applied, and their release characteristics controlled, in order to provide consumers with a consistently enjoyable experience.

SUMMARY

[0003] In one embodiment, a method for encapsulating a liquid flavorant composition in a multi-shelled capsule comprises: (a) co-extruding a first liquid flavorant composition and a first shell-forming polymeric material to form a core-shell droplet; (b) hard ening the first shell-forming polymeric material of the droplet

to form an inner shell around an inner core, the inner core comprising the first liquid flavorant composition; (c) coating the inner shell with a coating layer comprising a second shell-forming polymeric material to form an outer shell of the capsule; and (d) hardening the second shell-forming polymeric material by contacting the second shell-forming polymer with polyvalent metal ions present in or on the inner shell, to form an outer shell of the multi-shelled capsule.

[0004] Another embodiment is a multi-shelled capsule comprising: (a) an inner core comprising a first liquid flavorant composition, (b) an inner shell of a first polymeric material at least partially enclosing the inner core, (c) an outer shell of a second polymeric material at least partially enclosing the inner shell, and (d) a

second liquid flavorant composition disposed in a space between the inner shell and the outer shell.

[0005] In addition to providing flavorant compositions that are storage-stable, that provide controlled release of flavorant, and which can provide multiple flavorants, the embodiments disclosed herein provide an improved co-extrusion method for encapsulating flavorants that yields improved mechanical stability of the capsules produced, by providing multiple encapsulating coatings. In addition, the embodiments disclosed herein provide improved consistency in capsule size, reduce or eliminate capsule aggregation, and allow for control of capsule geometry.

BRIEF DESCRIPTION OF THE DRAWING FIGURES

[0006] Figures 1(a), 1(b), 1(c), and 1(d) are schematic illustrations of co-extruded core-shell droplets at a nozzle according to embodiments disclosed herein.

[0007] Figure 2 is a schematic diagram showing a process for forming a multi-shelled capsule according to an embodiment disclosed herein.

[0008] Figures 3(a) and 3(b) shows the increase in burst strength with coating time and capsule thickness according to embodiments disclosed herein.

[0009] Figures 4(a), 4(b), 4(c), 4(d), and 4(e) are photomicrographs showing a phase separation between the inner and outer shells of a multi-shelled capsule according to an embodiment disclosed herein.

[0010] Figures 5(a) and 5(b) are schematic diagrams showing the formation of multi-shelled capsules with inner liquid cores and second liquid regions between the inner and outer shells according to embodiments disclosed herein.

[0011] Figure 6 shows that either spherical or ovoid capsules can be obtained according to embodiments disclosed herein.

DETAILED DESCRIPTION

[0012] As used herein, the term "smoking article" includes any material, article or device that is typically used to enjoy tobacco or tobacco substitutes by inhalation or smoking, including but not limited to cigars, cigarettes, pipe tobacco, loose or "roll-your-own" tobacco, electrically heated cigarettes, and the like.

[0013] As used herein, the term "smokeless tobacco" includes tobacco intended to be enjoyed in some manner other than inhalation or smoking, e.g., taken orally. Examples include snuff, pouched tobacco including snus, dip, plug tobacco, and the like.

[0014] As used herein, the term "tobacco product" includes both smoking articles and smokeless tobacco.

[0015] As used herein, the terms "flavorant" and "flavorant composition" denote organoleptic compounds and compositions that are applied to a substrate or article, at least in part in order to alter the taste or aroma characteristics of the substrate or article during consumption thereof.

[0016] A "liquid flavorant composition" as used herein denotes a flavorant composition that is in a liquid form, or can be rendered into liquid form by dissolution, suspension, or similar processes, under conditions typically encountered for the storage of the flavorant composition or of the article to which the flavorant composition is to be applied. A liquid flavorant composition may include high viscosity liquid compositions.

[0017] As used herein, the term "shell-forming polymeric material" denotes polymeric materials that can be cross-linked, dried, or otherwise hardened to form a shell, e.g., as part of a capsule. The term "first shell-forming polymeric material" denotes a shell-forming polymeric material that is substantially impermeable to one or more liquid flavorant compositions, at least in hardened form.

[0018] As used herein, the term "substantially impermeable" denotes a level of permeability sufficient that only a minor portion, if any, of the liquid being encapsulated within the substantially impermeable material can diffuse through the material over a period of time. This period of time is generally equivalent to a typical storage time for the consumable product, plus the typical storage time for the encapsulated flavorant composition.

[0019] As used herein, the term "hardening" denotes a curing, cross-linking, precipitation, drying, or other chemical or physical change to, or in, the polymeric material that renders the material into a shell that is less permeable to one or more components of the liquid flavorant composition and/or more structurally and/or dimensionally stable (i.e., able to withstand stress without rupture) and/or less permeable than the shell-forming polymeric material prior to hardening. The term "hardenable" denotes a material capable of undergoing hardening. A material that has undergone hardening may be resilient and/or flexible.

[0020] As used herein, the term "substantially insoluble" denotes a material that will not form a solid solution with the second polymeric material. Instead, most (if not all) of the material will undergo phase separation from the second polymeric material or from the second shell-forming polymeric material at least as early as the hardening of the second shell-forming polymeric material to form the outer shell.

[0021] As used herein, the terms "substantially spherical" and "substantially ovoid" denote generally spherical and ovoid shapes, respectively, and do not exclude slight departures or variations from the strict geometrical definitions of "spherical" and "ovoid."

[0022] As used herein, the term "about" when used in conjunction with a stated numerical value or range has the meaning reasonably ascribed to it by a person skilled in the art, i.e. denoting somewhat more or somewhat less than the stated value or range, to within a range of $\pm 10\%$ of the stated value.

[0023] Formation of core-shell capsules using a co-extrusion process is depends on numerous parameters. These include the physical properties of the materials used (e.g., their viscosity, density, and interfacial tension), as well as processing

conditions (flow rates, temperatures, amplitude and frequency of vibration of nozzle, the use of a submerged nozzle or non-submerged nozzle, and the geometry of nozzle such as the diameters of the inner and outer orifices). The influences of each of these factors is not isolated, but rather a complex interplay exists among them. Thus, using only an extrusion process to obtain core-shell capsules having desired properties, in particular having sufficient shell thickness, may be difficult or impossible. As disclosed herein, providing capsules with an inner and an outer shell of hardened second shell-forming polymeric material can overcome some of these difficulties.

[0024] In one embodiment, a method is provided for encapsulating a liquid

flavorant composition, by co-extruding a first liquid flavorant composition and a

first shell-forming polymeric material to form core-shell droplets containing an inner core that contains the first liquid flavorant composition, and an outer layer containing the first shell-forming polymeric material.

[0025] This droplet is preferably formed by a pair of concentric nozzles, with the liquid flavorant composition being passed through the inner nozzle, and the first shell-forming polymeric material passing through the outer nozzle. Droplet formation can include vibration or the passing of a gas or vapor stream near the nozzle in order to dislodge the droplet from the nozzle.

[0026] For example, droplet formation can take place in a Spherisator 2002 Mark II (Brace GmbH), desirably operating at a frequency ranging between about 20 Hz and about 200 Hz, more particularly between about 60 Hz and about 100 Hz, even more particularly between about 70 Hz and about 85 Hz, still more particularly between about 70 Hz and about 80 Hz. The amplitude applied to the

electromagnetic shaker of the device is desirably between about 100 mV and about 2000 mV, more particularly between about 330 mV and about 1000 mV, even more particularly between about 350 mV and about 450 mV. Nozzle diameters generally range between about 0.5 mm and about 2 mm, more particularly between about 0.9 mm and about 1.5 mm, for the inner, core-forming nozzle, and between about 1.5 mm and about 3 mm, more particularly between about 2 mm and about 2.5 mm, for the outer, shell-forming nozzle. Pressure in the core-forming stream of the co-extruder is generally between about 40 mbar and about 80 mbar, more particularly between about 50 mbar and about 65 mbar, while pressure in the shell-forming stream of the co-extruder is generally between about 90 mbar and about 150 mbar, more particularly between about 100 mbar and about 130 mbar. The diameter of the co-extruded capsules typically ranges from about 1 to about 7 mm.

[0027] Figures 1(a), 1(b), 1(c), and 1(d) are schematic illustrations of alternate forms which can be taken by a co-extruded core-shell droplet at a nozzle. In Fig. 1(a) the shell-forming polymeric material tends to release relatively easily from the surface of the nozzle, whereas in Fig. 1(b) the shell-forming polymeric material tends to cling to the surface of the nozzle. In Fig. 1(c) the co-extruded droplet tends to extend relatively far before assuming a rounded or globular shape, whereas in Fig. 1(d) the co-extruded droplet tends to form a substantially rounded or globular shape before releasing from the nozzle. The co-extruded core-shell droplet could take other forms, including mixed or intermediate forms, apart from those illustrated. Droplet shape may be indicative of process parameters so that observation thereof may guide formation of desirable capsules.

[0028] Once free of the nozzle, the first shell-forming polymeric material can flow around the core-shell droplet to completely, or substantially completely, surround the liquid flavorant composition.

[0029] Liquid flavorant compositions suitable for use herein include both hydrophilic, generally aqueous, compositions, and hydrophobic, generally oil-based, compositions. In general, these compositions contain one or more flavorant molecules, which can be dissolved or suspended in a liquid vehicle or solvent, particularly if they are not naturally obtained in liquid form. Examples of suitable flavorants include, but are not limited to, menthol, mint, such as peppermint or

spearmint, chocolate, licorice, citrus and other fruit flavors, gamma octalactone,

vanillin, ethyl vanillin, cinnamon, methyl salicylate, linalool, bergamot oil, geranium oil, lemon oil, ginger oil, tobacco extract, phenylacetic acid, solanone, megastigmatrienone, 2-heptanone, benzylalcohol, cis-3-hexenyl acetate, valeric acid, valeric aldehyde, etc. Flavorants in a solution or suspension of vegetable oil have been found to be particularly useful.

[0030] The first shell-forming polymeric material preferably contains a cross-linkable polysaccharide, a protein, or a wax. When hardened to form a shell, the first shell-forming polymeric material forms a substantially impermeable barrier to the first liquid flavorant composition. Preferred cross-linkable polysaccharides include alginates, pectins, carrageenans, chitosans, dextrans, and combinations and mixtures of these. Preferred proteins include gelatins. Particularly preferred as the first shell-forming polymeric material are alginate salts with monovalent cations, such as sodium alginate. Preferably, the alginate is coextruded as an aqueous

solution having an alginate concentration ranging between about 1 and about 5 wt%, preferably between about 2 and about 2.5 wt%.

[0031] The formed droplet is then treated to harden the first shell-forming polymeric material to form an inner shell around an inner core comprising the first liquid flavorant composition. The hardening process may simply involve cooling, e.g., if the first shell-forming polymeric material is a wax or a gelatin.

[0032] Hardening may, however, involve more complex processes, particularly when the first shell-forming polymeric material contains a polysaccharide. For example, if the first shell-forming polymeric material comprises sodium alginate, the hardening process will preferably involve an ionic substitution reaction, with a

divalent metal ion displacing sodium, and effectively cross-linking the alginate polymer. Other polysaccharides undergo similar ionic cross-linking reactions during hardening. In addition, hardening may involve drying in order to remove excess moisture from the shell, and to render the shell less tacky. This type of hardening process may be carried out by dropping the droplets into a bath of aqueous divalent metal ion, preferably calcium ion. As an example, a bath of aqueous CaCl_2 can be used. Alternatively, droplets can be sprayed with a mist of aqueous CaCl_2 or other divalent metal ion after they have left the concentric nozzles. Either way, calcium ions on the surface of the droplet displace sodium ions and cross-link the alginate polymer. As the length of time the droplets spend in contact with the calcium ion solution increases, the depth of penetration of calcium ions into the outer layer increases, and so does the depth of hardened polymer. Desirably, the CaCl_2 solution is applied as an aqueous solution having a concentration between about 3 wt% and about 10 wt%, more particularly, having a concentration of about 5 wt%. The CaCl_2

contact time and solution concentration, along with subsequent washing to remove calcium ions (described more fully herein), can also affect the formation of a coating later and/or the hardening of the coating layers.

[0033] Figure 2 shows an illustrative example of how the capsule, containing the encapsulated first liquid flavorant composition and the inner shell of the hardened first polymeric material, is then coated with one or more coating layers containing a second shell-forming polymeric material to form a multi-shelled capsule. This multi-shelled capsule has shells of hardened shell-forming polymeric material surrounding a core. A variety of processes for coating capsules, such as curtain

coating, coacervation, etc., will provide acceptable results; however, an exemplary

coating process is described herein and illustrated in Fig. 2. The capsules described above, having the inner shell but not yet an outer shell, can be harvested by filtration from their aqueous bath (in Fig. 2, a CaCl_2 solution), and after washing to remove excess divalent metal ions, and draining to remove excess surface water, are deposited into a solution of second shell-forming polymeric material, typically while stirring (in Fig. 2, the solution of second shell-forming polymeric material is an alginate solution). The capsules are maintained in this solution for a period of time sufficient to allow the coating layer to grow to its desired thickness, the time typically ranging from about 30 seconds to several hours, depending on the desired thickness. At the conclusion of this time, water is added to dilute the solution of second shell-forming polymeric material, and slow or stop the growth of the coating layer. The coated capsules are separated from the coating solution by filtration or decanting, and additional water is added to remove excess shell-forming polymeric material. This separation and diluting process may be repeated several times, and

the resulting coated capsules may then be optionally dried, e.g., by exposure to a stream of hot gas, such as in a tumble drier.

[0034] Examples of suitable second shell-forming polymeric materials include cross-linkable polysaccharides, such as alginate, pectin, carrageenan, chitosan, and mixtures thereof.

[0035] Once the coated capsules have been formed, the second shell-forming polymeric material in the coating layer is hardened to form a multi-shelled capsule containing the capsule with the inner shell surrounded by an outer shell of hardened second shell-forming polymeric material. Hardening may be accomplished by

contacting the second shell-forming polymeric material with the appropriate cross-linking agent. For example, if the second shell-forming polymeric material includes sodium alginate, a solution of calcium ions can be added to harden the coating layer. If the inner shell contains cross-linked alginate, there may be sufficient residual free calcium ion in the inner shell to migrate into the coating and cause cross-linking to occur, without need for additional calcium ions. The hardening may preferably begin during the coating step, for example by cross-linking during coating with residual calcium in the inner shell.

[0036] In some cases, the outer surface of the multi-shelled capsule will be somewhat adherent or tacky, in part due to the high moisture content therein. In one embodiment, the method of producing the multi-shelled capsules includes drying the capsules to reduce this tackiness. Drying in this way may also be regarded as a hardening step. It is desirable to dry the multi-shelled capsules while minimizing any disruption of their shells. A tumbling drier will be suitable for this purpose. In order to limit the adherence of the multi-shelled capsules to the interior surfaces of

the drier, it is preferred to conduct the drying while introducing an inert gas, such as nitrogen, into the drier.

[0037] The capsules produced by this process will be highly storage stable, and can effectively reduce or prevent migration and/or loss of the flavorant in the liquid flavorant composition during storage of articles and products incorporating the capsules.

[0038] Fig. 3 shows data obtained on the burst strength of 4.0 mm diameter multi-shelled capsules. In Fig. 3(a), the solution of second shell-forming polymeric material was 0.25% by weight of alginate, and it can be seen that the burst strength increased with increasing coating time. In Fig. 3(b), burst strength of capsules

having various shell thicknesses from about 12 to 43 μm (in this figure, meaning a combined thickness of the inner and outer shells including any space between the shells) was measured using a Shimadzu EZ-Graph with a compression speed of 100 mm/min. The burst strength increased with increasing shell thickness. These graphs shows that the methods described herein are able to produce a capsule having a burst strength of about 6 to 11 N, preferably about 8 to 10 N.

[0039] The first and second shells are distinct from one another, and each which can have different thicknesses, mechanical strengths, thermal and/or moisture stability, degradation rates, and the like. As a result, the selection of the first and second polymeric materials can vary the physical and chemical properties of the resulting multi-shelled capsule.

[0040] Irrespective of the particular first and second shell-forming polymeric materials used to form the inner and outer shells, the outer shell, after hardening, contains an inner surface and an outer surface, such that the inner surface of the

outer shell is separate and/or separable from the outer surface of the inner shell. The two shells can define a space between them when they are separated. Thus the two shells may be forced apart by osmotic pressure imposed by phase separation or by diffusion into the capsule, as explained more fully herein. The ability to provide different liquid flavorant compositions in the core and in a space between shells in the same capsule allows for the controlled release of different flavorant compositions as the article containing the capsule is consumed, providing a different and pleasing aesthetic effect to the consumer.

[0041] Figures 4(a)-(e) shows photomicrographs of cross sections of a multi-shelled capsule. In these figures, "i" represents the inside of the capsule and "o" represents the outside. Fig. 4(a) shows an image of a cross-section of a multi-shelled capsule according to embodiments described herein, with Figs. 4(b)-(e) showing more details images at various points along the cross-section. A space between the first and second shells can be seen.

[0042] As seen in Figures 5(a) and 5(b), the encapsulated composition can comprise, in addition to the inner core with its first liquid flavorant composition, a second liquid composition (for example, a flavorant, the same or different from the flavorant or the first liquid flavorant composition) that contains one or more components that are substantially insoluble in the outer shell of the multi-shelled capsule.

[0043] In one such embodiment, illustrated schematically in Fig. 5(a), the initial capsule (having an inner shell around an inner core) is coated with a gel comprising a liquid that is substantially insoluble in the hardened second shell-forming polymeric material. Upon phase separation, this substantially insoluble component

or components separates and migrates to a space between the two shells. Because the outer surface of the inner shell and the inner surface of the outer shell are separate and/or separable, osmotic pressure allows the migrating component of the second liquid flavorant composition to occupy and/or force its way between the shell surfaces. Upon hardening of the outer shell, this migrating component can form a liquid region that is at least partially in a space between the outer surface of the inner shell and the inner surface of the outer shell.

[0044] In another embodiment, illustrated schematically in Fig. 5(b), a second flavorant liquid composition is introduced between the inner and outer shells by placing the multi-shelled capsule or the coated first capsule (the capsule having an

inner shell and a coating layer) in a solution or suspension of the second liquid flavorant composition, before the second shell-forming polymeric material is completely hardened. Because the inner surface of the outer shell is separate and/or separable from the outer surface of the inner shell, the second liquid flavorant composition can penetrate the outer shell or coating layer by diffusion, and create and/or occupy a space between the inner and outer shells, or between the inner shell and the coating layer, thereby forming a liquid region at least partially between the outer surface of the inner shell and the inner surface of the outer shell. The second shell-forming polymeric material is then subjected to hardening, or additional hardening as the case may be.

[0045] The result of either of these embodiments is a capsule having a first liquid flavorant composition in the core and a second, optionally different, liquid flavorant composition at least partially in a region between the inner and outer shells. This

allows for release of flavorants at different times during the consumption of an article incorporating such capsules.

SMOKING ARTICLES AND SMOKELESS TOBACCO

[0046] Flavorants used with tobacco smoking articles, e.g., menthol, can migrate from the tobacco to which the menthol was applied to other parts of the smoking article, or can migrate out of the smoking article entirely. This decreases the level of flavorant available when the article is consumed, often requiring that increased levels of flavorants be applied to the article. Applying increased amounts of flavorant means undesired added costs in production. The use of encapsulated flavorants as described herein can overcome these problems.

[0047] For example, one or more capsules containing one flavorant, e.g. menthol, as the flavorant in the first and second liquid flavorant compositions can be incorporated into the tobacco rod or filter of a smoking article, such as a cigarette. As the cigarette is smoked, the second polymeric coating can become degraded by the mainstream smoke flowing past the capsule, thereby releasing the menthol from the second liquid flavorant composition to the consumer. Later, as the cigarette continues to be smoked, the menthol in the first liquid flavorant composition in the core is released to the mainstream smoke as the inner shell degrades. The result is that the consumer enjoys increased menthol flavor at different points in the smoking experience.

[0048] In another example, one or more capsules containing one flavorant, e.g., menthol as a flavorant in the first liquid flavorant composition, and a different flavorant, e.g. tobacco extract, as a flavorant in the second liquid flavorant

composition, can be incorporated into the tobacco rod and/or filter of a cigarette. As the cigarette is smoked, the outer shell degrades in the moist, hot mainstream smoke, releasing tobacco flavor, thereby enhancing the tobacco flavor provided by tobacco in the cigarette. As smoking continues, the inner shell can become degraded, releasing menthol flavor into the mainstream smoke.

[0049] In either of these examples, multiple capsules can be disposed in the cigarette, and their disposition can have an effect on the delivery of flavorant to the consumer. For instance, disposing multiple capsules having the same or similar thicknesses of shells at the same or similar location in the cigarette can result in an increase of a particular flavor over a relatively short time. Because each of the

capsules is subjected to similar degradation conditions, the shells will degrade at similar rates, releasing their flavorants at similar times.

[0050] In another embodiment, it is possible to vary the release rates of flavorant from different capsules by varying the thickness and other mechanical properties of the inner and outer shells. This allows for the capsules to be engineered for different locations in the article, thereby controlling flavorant release with time. For example, capsules having relatively thick shells can be disposed in or near the filter, while capsules having relatively thin shells can be disposed in the tobacco rod near the lit end of a cigarette. The thick shelled capsules will retain their flavorant for a longer time when subjected to mainstream smoke, so that the consumer continues to experience flavorant release later in the smoking experience. Cigarettes including encapsulated flavoring are described in U.S. Patent Application Publication Nos. 2005/0172976 and 2008/0017206 each of which is herein incorporated by reference in its entirety.

[0051] Similarly, capsules can be added to smokeless tobacco products, wherein flavorant release results from mechanical rupture of the capsules during mastication or from dissolution of the capsules in saliva. By including capsules having varying shell thicknesses, the release profile for delivery of the flavorant or flavorants over time can be controlled, so that the consumer experiences certain flavors early in the experience and other flavors later on, or so that the consumer experiences a more continuous, consistent level of a particular flavorant.

[0052] As shown by Figure 6, in addition to providing control over the structure of the capsules, their mechanical properties, and their delivery characteristics, the method disclosed herein can provide control over the overall capsule morphology.

By varying the parameters of the co-extrusion process, capsule shape can be varied between substantially spherical to substantially ovoid. Among the advantages of various morphologies, an ovoid type of capsule may require reduced force required for bursting (because force is concentrated at a tip of the capsule), which may be desirable in certain applications.

[0053] In yet another embodiment, one or more multi-shelled capsules as described herein are incorporated in filter of a cigarette so that, at a time chosen by the smoker, they may be crushed to release liquid flavorant into the filter. Preferably, such capsules are ovoid-shaped to facilitate mechanical rupture. Cigarettes and filter subassemblies with squeezable flavor capsules are described in U.S. Patent Application Publications 2007/0012327 and 2006/0174901, each of which is herein incorporated by reference in its entirety.

EXAMPLES

EXAMPLE 1

[0054] A mixture of flavorant (9670-102A) in vegetable oil was fed through the inner, or core, nozzle (1.0 mm diameter) of a Brace GmbH Spherisator 2002 Mark II 1410-087 co-extruder under a pressure of 55 mbar. A aqueous solution of 2 wt% sodium alginate (a first shell-forming polymeric material) was fed through the outer, or shell-forming, nozzle of the co-extruder (2.5 mm diameter) under a pressure of 100 mbar. The frequency of vibration was 80 Hz, and the amplitude of vibration was 350 mV. The coated cores produced by the co-extrusion were contacted with an aqueous hardening solution containing 5 wt% calcium chloride and filtered and washed with additional aqueous hardening solution containing 5 wt% calcium chloride. Some of the coated cores that were produced were undesirably small "satellite" capsules (which can be screened or separated from desirable capsules) or had cores that were not perfectly centered. A small amount of oil was observed on the surface of the suspension of coated cores, believed to originate from broken capsules and/or unincorporated core material.

[0055] The capsules were washed and screened and were then grown by the following process to produce multi-shelled capsules. The capsules were added to an aqueous solution of 0.25 wt% sodium alginate (the second shell-forming polymeric material), stirred for 20 minutes, and deionized water was then added to dilute the alginate solution. (It was found that using alginate concentrations substantially greater than 0.25 wt% resulted in undesired aggregation of capsules.) The capsules were removed from the solution, and contacted with 5 wt% calcium chloride, filtered, washed with deionized water, and contacted with room temperature nitrogen in a tumbling dryer to dry the capsules. Relatively uniform capsules with

no observed aggregation were obtained. The resulting multi-shelled capsules weighed between about 35 mg and about 39 mg per capsule, with an average weight of about 36 mg/capsule.

EXAMPLE 2

[0056] The procedure described above in Example 1 was generally followed, except that the flavorant was fed through the inner nozzle under a pressure of 60 mbar, and the alginate solution was fed through the outer nozzle under a pressure of 125 mbar. Some of the coated cores produced were satellites or had cores that were not perfectly centered. After drying, several of the capsules were broken. The weight of the capsules ranged between about 30 mg and about 35 mg per capsule, with an average weight of about 32 mg/capsule. The burst strength of the capsules was measured and found to range between about 3.5 N and about 16.7 N.

EXAMPLE 3

[0057] The procedure described in Example 1 was generally followed, except that the vibration frequency was 100 Hz, the outer nozzle pressure was 105 mbar. Almost no small capsules were observed, although several non-encapsulated beads were observed. The filtered coated cores were added to an aqueous solution containing 0.25 wt% sodium alginate and 1.0 wt% polyvinylpyrrolidone ("PVP"), stirred for 20 minutes, diluted with water, removed from solution, and filtered directly without addition of more calcium chloride. The filtered capsules were dried in a tumbling drier, as in Example 1. Average capsule weight was found to be 33.8 mg/capsule, but the PVP did not prevent the formation of aggregates.

EXAMPLE 4

[0058] The procedure described above for Example 1 was generally followed, except that a different flavorant (9814-57) in vegetable oil was used, along with the following additional changes.

[0059] As a first sub-example, the feed through the inner nozzle was at a pressure of 60 mbar, the feed through the outer nozzle was at a pressure of 130 mbar, using a frequency of 50 Hz and an amplitude of 300 mV. The output from the nozzle appeared as Fig. 1(a). The result was many non-core/shell spheres (that is, spheres without a core) and an unstable process, along with non-centered cores and an oil layer.

[0060] As a second sub-example, the feed through the inner nozzle was at a pressure of 58 mbar, the feed through the outer nozzle was at a pressure of 125 mbar, using a frequency of 50 Hz and an amplitude of 300 mV. The output from the nozzle appeared as Fig. 1(a). The result was many non core/shell spheres and an oil layer. The resulting capsules were sticky, easy to break, and of non-uniform size.

[0061] As a third sub-example, the feed through the inner nozzle was at a pressure of 57 mbar, the feed through the outer nozzle was at a pressure of 130 mbar, using a frequency of 80 Hz and an amplitude of 350 mV. The output from the nozzle appeared as Fig. 1(b). The result was no observed non-core/shell spheres and several satellite capsules, which were spherical.

[0062] As a fourth sub-example, the feed through the inner nozzle was at a pressure of 60 mbar, the feed through the outer nozzle was at a pressure of 115 mbar, using a frequency of 80 Hz and an amplitude of 350 mV. The output from the

nozzle appeared as Fig. 1(a). The result was many non core/shell spheres and an oil layer. The resulting capsules were easy to break, and of non-uniform size.

EXAMPLE 5

[0063] The procedure described above for Example 1 was generally followed, except flavorant 9814-57 in vegetable oil was fed through the inner nozzle at a pressure of 60 mbar, and the sodium alginate solution was fed through the outer nozzle at a pressure of 130 mbar. The output from the nozzle appeared as Fig. 1(a). Capsules and several spheres that were non core/shell spheres were produced. At least some of the cores appeared highly off-center, and small. To the 0.25 wt% alginate solution was added 0.1 wt% green food coloring, to enhance visualization of the second alginate layer (the outer shell). The dried capsules were desirably small (not satellites), hard, and ovoid or egg shaped.

EXAMPLE 6

[0064] The procedure described above for Example 5 was followed, except that the nozzle output was made to appear as in Fig. 1(b). This resulted in desirably small capsules that were ovoid or egg shaped.

EXAMPLE 7

[0065] The procedure described above for Example 1 was generally followed, except that the core material was vegetable oil with blue dye fed at 60-100 mbar and the shell was fed at 90-140 mbar. The frequency was 90 Hz and the amplitude was 400 mV. This resulted in small capsules with off-centered cores.

EXAMPLE 8

[0066] The procedure described above for Example 1 was generally followed, except that the core material was vegetable oil with blue dye, along with the following additional changes.

[0067] As a first sub-example, the core material was fed at 65 mbar through a 0.9 mm nozzle and the shell was fed at 90-140 mbar. The frequency was 90 Hz and the amplitude was 400 mV. The output from the nozzle appeared as Fig. 1(c). The process was unstable. Small capsules with off-centered cores were produced.

[0068] As a second sub-example, the procedure for the first sub-example was used, with the following changes. The shell material was fed through a 2.2mm nozzle at 115 mbar and the core material was fed at 70 mbar. The frequency was 80 Hz and the amplitude was 350 mV. The output from the nozzle appeared as Fig. 1(d). The process was stable with desirably small capsules produced. Cores were not centered.

[0069] As a third sub-example, the procedure for the first sub-example was used, with the following changes. The core was fed through a 1.0 mm nozzle at 65 mbar and the shell was fed through a 2.5 mm nozzle at 120 mbar. The frequency was 80 Hz and the amplitude was 350 mV. The output from the nozzle appeared as Fig. 1(a). The process was stable with no satellite capsules produced. There were non-core/shell spheres. Cores were not centered.

[0070] As a fourth sub-example, the procedure for the third sub-example was used, with the following changes. The shell material was fed at 125 mbar and the core material was fed at 80 mbar. The frequency was 100 Hz. The output from the nozzle appeared as Fig. 1(a). The process was stable with no small capsules

produced. There were non-core/shell spheres. The centering of the core was better than in the third sub-example.

[0071] As a fifth sub-example, the procedure for the fourth sub-example was used, with the following changes. The shell material was fed at 115 mbar and the core material was fed at 75 mbar. The output from the nozzle appeared as Fig. 1(d). Small capsules appeared as a by-product, and cores were not centered.

EXAMPLE 9

[0072] The procedure described above for Example 1 was generally followed, except that the inner nozzle diameter was 0.9 mm and the outer nozzle diameter was 2.2 mm; the pressure of material fed to the inner nozzle was varied, so that 64 mbar,

70 mbar, 75 mbar, 80 mbar, 85 mbar, and 87 mbar pressures were used. The pressure of material fed to the outer nozzle was kept at 115 mbar. The frequency of vibration was 90 Hz. The process did not produce satellite capsules. As the inner nozzle pressure increased, the centering of the core in the capsules was improved. At an inner nozzle pressure of 87 mbar, some of the capsules produced were easily broken. Capsules produced at an inner nozzle pressure of 85 mbar were dried for 2 hours, and contacted with 0.25 wt% sodium alginate solution for 20 minutes while stirring at 250 rpm. The particles were washed several times with 1000 ml aliquots of water, which was then removed. The washed capsules were then placed into 100 ml of 5 wt% CaCl₂, filtered, and washed with several 500 ml aliquots of water. Egg-shaped or ovoid capsules were produced.

[0073] While the invention has been described in detail with reference to preferred embodiments thereof, it will be apparent to one skilled in the art that various changes can be made, and equivalents employed, without departing from the scope

Patent
Attorney's Docket No. 1021238-000836

of the invention.

[0074] All of the above-mentioned references are herein incorporated by reference in their entirety to the same extent as if each individual reference was specifically and individually indicated to be incorporated herein by reference in its entirety.

WHAT IS CLAIMED IS:

1. A method for encapsulating a liquid flavorant composition in a multi-shelled capsule, comprising:

- (a) co-extruding a first liquid flavorant composition and a first shell-forming polymeric material to form a core-shell droplet;
- (b) hardening the first shell-forming polymeric material of the droplet to form an inner shell around an inner core, the inner core comprising the first liquid flavorant composition;
- (c) coating the inner shell with a coating layer comprising a second shell-forming polymeric material; and
- (d) hardening the second shell-forming polymeric material by contacting the second shell-forming polymer with polyvalent metal ions present in or on the inner shell, to form an outer shell of the multi-shelled capsule.

2. The method of claim 1, wherein an inner surface of the outer shell is separated from an outer surface of the inner shell.

3. The method of claim 2,
further comprising forming a second liquid region at least partially between the outer surface of the inner shell and the inner surface of the outer shell.

4. The method of claim 3, wherein said forming a liquid region comprises one of the following:

- (a) said step of coating the inner shell further comprises coating the inner shell with a gel comprising one or more components that are substantially insoluble

in the second shell-forming polymeric material, whereby before or upon hardening of the second shell-forming polymeric material the second liquid region is formed and comprises the one or more components that are substantially insoluble; or

(b) before the second shell-forming polymeric material is completely hardened, contacting either the coated inner shell or the multi-shelled capsule with a second liquid flavorant composition for a time and under conditions sufficient for at least a portion of said second liquid flavorant composition to move through said outer shell or said coating layer to form said liquid region, followed by hardening of the second shell-forming polymeric material.

5. ~~The method of claim 1, wherein the multi-shelled capsule has a burst~~
strength of between about 6 and 11 N.

6. The method of claim 1, wherein said first liquid flavorant composition comprises a first flavorant selected from the group consisting of menthol, mint, chocolate, licorice, citrus and other fruit flavors, gamma octalactone, vanillin, ethyl vanillin, cinnamon, methyl salicylate, linalool, bergamot oil, geranium oil, lemon oil, ginger oil, tobacco extract, phenylacetic acid, solanone, megastigmatrienone, 2-heptanone, benzylalcohol, cis-3-hexenyl acetate, valeric acid, valeric aldehyde, and mixtures thereof.

7. The method of claim 1, wherein the multi-shelled capsule is substantially spherical or ovoid.

8. The method of claim 1, wherein said first shell-forming polymeric material comprises a cross-linkable polysaccharide, a hardenable protein, or a hardenable wax.
9. The method of claim 8, wherein said cross-linkable polysaccharide is selected from the group consisting of alginates, pectins, carrageenans, chitosans, dextrans, and combinations or mixtures thereof.
10. The method of claim 9, wherein the first and second shell-forming polymeric materials each comprise a cross-linkable alginate.
-
11. The method of claim 1, wherein said hardening the second shell-forming polymeric material comprises drying in a tumbling dryer.
-
12. The method of claim 1, wherein said co-extruding step comprises using a co-extruder comprising an inner nozzle diameter of between about 0.5 mm and 2 mm, and an outer nozzle diameter of between about 1.5 mm and 3 mm, wherein the inner nozzle is fed at between about 40 mbar and 80 mbar and the outer nozzle is fed at between about 100 mbar and 130 mbar.
13. The method of claim 1, wherein said co-extruding step comprises using a co-extruder having an electromagnetic shaker operating at a frequency of between about 20 and 200 Hz and an amplitude of between about 100 and 2000 mV.
14. A multi-shelled capsule comprising:
- (a) an inner core comprising a first liquid flavorant composition,
 - (b) an inner shell of a first polymeric material at least partially enclosing the

inner core,

(c) an outer shell of a second polymeric material at least partially enclosing the inner shell, and

(d) a second liquid flavorant composition disposed in a space between the inner shell and the outer shell.

15. The multi-shelled capsule of claim 14, wherein said capsule is substantially spherical and has a diameter of 1 to 7 mm.

16. The multi-shelled capsule of claim 14, wherein the inner and outer shells have a combined thickness, including the space between the shells, of between about 12 and 43 μm .

17. The multi-shelled capsule of claim 14, wherein the multi-shelled capsule has a burst strength of between about 6 and 11 N.

18. The multi-shelled capsule of claim 14, wherein at least one of the inner and outer shells comprises cross-linked alginate.

19. A smoking article, comprising at least one multi-shelled capsule of claim 14.

20. The smoking article of claim 19, wherein the first and second liquid flavorant compositions are different.

21. The smoking article of claim 19, wherein the at least one multi-shelled capsule comprises a plurality of multi-shelled capsules, at least some of which have different combined thicknesses of inner and outer shells.

22. The smoking article of claim 19, wherein
the smoking article comprises a filter, and
said at least one multi-shelled capsule is disposed in the filter, and is
disposed to be crushable by a smoker to release the first and/or second liquid
flavorant composition into the filter,
wherein said at least one multi-shelled capsules are substantially ovoid.
23. A smokeless tobacco product, comprising at least one multi-shelled capsule
of claim 14.
24. The smokeless tobacco product of claim 23, wherein the at least one multi-
shelled capsule comprises a plurality of multi-shelled capsules, at least some of
which have different combined thicknesses of inner and outer shells..

ABSTRACT OF THE DISCLOSURE

Multi-shelled capsules are made by co-extruding a first liquid flavorant composition and a first shell-forming polymeric material to form droplets which are hardened to form an inner shell containing a first liquid flavorant composition, and then coated with a second shell-forming polymeric material which is hardened to form an outer shell. The result is a capsule where the inner surface of the outer shell is separate and/or separable from the outer surface of the inner shell to define a space, wherein a second liquid flavorant composition may be located.

APPLN. FILING DATE: MARCH 26, 2010
TITLE: FABRICATION OF CORE/SHELL CAPSULES OF
DIFFERENT GEOMETRIES AND TREATMENT THEREAFTER
INVENTOR(S): HONGWEI LUI ET AL.
ATTORNEY DOCKET NO.: 1021238-000836 SHEET 1 OF 6




FIG. 1a




FIG. 1b

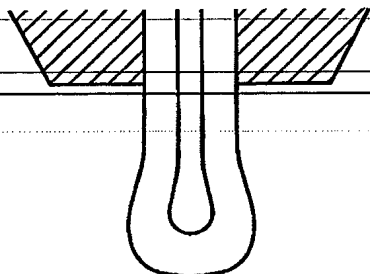


FIG. 1c

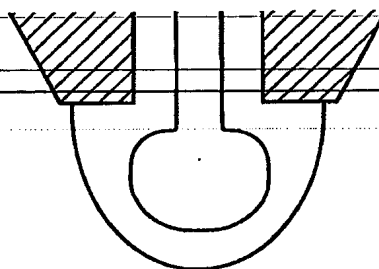
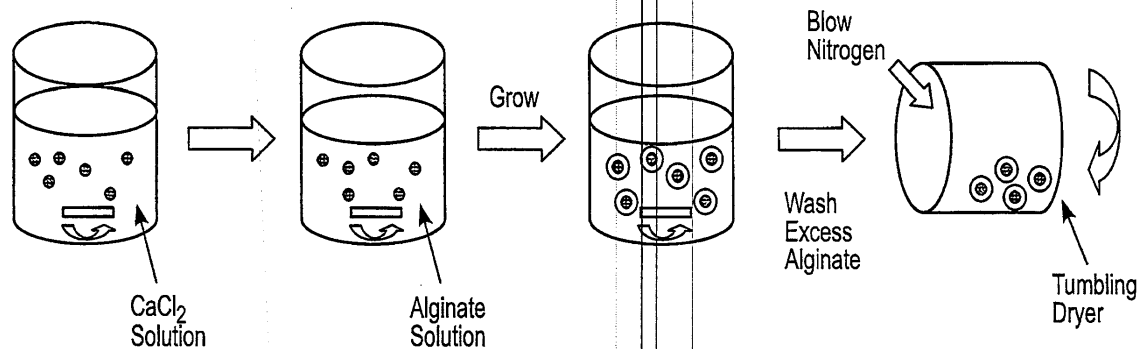


FIG. 1d

FIG. 2



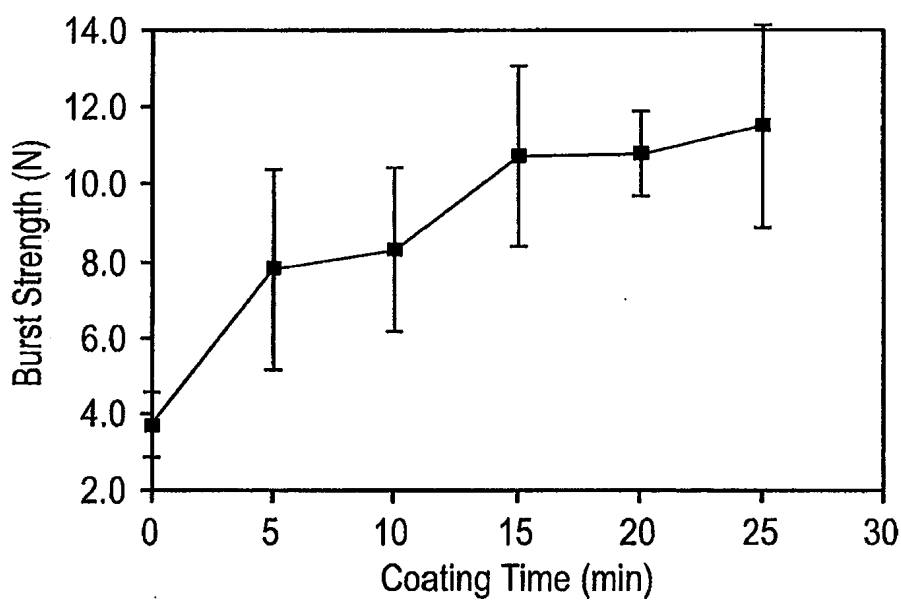


FIG. 3a

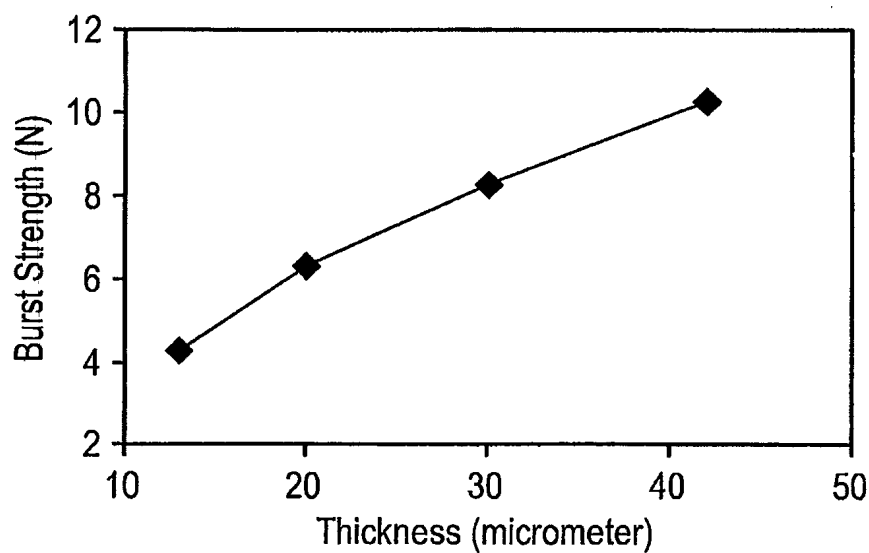


FIG. 3b

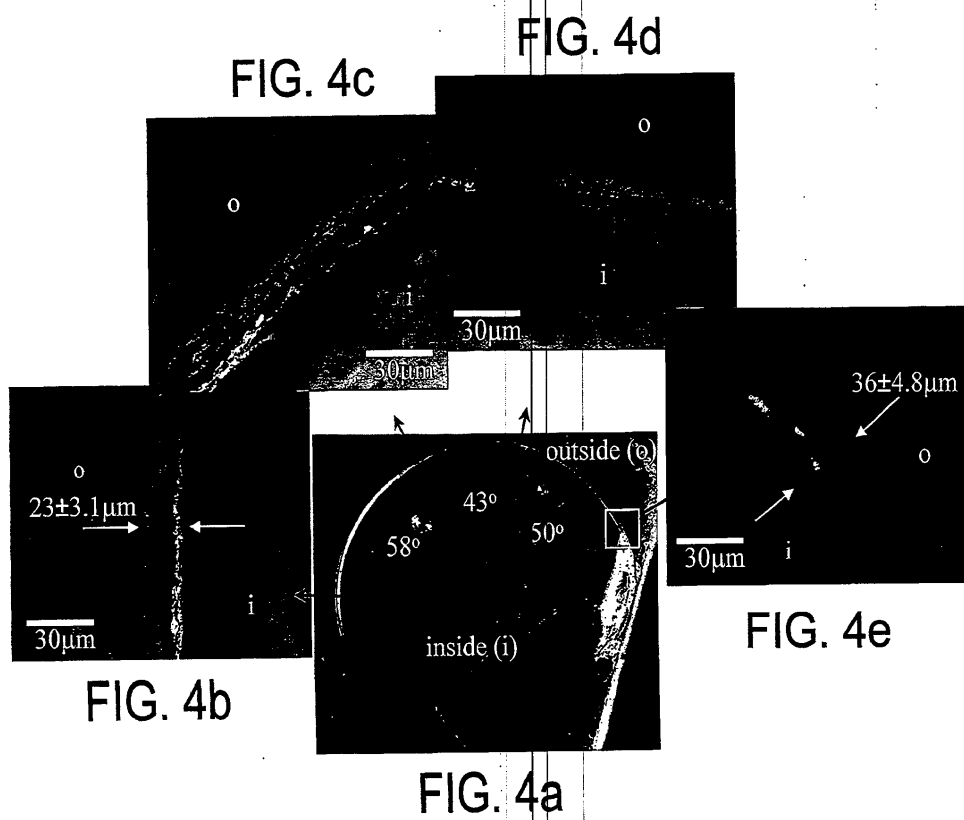


FIG. 5a


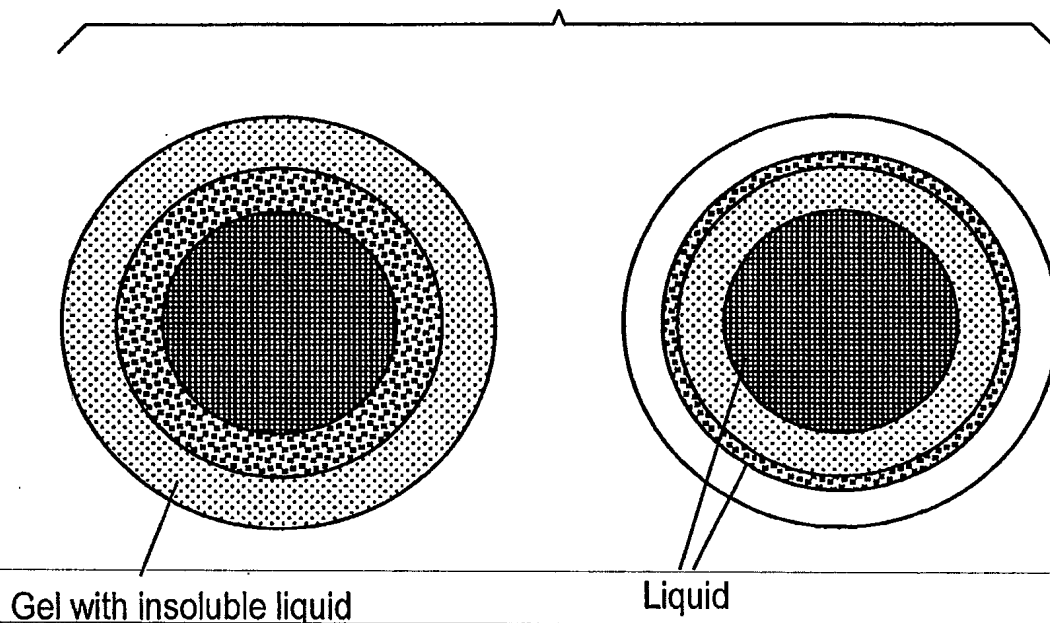


FIG. 5b

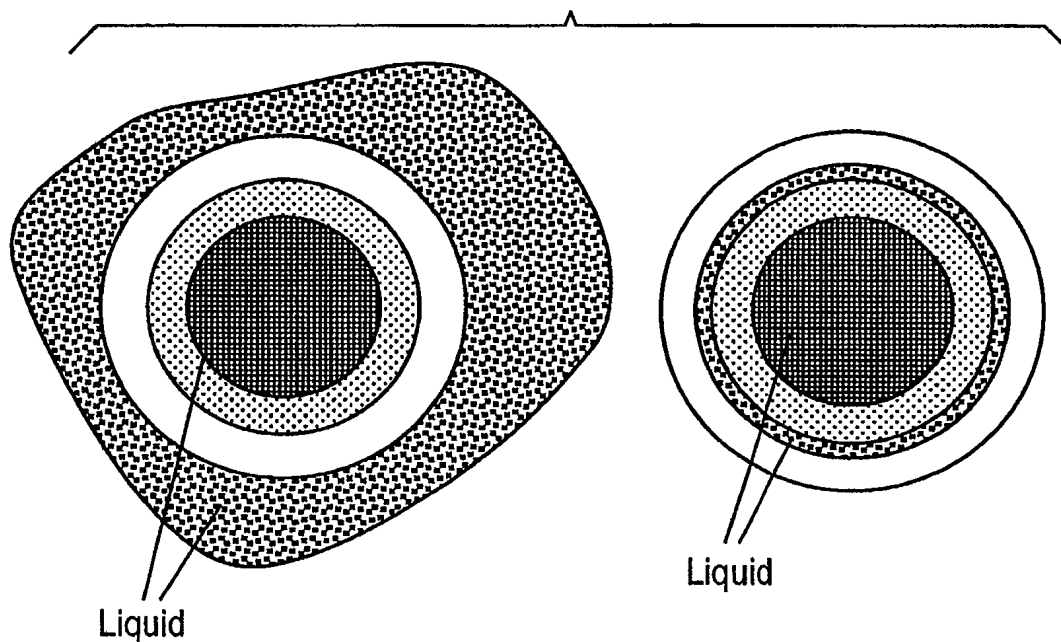

APPLN. FILING DATE: MARCH 26, 2010
TITLE: FABRICATION OF CORE/SHELL CAPSULES OF
DIFFERENT GEOMETRIES AND TREATMENT
THEREAFTER
INVENTOR(S): HONGWEI LUI ET AL.
ATTORNEY DOCKET NO.: 1021238-000836 SHEET 6 OF 6

Spherical capsules

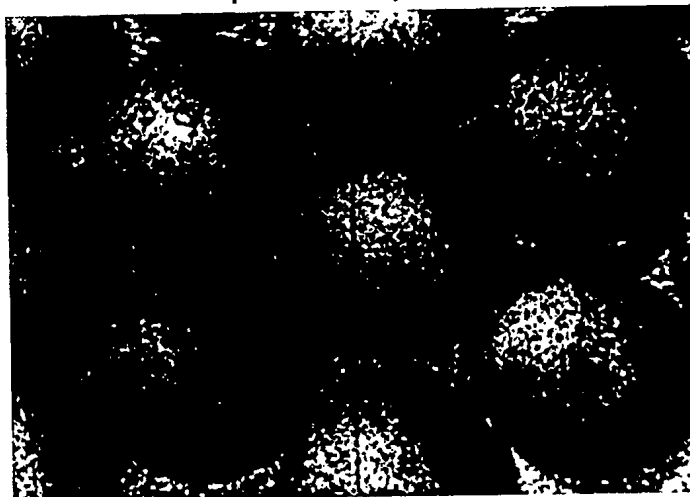


FIG. 6a

Oval capsules



FIG. 6b

TRADUCCIÓN SIMPLE AL ESPAÑOL REALIZADA POR MELISSA AGUDELO
MAGALHAES DEL SIGUIENTE DOCUMENTO, ESCRITO ORIGINALMENTE EN
INGLÉS.

ESTADOS UNIDOS DE AMÉRICA
A TODOS LOS QUE LA PRESENTE VIEREN, SABED:
DEPARTAMENTO DE COMERCIO DE LOS ESTADOS UNIDOS
Oficina de Marcas y Patentes de los Estados Unidos

10 de octubre del 2012

POR MEDIO DE LA PRESENTE SE CERTIFICA QUE EL DOCUMENTO QUE FIGURA
EN ANEXO ES UNA COPIA FIEL TOMADA DE LOS ARCHIVOS DE LA OFICINA DE
MARCAS Y PATENTES DE LOS ESTADOS UNIDOS, CORRESPONDIENTE A LA
SOLICITUD DE PATENTE IDENTIFICADA A CONTINUACIÓN, LA CUAL CUMPLIÓ
CON LOS REQUISITOS PARA LA CONCESIÓN DE UNA FECHA DE PRESENTACIÓN
CONFORME AL 35 USC 111.

NÚMERO DE SOLICITUD: *61/318,216*

FECHA DE PRESENTACIÓN: *26 de marzo del 2010*

EL CÓDIGO DE PAÍS Y EL NÚMERO DE SU SOLICITUD DE PRIORIDAD
NECESARIOS PARA PRESENTAR SOLICITUDES EN EL EXTERIOR CONFORME A
LA CONVENCION DE PARÍS ES *US61/318,216*

Con autorización del
Subsecretario de Comercio para la Propiedad Intelectual y
Director de la Oficina de Marcas y Patentes de Estados Unidos

(Firmado)
P.R. GRANT
Oficial de Registro

SELLO: OFICINA DE MARCAS Y PATENTES DE ESTADOS UNIDOS.
DEPARTAMENTO DE COMERCIO

REIVINDICACIONES:

1. Un método para encapsular una composición saborizante líquida en una cápsula de corazas múltiples que comprende:
 - (a) co-extrusión de una primera composición saborizante líquida y un primer material polimérico formador de coraza para formar una gotícula de núcleo-coraza
 - (b) endurecimiento del primer material polimérico formador de coraza de la gotícula para formar una coraza interior alrededor de un núcleo interno, el cual comprende la primera composición saborizante líquida:
 - (c) recubrimiento de la coraza interior con una capa de revestimiento que comprende un segundo material polimérico formador de coraza; y
 - (d) endurecimiento del segundo material polimérico formador de coraza al poner en contacto al segundo polímero formador de coraza con iones metálicos polivalentes presentes en o sobre la coraza interior, para formar una coraza exterior de la cápsula de corazas múltiples.
2. El método de la reivindicación 1, en donde una superficie interior de la coraza exterior se separa de una superficie exterior de la coraza interior.
3. El método de la reivindicación 2,
que comprende además la formación de una segunda región líquida, al menos parcialmente entre la superficie exterior de la coraza interior y la superficie interior de la coraza exterior.
4. El método de la reivindicación 3, en donde dicha formación de una región líquida comprende una de las siguientes:
 - (a) dicho paso de recubrimiento de la coraza interior comprende además el recubrimiento de la coraza interior con un gel que comprende uno o más componentes que son substancialmente insolubles en el segundo material polimérico formador de

coraza, en donde antes o al momento de endurecer el segundo material polimérico formador de coraza la segunda región líquida se forma y comprende el uno o más componentes substancialmente insolubles; o

(b) antes de que se endurezca completamente el segundo material polimérico formador de coraza, puesta en contacto ya sea a la coraza interior recubierta o la cápsula de corazas múltiples con una segunda composición saborizante líquida por un tiempo y bajo condiciones suficientes para que al menos una porción de dicha segunda composición saborizante líquida se mueva a través de dicha coraza exterior o dicha capa de revestimiento para formar dicha región líquida, seguida por el endurecimiento del segundo material polimérico formador de coraza.

5. El método de la reivindicación 1, en donde la cápsula de corazas múltiples tiene una presión de ruptura de entre 6 y 11 N.
6. El método de la reivindicación 1, en donde dicha primera composición saborizante líquida comprende un primer saborizante seleccionado de un grupo que consiste en mentol, menta, chocolate, regaliz, cítricos y otros sabores frutales, gamma octalactona, vainillina, etil vainillina, canela, metil salicilato, linalool, aceite de bergamota, aceite de geranio, aceite de limón, aceite de jengibre, extracto de tabaco, ácido fenilacético, solanona, megastigmatrienona, 2-heptanona, alcohol bencílico, acetato de cis-3-hexenilo, ácido valérico, aldehído valérico y mezclas de los mismos.
7. El método de la reivindicación 1, en donde la cápsula de corazas múltiples es substancialmente esférica u ovoide.
8. El método de la reivindicación 1, en donde dicho primer material polimérico formador de coraza comprende un polisacárido reticulable, una proteína endurecible o una cera endurecible.

9. El método de la reivindicación 8, en donde dicho polisacárido reticulable se selecciona de un grupo que consiste de alginatos, pectinas, carrageninas, quitosanos, dextranos y combinaciones o mezclas de los mismos.
10. El método de la reivindicación 9, en donde el primer y el segundo material polimérico formador de coraza comprenden cada uno un alginato reticulable.
11. El método de la reivindicación 1, en donde dicho endurecimiento del segundo material polimérico formador de coraza comprende el secado en secador.
12. El método de la reivindicación 1, en donde dicho paso de co-extrusión comprende el uso de una co-extrusora que tiene un diámetro de la boquilla interior de entre 0,5 mm y 2 mm, y un diámetro de la boquilla exterior de entre 1,5 mm y 3 mm, en donde la boquilla interior se alimenta a entre 40 mbar y 80 mbar y la boquilla exterior se alimenta a entre 100 mbar y 130 mbar.
13. El método de la reivindicación 1, en donde dicho paso de co-extrusión comprende el uso de una co-extrusora que tiene un agitador electromagnético que opera a una frecuencia de entre 20 y 200 Hz y una amplitud de entre 100 y 2000 mV.
14. Una cápsula de corazas múltiples que comprende:
- (a) un núcleo interno que comprende una primera composición saborizante líquida,
 - (b) una coraza interior de un primer material polimérico que encierra al menos parcialmente el núcleo interno,
 - (c) una coraza exterior de un segundo material polimérico que encierra al menos parcialmente la coraza interior,
 - (d) una segunda composición saborizante líquida dispuesta en un espacio entre la coraza interior y la coraza exterior.

15. La cápsula de corazas múltiples de la reivindicación 14, en donde dicha cápsula es substancialmente esférica y tiene un diámetro de 1 a 7 mm.

16. La cápsula de corazas múltiples de la reivindicación 14, en donde la coraza interior y la exterior tienen un espesor combinado, incluyendo el espacio entre las corazas, de entre 12 y 43 μm .

17. La cápsula de corazas múltiples de la reivindicación 14, en donde la cápsula de corazas múltiples tiene una presión de ruptura de entre 6 y 11 N.

18. La cápsula de corazas múltiples de la reivindicación 14, en donde por lo menos una de las corazas interior y exterior comprenden un alginato reticulable.

19. Un artículo para fumar que comprende por lo menos una cápsula de corazas múltiples de la reivindicación 14.

20. El artículo para fumar de la reivindicación 19, en donde la primera y segunda composición saborizante líquida son diferentes.

21. El artículo para fumar de la reivindicación 19, en donde la por lo menos una cápsula de corazas múltiples comprende una pluralidad de cápsulas de corazas múltiples, por lo menos una de las cuales tiene diferentes espesores combinados de las corazas interior y exterior.

22. El artículo para fumar de la reivindicación 19, en donde

el artículo para fumar comprende un filtro, y

dicha por lo menos una cápsula de corazas múltiples está dispuesta en el filtro, y está dispuesta de tal manera que pueda ser triturada por el fumador para que libere la primera y/o segunda composición saborizante líquida en el filtro,

en donde dicha por lo menos una cápsula de corazas múltiples es substancialmente ovoide.

23. Un producto de tabaco sin humo que comprende por lo menos una de las cápsulas de corazas múltiples de la reivindicación 14.

24. El producto de tabaco sin humo de la reivindicación 23, en donde la por lo menos una cápsula de corazas múltiples comprende una pluralidad de cápsulas de corazas múltiples, al menos algunas de las cuales tienen diferentes espesores combinados de las corazas interior y exterior.

MAM\MAM\ID-229399\WPC12770

48
47

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO
NIT : 800.176.089-2
-/-



RECIBO DE CAJA

No. 12 - 137078

Bogotá D.C., Diciembre 12 de 2012 - 09:04:17

RECIBIDO DE : CAVELIER ABOGADOS

NI 860.041.367

*** Soporte del Pago ***

TIPO PAGO	BANCO	CUENTA	No. PAGO	FECHA PAGO	VR. PAGO
CONSIGNACION	BANCO DE BOGOTA	062754387	446245973	12/12/2012	17.115.300.00

*** Conceptos Pagados ***

CANT.	RENTISTICO	CONCEPTO	Vr.UNDITARIO	Vr.CONCEPTO
1	50005-01-01 SOLICITUDES	82 INVOCACION DE UNA PRIORIDAD EN NUEVAS CREACIONES	170.000.00	170.000.00
				\$170.000.00

SON: **CIENTO SETENTA MIL PESOS MONEDA CORRIENTE**

Responsable: _____

Recibo de Caja Aplicado al Expediente No. _____

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO



No. 12-188617- -00001-0000

Fecha: 2012-12-13 18:04:05 Dep. 2020 DIR.NUEVASCR
Tra 11 PATENTEIYII Eve 378 FASENACIONALI
Act. 329 CTOINFORMACION Folios: 48

0020: 12770-841-076-7.

Sede Centro: Carrera 13 No. 27 - 00 Pisos 3,4,5 y 10 Bogotá, D.C.- Colombia

Web: www.sic.gov.co e-mai: info@sic.gov.co Conmutador: (571) 5870000 Fax: (571) 5870284 Línea: 018000-910165 Call Center: (571) 6513240

, Diciembre 12 de 2012 - 09:04:27