

Doctora:
ALIX CÉSPEDES DE VERGEL
JEFE DE DIVISIÓN DE NUEVAS CREACIONES
SUPERINTENDENCIA DE INDUSTRIA Y COMERC
Ciudad.

2221
-520

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO



No. 06-065916- -00007-0000

Fecha: 2009-11-12 15:35:25 Dep. 2020 NUECREACION
Tra 2 PATENTES Eva: 1 REGDEPOSITO
Act. 329 CTOINFORMACION Folios: 20

Ref. SOLICITUD DE PATENTE DE INVENCION

Expediente: **06.65916**

Solicitante: **SMARTMATIC INTERNATIONAL CORPORATION**

Asunto: **COMPLEMENTO DE INFORMACION.**

ENRIQUE ARANGUREN LAURENS, identificado como aparece al pie de mi firma, por medio del presente escrito complemento la respuesta al Oficio No. 7.558 del 8 de julio de 2009 radicada en Octubre 6 del 2.009, adjuntando el siguiente documento:

Copia certificada del record de la Patente de Invención denominada "Electronic voting pad input device, system and method ", la cual fue conferida por la Oficina de Patentes de los Estados Unidos de América bajo el número de Patente 7.537.159 a nombre del solicitante **SMARTMATIC INTERNATIONAL CORPORATION**

Llamo la atención de que la presente solicitud de patente de invención se basó sobre esta solicitud de patente tramitada originalmente bajo el número 11/160782, sobre la cual se reivindicó prioridad.

En consecuencia, respetuosamente solicito se continúe el examen de fondo y que se conceda la patente solicitada.

NOTIFICACIONES.

Podré ser notificado en la secretaría de su despacho o bien en la Carrera 9 A # 93-76, Oficina 303, en la ciudad de Bogotá D.C.


De usted, atentamente,

ENRIQUE ARANGUREN LAURENS

C.C. 80'410.504

T.P. 71.254 del C.S. de la J.

U 7203684

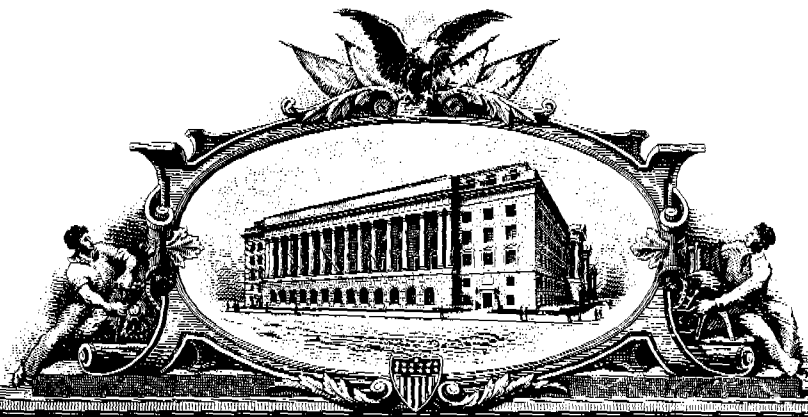

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

September 21, 2009

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM
THE RECORDS OF THIS OFFICE OF:**

U.S. PATENT: 7,537,159

ISSUE DATE: May 26, 2009

By Authority of the
Under Secretary of Commerce for Intellectual Property
and Director of the United States Patent and Trademark Office



P. SWAIN
Certifying Officer



US007537159B2

B
22
224

(12) **United States Patent**
Mugica et al.

(10) **Patent No.:** **US 7,537,159 B2**
(45) **Date of Patent:** **May 26, 2009**

(54) **ELECTRONIC VOTING PAD INPUT DEVICE,
SYSTEM AND METHOD**

(75) Inventors: **Antonio Mugica**, Boca Raton, FL (US);
Roger A Pinate, Boca Raton, FL (US);
Roberto E Zamorano, Caracas (VE);
Eduado M Correia, Caracas (VE);
Edilmo D Palencia, Caracas (VE)

(73) Assignee: **SmartMatic International Corporation**
(BB)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **11/160,782**

(22) Filed: **Jul. 8, 2005**

(65) **Prior Publication Data**

US 2007/0007340 A1 Jan. 11, 2007

(51) Int. Cl.
G06K 17/00 (2006.01)

(52) U.S. Cl. **235/386; 235/51; 235/56;**
705/12

(58) Field of Classification Search **235/386,**
235/51, 56, 54 A; 705/12
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,189,288 A 2/1993 Anno

5,400,248 A * 3/1995 Chisholm 705/12
5,583,329 A 12/1996 Davis, III
5,878,399 A 3/1999 Peralto
6,540,138 B2 4/2003 Hall
6,688,517 B1 * 2/2004 McClure et al. 235/51
6,799,723 B2 10/2004 Kotob
6,892,935 B2 * 5/2005 Weiss 235/51
7,032,821 B2 * 4/2006 McClure et al. 235/386
7,048,186 B1 * 5/2006 Chandler et al. 235/386
7,111,782 B2 * 9/2006 Homewood et al. 235/386
2006/0102719 A1 * 5/2006 Hsueh 235/386

* cited by examiner


Primary Examiner—Ahshik Kim

(74) Attorney, Agent, or Firm—Furr Law Firm; Jeffrey Furr

(57) **ABSTRACT**

In the preferred embodiment, the invention is a data entry device intended for use by voters during an election to enter selected choices. Its basic functions are to display available options and accept voter input. Its design achieves simplicity in its preparation, deployment, and operation at any given electoral event. It also furnishes accuracy, reliability, durability, and reusability. It connects in a standard protocol to a voting station's host processor. It accepts up to 300 key codes, each one potentially a unique selection. Names, symbols, or pictures identifying candidates are printed on a paper template compliant with the device's geometry, inserted prior to an election, and visible through the device's transparent cover. When the number of candidates or valid options in a contest exceeds its capacity, additional identical units can be chain-connected, until a sufficient number of voting options are available.

20 Claims, 8 Drawing Sheets

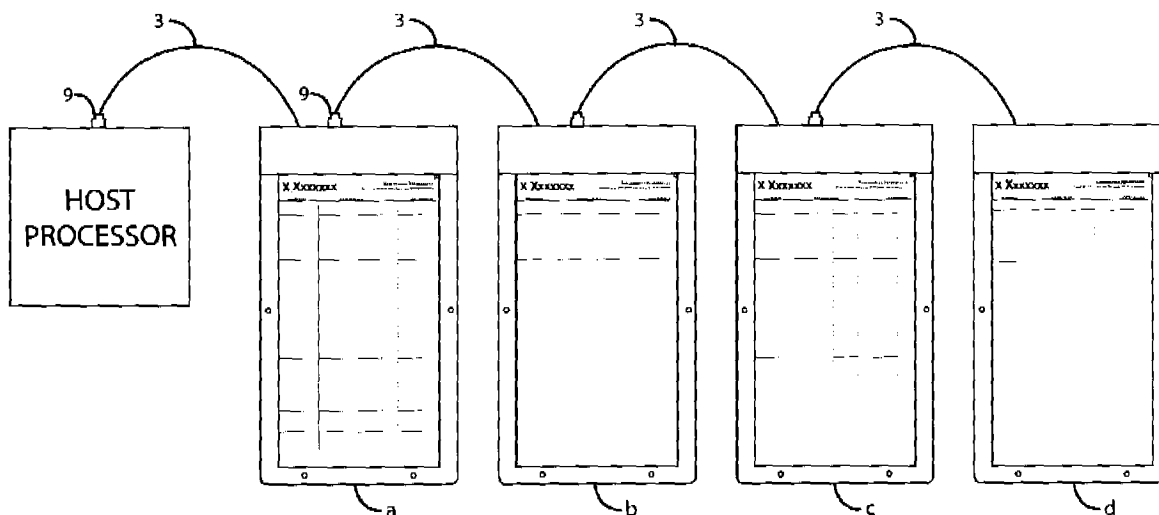

X
263
2005

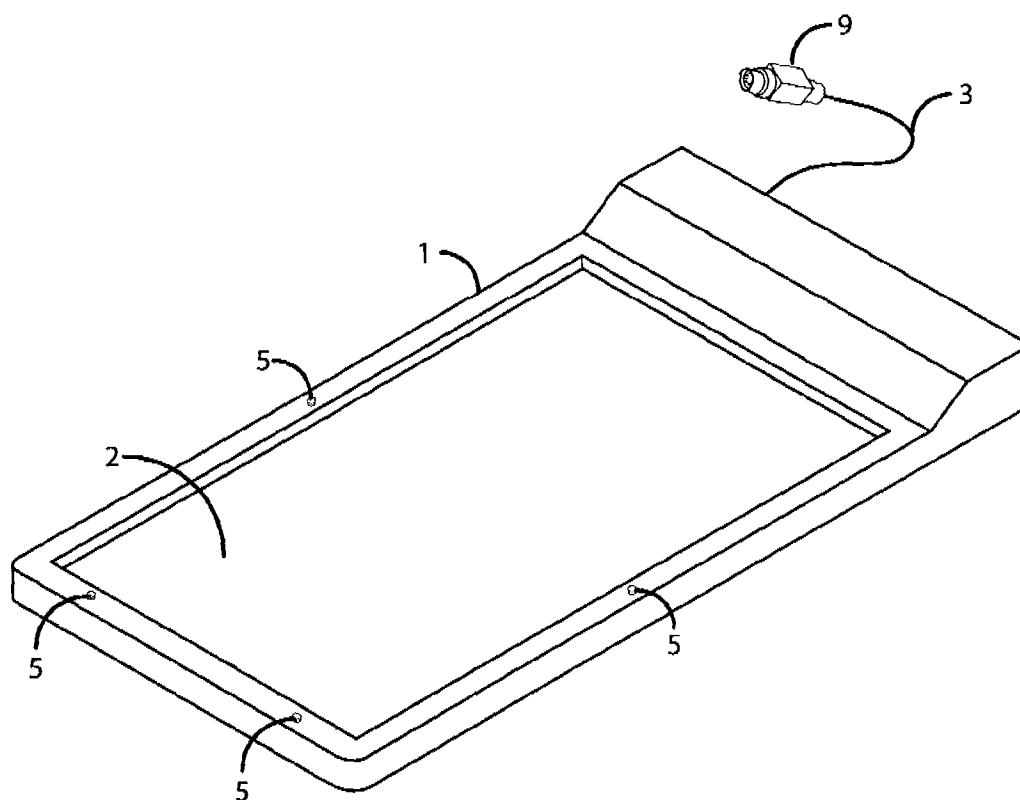


Fig. 1

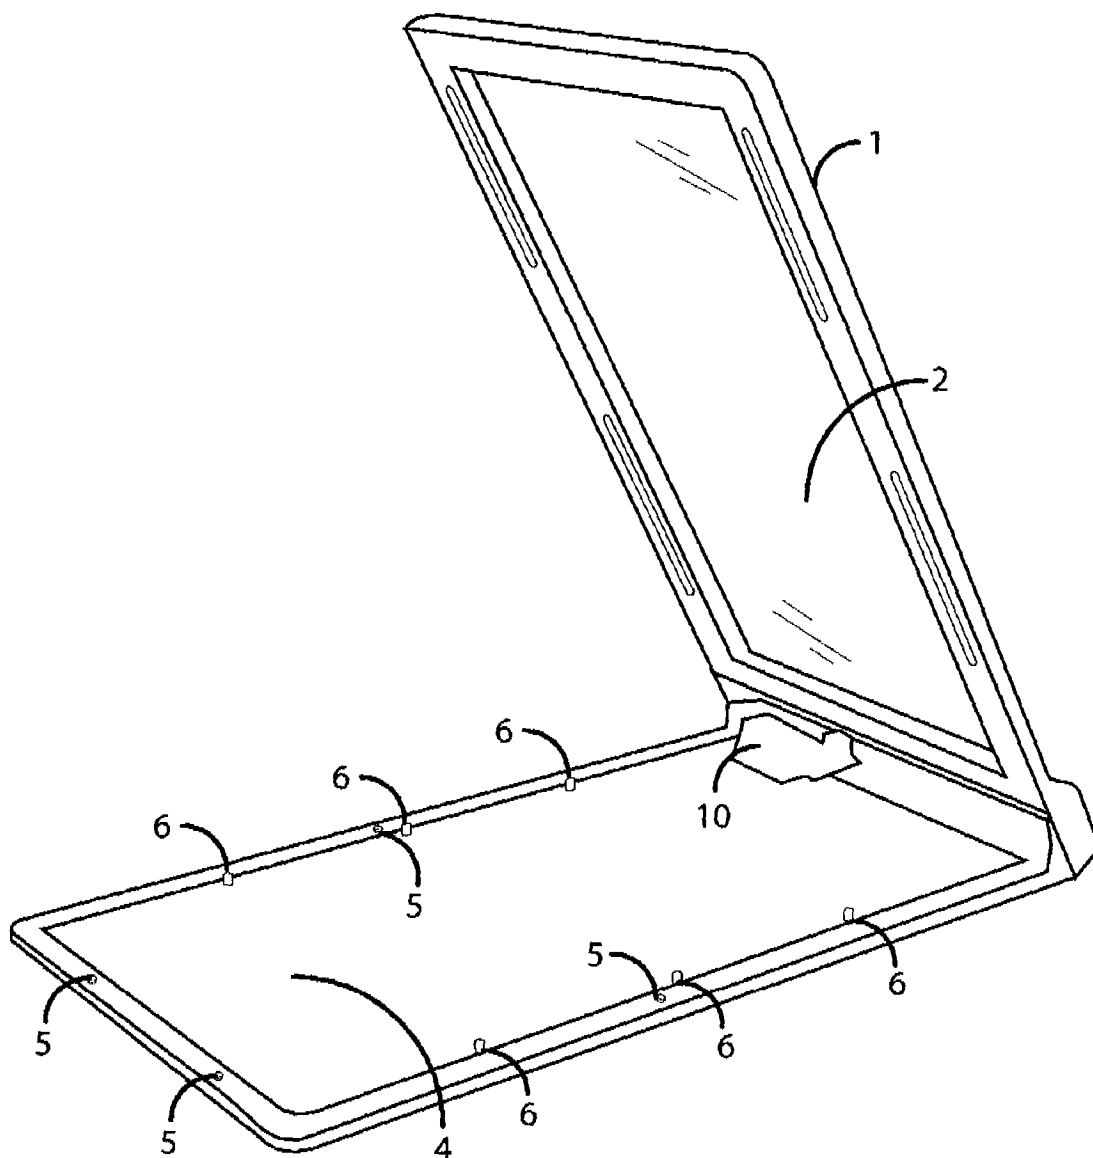


Fig. 2

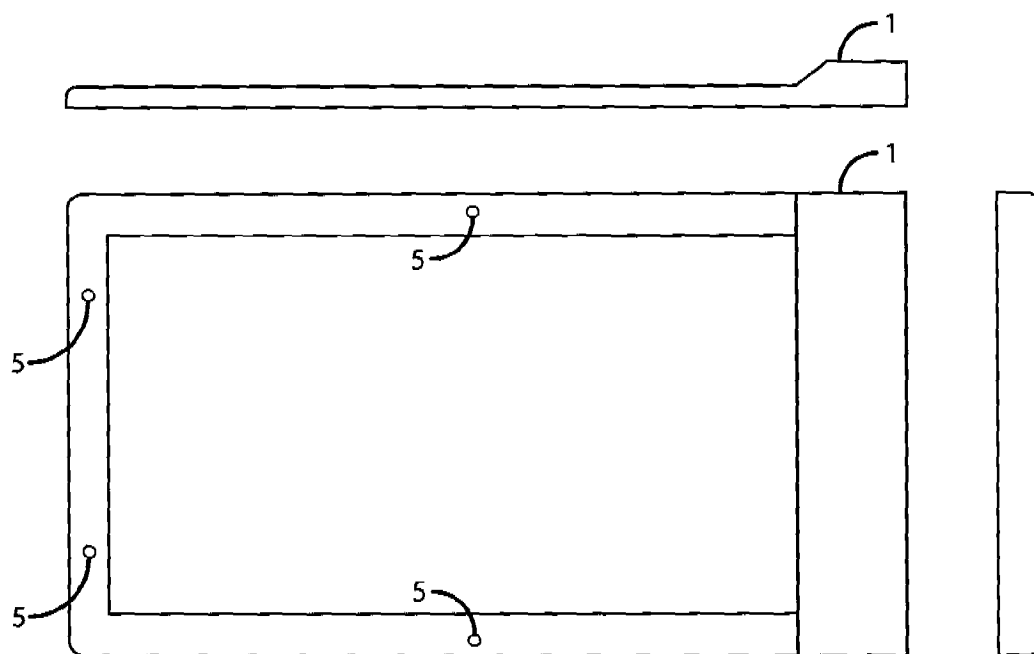
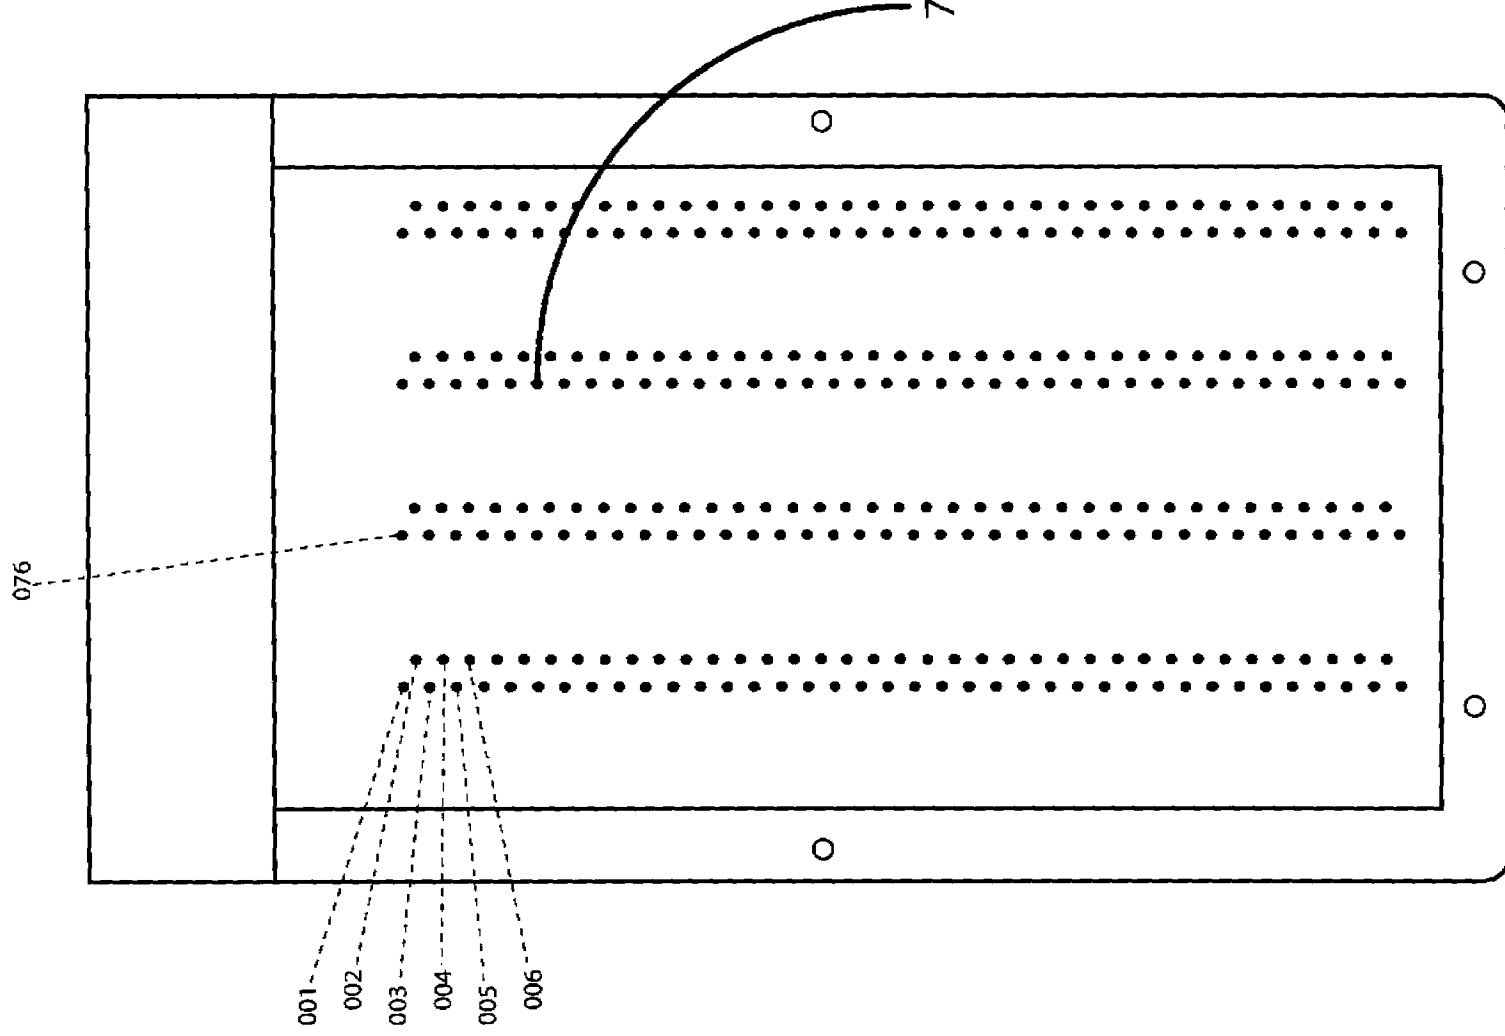


Fig. 3

Fig. 4



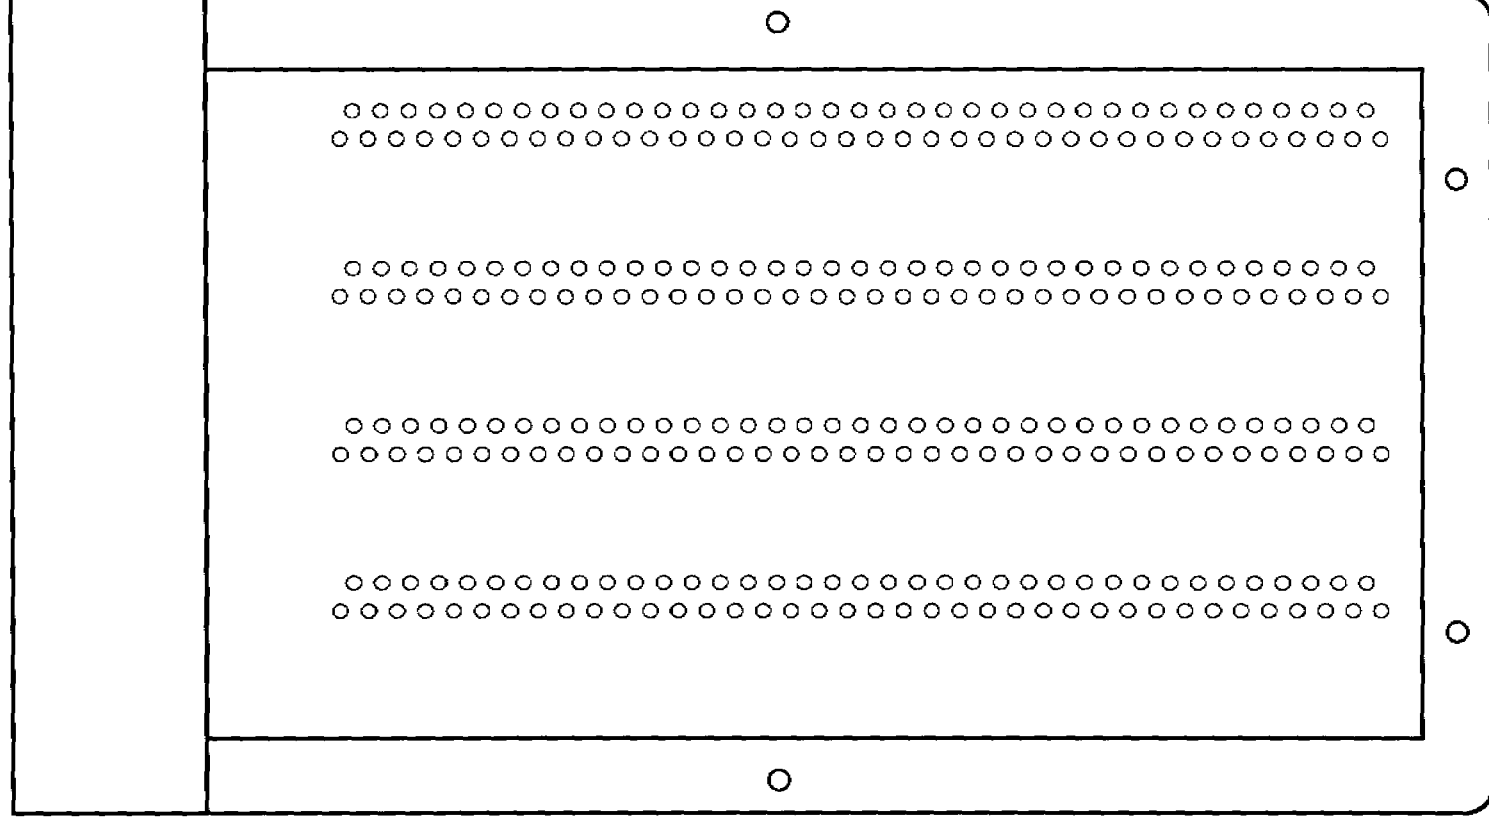


Fig. 5

276
230

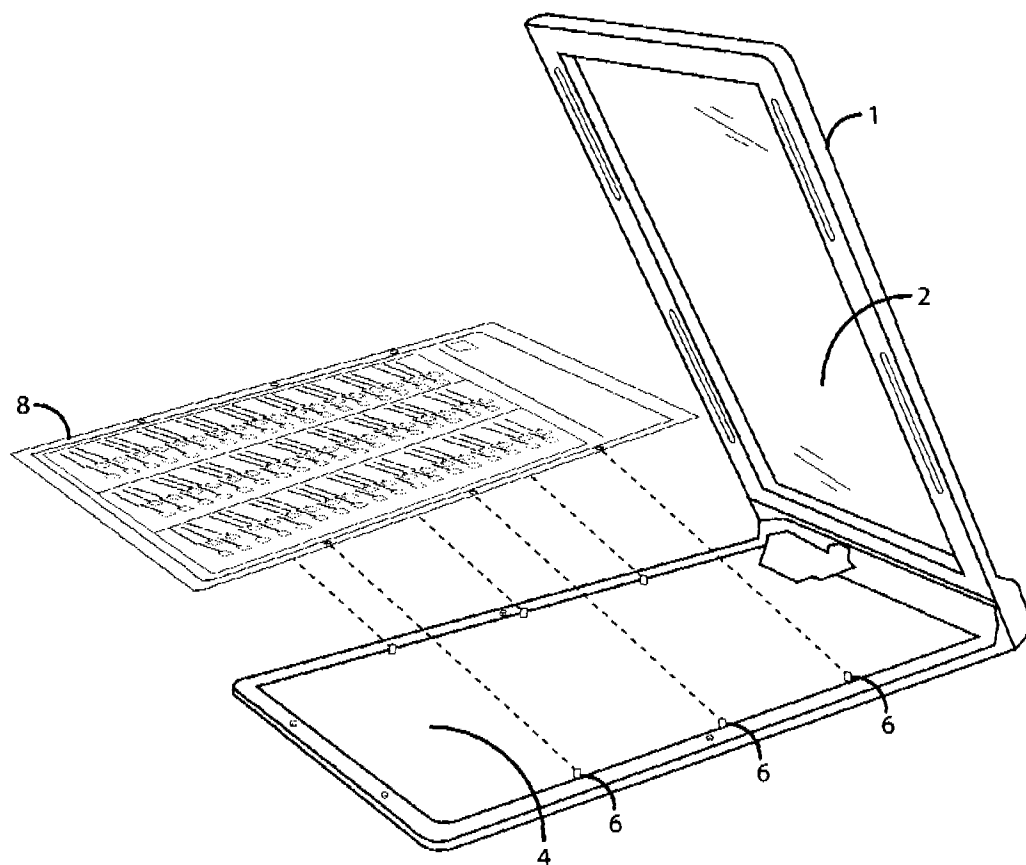


Fig. 6

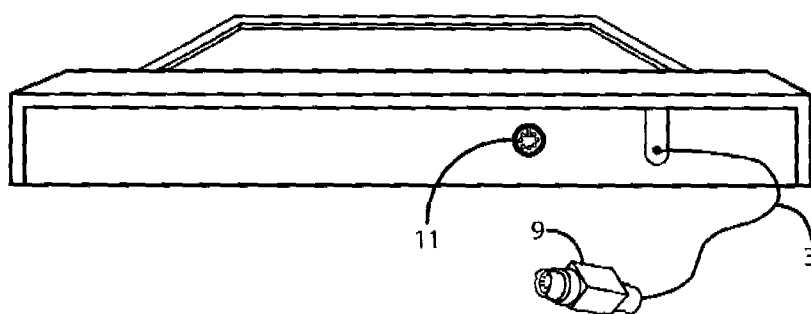


Fig. 7

30
229
231

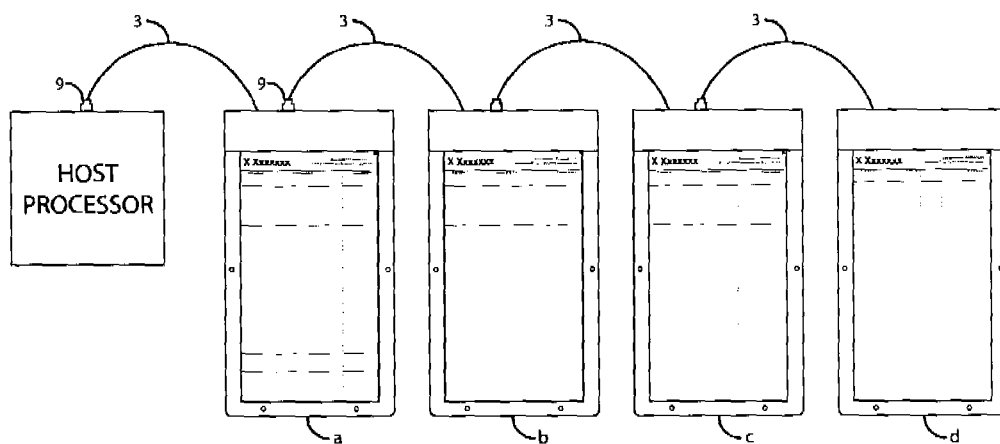


Fig. 8 - a

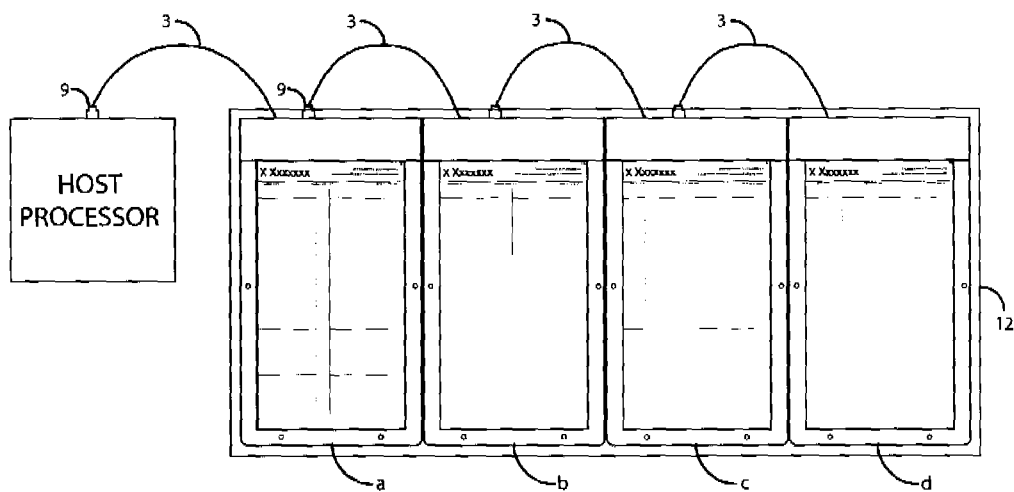


Fig. 8 - b

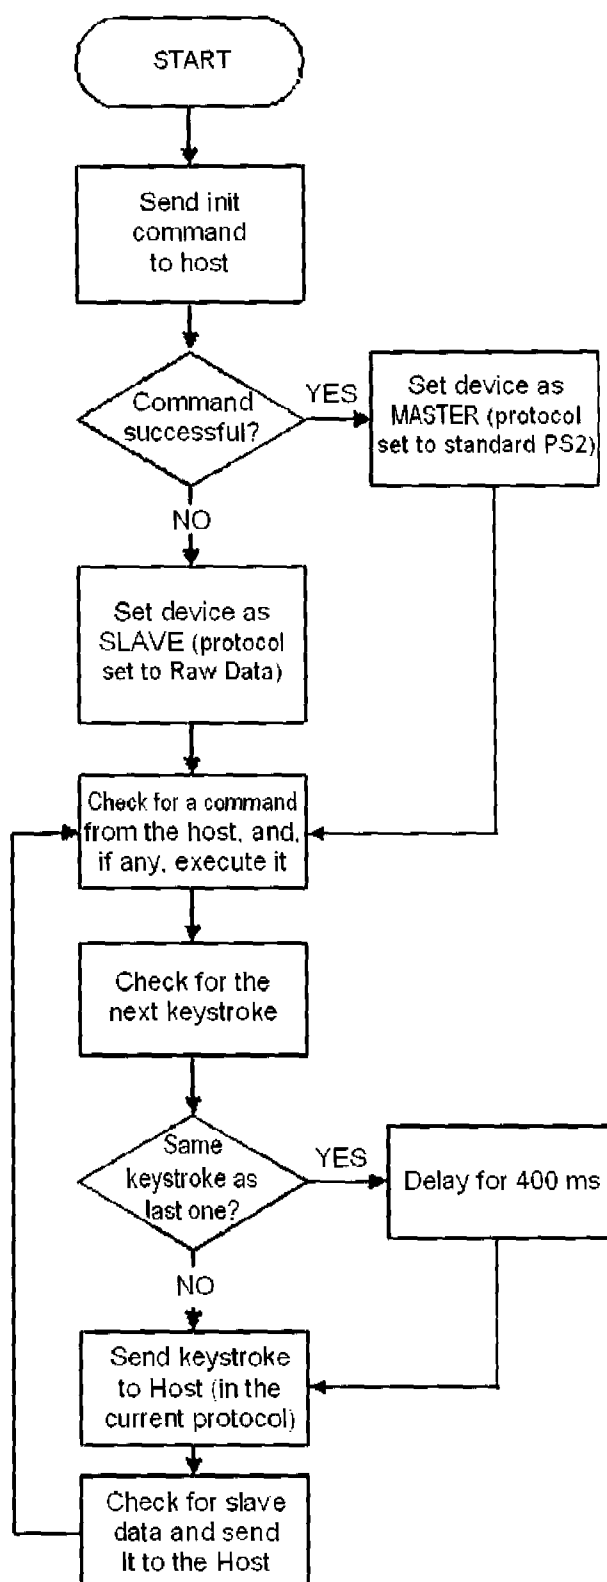


Fig. 9

**ELECTRONIC VOTING PAD INPUT DEVICE,
SYSTEM AND METHOD**

The present invention relates to a voting input means, system devices and methods.

BACKGROUND OF THE INVENTION

Some automated election systems currently in use at different worldwide locations have often been criticized or become the subject of controversy because of questions concerning their ability to provide an acceptable level of ease and convenience to the voting public, independently of other considerations concerning their reliability, security and auditability. Instead, occasionally some of said election systems have been hindered by frequent practical difficulties experienced by citizens during their actual voting act, said difficulties being related to the design of voting stations or data entry devices that do not offer a proper or convenient visual identification and easy manual selection of voting options available, or possibly due to confusion arising when voters are expected to perform operations that are more complex or cumbersome than anticipated, either manually or through mechanical or electronic means. Not infrequently, ballots have been designed and prepared with scant ergonomic provisions, possibly causing discomfort, nervousness and even frustration on the part of some voters who cannot easily find their preferred choices. At any rate, when difficulties have been experienced by a sufficiently significant proportion of the voting public at a given election, the consequences have been slowness in the voting process, and the occurrence of line delays, which in turn often have resulted in public dissatisfaction and even open protests.

Many of the traditional methods devised in the past have sometimes employed inadequate ballot designs, often in combination with machines or mechanical devices, requiring the voter to either actuate buttons, levers, or punching devices; or to write marks by hand on ballot sheets made of paper or other materials that must be subsequently scanned. Therefore, the process of voting has been hindered to a certain extent by a nontrivial potential for voter confusion, and also have been plagued by a potential for fraud. Many inventions in the past comprised unbelievably complicated designs, capable of frightening many an innocent voter, often unprepared to deal with impressive voting stations.

The interfaces that untrained voters must deal with for a first and single time cannot always be qualified as being user friendly, easy to understand, or straightforward to use, so interaction with such voting systems may pose a serious challenge to an average citizen, which must be solved in the course of a very short time as there is usually a time limit to cast a vote. It is a common experience to witness a voter undergoing a very stressing situation. Many a time, an election worker must step in and offer to help a voter accomplish his/her task, however not always such a gesture is welcome, as some voters may interpret it as an intrusion against their right to secrecy when actually voting. In other instances, the situation may be further complicated due to insufficient voter education, as instructions can be intricate or difficult due to the complexity involved, and hence confusing to voters. Sometimes when a voter meets the very instructions that are supposed to help or make easier the use of a voting station, the reaction is reluctance or even unwillingness to go through such complication.

Due to the above-mentioned physical and logical drawbacks related to some poorly designed mechanisms used to cast votes, which by themselves frequently may be a source of

confusion or discomfort, there arises the problem of involuntary mistakes, whereby many a vote cast may not truly reflect the intentions of a voter; in other words, the voter was inadvertently led to an error which was not evident or could not be corrected prior to actual casting of the vote. In addition, there are frequent occurrences of invalid or incomplete votes where crucial options were omitted due to partial marking of a box or spot or due to incomplete pressing of button sequences. In all of these instances, the accuracy and integrity of the voting process is compromised.

In a given election, sufficiently numerous occurrences of annoying problems or errors may seriously affect the truthfulness, and hence distort the very results, of said election, giving rise to doubt, mistrust or dissatisfaction from the voting public, and can dangerously undermine confidence in a government and its institutions.

What a modern, efficient, secure and reliable computer-based electronic voting system needs in order to alleviate the above-mentioned drawbacks that may occur when actual votes are being cast, is a convenient, easy-to-understand and easy-to-use means of data entry suitable for use by the general voting public, incorporating modern, state-of-the-art devices such as special touch pads or touch screens, and whose programming has been designed for operation in combination with a sufficiently advanced electronic voting system.

Thus, the need has been identified for the availability of a convenient, effective, easy to explain, easy to understand, and easy to use data entry means for casting votes, having a sound, unequivocal design; laid out in a clear, logical geometric arrangement; that at each relevant step gives the voter instant feedback during the voting act; and allowing for unambiguous selection and verification of candidates or voting options. Such a data entry means would eliminate or at least minimize potential human error, promoting authenticity of the results; and would minimize the time spent by voters at the voting station(s), so that the overall satisfaction of the public would reach a higher level.

Further features aimed at enhancing functionality, accuracy and security, and also at assuring the voter's confidence in the voting system being used, include:

activation of the data entry device(s) upon a system command;

instant visual and audible feedback of data entry operations;

furnishing a way for visually checking each one of the options of the vote being cast, thus providing confirmation of the voter's choice(s);

providing a way to correct, change or delete choices made prior to actually casting a vote;

printing a paper slip upon casting of a vote, showing all its relevant information, as evidence that the voting system indeed has accepted his particular options as specified, and which the voter, after checking it, must deposit into a ballot box as a traceable record for the votes cast in a given location.

detecting any undue changes, substitutions, or alterations to the electoral configuration of the voting station's data entry devices, thus preventing any tampering attempts to same.

These are functions whose implementation is highly dependent upon the close relationship between the data entry device(s) and the electronic voting system employed, which necessarily must be designed to work together.

The voting data entry means of the present invention addresses such needs. It comprises either a single device or a plurality of state-of-the-art devices, that are made available to or are integrated into a voting station, such as a specially designed array of Electronic Pad units, or such as touchscreens of general or custom design, providing a voter inter-

3

face having a clear display of voting information; furnishing an easy and intuitive mechanism for receiving voting selections made by each voter; and having sufficient built-in intelligence when supported by the accompanying electronic voting system, which may either be resident in a processor embedded within the voting station itself or may operate as an independent embodiment that is connected to the data entry device(s), in order to interact effectively with voters, administrative election officials and poll workers.

The input or data entry device(s), working together with the preferred electronic voting system, further comprises several ergonomic details aimed at enriching the voter's experience, providing visual and sonic aids as feedback and guidance during the voting session. The accompanying electronic voting system residing in the host, besides interacting with voters and other users by means of the data entry device(s) that are the object of the present invention, is in charge of opening and closing voting sessions; and is in charge of storing, representing, validating and displaying voting options corresponding to, and selected from, a database of one or more of a plurality of voting jurisdictions for the contests in effect. It is also in charge of recording and securely storing every one of the votes that are cast having all choices made by voters. Finally, it is in charge of a plurality of security, data integrity and audit procedures and provisions, in charge of printing a paper slip that enables voters to verify votes, in charge of printing the final voting tally for the individual voting station; and in charge of transmitting said votes and their tallies to the central computing facility for their inclusion in an election's overall computations.

DISCUSSION OF THE PREVIOUS ART

Among the issues related to the already well-known concept of automated voting systems and their electronic voting machines, there has been substantial controversy about both the advantages and drawbacks, and the merits and risks attributable to diverse mechanical, electromechanical, and electronic mechanisms, some of which have been around for quite a while, designed for the task of collecting votes during an election. A worthwhile automated election system is required to successfully address and solve the challenges and problems associated with crucial tasks encompassing all aspects of the collection and processing of votes from small to large populations, potentially servicing up to millions of voting citizens, across vast territories, including remote and dispersed areas. Such challenges include the preparation of the voting data deriving from the civil registry, from political parties supplying their candidates or lists running for different contests, and from electoral demography; also included are the administrative steps that must be performed to prepare, manage and deploy such voting data prior to distributing it across the many geographical entities (municipalities, counties and states) where voting machines or stations will be used in poll centers. In addition, automated voting systems are required to guarantee confidentiality, security, integrity, authenticity, and inviolability of the voting data collected. They must provide for multiple validation criteria, and allow for audit and verifications mechanisms, at various levels. Moreover, automated election systems are required to function rather quickly, allowing for easy, simple and fast steps to be performed by voters. Further, due to pressure to attain the outcome of an election at earliest possible time, the collected votes must be tallied and published in a very short time.

The actual physical means made available to voters, devised specifically to enable individuals to cast votes, include devices and apparatuses integrated to, attached to, or

4

comprising voting stations designed for interacting with voters. As practically every other aspect in modern life that has been influenced or changed by computer technology, nowadays mechanical voting stations are by and large being replaced by electronic devices of wide-ranging designs. Modern voting stations are being used to accept and collect votes; convert input media to electronic means, store collected votes in electronic form, count such votes, and deliver or transmit electronic versions of votes cast or their abridged results to tallying centers. Interaction of such devices with voters is accomplished in several different ways. For example, some devices are still based on punchcard systems but have been adapted to read punched ballots or cards. Many other devices currently used in several voting system solutions utilize optical scanning technologies, namely Optical Mark Reading (OMR), also called Marksense systems, where citizens are required to vote for a candidate by filling in appropriate rectangles or circles in paper ballots, and subsequently feeding such paper ballots into an optical scanner integrated to, or connected to the Voting Station or polling device.

A recent significant development in the evolution of automated voting systems has been the advent of Direct Recording Electronic (DRE) systems. Such systems implement a data entry method offering apparent simplicity, employing an electronic input device that can be a touch-screen, keypad, push-button tablet, or a similar artifact, designed to allow voters to enter their choices and cast their votes directly. DRE voting machines can take diverse designs and forms that may vary in size and shape, from data entry devices integrated together with processor logic in enclosures that may resemble an Automatic Teller Machine, possibly including an accompanying booth, up to a common keyboard or touch screen connected to a standard laptop computer. DRE systems collect votes in electronic form as the result of direct interaction with voters; hence, there is no need for furnishing paper ballots or cards to individual voters, which is an obvious advantage in terms of economical and practical considerations. Collected votes are electronically stored on a connected (or embedded) processor's storage media for further processing.

However, in many DRE implementations found in the market, there is no clear apparent boundary between the data entry functions, that is, those where votes are collected, and the tallying or counting functions, where votes are subject to partial or local computations. Often these functions actually overlap along time as voting proceeds in any given election day in any given location. From a design viewpoint, and mostly as it concerns to an election's administrative and implementation tasks, it would be fairly advantageous to separate these two distinct functional areas, at least conceptually.

The inventions utilizing DRE technology mentioned in the following paragraphs, comprising a fairly adequate representation of the prior art, have in common seemingly unclear or incomplete explanations of the actual mechanics of the voting act, as the emphasis apparently is directed toward other aspects of the inventions. In some instances, a certain technology of the device type is mentioned, but often not furnishing enough detail thereof.

U.S. Pat. No. 5,583,329 to Davis, III, et al, discloses an electronic election system, which includes a voting terminal having an input device for receiving voter selection data, a first processor for processing voter selection data, a terminal memory for storing election data, and other included devices. However, except for FIG. 2 having a box named "Touch Screen", there is no mention whatsoever in the patent's dis-

closure about the nature and/or characteristics of the aforementioned "input device" which is part of the voting terminal.

U.S. Pat. No. 5,189,288 to Anno, et al, discloses a system and method for establishing a vote tabulation system, where a voter gains access to any one of a number of portable or hand-held terminals. However, in the patent's disclosure there is no mention of the characteristics of such hand-held terminals, or of the physical details of the actual interaction of a voter with said terminals.

U.S. Pat. No. 5,878,399 to Peralto discloses a voting machine, and, more particularly, to a method and apparatus for positive identification of voters. After several previous steps where a voter is identified by means of scanning fingerprints, signature, photograph, etc., when it comes to the actual mechanical action of voting, it is stated that "selections are made by making all selections and operating a button, lever or switch after all selections are made", omitting details about the mechanism involved.

U.S. Pat. No. 6,540,138 to Hall, et al, discloses a method for voting, wherein the voter's choices are transmitted via a wireless data acquisition device to a central computer. With such a method, a voter would enter the voting booth and make his or her selections on a simple handheld device. It is further stated that portable data entry devices that are suitable for recording votes are preferably portable terminals. Finally, it is stated that the voter, being in a private place, is given a wireless data acquisition device . . . where the voter makes the selections from the slate of candidates. However, said wireless data acquisition device, not being an integral part of the invention, is not described in any way, and neither are its operating details describing how a voter actually uses its functions and parts in order to actually make selections.

U.S. Pat. No. 6,799,723 to Kotob, et al, discloses an automated voting system, capable of providing multiple ballot styles in one or more voting units and providing a touch electronic keyboard for write-in candidates. However, throughout the rest of the disclosure statement and particularly in the detailed description of the invention, all interactions between the voter and the voting station are depicted as being carried out through the utilization of a touch screen, and the utilization of the above-mentioned touch electronic keyboard is never explained or further mentioned.

In spite of the various electronic ballot designs and data collection devices devised for voting applications known, as exemplified in the prior art, the need has been identified for a reliable, adaptable, flexible and economical data entry device which is able to receive keystrokes corresponding to available voting choices, capable of presenting choices visually in a similar fashion as customarily such choices used to be printed in paper ballots, without risking any possibility of fraud or tampering, and enabling easy interaction with the voter, as well as administrative workers. Such a device would do away with a problem experienced by many voters who are uncomfortable with using computers and their devices, due to a lack of understanding of how computers work, and this problem may manifest itself when using an electronic voting system with an appearance of being a complicated apparatus, difficult to understand and interact with.

Consequently, the present invention comprises a method and apparatus for facilitating the casting of votes in an election. The method applies to a Voting Device connected to or integrated into a host processor having a suitable voting system designed specifically to communicate and interpret character sequences and commands received from the voting module, as a result of keystrokes being performed by a voter. The apparatus or voting module (also known as "Voting Machine") employed will have a built-in touch sensitive dis-

play screen ("Touch Screen") and a Voting System software having a suitable GUI (Graphical User Interface) that allows for state-of-the-art interactivity, displaying menus, available options, "virtual button" commands, voting choices made, and confirmation or warning messages, enabling voters to easily cast their votes in election contests. The Voting Machine may work either as a single data entry unit using its built-in touch screen (used, for example, in simple polls where the voting options are either "yes" or "no", as in the case of state legislation proposals), or alternatively working together with an electronic touch pad setup (one or more Electronic Pad Device units chained together) designed specifically for the purpose of supplying an expanded data entry capability. Such Electronic Pad device constitutes the preferred embodiment of the present invention.

SUMMARY OF THE INVENTION

The object of the present invention is to provide a novel design for a data entry device, ideally suited for efficient interaction with voters, aimed at:

(a) allowing for easy verification that available voting choices for a particular poll event and geographical jurisdiction, as graphically displayed in the voting mechanism that will be visible to voters, indeed matches the corresponding information previously stored in electronic form in a specific voting machine or voting station appointed to a specific voting center or precinct;

(b) allowing for easy visual identification, through an orderly display or prearrangement, of voting choices available to a voter;

(c) allowing for simple data entry of selected voting choices using an electronic mechanism of unique design, being either a suitable touch-button device, or a touch screen device, or an electronic pad device having sufficiently large dimensions in order to accommodate a roster of electoral choices that may be as large as needed;

d) allowing for the hosting of a large assortment of voting choices, either through a suitable graphical user interface in the integrated touch screen working in combination with the touch-button device or the Electronic Pad Device, or through a device chaining mechanism whereby several Electronic Pad Device units may be serially connected in a chain, allowing a user to actuate virtually an unlimited number of different keystrokes, thus greatly expanding the availability of voting choices in any single voting station;

(e) allowing for easy, instantaneous, and stepwise verification of choices made by a voter as the voting act proceeds;

(f) allowing for either easy confirmation, or correction, of any previously selected choices, in case a voter realizes there is a mistake, or in case he/she is not satisfied with choices already made;

(g) allowing for a final overall verification of all choices currently selected up to the moment;

(h) allowing for a final confirmation whereby the vote is actually cast as is, and upon said confirmation said vote will be accepted by the voting machine or voting station;

(i) providing for thorough diagnostics that ensure the correct operation of the device and also confirms the exact correspondence between electoral options in the ballot as visually presented to a voter for a given electoral event in a particular precinct; and as a result maximizing the probability of a flawless, trouble-free and reliable operation during such election;

(j) providing for easy, hassle-free replacement of any unit that may prove defective or breaks down for any given cause;

7

(k) allowing for significant savings due to avoidance of the need for printed ballots, at the rate of one per voter; instead just one printed-paper ballot is user per device.

(l) providing, by design, the capability of being reusable and re-configurable for deployment in several successive electoral events over a reasonable time span of several years.

BRIEF DESCRIPTION OF THE DRAWINGS OF THE PREFERRED EMBODIMENT

In order to supplement the description set forth below and to facilitate a better understanding of the features of the preferred embodiment of the present invention, the accompanying set of figures showing the most significant details of the Electronic Pad Device is included for informative and non-restrictive purposes.

FIG. 1 shows a schematic perspective view of the Electronic Pad Device that is the preferred embodiment of the present invention.

FIG. 2 shows a schematic perspective view of the Electronic Pad Device with its lid open.

FIG. 3 depicts side, top and back schematic views of the Electronic Voting Pad's lid or cover.

FIG. 4 shows a top view of the Electronic Pad Device with its lid removed, showing the upper membrane and its touch key numbering scheme.

FIG. 5 shows a schematic top view of the spacer layer, further emphasizing the locations of pressure points corresponding to touch-sensitive areas or "buttons".

FIG. 6 shows an Electronic Pad Device being prepared for an election.

FIG. 7 shows the hind side of the Electronic Pad Device unit.

FIG. 8-a shows an example of an arrangement comprised of four chained Electronic Pad Device units connected to a Voting Station's host processor.

FIG. 8-b shows a similar arrangement four chained Electronic Pad Device units, mounted in a frame that holds them together, which may be a convenient fashion for easy handling and storing of a set of several units.

FIG. 9 depicts a program logic diagram of the Controller Circuit's firmware of the Electronic Pad Device.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

In light of the aforementioned Figures, a preferred embodiment of the invention is described below along with an explanation of the drawings.

The invention consists of an Electronic Pad Device which is essentially a human input device, having in principle a 300-key matrix (4x75) of the membrane contact keyswitch type; using either Serial, USB, or PS2 hardware and protocols for communication with the host; incorporating several functions aimed at providing the basis for implementing a number of software security and reliability measures; whose specific and only purpose is to serve as a voting device—so it could rightfully be called "Electronic Voting Pad", "Electronic Ballot", "Keypad Ballot", or other similar names—, and designed to attain the goals of reliability, accuracy, simplicity and low cost, among others. In this document it will henceforth be called "Electronic Pad Device". The above-mentioned number of available contact points (300) is a good compromise between convenient dimensions and weight factors and sufficiently ample voting choices to be presented which can be active at a given event in a single unit; nonetheless, several other matrix size combinations, and hence,

8

device dimensions, are feasible. Similarly, the membrane technology is currently favored due to its simplicity, durability, and low cost; however other touch-sensitive technologies are equally feasible.

The Electronic Pad Device is a lightweight, flat device of size and shape reminiscent of a flatbed scanner. The device of the present invention includes a housing having a base, a lid with a protective transparent cover, a back panel, two membranes, and a spacer layer. A controller circuit, installed within the housing, performs several functions such as key-stroke detection, scan codes submittal, execution of host-received commands, collision detection, and command retry. Said controller circuit does not store any information whatsoever about the contents of the vote of any particular elector. Its functions are summarized below, under "Principles of Operation and Functional Characteristics of the Preferred Embodiment".

The design of the touch-sensitive components consists of three layers. The top layer or membrane has conductive strips running on its underside. Under this it has a spacer layer, which keeps the top and bottom layers apart so that they do not make electrical contact, unless a pressure is applied over any one of the contact points or areas. The bottom layer or membrane has conductive strips perpendicular to those of the top layer. The top and bottom layer circuits are connected to a controller circuit that lies close to the hinge holding the upper lid to the base.

When assembled in a factory, the combined strips in the top and bottom layers outline a grid. When pressure is applied at a particular position in the grid, the top layer is pushed down through the spacer layer to close a circuit with the bottom layer at one of the intersections of the grid. The controller circuit is programmed to sense that a particular keystroke or "button" is being pressed, out of the three hundred possible combinations in the unit, and sends a corresponding scan code sequence to the host processor. The membrane mechanism does not provide by itself a "feel" that contact has been made, as there is insignificant mechanical motion. Hence any other kind of feedback to the user must be provided by electronic means and/or under program control.

The device is equipped with a PS2 cable and connector, connecting it to a BIOS-compatible host's standard PS2 communications port, in order to establish bi-directional communication enabling it to send scan codes to the host processor and receive commands from same. There is no need for a power supply, as the minimal power requirements of the unit are supplied by the PS2 port. Instead of the PS2 ports, connectors and protocol, the device could alternatively be built using equivalent USB or Serial hardware and protocols.

The lid has a transparent layer that is actually the pressure contact surface, so the upper membrane is never touched by human fingers or by any other objects. In actual operation, the lid is closed and secured by means of special screws; the unit is sealed by adding security stickers or decals, which cannot be removed without destroying them. If an attempt to open the unit is made by an unauthorized person, it will be evident that tampering has occurred, so the overall result is a fairly rugged and tamper-resistant design.

FIG. 1 shows a perspective schematic view of the Electronic Pad Device with its lid 1 closed, showing its cable 3 and connector 9. Screw holes 5 house special screws (for example, Allen or Torx screws) that secure the contents of the device by preventing the lid from being opened by unauthorized persons. Screws may be further protected by attaching tamper-proof seals or decals, covering such screw holes. Voters may clearly see the printed ballot template through the transparent protective layer 2.

The present invention applies equally to an Electronic Voting Pad, which is the preferred embodiment to be described in detail later, to a Push-Button device, and to a Touch Screen.

It is taken for granted, however, that the main input/output device used for communicating with the Voting System and for carrying out interactively both the administrative and the voting operations inherent to such Voting System, is a touch screen device, an integral part of and inseparable from the Voting Station, while the Electronic Pad Device and the Push-Button devices, while either one of them necessary for most elections, are in truth optional, depending on the particular configuration and/or the peculiarities of the electoral event at stake: in the example given above, of simple polls where the voting options are either "yes" or "no", as in the case of referenda or state legislation proposals, the expanded capability of either Electronic Voting Pads or Push-Button devices would not be required.

The following paragraphs describe the proposed operation of the Voting Input Devices, under tight program control of the Voting System operating in the Voting Station to which such devices belong and/or constitute a part of. Other several functions, provisions, safeguards, characteristics and features pertaining to the Voting System proper, not related to the Voting Devices that are the object of the present invention, are not discussed in this document. Similarly, detailed functions and features of the Voting Station and its local subset version of the overall Voting System, not specific or directly related to the voting device(s), are not covered.

1. At least one of the Voting Devices in operation should clearly display the complete roster of available electoral choices to the voter. The Electronic Voting Pad units fulfill this condition in all cases. The voting choices should be easily readable and the location of the buttons (either real, in a push-button device, or virtual, in a touch screen), or pressure areas in an Electronic Voting Pad, should be easily identifiable on the spot, upon the voter entering the voting booth or cubicle.

2. The Voting System must disable all inputs from any of the above-mentioned physical means available, until the very moment a voter arrives afresh and gets ready for the voting act; whereupon the Voting System enables the corresponding devices. Consequently, upon completing the act of casting a vote, prior to leaving the voting booth or cubicle, the Voting System must again disable all input until the next voter is granted access.

3. When the voter makes a choice and takes its corresponding mechanical action, namely, he/she presses a push button, or a "virtual button", or touch area in a touch screen, valid for any one voting choice, there should be an immediate feedback, either consisting of a change in shading or colors in the selected area in the screen, displaying the same option being selected. Similarly, when an Electronic Pad Device is used, upon pressing one of the valid voting options in the ballot image visible in the Electronic Voting Pad, the accompanying touch screen should immediately display the same selected choice. In the same fashion, if a touch-button device is used, the touch screen should behave in the same fashion as above. As a means to reinforce the feedback that the voter receives, the Voting System may activate specific lights and sound signals as a result of any actions performed.

4. During the voting act, the voter must be given the opportunity to change his/her mind and make all changes desired to any one of the electoral choices previously made, until he/she is fully satisfied with the final assortment of choices displayed on-screen. Only at that stage the vote may be actually cast. Even at that final stage, the voter should be issued a final warning and given a final opportunity to change his/her mind

or confirm that the choices are as intended. Upon pressing a virtual "Vote" button and possibly a final "Yes" answer confirming all choices made, the Voting System should accept the vote and proceed with subsequent actions.

5. A particular function of the Voting System, in line with many recent decisions and current regulations being adopted everywhere regarding electronic voting, is the on-the-spot printing of a numbered receipt, or paper trail, furnishing a permanent paper record that displays the choices made, showing the voter a definitive record of his/her vote. The voter might be allowed or expected to compare the printed choices to those still being displayed in the Voting Station's Touch Screen. Besides serving as a confirmation that the voter's choices were accepted as intended, the receipt serves as physical proof of each vote; even might serve as a back-up copy of the electronic vote, and as such should be deposited in a ballot box for later audits or recounts, if required.

6. The security and reliability-oriented functions supported by the local Voting System residing in the host, together with the firmware in the data entry devices belonging to a Voting Station, must include the detection of any alteration in their configuration that may occur at any moment during actual voting, such as device malfunction, disconnection, or replacement of any one of the units comprising said data entry configuration of devices, and the ensuing actions and/or procedures oriented toward solving or addressing such anomalies. Insofar as said configuration may be pre-established and stored in the Voting Station at the warehouse preparation stage, under control of the Election Administration section of the associated voting system, any alteration made to the exact order and placement of specific units attached to any one Voting Station should be readily detected. The necessary provisions for this and other security-oriented functions have been included.

In the following detailed description of the preferred embodiment, reference is made to the accompanying drawings which form a part hereof, and in which is shown by way of illustration specific preferred embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized and that logical, mechanical and electrical changes may be made without departing from the spirit or scope of the invention. The following detailed description is, therefore, not to be taken in a limiting sense, and the scope of the present invention is defined only by the appended claims.

Principles of Operation and Functional Characteristics of the Preferred Embodiment

The Electronic Pad Device that constitutes the preferred embodiment of the present invention has the following principles of operation and assortment of functional characteristics. A number of functional characteristics have been designed with security and reliability provisions in mind; and as such these are highly dependant on detailed pre-specified requirements implemented in the associated Voting System software, in close synchronization with the Electronic Voting Pad's firmware that resides in its controller circuit. The principles of operation and functional characteristics of the preferred embodiment may be summarized as follows:

The Electronic Pad Device features a matrix arrangement that yields 300 contact points or "keys", each of which can be assigned a specific meaning by the Voting System software that operates in the host processor to which it is connected;

A fairly rich and complete API (Application Program Interface) may readily be built in the Voting Machine to which a chain of Electronic Voting Pads are connected, using the above-mentioned commands that can be issued to the firmware in any one of the Electronic Pad Device units in a chain. A list of basic commands and their corresponding functions follows.

NOTE: In the case of host-issued commands requesting information, all responses sent back to the host processor include Position Number (in the chain of units) and Serial Number of each Electronic Voting Pad issuing a response.

Enable Electronic Voting Pad. Activates a Voting Pad unit, enabling the scanning of all available options (keypad positions) at any time.

Disable Electronic Voting Pad. Immediately deactivates a Voting Pad unit, stopping all scanning or data input. This is useful to prevent any data from being entered when the voting system is not ready, or when no data input is supposed to take place.

Last Ping (ask which Electronic Pad Device is last in chain). Only the last Voting Pad unit responds (Position Number and Serial Number). This command is useful to find out and verify, albeit in an indirect fashion, the actual number of Voting Pad units connected in the chain.

Serial Ping (ask if an Electronic Pad Device having a specific serial number is alive) Useful for ascertaining if a specific Voting Pad unit is connected and functional.

Position Ping (ask for the Serial Number of an n^{th} Electronic Pad Device in a chain). Obtains the serial number of a Voting Pad unit located in a specific position in a chain of units. This command is useful as an alternative way for ascertaining whether a specific Voting Pad unit is connected and operational.

Ping All—obtains all serial numbers and relative positions of each of the Electronic Pad units in a chain.

Acquire Firmware Version (of a specific Electronic Voting Pad). Acquires the firmware version number of a specific Electronic Pad unit having a specific relative position in a chain. Useful for diagnostic purposes, for example, to determine whether certain new functionalities are available or not.

Acquire All Firmware Versions. Acquires the firmware version numbers for all Electronic Voting Pad units connected in a chain. Useful for diagnostic purposes.

Change Serial. (Can be used to change any one of the Electronic Pad Device unit's serial number); stores a new serial number in the firmware of the selected Electronic Voting Pad unit. This enables assignment of initial serial numbers at warehouse preparation time.

Firmware Upgrade (allows upgrading an Electronic Voting Pad's controller circuit firmware). For a specific Electronic Voting Pad unit, this command initiates the firmware mode whereby its update is allowed. Such procedure is initiated and performed from the host processor. Useful for adding new functionalities and new commands, or for enhancing existing ones.

Although a specific embodiment has been illustrated and described herein, it will be appreciated by those skilled in the art that any arrangement which is calculated to achieve the same purpose may be substituted for the specific embodiment shown. This application is intended to cover any adaptations or variations of the present invention. Therefore, it is manifestly intended that this invention be limited only by the following claims and equivalents thereof.

What is claimed is:

1. An electronic data entry device for use by citizens during an election so as to facilitate the actual act of voting, comprising: having electoral options displayed, where choices

made by a voter from such options will be detected in order to cast a vote; designed to either connect directly to a voting machine, or to connect to another identical device which precedes said data entry device in a group, the group comprised of a plurality of identical devices connected to said voting machine in a daisy chain fashion; each data entry device connected in said daisy chain having a unique set of electoral options displayed; and having the choices made by a voter, from a set of displayed electoral options, detected and recognized as electric impulses when any one of the pressure-sensitive fields of any one of said devices in a chain is pressed by said voter in order to cast a vote.

2. The electronic data entry device of claim 1, comprising a plastic housing having a base, a lid with a protective transparent cover, a back panel, a plurality of membranes, a spacer layer, a plurality of touch-sensitive fields, a connection cable and sockets, and an electronic controller circuit designed to perform a plurality of validation, data entry, and communications control functions.

3. The electronic data entry device of claim 2, designed to accommodate a pre-printed paper sheet or overlay which is inserted into said housing as part of the election management procedures prior to an election, where said sheet is a ballot, where said ballot is made clearly visible to the voter through said transparent cover during the act of voting; said ballot clearly identifying the available electoral options, whose locations correspond in a one-to-one basis to an array of touch-sensitive or pressure-sensitive fields determined by the geometry of said membranes, and laid out in accordance to the predefined set of electoral options in the database subset stored in the connected voting machine, one paper sheet to a device, having a set of pre-established dimensions, on which an orderly array of electoral choices have been previously printed, providing the overall appearance of a traditional paper ballot; inasmuch as said overlay or paper ballot is inserted onto the voting device and protected by a transparent cover, so the paper ballot may remain visible and untouched for the whole time span of an election day, repeatedly viewed and utilized by voters at the moment of voting.

4. The electronic data entry device of claim 2, wherein the functions of said electronic controller circuit include: detection of one or more keystrokes that may occur upon pressing any of said touch sensitive fields; submittal of signals resulting from detection of said keystrokes to a voting machine, also called a "host processor"; execution of host-received commands; collision detection; and command retry, allowing the validation of the exact correspondence of the electoral options as displayed in specific location on the inserted paper ballot with those stored in the voting machine.

5. The electronic data entry device of claim 2, wherein said controller circuit does not store any information about the vote of any particular elector, or about the current electoral event taking place which the particular voting machine to which said device is connected is taking a part of.

6. The electronic data entry device of claim 2, where said controller circuit has a suitable firmware that supports a program logic that implements the several functions and commands of the device that allows said device to connect to and to communicate with a voting machine or host processor using a communication means.

7. The electronic data entry device of claim 2, wherein signals are generated when a voter presses any of said touch-sensitive fields, and transmitted to a host processor to which said device is connected; where said specific signals sent by said device to the host processor are recognized by the latter as valid voting options that have been selected by the voter; and where said device is configured for a specific polling

17

place, to be connected to and to interact with a specific voting machine in a specific election process.

8. The electronic data entry device of claim 2, wherein said functions include the ability to perform diagnostics, verifying the proper order of connection, and ascertain the exact correspondence of active voting options with the enabled pressure-sensitive fields; where said diagnostics should be performed as part of the voting station preparation stages prior to an election, as said device does not have the ability nor provides support for the connected voting machine to automatically read the particular ballot overlay in order to verify that the proper ballot is being used; therefore said diagnostics ensure that said ballot options as displayed to the voter are identical to those in the corresponding ballot image as previously recorded electronically in the voting machine.

9. The electronic data entry device of claim 2, when the number of voting options or candidates in effect for a given contest exceeds the space and capability of up to three hundred different choices for said single device, then a plurality of identical said devices can be daisy-chain connected to their corresponding voting machine, thus overcoming in a convenient way the difficulty of accommodating a number of available choices in force which is sufficient, a capability that renders said electronic data entry device useful for a vast majority of electoral contests.

10. The electronic data entry device of claim 2, where said device will detect any disconnection of devices in a chain; and likewise will detect any addition of a device in a chain.

11. The electronic data entry device of claim 2, where said device will detect abnormal events and take the proper action, by means of sending the appropriate messages to the voting machine to which said device is connected.

12. The method designed to allow for data entry of electoral choices made by citizens during an election comprising the steps of: enabling the connection of a electronic data entry device; said device designed to either connect directly to a voting machine, or to connect to another identical device which precedes said data entry device in a group, the group comprised of a plurality of identical devices connected to said voting machine in a daisy chain fashion; where each data entry device connected in said daisy chain has a unique set of electoral options displayed; and having the choices made by a voter, from a set of displayed electoral options, detected and recognized as electric impulses when any one of the pressure-sensitive fields of any one of said devices in a chain is pressed by said voter in order to cast a vote.

13. The method as in claim 12, further comprising the steps of generating and transmitting signals corresponding to said electric impulses, or keystrokes, to a connected voting machine or host processor.

18

14. The method as in claim 12, further comprising the steps of interpreting received signals as keystrokes corresponding to voting choices, whose matching information is in turn contained in a database subset resident in the voting machine or host processor to which said electronic voting device is connected; said data base subset having been prepared and stored by the suitable election management subsystem in a stage prior to an election.

15. The method as in claim 12, further comprising the steps of having the received signals interpreted as keystrokes corresponding to voting choices and validating such choices against the information contained in a corresponding database subset resident in the voting machine having said host processor, and upon finding such choices as valid, accepting storing them as the whole or as part of the vote being cast, and henceforth prompting the voter to continue with the next step in the voting procedure.

16. The method in claim 12 further comprising supporting commands issued by said host processor to a specific connected electronic voting device, which in turn executes such commands.

17. The method in claim 12 further comprising a plurality of functions implemented in the firmware code resident in the controller circuit of each electronic voting device.

18. The method in claim 12 further comprising functions that lend themselves, in conjunction with the voting system software in the voting machine's processor, toward implementing measures aimed at enhancing the integrity and security of the associated voting system in said voting machine.

19. The method in claim 12 further comprising said security functions including the detection, during the course of an active voting session, of a disconnection of any device in a chain the detection of any addition of a device in a chain; and detection of abnormal events such as device malfunction; and having the capability of taking a suitable course of action for each of such detected events.

20. The method in claim 12 further comprising additional functions, including one or more of the following: enabling or disabling a specific device in a chain; assigning and storing initial serial numbers onto each of the devices in a chain; verifying all serial numbers and relative positions of each of the devices in a chain; determining the number of connected devices in a chain; obtaining the serial number of a device in a specific position in a chain; obtaining the firmware version of one or all devices in a chain; and upgrading of the firmware code of one or all devices in a chain to a higher version of said firmware.

* * * * *

2020
Bogotá, D.C.,

ASUNTO	Radicación	06-65916
	Trámite	011
	Evento	379
	Actuación	430
	Oficio	-
	Folios	005

Vía Nacional 

Vía PCT (fase nacional) ☐ Cap. I ☐ Cap. II ☐

Como resultado del examen de fondo, realizado con fundamento en el artículo 45 de la Decisión 486 de la Comisión de la Comunidad Andina, se le comunica:

1. Documentos estudiados

Descripción: Folios: 5 a 25 como se radicó inicialmente

Reivindicaciones: Folios: 26 a 29 como se radicó inicialmente
Folios: 209 a 213 del memorial del 06-10-2009

Dibujos: Folios: 30 a 37 como se radicó inicialmente

Prioridad: Folios: 39 a 91
(2005-07-08, US, N° 11/160782).

Rta. Del Solicitante: Folios: 201 a 239

2. Objeto de la invención

La presente solicitud se titula "BOLETA ELECTRÓNICA ELECTORAL" Folio N° 201.

El objeto de la presente solicitud es un dispositivo de entrada de datos orientado especialmente para establecer una eficiente interacción con los votantes que facilite una fácil verificación de las opciones de votación, fácil identificación visual, ingreso de datos sencillo, etc.

De otra parte, el nuevo pliego reclama: un dispositivo electrónico de entrada de datos para uso de los votantes durante una elección, relacionado en las reivindicaciones 1 a 11, y un método para permitir la entrada de datos correspondiente a las opciones electorales, relacionado en las reivindicaciones 12 a 20.

El objeto de la solicitud definido anteriormente se clasificó en la IPC G07C 13/00.

3. De la solicitud de Patente

3.1. Reivindicaciones (artículo 30 D 486)

El nuevo pliego reivindicatorio no solventa las objeciones de claridad y definición planteadas por cuanto:

La reivindicación 1 no contiene ninguna característica técnica que defina un elemento tal como un dispositivo electrónico de votación. La reivindicación se enfoca en el resultado del uso del dispositivo: mostrar las opciones electorales, conectarse directamente a una máquina de votación u otro dispositivo, presentar un surtido único de opciones electorales, y reconocer como impulsos las entradas realizadas por el votante. Como se puede ver, las características anteriores corresponden a la operación (uso) del dispositivo de votación lo cual no es válido para definir una invención.

Una invención de producto, debe estar definida por medio de los componentes del dispositivo y las relaciones funcionales o estructurales existentes entre tales componentes. La mención del uso que se da a un determinado componente NO es una característica funcional puesto que el uso individual de cada componente no establece una relación entre el componente con el resto del dispositivo.

Por otro lado, la reivindicación hace una mezcla indebida entre características de producto y de procedimiento. Como es bien sabido, la reivindicación debe dejar muy clara la categoría a la que pertenece (producto o procedimiento), puesto que las instrucciones que necesita la máquina para funcionar, son características de un método de uso no de un producto tal como un dispositivo electrónico.

La reivindicación 1 tampoco tiene claro cual es el objeto de la solicitud: ¿un dispositivo electrónico de entrada de datos, o una estación de votación?, esto debe especificarse claramente dado que una misma reivindicación no puede contener dos o más invenciones.

Por otra parte, la reivindicación 2 presenta los elementos que conforman al dispositivo electrónico, pero no presenta ninguna relación funcional o estructural entre tales componentes. La simple enumeración de componentes no es suficiente para definir una invención dado que son necesarias las relaciones que se presentan entre los componentes para definir el alcance y el aporte de la solicitud al estado del arte.

La reivindicación 3 especifica las capacidades del circuito electrónico. Como se dijo antes, la finalidad o el uso de un determinado componente del dispositivo no es una característica técnica del dispositivo como tal, de manera que este tipo de reivindicación no es aceptable.

La reivindicación 4 especifica una hoja de papel preimpresa y la información que esta hoja puede contener. En primer lugar, el dispositivo electrónico de votación es independiente de la hoja que se coloque. La utilización de la hoja preimpresa es tan solo uno de los múltiples usos que se puede dar al dispositivo (hojas, cartulinas, láminas en relieve, etc.), de manera que este elemento no constituye una característica como tal del dispositivo. Por otro lado, especificar un elemento por la información contenida en éste, es presentación de información. En este caso se está caracterizando al dispositivo de votación por la información contenida en la hoja de

papel, por ejemplo las opciones electorales. Esta caracterización no es admisible de acuerdo a lo establecido en el literal f) del artículo 15 de la Decisión 486.

La materia especificada en la reivindicación 5 no es aceptable por varias razones. En primer lugar, no es permitida la definición de un objeto por medio de características negativas (*disclaimers*) tales como el NO almacenamiento de información. En segundo lugar el almacenamiento o no almacenamiento de información, corresponde a una especificación de uso, lo cual se recalca, NO corresponde a una característica técnica de la invención.

La reivindicación 6 especifica las características de un programa de soporte lógico, lo cual no constituye materia patentable de acuerdo a lo establecido en el literal e) del artículo 15.

Las reivindicaciones 7 a 11 no aclaran ni especifican ninguna característica técnica del dispositivo electrónico, por cuanto se refieren a las instrucciones de operación (uso) del aparato.

Finalmente, el método especificado en las reivindicaciones 12 a 20 no es aceptable por cuanto se refiere a las instrucciones rutinarias de operación que debe realizar un usuario para colocar su opción electoral. Las instrucciones de uso (operación) no son características técnicas que permitan definir un procedimiento patentable.

En resumen, el nuevo pliego reivindicatorio es aún menos claro y definido que el pliego originalmente radicado, de manera que ninguna de las objeciones trasladadas fue solventada con la corrección hecha.

En conclusión, el pliego reivindicatorio calificado no cumple los requisitos de claridad, exigidos en el Art. 30 de la Decisión.

4. Reivindicaciones relativas a un uso o a un uso distinto (artículos 14 y 21 D 486)

Las reivindicaciones 12 a 20 que se refieren a un método para permitir la entrada de datos correspondientes a las opciones electorales, no cumplen con lo establecido en el artículo 14 por cuanto la materia allí relacionada no corresponde ni a un procedimiento ni a un producto que se ajuste a los lineamientos legales vigentes.

El método que relaciona el solicitante indica la forma como un usuario utilizaría un dispositivo de votación electrónico. Es bien sabido que los usos no son materia patentable por cuanto estos no tienen carácter técnico. Dado lo anterior la oficina considera que el método relacionado en las reivindicaciones 12 a 20 no cumple con los requerimientos establecidos en el Art. 14 de la Decisión.

5. Determinación del Estado de la Técnica

Considerando que la solicitud reclama prioridad a la fecha de 8 julio de 2005, se buscaron documentos del estado de la técnica relacionados, con fecha de publicación anterior a esta. Se realizó búsqueda de documentos relevantes dentro del estado de la técnica, entendiendo como estado de la técnica la definición provista en el Art. 16 D 486, y las excepciones fijadas en el Art. 17 de la misma.

Se encontró como anterioridades los documentos relacionados a continuación que afectan la patentabilidad del objeto de la presente solicitud

N°	Documento	Título	Fecha de publicación
D1	US6688517	ELECTRONIC VOTING SYSTEM	2004-02-10

6. Análisis de patentabilidad (artículo 14 D486)

En cumplimiento del Art. 14 D486 se procedió a evaluar los requisitos de novedad, nivel inventivo y aplicabilidad industrial, con el fin de establecer la patentabilidad de la invención reivindicada de la solicitud en estudio.

6.1. Novedad (artículo 16 D486)

El requisito de novedad se evaluó por comparación entre lo solicitado y los documentos encontrados en el estado de la técnica y que se relacionan con el objeto reivindicado. Para el examen de novedad solo se tuvo en cuenta las características técnicas de la invención.

Las reivindicaciones 1 a 11 se refieren a un dispositivo electrónico caracterizado porque comprende:

- Una caja plástica.
- Una base.
- Una tapa con una cubierta protectora transparente.
- Un panel trasero.
- Una pluralidad de membranas.
- Una lámina espaciadora.
- Una pluralidad de campos o áreas sensibles a la presión.
- Un cable y sus conectores
- Un circuito controlador.

La anterioridad **D1** se refiere a un sistema electrónico de votación que maximiza la habilidad para realizar el voto y adicionalmente permite gran precisión en el cálculo del resultado final de la votación. El documento **D1** presenta los siguientes elementos comunes a la materia reclamada en la presente solicitud:

- Un cuerpo **56** provisto de una base
- Una cubierta **65** provista de una lámina protectora transparente (col. 10 líneas 44 a 48).
- Un panel posterior (Fig. 11)
- Una pluralidad de membranas de una pantalla táctil.
- Una lámina espaciadora (Fig. 14)
- Una pantalla sensible al tacto (col. 18 líneas 20 a 29).
- Un cable **170** y sus conectores **172** (Fig. 21B)
- Un circuito controlador (Figs. 16 y 17)

Como se puede ver la anterioridad **D1** comprende todas las características reclamadas en la solicitud en estudio. Dado lo anterior la oficina considera que **D1** afecta la novedad de la presente solicitud.

En conclusión, al hacer la comparación elemento por elemento entre lo solicitado y el estado de la técnica, se encuentra que las características esenciales del objeto de esta solicitud son idénticas a lo comprendido en el documento **D1**, razón por la cual la solicitud no cumple con lo requisitos de novedad establecidos en el artículo 16 de la Decisión.

7. Conclusión:


Los requisitos de patentabilidad de la presente solicitud se encuentran afectados así:

N°	Documento N°	Reivindicaciones afectadas	Requisito que afecta
D1	US6688517	1 a 11	Novedad

Se recomienda, que tenga en cuenta que el replanteamiento de esos apartes NO podrá implicar una ampliación de la protección que correspondería a la divulgación contenida en la solicitud inicial, de acuerdo a lo que establece el artículo 34 de la Decisión 486.

En cumplimiento del artículo 45 de la Decisión 486 de la Comisión de la Comunidad Andina, se le indica que debe dar respuesta dentro del término de sesenta días contados a partir de la fecha de notificación de la presente comunicación. En caso de no dar respuesta al presente requerimiento, o si a pesar de la respuesta subsistieran los impedimentos para la concesión, se denegará la patente.

Notifíquese el presente oficio conforme a lo dispuesto en el numeral 5.2, literal e), del capítulo quinto del título primero de la Circular Única N° 10 de 2001.



JESÚS FERNEL GARCÍA GARCÍA
Director Nuevas Creaciones (E)

El anterior requerimiento fue notificado por fijación en lista, de fecha

CONCEPTO TÉCNICO No. 4418	EXAMINADOR TÉCNICO Código No. 202082
----------------------------------	--