

Medellín, 29 de enero de 2008

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO



No. 07-218143- -00001-0000

Fecha: 2008-01-31 13:32:38 Dep. 2020 NUECREACIONE.
Tra. 3 MODELO Eve: 1 REGDEPOSITO
Act. 538 PETICION Folios: 2

Señores
SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO
DIVISIÓN DE NUEVAS CREACIONES
Carrera 13 # 27 – 00 Edificio Bochica . Piso 2
Bogotá D.C.

ASUNTO: Solicitud examen de Patentabilidad

REFERENCIA: **RADICADO # 07-218143 (MODELO DE UTILIDAD)**

NOMBRE : **CASA DESECHABLE PARA MASCOTAS**

Por medio de la presente me permito solicitarles se de paso al **EXAMEN DE PATENTABILIDAD** para la solicitud de **MODELO DE UTILIDAD** detallada en la referencia y de conformidad en lo establecido en el artículo 44 de la Decisión 486.

Anexo a la presente, comprobante de pago de la tasa establecida por valor de \$ 280.000

Cordialmente

ARMANDO LAVERDE URIBE
C.C. 8.288.998

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO

NIT : 800176089-2

RECIBO OFICIAL DE CAJA : 08 - 8,400
FECHA : ENERO 31 DE 2008

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO



No. 07-218143--00001-0000

Fecha: 2008-01-31 13:32:38 Dep. 2020 NUECREACION
Tra. 3 MODELO Eve: 1 REGDEPOSITO
Act. 538 PETICION Folios: 2

***** CONSIGNACION *****

DEPOSITANTE	TIPO PAGO	BANCO	CUENTA	No. PAGO	FECHA PGO	Vr. PAGO
ARMANDO LAVERDE	CONSIGNACION	BANCO DE BOGOTA	062754387	2952580	29/01/2008	280,000.00

***** CONCEPTO *****

CANT. RENTISTICO	CONCEPTO	TOTAL CONCEPTO
1 50005-01-01 SOLICITUDES	86 EXAMEN DE PATENTABILIDAD DE MODEL	280,000.00
	TOTAL :	\$ 280,000.00

SON: DOSCIENTOS OCHENTA MIL PESOS

RESPONSABLE :

RECIBO DE CAJA APLICADO AL EXPEDIENTE No. _____

DIVISION DE NUEVAS CREACIONES

RADICACIÓN EXPEDIENTE No 07-218143

EXTRACTO DE LA PRESENTE SOLICITUD DE **MODELO DE UTILIDAD**

NUMERO FUE PUBLICADO EN LA GACETA DE PROPIEDAD INDUSTRIAL No

582 DE FECHA **30 DE NOVIEMBRE DE 2007** EL TERMINO HABIL SEÑALADO

POR LA LEY EXPIRA EL **16 DE ENERO DE 2008.**

NOTA: Dentro del plazo de los tres (3) meses siguientes a partir de la fecha de publicación en la gaceta de Propiedad Industrial, deberá solicitar y cancelar el examen de patentabilidad so pena de que la solicitud caiga en abandono, de acuerdo con lo establecido en el Artículo 44 y en concordancia con el artículo 85 de la Decisión 486/2000.

SE PRESENTARON OPOSICIONES POR PARTE DE TERCEROS.

SI _____ NO X



US005465686A

United States Patent [19]
Monetti et al.

[11] **Patent Number:** **5,465,686**
 [45] **Date of Patent:** **Nov. 14, 1995**

- [54] **COLLAPSIBLE HOUSE FOR PETS**
- [76] Inventors: **Steven A. Monetti; Catherine J. Monetti**, both of 14 Crestwood Dr., Mountain Lakes, N.J. 07046
- [21] Appl. No.: **305,592**
- [22] Filed: **Sep. 14, 1994**
- [51] **Int. Cl.⁶** **A01K 29/00**
- [52] **U.S. Cl.** **119/168**
- [58] **Field of Search** 119/165, 168, 119/19

[56] **References Cited**
U.S. PATENT DOCUMENTS

4,792,082	12/1988	Williamson	119/168 X
4,940,016	7/1990	Heath	119/168
5,014,649	5/1991	Taft	119/168
5,129,364	7/1992	Pirkle	119/168 X


Primary Examiner—Paul J. Hirsch
Assistant Examiner—Thomas Price
Attorney, Agent, or Firm—Alfred C. Hill

[57] **ABSTRACT**

A disposable, collapsible pet house foldable from a unitary blank of material received in a flat state, the house being foldable from the blank between a collapsed state for

shipping, storage and disposal and an enclosed, erect state for use, the house comprising a container portion having a bottom, a pair of oppositely opposed sidewalls extending upwardly from and integral with the bottom, and a pair of oppositely opposed end walls extending upwardly from and integral with the bottom, the pair of end walls being connected to the pair of sidewalls; a pair of sidewall panels, each integral with a different one of a pair of sidewalls; a pair of end wall panels, each integral with a different one of a pair of end walls, at least one of the pair of end wall panels having an opening therein for ingress and egress of a pet when the house is in the erect state; a pair of roof panels, each integral with a different one of the pair of sidewall panels, one of the pair of roof panels overlapping a portion of the other of the pair of roof panels when the house is in the erect state; and a releasable arrangement associated with each of the pair of roof panels and the pair of end wall panels to interconnect the same to provide the house with stability in the erect state; the pair of end wall panels and the other of the pair of roof panels and its associated one of the pair of sidewall panels being foldable into the container portion and the one of the pair of roof panels and its associated one of the pair of sidewall panels being foldable to cover the pair of end wall panels and the other of the pair of roof panels and its associated one of the pair of sidewall panels and extending over one of the pair of sidewalls and a portion of the bottom to be in an interlocking relation with the bottom when in the collapsed state.

15 Claims, 5 Drawing Sheets

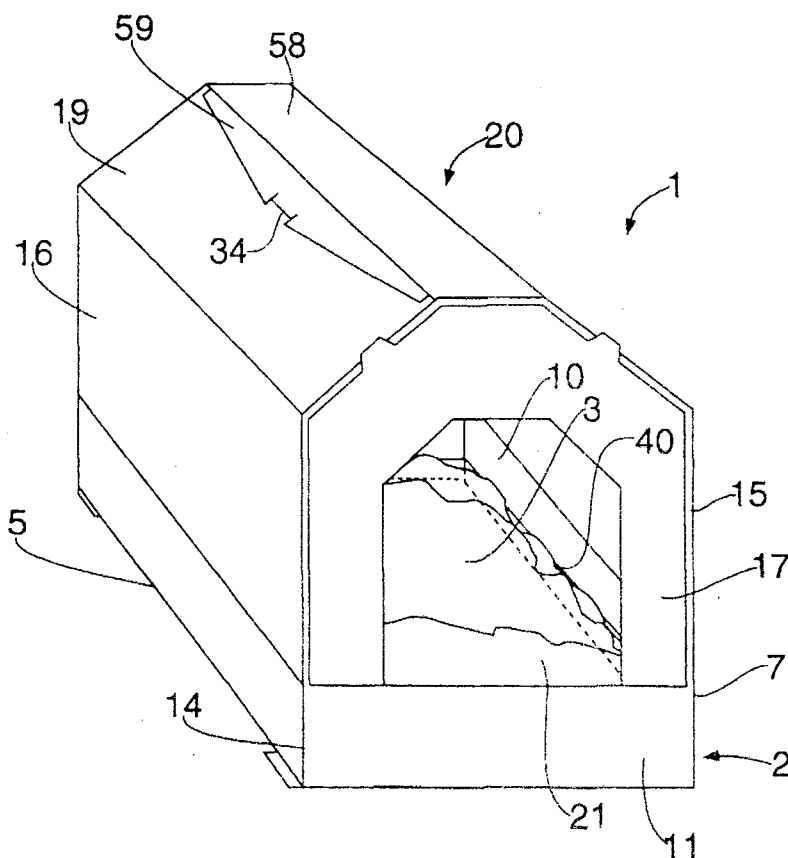

5,465,686

9

user, thereby making it especially well adapted for commercial production, sale and of use by the consumer in the home.

A feature of the present invention is the provision of a disposable, collapsible pet house foldable from a unitary blank of material received in a flat state, the pet house being foldable from the blank between a collapsed state for shipping, storage and disposal and an enclosed, erect state for use, the pet house comprising a container portion having a bottom means, a pair of oppositely opposed sidewalls extending upwardly from and integral with the bottom means, and a pair of oppositely opposed end walls extending upwardly from and integral with the bottom means, the pair of end walls being connected to the pair of sidewalls; a pair of sidewall panels, each integral with a different one of the pair of sidewalls; a pair of end wall panels, each integral with a different one of the pair of end walls, at least one of the pair of end wall panels having an opening therein for ingress and egress of a pet when the house is in the erect state; a pair of roof panels, each integral with a different one of the pair of sidewall panels, one of the pair of roof panels overlapping a portion of the other of the pair of roof panels when the house is in the erect state; and releasable means associated with each of the pair of roof panels and the pair of end wall panels to interconnect the same to provide the house with stability in the erect state; the pair of end wall panels and the other of the pair of roof panels and its associated one of the pair of sidewall panels being foldable into the container portion and the one of the pair of roof panels and its associated one of the pair of sidewall panels being foldable to cover the pair of end wall panels and the other of the pair of roof panels and its associated one of the pair of sidewall panels and extending over one of the pair of sidewalls and a portion of the bottom means to be in an interlocking relation with the bottom means when in the collapsed state.

BRIEF DESCRIPTION OF THE DRAWING

Above-mentioned and other features and objects of the present invention will become more apparent by reference to the following description taken in conjunction with the accompanying drawing, in which;

FIG. 1 is a front perspective view of the pet house in accordance with the principles of the present invention in its erect state;

FIG. 2 is a perspective view of the pet house in accordance with the principles of the present invention in an intermediate state between its collapsed state and its erect state;

FIG. 3 is a perspective view looking at the bottom of the pet house in accordance with the principles of the present invention in its collapsed state with the locking top partially engaged in the bottom flaps;

FIG. 4 is a perspective view looking at the top of the pet house in accordance with the principles of the present invention in its collapsed state with the locking top fully engaged in the bottom flaps;

FIG. 5 is a plan view of a unitary blank of container material cut to form the pet house structure in accordance with the principles of the present invention;

FIG. 6 is a detailed plan view of the locking tab and slot arrangement used to secure the roof panels to the end wall panels when the pet house is in its erect state; and

FIG. 7 is a detailed plan view of the roof locking tab and roof locking slot used to join the roof panels to form a stable,

10

sturdy pet house when in the erect state.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to FIGS. 1-7, in accordance with the principles of the present invention, the pet house 1 has three states. The first state is illustrated in FIG. 1 and is an erect state with the pet house 1 being either a pet litter-house, or a pet playhouse, depending upon the material 3 disposed within the container portion 2 thereof. If material 3 placed in container 2 is pet litter, the house 1 is employed as a pet litter-house. If the material 3 placed in container 2 is bedding material, the house 1 is then a pet playhouse. The end utilization whether a pet litter-house, or a pet playhouse depends upon the end use of the house 1.

The second state of the pet house 1 is shown in FIGS. 3 and 4 and is considered a collapsed state. In the collapsed state, the container 2 is completely enclosed and sealed so that it can be employed as a shipping container, a storage container or a disposal container so that the material 3 contained therein can be shipped, stored or disposed of without injuring the environment, requiring a lot of storage space and a lot of shipping space.

Pet house 1 is folded from a flat material blank normally employed in box structures, such as corrugated cardboard or similar material. The flat blank is shown in FIG. 5 in which the solid lines therein indicate the panels employed in the pet house 1 with the broken lines therein representing the fold lines as will be discussed herein below. During the manufacturing process after the various panels and fold lines are provided in the blank, tab 4 integral with sidewall 5 is glued to end wall 12 as shown in FIG. 2. The blank of FIG. 5 is then folded on fold lines 7 and 8 to place the pet house 1 in its flat state. In this flat state, the pet house 1 is shipped to an assembly point for assembly into the collapsed state of the pet house 1 which then would be shipped to an end user either as a pet litter-house, or as a pet playhouse depending upon the material 3 contained in container 2.

In accordance with the principles of the present invention, the disposable, collapsible pet house 1 is foldable between the collapsed state of FIGS. 3 and 4 for shipping, storage and disposal and an enclosed, erect state as shown in FIG. 1. The pet house 1 includes a container portion 2 having a bottom 9 as more clearly illustrated in FIG. 2, a pair of oppositely opposed sidewalls 5 and 10 extending upwardly from and integral with the bottom 9 and a pair of oppositely opposed end walls 11 and 12 extending upwardly from and integral with the bottom 9. The pair of end walls 11 and 12 are connected to the pair of sidewalls 5 and 10 by fold lines 7, 13 and 14 as best seen in FIG. 5. The structure of pet house 1 is completed by having a pair of sidewall panels 15 and 16 each integral with a different one of the pair of sidewalls 5 and 10, a pair of end wall panels 17 and 18 each integral with a different one of the end walls 11 and 12, and a pair of roof panels 19 and 20 each integral with a different one of the pair of sidewall panels 15 and 16 with one of the pair of roof panels, namely, roof panel 20 overlapping a portion of the other of the pair of roof panels, namely, roof panel 19 when house 1 is in its erect state.

As shown in FIGS. 1, 2 and 5 one of the end wall panels, namely, end wall panel 17 has an opening 21 therein to provide an ingress and egress for a pet when house 1 is in its erect state. It would of course be possible to provide a similar opening in the other of the end wall panels.

Releasable means associated with each of the pair of roof

11

panels and the pair of end wall panels are employed to interconnect the same to provide pet house 1 with stability in the erect state.

The releasable means includes a plurality of slots 22, 23, 24 and 25 disposed adjacent an edge of each of the pair of end wall panels 17 and 18 adjacent the top thereof. The slots 22, 23, 24 and 25 are provided in members 26, 27, 28 and 29 integral with the pair of end wall panels 17 and 18 and are folded inwardly when pet house 1 is placed in its erect state. Tabs 30, 31, 32 and 33 are provided on the roof panels 19 and 20 in an aligned relationship with the slots 22, 23, 24 and 25 to thereby engage these slots when pet house 1 is in its erect state. Roof panels 19 and 20 are interconnected by employing a slot 34 in roof panel 19 which is engaged when in its erect state by tab 35 on roof panel 20. The above-mentioned slots and tabs provide stability, strength and add to the tightness and snugness of the fitting of the components of pet house 1 when in its erect state.

Bottom 9 as illustrated in FIGS. 2 and 3 include a first pair of flaps 36 and 37 extending inwardly from and integral with an edge of a different one of the end walls 11 and 12 opposite an associated edge integral with the end wall panels 17 and 18 which is best seen in FIG. 2. A second pair of flaps 38 and 39 each extending inwardly from and integral with an edge of a different one of the pair of sidewalls 5 and 10 opposite an associated edge integral with the pair of sidewall panels 15 and 16. The flaps 36-39 provide an interlocking arrangement with one another to provide a self locking and sealed bottom for the container portion 2. A liner or insert 40 of moisture resistant material could be placed in the bottom of container 2 as best seen in FIG. 1 to prevent dampness from impregnating the board material when house 1 is employed as a pet litter-house. Alternatively, the board material forming the container 2 can be impregnated or coated with wax or similar material to make the board material substantially waterproof when employed as a pet litter-house.

The interlocking arrangement for the bottom 9 is provided by having a predetermined configuration for the flaps 36-39. More specifically, the flaps 36 and 37 contain a rectangular portion as illustrated at 41 and 42 in FIG. 5 with a second portion being provided as illustrated at 43 and 44 in FIG. 5 with an inclined edge 45 and 46 extending from a first point located approximately one half the distance from the edge of an associated one of the end walls 11 and 12 to a second point adjacent the edge of the associated one of the end walls 11 and 12. The length of rectangular portions 41 and 42 is equal to approximately one half the length of the sidewalls 5 and 10. Flap 38 is approximately one half the length of the end walls 11 and 12 and has a notch 47 therein as best seen in FIGS. 2 and 5. The configuration of flap 39 is substantially a truncated conical member having a length equal to one half the length of the end walls 11 and 12 and a width at the truncated portion 48 equal to the length of the notch 47 as best seen in FIG. 5. When flap 38 is folded inwardly to start the formation of bottom 9 and then flaps 36 and 37 are folded inwardly such that the rectangular portions 49 and 50 of flap 38 engage flaps 36 and 37 as best illustrated in FIG. 2. This is accomplished by a slight pressure on these three flaps, namely, flaps 36, 37 and 38. The flap 39 is positioned and folded in on top of flaps 36, 37 and 38 on the exterior of the bottom 9 and the truncated portion 48 is caused to engage slot 47 in flap 38 so that there results an interlocked bottom which is also in a sealed condition so that any litter or bedding material can not spill out through the bottom 9. This engagement is accomplished by slight pressure on flap 39 until truncated portion 48 is caused to engage slot 47 in flap 38. This interlocking of the flaps 38 and 39 is

12

best seen in FIG. 3.

The material 51 remaining in the opening 21 is folded along fold line 52 to a position within the container 2 to further lock the bottom 9 to prevent the interlocked arrangement thereof from becoming undone when in use.

During shipment, storage or disposal, the pet house in accordance with the principles of the present invention is placed in its collapsed state. This is accomplished by disconnecting the various tab and slot arrangements in the roof panels 19 and 20 and the end wall panels 17 and 18. After this disconnection of the interlocked arrangement the end wall panels 17 and 18 are folded along fold lines 53 and 54 into container 2 and then side wall panel 16 and roof panel 19 are folded along fold line 55 on top of the end wall panels 17 and 18. The sidewall panel 15 and the roof panel 20 are folded along fold line 56 and placed on top of the panels 16 and 19, and end wall panels 17 and 18 in such a manner that sidewall panel 15 and portion 57 of roof panel 20 covers the previously turned in panels. A portion 58 of roof panel 20 covers the sidewall 5 as illustrated in FIGS. 3 and 4 with the portion 59 of the roof panel 20 being inserted underneath the slanted portion of flaps 36 and 37 to provide an interlocking relationship between these components so that container 2 is completely enclosed as well as sealed for shipping, storage or disposal.

Referring to FIG. 6, the manner of cutting the slots and the tabs for the interlocking connection between the roof panels and the end wall panels are clearly illustrated in such a manner as to indicated the saving of material which is accomplished by the layout of the material used in the pet house in accordance with the principles of the present invention.

FIG. 7 is an enlarged illustration of the relationship between the tab 35 in the roof portion 20 and the slot 34 in the roof portion 19.

While we have described above the principles of our invention in connection with specific apparatus, it is to be clearly understood that this description is made only by way of example and not as a limitation to the scope of our invention as set forth in the objects thereof and in the accompanying claims.

We claim:

1. A disposable, collapsible pet house foldable from a unitary blank of material received in a flat state, said house being foldable from said blank between a collapsed state for shipping, storage and disposal and an enclosed, erect state for use, said house comprising:

- a container portion having
- a bottom means,
- a pair of oppositely opposed sidewalls extending upwardly from and integral with said bottom means, and
- a pair of oppositely opposed end walls extending upwardly from and integral with said bottom means, said pair of end walls being connected to said pair of sidewalls;
- a pair of sidewall panels, each integral with a different one of said pair of sidewalls;
- a pair of end wall panels, each integral with a different one of said pair of end walls, at least one of said pair of end wall panels having an opening therein for ingress and egress of a pet when said house is in said erect state;
- a pair of roof panels, each integral with a different one of said pair of sidewall panels, one of said pair of roof panels overlapping a portion of the other of said pair of roof panels when said house is in said erect state; and

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO
DIRECCION DE NUEVAS CREACIONES

202084

Bogotá, D.C.

Solicitante
ARMANDO LAVERDE URIBE

ASUNTO	Radicación	07 – 218143
	Trámite	003
	Evento	001
	Actuación	519
	Oficio	2991
	Folios	008

Patente de Invención	☐	Patente de Modelo de Utilidad	☒
Vía Nacional	☒		
Vía PCT (fase nacional)	☐	Cap. I	☐
		Cap. II	☐

Como resultado del examen de fondo, realizado con fundamento en el artículo 85 y en concordancia con el artículo 45 de la Decisión 486 de la Comisión de la Comunidad Andina, se le comunica:

1. Documentos estudiados

- 1.1. Descripción: Folios 4 a 6
- 1.2. Reivindicaciones: Folio 6
- 1.3. Dibujos: Folios 7 a 14

2. Objeto de la invención

Titulo de la solicitud: "CASA DESECHABLE PARA MASCOTAS."

El problema planteado en esta solicitud es que actualmente se conocen que las casa para mascotas son elaboradas en materiales rígidos (cemento, ladrillo, madera, plástico, etc.) que no permite su fácil transporte, y generalmente no son muy higiénicas.

Para solucionar este problema técnico la solicitud en estudio proporciona un cubículo fabricado en forma de casa, elaborado en materiales livianos, desechables y no contaminantes; donde puede dormir una mascota con comodidad, higiene y seguridad. La casa es liviana, con un sencillo método de armado y desarmado, ocupa poco espacio y fácil de transportar.

El objeto de la presente invención se lleva acabo de acuerdo con las características de la reivindicación independiente 1, (ver folio 6).

El objeto de la solicitud definida anterior mente se encuentra en la Clasificación Internacional de Patentes (IPC) A01K 1/00, A01K 1/03, A01K 1/035.

3. Determinación del Estado de la Técnica

Se buscaron documentos del estado de la técnica relacionados, con fecha de publicación anterior a 2007-05-02, que pueden afectar la patentabilidad del objeto de la presente solicitud, encontrándose:

Nº	Documento	Título	Fecha de Publicación
D1	US5465686	Collapsible house for pets	Nov 14, 1995

4. De la solicitud de Patente

4.1. Descripción (artículo 28 D 486)

Se observa que las figuras no presentan números de referencia, en donde se indiquen los diferentes elementos, para facilitar su enlace y por ende una correcta descripción en dicho capítulo. La descripción y los dibujos deben ser consistentes los unos con los otros al referirse a los signos, símbolos o números de referencia.

Los dibujos, planos, figuras y representaciones gráficas tienen como finalidad contribuir a una mejor comprensión y divulgación de la invención. Los dibujos deben estar explicados en la descripción. Tienen que ser esquemáticos, libre de detalles inútiles, de leyendas y palabras, poniendo en evidencia lo esencial, o sea, las características de la invención, por lo tanto deberán tener ciertas características:

- deben tener relación directa con la descripción;
- deben permitir visualizar las formas de ejecución descritas;
- la relación entre la descripción y los dibujos se debe hacer por medio de signos de referencia que se encuentren en ambos elementos y guarden una correspondencia;
- si dentro de la descripción han sido mencionados algunas figuras, necesariamente deben estar incluidas;
- no deben considerarse figuras o dibujos que no hayan sido descritos;
- deben ser enumerados individualmente y consecutivamente.

Se debe tener en cuenta que:

- 1) La descripción debe garantizar que la solicitud contenga todas las informaciones técnicas exigidas para que pueda realizar la invención un experto en la materia.
- 2) La descripción debe permitir a cualquier lector comprender la contribución aportada por el inventor al estado de la técnica.

En conclusión la descripción no reúne los requisitos de presentación de acuerdo con lo establecido en el Art. 28 de la Decisión 486, la descripción no es clara y completa en divulgar la invención.

De acuerdo con lo anterior, **se sugiere al solicitante presentar un nuevo capítulo Descriptivo que cumpla con la función de divulgar la invención:**

4.2. Reivindicaciones (artículo 30 D 486)

Se observa que las reivindicaciones 3 y 4, mencionan: **usos, ventaja, efectos o funcionamientos**, los cuales no deben hacer parte de las reivindicaciones. En las reivindicaciones de la casa desechable para mascotas, solo debe estar: La forma, disposición, ubicación, construcción de cada una de las partes y como se acoplan entre sí.

También se aconseja que la reivindicación independiente, mencione todas las características conocidas en el estado de la técnica, en el preámbulo, y seguido del término **“CARACTERIZADO POR”** se muestren las características técnicas novedosas propias de la solicitud, y que la diferenciarían del estado de la técnica. Con lo anterior se busca que la reivindicación independiente de mayor claridad y delimite mejor la invención, para reflejar el verdadero alcance de la protección.

Se sugiere que el capítulo reivindicatorio este en una hoja aparte, de la descripción (ver folio 6 de la página 3).

Se aconseja en todo el capítulo reivindicatorio hacer una referencia por medio de paréntesis “()” inmediatamente después de hablar del elemento, sin hacer ningún otro tipo de alusión o mencionar la figura directamente, para facilitar su comprensión.

5. Análisis de patentabilidad (artículo 14 D 486)

5.1. Novedad (artículo 16 D 486)

Teniendo en cuenta que el documento **US5465686** (mencionado de ahora en adelante como **D1**), que se refiere a: un **“Collapsible house for pets”** como se muestra a continuación:

Al comparar elemento por elemento de la invención tal como está definido en la reivindicación 1; con el documento **D1**: vemos que el dicho documento contiene todas las características técnicas:

- Elaborada en un material desechable: cartón, cartón corrugado u otros elementos de características similares. Ver **D1** Capítulo descriptivo, columnas 10 a 12; elemento 1 y Figuras 1 a 7.
- En forma de casa, con un acceso amplio y cómodo para la mascota y el resto completamente cerrado. Ver **D1** Capítulo descriptivo, columnas 10 a 12; elementos 1, 10, 11, 12, 15 y Figuras 1 a 7.
- Con un sencillo armado y doblado, que la hacen de fácil manipulación y almacenamiento. Ver **D1** Capítulo descriptivo, columnas 10 a 12; elementos 1, 10, 11, 12, 15 y Figuras 1 a 7.
- La hace más higiénica. Ver **D1** Capítulo descriptivo, columnas 10 a 12; elementos 1, 10 y Figuras 1 a 7.
- Es liviana para facilitar su desplazamiento de un lugar a otro. Ver **D1** Capítulo descriptivo, columnas 10 a 12; elemento 1 y Figuras 1 a 7.

Realizada la comparación del documento **D1** con la presente solicitud de patente de invención, se observa que dicho documento contiene todas las características técnicas de la reivindicación 1; con lo cual quedaría desvirtuada la novedad de esta.

6. Conclusión:

Los requisitos de patentabilidad de la presente solicitud se encuentran afectados así:

Nº	Documento Nº	Reivindicaciones Afectadas	Requisito que Afecta
D1	US5465686	1 a 4	Novedad

En conclusión las reivindicaciones no reúnen los requisitos de acuerdo con lo establecido en los Art. 28 y 30 de la Decisión 486, ya que no definen ni precisan las características de que se desea proteger, no se observan cuales son las características técnicas que constituyen la novedad de la invención frente a lo conocido en el estado de la técnica. Las reivindicaciones deben ser claras en lo que se quiere proteger.

En cumplimiento del artículo 85 en concordancia con el artículo 45 de la Decisión 486 de la Comisión de la Comunidad Andina, se le indica que debe dar respuesta dentro del término de treinta días contados a partir de la fecha de notificación de la presente comunicación. En caso de no dar respuesta al presente requerimiento, o si a pesar de la respuesta subsistieran los impedimentos para la concesión, se denegará la patente.

Notifíquese el presente oficio conforme a lo dispuesto en el numeral 5.2, literal e), del capítulo quinto del título primero de la Circular Única N° 10 de 2001.

ALIX CARMENZA CÉSPEDES DE VERGEL
Directora de Nuevas Creaciones (C)

El anterior requerimiento fue notificado por fijación en lista, de fecha

04 MAR. 2010

CONCEPTO TÉCNICO No. 627	EXAMINADOR TÉCNICO Código No. 84
---------------------------------	--