

Bogotá D.C., Abril 19 de 2010

Doctora
Alix Carmenza Céspedes de Vergel
Dirección de Nuevas Creaciones
Superintendencia de Industria y Comercio
Ciudad.

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO



No. 07-134427- -00006-0000

Fecha: 2010-04-19 16:05:57 Dep. 2020 DIR NUEVASCR
Tra. 11 PATENTEIYII Eje: 378 FASENACIONALI
Act. 444 RESPUESTAREQUE Folios: 25

Referencia: Radicación No. 07 134427
PATENTE DE INVENCION
Contestación de requerimiento.

JULIO CÉSAR RAMÍREZ PIÑA, identificado con la cédula de ciudadanía n° 79779.990 de Bogotá, portador de la tarjeta profesional de abogado n° 113.206 del C. S. de la J., en calidad de apoderado de la sociedad **HE SHAN LIDE ELECTRONICS INTERPRISE COMPANY LTDA**, tal y como consta en la sustitución que anexo al presente escrito, me dirijo a Usted para dar respuesta al requerimiento del que fue objeto la solicitud de la referencia, mediante el Oficio 500 del 14 de enero de 2010, en el siguiente sentido:

INTRODUCCIÓN

Teniendo en cuenta que la Dirección de Nuevas creaciones reprocha de la solicitud de la referencia la ausencia del cumplimiento de los requisitos de novedad, aplicación industrial, y el nivel inventivo, se ha encontrado al cotejar el requerimiento frente a los documentos que obran en el expediente, que la interpretación del Despacho obedece a una deficiente traducción del contenido y alcance de la solicitud, razón por la cual se presentará otra traducción, esta de carácter oficial, para efectos de que se establezca el cumplimiento de los requisitos exigidos por los artículos 14 y siguientes de la Decisión 486 de la Comisión de la Comunidad Andina de Naciones.

Para el mismo efecto estoy aportando copia simple de la solicitud presentada en Australia, bajo el número AU 2005332258 B2, la misma que será aportada traducida en idioma español, antes de que se profiera decisión de fondo, para efectos de que se establezca fehacientemente el cumplimiento de los requisitos de novedad, aplicación industrial, y el nivel inventivo.

DERECHO

1. Respecto de la descripción de la invención, más allá de que sea un proceso de extrusión de material como lo denomina el examinador técnico, tal proceso comprende unas especificaciones particulares como lo son el material utilizado y la finalidad del proceso.
2. En cuanto al nombre de la invención se tiene que la expresión "ESTRUCTURA MEJORADA DE UNA LUZ TUBULAR SUAVE DE COLOR VARIABLE" refleja claramente el objeto de la invención ya que describe su finalidad y especifica el objeto técnico sobre el cual recae la invención.
3. Respecto de los supuestos errores de transcripción, en cuanto a la expresión DEL constituida por siglas en idioma inglés, es superficial y desatinada la calificación del examinador toda vez que en una única oportunidad equivocadamente se cambió por las siglas LED, no con esto variando el sentido ni modificando las siglas, puesto que todo aquel que posee conocimiento técnico medio comprende la expresión que es estandar en todo el mundo.

Recibo notificaciones en la carrera 11 No. 86 – 32, Oficina 101, de esta ciudad, o en el casillero asignado al suscrito por esa entidad.

PERSONERÍA

Ruego al Despacho se sirva reconocerme personería de conformidad con el poder especial que aporto con este escrito.

ANEXOS

Aporto copia simple de la solicitud presentada en Australia, bajo el número AU 2005332258 B2, la misma que será aportada traducida en idioma español, antes de que se profiera decisión de fondo, para efectos de que se establezca fehacientemente el cumplimiento de los requisitos de novedad, aplicación industrial, y el nivel inventivo.

Bogotá D.C., Abril 15 de 2010.

Señora Jefe
ALIX CARMENZA CESPEDES DE VERGEL
DIVISIÓN DE NUEVAS CREACIONES
SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO
E. S. D.

Referencia: **ESTRUCTURA MEJORADA DE UNA LUZ
TUBULAR SUAVE DE COLOR VARIABLE**
Expediente No. 2007134427

JUAN MANUEL SERRANO CASTILLO, mayor de edad, domiciliado en esta ciudad, identificado con la cédula de ciudadanía No. 79'875.670 de Bogotá, abogado en ejercicio, portador de la tarjeta profesional No. 124.953 del C. S. de la J., actuando en calidad de apoderado de la sociedad **HE SHAN LIDE ELECTRONICS ENTERPRISE LTDA.**, me dirijo respetuosamente a su Despacho para manifestarle que sustituyo con idénticas facultades el poder a mi conferido al señor **JULIO CÉSAR RAMÍREZ PIÑA**, quien se identifica como aparece al pie de su firma, y se encuentra domiciliado en la Carrera 11 No. 86 - 32 (oficina 101) de Bogotá, D.C.

Ruego al Despacho que se sirva reconocerle personería para adelantar y llevar hasta su culminación el correspondiente trámite de Patente de la referencia.

De Usted, atentamente,


JUAN MANUEL SERRANO CASTILLO
C.C. No. 79'875.670 de Bogotá D.C.
T.P. No. 124.953 del C.S. de la J.

Acepto,


JULIO CÉSAR RAMÍREZ PIÑA
C.C. No. 79'779.990 de Bogotá D.C.
T.P. No. 113.206 del C. S. de la J.

PRESENTACION PERSONAL


El anterior escrito fue presentado ante el
NOTARIO ONCE (E) DEL CIRCUITO DE BOGOTÁ, D.C.
personalmente por

Juan Manuel
Serrano Coshito
79825670- Boloh
quien exhibió la c.c.
y Tarjeta Profesional No. 124753 D.S.

Firma: Juan Manuel S.

Fecha: 15 ABR 2010

Neison J. Sanchez García
NOTARIO (E)

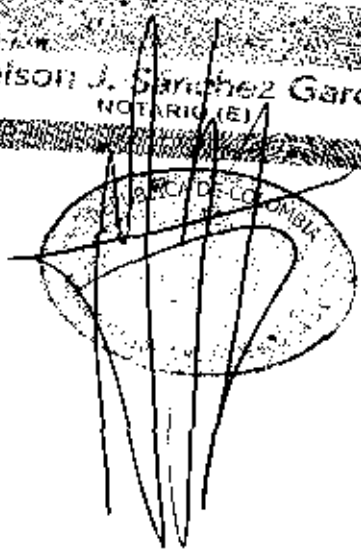

(12) STANDARD PATENT
(13) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 2005332258 B2

(54) Title
An improved structure of a color changeable soft-tube light

(51) International Patent Classification(s)
F21S 4/00 (2006.01) F21V 23/00 (2006.01)
F21S 10/00 (2006.01)

(21) Application No: 2005332258 (22) Date of Filing: 2005.05.23

(87) WIPO No: WO06/125338

(43) Publication Date: 2006.11.30

(44) Accepted Journal Date: 2009.09.17

(71) Applicant(s)
He Shan Lide Electronic Enterprise Company Ltd.

(72) Inventor(s)
Fan, Ben

(74) Agent / Attorney
Madderns, First Floor 64 Hindmarsh Square, Adelaide, SA, 5000

(56) Related Art
WO 2005/017408A

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局



(43) 国际公布日
2006 年 11 月 30 日 (30.11.2006)

PCT

(10) 国际公布号
WO 2006/125338 A1

(51) 国际专利分类号:

F21S 4/00 (2006.01) F21V 23/00 (2006.01)
F21S 10/40 (2006.01)

(74) 代理人: 广州新诺专利商标事务所有限公司
(GUANGZHOU SINO PATENT & TRADEMARK
AGENCY CO., LTD.); 中国广东省广州市金边路 87
号四楼, Guangdong 510030 (CN)。

(21) 国际申请号: PCT/CN2005/000707

(22) 国际申请日: 2005 年 5 月 23 日 (23.05.2005)

(25) 申请语言: 中文

(26) 公布语言: 中文

(71) 申请人 (对除美国外的所有指定国): 鹤山丽得电
子实业有限公司 (HE SHAN LIDE ELECTRONIC
ENTERPRISE COMPANY LTD.) [CN/CN]; 中国广
东省鹤山市共和镇, Guangdong 529728 (CN)。

(81) 指定国 (除另有指明, 要求每一种可提供的国家保
护): AF, AG, AI, AM, AT, AU, AZ, BA, BB, BG, BR,
BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK,
DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM,
HN, HU, IL, IN, IS, JP, KE, KM, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MY, NA, NG, NI, NO, NZ, OM, PG, PL, PT,
RU, RO, SA, SD, SE, SG, SK, SL, SM, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW。

(72) 发明人: 及


(75) 发明人/申请人 (仅对美国): 樊邦弘 (FAN, Ben)
[CN/CN]; 中国广东省鹤山市共和镇祥和路 301 号鹤
山银南灯饰有限公司, Guangdong 529728 (CN)。

(84) 指定国 (除另有指明, 要求每一种可提供的地区
保护): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA,
SD, SL, SZ, TZ, UG, ZM, ZW); 欧亚 (AM, AZ, BY,
KG, KZ, MD, RU, TJ, TM); 欧洲 (AT, BE, BG, CH,
CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS,

[见续页]

(54) Title: AN IMPROVED STRUCTURE OF A COLOR CHANGEABLE SOFT-TUBE LIGHT

(54) 发明名称: 一种改良的变色软管灯结构

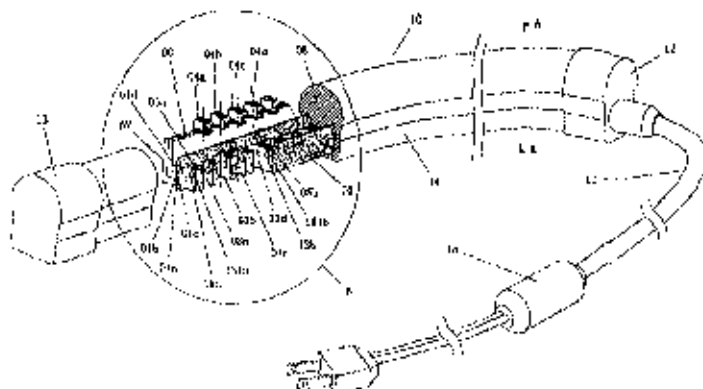

(57) Abstract: An improved structure of a color changeable soft-tube light comprises an opaque core line, a plurality of LEDs disposed within the core line, a translucent diffuser placed over the LEDs and its length being equal to the core line, and a jacket surrounding the core line and the translucent diffuser and its length being also equal to the core line. The jacket is integrally extruded and wrinkled on the outer portions of the core line and the diffuser. The LEDs are divided into many groups, each of which comprises a red LED, a green LED and a blue LED, and each of which is placed into a fixing device to form a unit. A plurality of the units are connected in series and placed into the transversal through-holes locating in the core line. The fixing device can be a box, which is quadrate, circular or elliptical. The improved structure of the soft-tube light can afford a color changeable, color mixable, and alternately versatile fixture, which can have the same uniform and sequential effect as neon light. Therefore, it can achieve the aim that is desired and pursued in the soft-tube light industry.

[见续页]

WO 2006/125338 A1

第121
119

WO 2006/125338 A1



(T, L, U, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,
NE, SN, TD, TG);

所引用双字母代码及其它缩写符号，请参考刊登在每
期PCT公报第I页起始的“代码及缩写符号简要说明”。

本国际公布：

包括国际检索报告。

(57) 摘要：

本发明公开了一种改良的变色软管灯结构，包括一不透光的芯线、设置于芯
线内的多个LED、设置于LED上方的一与芯线等长的半透明散光体、一包覆于芯
线外的与上述散光体一体挤出成型的与芯线等长度的包覆层，该包覆层与散光体
为一整体。所述的多个LED灯泡，以红、绿、蓝三个LED为一组设置于一个固定
装置形成一个单元，多个这样的单元串联并对应地设置于所述芯线中的多个横向
孔中。所述固定装置为一盒体。所述的盒体可以为方形、圆形或者椭圆形盒体。
本发明有模拟霓虹灯均匀连续的光线效果，而且可以变色及混色，色泽多样绚丽，
达到了软管灯行业追求的更高目标。

122
120

AN IMPROVED STRUCTURE OF A COLOR CHANGEABLE SOFT -TUBE LIGHT

BACKGROUND OF THE INVENTION

5 The present invention relates to a decorative lighting device, and in particular to a color changeable tube light for simulating the effects of successive, even, vivid and soft light beams of the neon light.

10 The known tube light for simulating the effects of the neon light is provided with transversal through-holes in the core line and LEDs in the transversal through-hole. Though the effects of successive, even, bright-color and soft light beams of the neon light are obtained, the effect of color changeable remains unavailable. In the PCT International Application No. PCT/CN2004/000634 filed by the present applicant, a fixing means for containing a red LED, a green LED and a blue LED and disposing in the transversal through-hole of the core line is not disclosed. If a tube light for simulating the effects of color changeable neon light is designed according to the above international application, a red LED, a green LED and a blue LED should be disposed into three parallel transversal through-holes respectively, and thus the spacing is obviously large, which goes against the scattering and homogenizing of light beams by the diffuser, color mixing and color changing. If the red LED, the green LED and the blue LED are simultaneously disposed in the transversal through-hole, the three LEDs would be dislocated easily for lacking of fixing means, which goes against color mixing, color changing and results in color unevenness of the emission light, and besides the structure is not compact and firm enough, the LED lead wire would be broken easily which lead to bad electrical connection. Therefore, it is an object for the companies in this field to design a tube light for simulating the effects of successive, even, vivid and soft light beams of the neon light, which is capable to change the color and mix the colors of light beams, and is of compact and firm structure, and can be bended freely and cut off or extended if necessary.

SUMMARY OF THE INVENTION

30 Having outlined the state of the prior art and its attendant shortages, it is an object of the present invention to provide a tube light for simulating the effects of successive, even, bright-color and soft light beams of the neon light, which is capable to change the color and mix the colors of light beams, and is of compact and firm structure, and can be bended freely and cut off or extended if necessary.

35 The above object of the present invention is achieved by the following technical

4/13/12

07 Jul 2009 2005332258

solutions:

An improved color changeable tube light, includes:

a core line, the core line being formed of a strip with predetermined length produced by extrusion molding of white opaque flexible plastic, wherein four copper stranded wires are provided vertically in interval in one side portion of the cross section of the strip, two longitudinal through-holes are provided at the middle portion of the cross section of the strip, the copper stranded wire is of the same length as that of the longitudinal through-hole, a slot is formed longitudinally on the upper side wall of the longitudinal through-hole, a plurality of transversal through-hole are arranged at predetermined even interval along the longitudinal length of the strip, each of the transversal through-hole parallel to the copper stranded wire is providing in the central of the strip, a reverse trapezoidal groove is provided on the upper side wall of the strip;

a plurality of LEDs being connected in series with each other and with at least one current limiting resistor, the two ends of the string of the serially connected LEDs being electrically connected to the copper stranded wires in the core line;

a diffuser being a milky translucent object with the same length as the core line and with predetermined height and width and provided above the plurality of LEDs for scattering the light beams of the LED;

a cladding layer with the same length as the core line, the cladding layer being formed of white opaque flexible plastic by extrusion molding for wrapping the core line, the diffuser and the plurality of LEDs, the cladding layer being a semicircular surface simulating the tube light emitting surface of neon light, the cladding layer being formed integrally with the diffuser into one piece;

wherein a unit is formed by disposing a red LED, a green LED and a blue LED of the plurality of LEDs into a fixing means, a plurality of the units are connected in series and disposed in the plurality of transversal through-hole of the core line respectively.

The transversal through-hole is quadrate, circular or elliptical in shape.

The fixing device can be a box. The box is quadrate, circular or elliptical in shape. The box is provided with an opening on the top and an opening at the bottom, the opening at the bottom is slightly larger than that on the top. The box is provided with a clasp plate and a clasp key at the bottom for closing over the LED. The box is provided with slots for leading out the LED lead wires on the two sides of the bottom. The clasp plate is provided with a claspboard for supporting the led and separating

the two LED lead wires.

With the present invention, the improved color changeable tube light is of the following advantages:

Due to the fact that a unit is formed by disposing a red LED, a green LED and a blue LED of the plurality of LEDs into a fixing means and a plurality of the units are disposed in the transversal through-holes of the core line respectively, the tube light is of compact and firm the structure, and the LED lead wire is not broken easily, the electrical connection is stable, the three LEDs are not dislocated, the spacing between the three LEDs is small, which is beneficial for the color changing and mixing of the red, green and blue LEDs, so that the tube light according to the present invention is of the effects of successive, even, bright-color and soft light beams and can be bended freely and cut off or extended if necessary. The changing and flashing of seven colors and the variety and floweriness of color can be obtained accordingly.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG.1 is a perspective view of a tube light according to an embodiment of the present invention.

FIG.2 is a cross-sectional view of the tube light shown in FIG.1 taking from A-A line.

FIG.3 is a detailed view of the "B" section of FIG.1.

FIG.4 is a schematic view of extrusion molding of a tube light according to an embodiment of the present invention.

FIG.5 is a schematic principle diagram of optics of a tube light according to an embodiment of the present invention.

FIG.6 is an exploded view of a quadrate box as the fixing means according to an embodiment of the present invention.

FIG.7 is an assembly view of a quadrate box as the fixing means according to an embodiment of the present invention.

FIG.8 is a perspective view of the known tube light in the art.

FIG.9 is an example of using the tube light according to an embodiment of the present invention.

12
125
123

DETAILED DESCRIPTION OF THE INVENTION

Referring to FIG.1, FIG.2 and FIG.3, in the production process of an improved color changeable tube light, four copper stranded wires 01a, 01b, 01c and 01d pass through the molding hole (not shown) of the extrusion molding machine, a strip with predetermined length made of white opaque flexible plastic such as PVC or plastic with other color is automatically and successively extruded. The strip is provided with a groove of reverse trapezoidal shape. The strip is the core line 02. In the middle part of the core line 02, two longitudinal through holes 18a and 18b are arranged horizontally at interval. The copper stranded wires 01a, 01b, 01c, 01d and the longitudinal through holes 18a, 18b extend longitudinally along the strip and have the same length as the core line 02. Slots 181a, 181b are formed longitudinally on the upper side wall of the longitudinal through holes 18a, 18b respectively.

Then, along the whole longitudinal length of the core line 02, a plurality of transversal through holes 03a, 03b, 03c, 03d, 05a and 05b parallel with the copper stranded wires 01a, 01b, 01c and 01d are punched at even interval by automatic punching machine. The interval through holes are arranged in the middle part of the core line 02 on the side opposite to that of the copper stranded wires 01a, 01b, 01c and 01d and parallel to the copper stranded wires 01a, 01b, 01c and 01d. The punched lateral through holes on the core line are of at least one row, and may be two rows, three rows etc. The lateral through hole may be quadrate, circular or elliptical or other in shape. In this embodiment, the transversal through holes 03a, 03b, 03c, 03d are quadrate, and the other two rows of the lateral through holes 05a, 05b are round.

LED bulb is of the good properties such as low energy consumption, low temperature, high brightness and small size, and thus the spacing between the LEDs can be reduced to increase the number of LEDs per unit length, so that the brightness of tube light can be improved safely, and it is possible to obtain the brightness which exceeds that of the glass neon light. Preferably, the LED bulb is elliptical or flat in shape and has a diameter or width of 3mm to 5mm, and the brightness of LED is around 200Mcd, and the spacing between the transversal through holes 03a, 03b, 03c and 03d for containing the LEDs is only 1/2 inch.

In the present invention, a unit is formed by disposing a red LED, a green LED and a blue LED of the plurality of LEDs into a fixing means, a plurality of the units are connected in series and disposed in the plurality of transversal through-holes of the core line respectively. The box is quadrate, round or elliptic in shape. As shown in FIG.6, FIG.7, the fixing means is preferably implemented in the form of the quadrate box 23, which can prevent the breaking of LED lead wire and enable the structure compact and firm. The quadrate box 23 is provided with an opening on the top 27

124

and an opening at the bottom 28, the opening at the bottom 28 is slightly larger than the opening on the top 27. A clasp plate 24 and a clasp key 25 for closing over the LED is provided at the bottom of the quadrate box 23. The clasp plate 24 is provided with a clapboard 26 for supporting the LED and separating the two LED lead wires. The box 23 is provided with slots 29 for leading out the LED lead wires on the two sides of the bottom. The LED bulb 04, that is the three LEDs of red, green and blue, is inserted into the quadrate box 23 via the bottom 28, and then the clasp plate 24 is covered, and thus the clapboard 26 exactly supports the LEDs and separates the two lead wires of LEDs. The lead wires 291 are guided out of the quadrate box through the slots 29. The clasp plate 24 and the clasp key 25 snap together, so that the firm and compact structure is obtained and the breaking of the two LED lead wires can be avoided, as shown in FIG. 7.

After the core line 02 is produced, the quadrate boxes 04a, 04b, 04c and 04d each of which contains the three LEDs of red, green and blue are connected in series according to the color, that is, red LEDs are connected with each other into one route, green LEDs are connected with each other into one route, and blue LEDs are connected with each other into one route. At least one current limiting resistor 06 is connected in series with the LEDs. The quadrate boxes 04a, 04b, 04c and 04d are inserted into the quadrate transversal through-holes 03a, 03b, 03c, 03d of the core line 02 respectively in sequence. Two round transversal through-holes 05a, 05b for containing the wires connecting the LEDs or the serially connected current limiting resistor 06 are arranged between two quadrate transversal through-holes. The lead wires 291 of the LEDs 04 and the connection wires thereof are disposed in the longitudinal through holes 18a, 18b via the slots 181a and 181b. After the LED string is inserted into the core line 02, the lead wires 07 of the head end of the LED string are connected to the copper stranded wires 01a, 01b, 01c and the other end of the LED string is connected to the copper stranded wire 01d, so that three loop are formed, as shown in FIG. 3.

As shown in FIG. 8, the known tube light is formed of a core line 120 covered with a diffuser 180 and a light shield layer 190. The copper stranded wires 110a, 110b are provided up and down on one side of the cross section of the core line 120 at interval, and the LEDs 140a, 140b are provided on the other side opposite to the copper stranded wires 110a, 110b. The LEDs 140a, 140b, the connection wire 150 and the current limiting resistor 160 are inserted into the transversal through-holes 130a, 130b, 130c and 130d of the core line 120. The fixing means is not used, and the LEDs 140a, 140b are inserted into the transversal through-holes directly.

After the above LED string is completely inserted into the core line 02, the core

120

line 02 is pulled through the molding hole 17 of the extrusion molding machine 16, as shown in FIG.4, a cladding layer 14 with the same length as the core line 02 for covering the core line 02 is formed automatically by extrusion molding of flexible plastic 19. The diffuser which is a milky translucent object is automatically and successively extruded integrally with the cladding layer 14. The diffuser is of the same length as the cladding layer 14. That is, when the core line 02 passes through the extrusion molding machine, the diffuser 08 is formed above the core line 02, the cladding layer 14 is formed below the core line 02, and the diffuser 08 and the cladding layer 14 are extruded simultaneously in one piece by extrusion molding. The plastic 19 for molding the diffuser 08 and the cladding layer 14 is milky translucent flexible plastic normally PVC. The diffuser 08 is above the LED bulb 04, and is semi-circular surface 10 for simulating the tube light emitting surface of neon light. The diffuser 08 above the core line 20 is 14mm in height and 27mm in width, as shown in FIG.2.

It is known to the skilled in the art that when the core line 02 passes through the molding hole 17 of the molding machine 16, the diffuser 08 should be disposed on right above the LED bulb 04 in the core line 02, that is, the LED bulb 04 should be disposed on right below the diffuser 08 and close to the midline of the diffuser 08.

Because the core line 02 is made of opaque plastic, the emission light of LED will not penetrate the two side walls of the core line 02 after the LEDs are disposed in the quadrate transversal through-holes of the core line. The opaque core line 02 performs the function of shielding the emission light from the sides of LEDs 04, so that light beams are only emitted from the top of the LEDs 04 and then emitted outwards through the diffuser 08.

The diffuser 08 of the improved color changeable tube light according to the present invention is a milky translucent or foggy translucent object, and normally made of milky flexible PVC or Acrylic by extrusion molding. The width and height of the diffuser 08 is correlative to the brightness and the irradiation angle of LEDs in the core line. The height and width of the diffuser may be larger if the brightness and the irradiation angle of LEDs is large. In contrary, the height and width of the diffuser should be smaller if the brightness and the irradiation angle of LEDs are small. The larger the width and height of the diffuser, the more loss in brightness, and the better in eliminating the appearance of the spot light source. In contrary, the smaller the width and height of the diffuser, the weaker in eliminating the appearance of the spot light source, and the higher in brightness. It is preferred to the present invention that the diameter or the width of a LED is 3~5mm, the brightness of LED is around 200Mcd, the irradiation angle of a LED is 45 degree, and the spacing between the

126

quadrate lateral through holes on the core line 02 for containing the quadrate boxes of LEDs is 1/2 inch. The diffuser 08 is of a height H of 14mm and a width L of 27mm, as shown in FIG.2. The emission light of LED is diffused and refracted by the diffuser 08, and the light beams of LED 04a, 04b, 04c, 04d overlap at edge sections, for example, the emission light beams of LED 04b, 04c overlap at section 121, so that the brightness at edge sections of LEDs is enhanced and nearly equivalent to that at central sections of LEDs, as shown in FIG. 5. Therefore, the appearance of tube light according to the present invention has the effect of successive and even light beams similar to that of the neon light.

After the above-mentioned cladding layer is formed, the copper stranded wires 01a, 01b, 01c, 01d should be electrically connected to the power supply wire 11 and a plastic casing is provided for protecting the electrical connection, and thus a connector 12 is formed, as shown in FIG.1. Meanwhile, a plastic casing, that is, a tail plug 13 for encapsulating the copper stranded wire and the electrical connection wire thereof is formed on the end of the above-mentioned core line 02 and the cladding layer 14. It is known to those skilled in the art that a plurality of methods for implementing the electrical connection and the plastic casing for protecting the electrical connection have been available.

The structure of the core line of the improved color changeable tube light according to the present invention is shown in FIG.1, FIG.2 and FIG.3. The core line 02 is provided with a groove on the side facing the top of the LED bulb 04, and the groove is reverse trapezoidal in shape. The two inclined surfaces of the trapezoid concentrate and reflect the light beams emitted by the LEDs 04 in the core line 02, so that it appears from the above of the semi-circular surface that the brightness is higher and the effects of successive, even, bright-color light beams are better. In addition, a layer of phosphor may be provided on each of the inclined surfaces of the groove in the core line 02 so as to obtain a more flowery appearance of light beams.

As shown in FIG.9, a light board displaying the word "OPEN" is formed by using the tube lights according to the present invention, which simulate the neon light. During the assembly, the tube lights are cut off and bended so as to form the word "OPEN", and the tube lights are fixed to a board 31 by fixing means such as clamps 30. Therefore, the improved color changeable tube light of the present invention is of simple structure, and can be easily assembled, and is safe and reliable. Meanwhile, it is seen from the above of the semi-circular surface 10 that the tube light is of successive and even light beams, and the light beams from the sides of LEDs are shielded by the opaque core line so as to enable the word pattern formed by the tube light of the present invention to have the effects of light beams of neon light, and the

129
122

07 Jul 2009
2005332258

color changing and the color mixing to obtain various effects are available.

A detailed description of one or more preferred embodiments of the invention is provided above along with accompanying figures that illustrate by way of example the principles of the invention. While the invention is described in connection with such embodiments, it should be understood that the invention is not limited to any embodiment. On the contrary, the scope of the invention is limited only by the appended claims and the invention encompasses numerous alternatives, modifications, and equivalents. For the purpose of example, numerous specific details are set forth in the description above in order to provide a thorough understanding of the present invention. The present invention may be practiced according to the claims without some or all of these specific details. For the purpose of clarity, technical material that is known in the technical fields related to the invention has not been described in detail so that the present invention is not unnecessarily obscured.

Throughout this specification and the claims that follow unless the context requires otherwise, the words 'comprise' and 'include' and variations such as 'comprising' and 'including' will be understood to imply the inclusion of a stated integer or group of integers but not the exclusion of any other integer or group of integers.

The reference to any prior art in this specification is not, and should not be taken as, an acknowledgment or any form of suggestion that such prior art forms part of the common general knowledge of the technical field.

12
130
128

2005332258 07 Jul 2009

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. An improved color changeable tube light, including:

a core line, the core line being formed of a strip with predetermined length produced by extrusion molding of white opaque flexible plastic, wherein four copper stranded wires are provided vertically in interval in one side portion of the cross section of the strip, two longitudinal through-holes are provided at the middle portion of the cross section of the strip, the copper stranded wire is of the same length as that of the longitudinal through-hole, a slot is formed longitudinally on the upper side wall of the longitudinal through-hole, a plurality of transversal through-hole are arranged at predetermined even interval along the longitudinal length of the strip, each of the transversal through-hole parallel to the copper stranded wire is providing in the central of the strip, a reverse trapezoidal groove is provided on the upper side wall of the strip;

a plurality of LEDs being connected in series with each other and with at least one current limiting resistor, the two ends of the string of the serially connected LEDs being electrically connected to the copper stranded wires in the core line;

a diffuser being a milky translucent object with the same length as the core line and with predetermined height and width and provided above the plurality of LEDs for scattering the light beams of the LED;

a cladding layer with the same length as the core line, the cladding layer being formed of white opaque flexible plastic by extrusion molding for wrapping the core line, the diffuser and the plurality of LEDs, the cladding layer being a semicircular surface simulating the tube light emitting surface of neon light, the cladding layer being formed integrally with the diffuser into one piece;

wherein a unit is formed by disposing a red LED, a green LED and a blue LED of the plurality of LEDs into a fixing means, a plurality of the units are connected in series and disposed in the plurality of transversal through-hole of the core line respectively.

2. The improved color changeable tube light of claim 1, wherein the transversal through-hole is quadrate, circular or elliptical in shape.

3. The improved color changeable tube light of claim 1, wherein the fixing device is a box.

4. The improved color changeable tube light of claim 3, wherein the box is quadrate, circular or elliptical in shape.

5. The improved color changeable tube light of claim 4, wherein the box is provided with an opening on the top and an opening at the bottom, the opening at the bottom is slightly larger than that on the top.

123

07 Jul 2009

2005332258

6. The improved color changeable tube light of claim 4, wherein the box is provided with a clasp plate and a clasp key at the bottom for closing over the LED.

7. The improved color changeable tube light of claim 4, wherein the box is provided with slots for leading out the LED wires on the two sides of the bottom.

8. The improved color changeable tube light of claim 6, wherein the clasp plate is provided with a claspboard for supporting the LED and separating the two LED lead wires.

9. An improved color changeable tube light as claimed in claim 1, substantially as herein described with reference to the accompanying drawings.

10. An improved color changeable tube light substantially as herein described with reference to any one of the embodiments of the invention illustrated in the accompanying drawings.

131

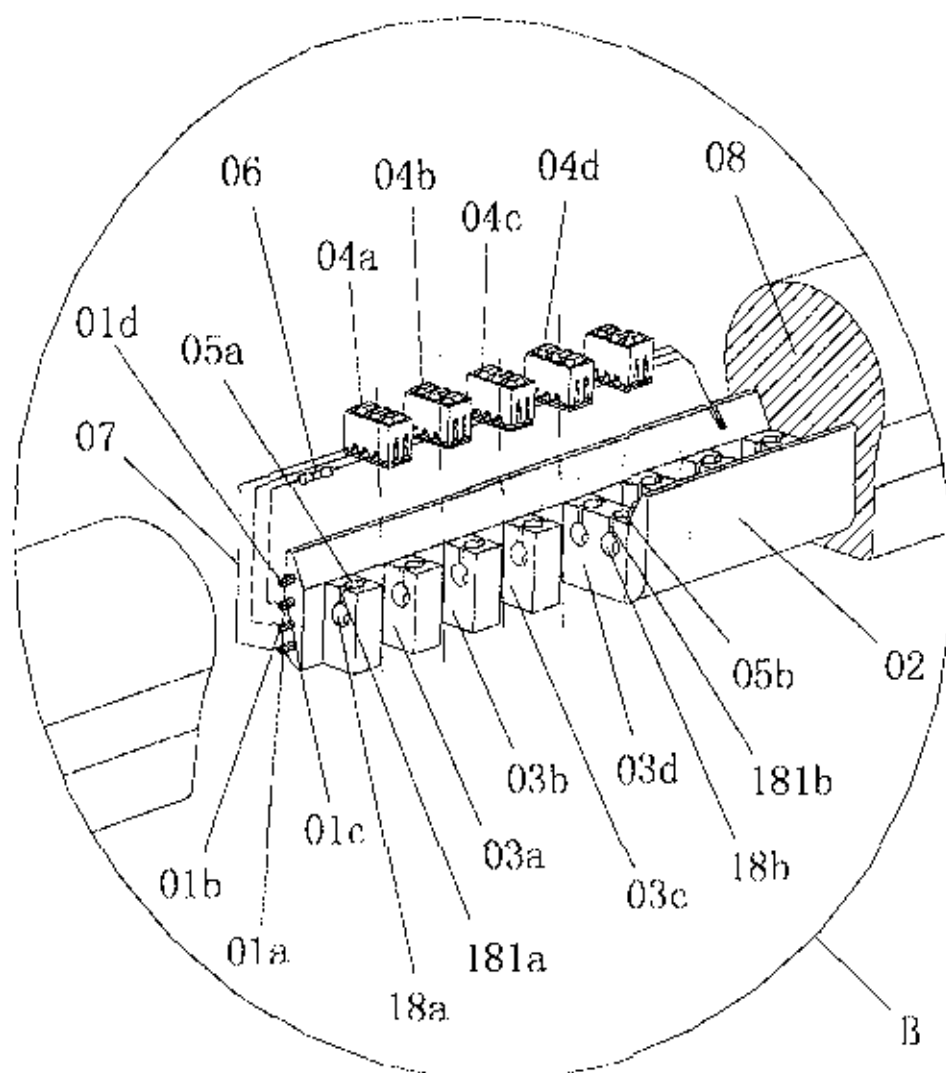


FIG.3

2/104
132


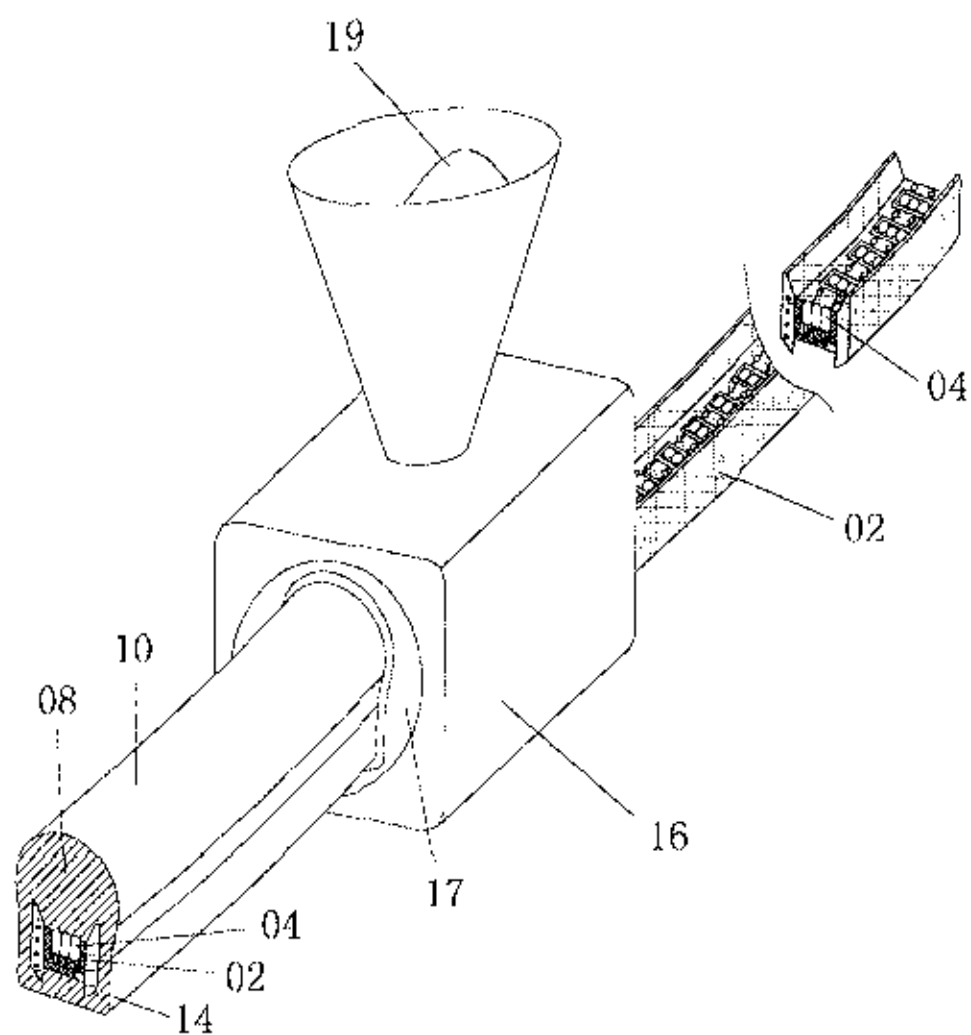


FIG. 4

FIG. 8

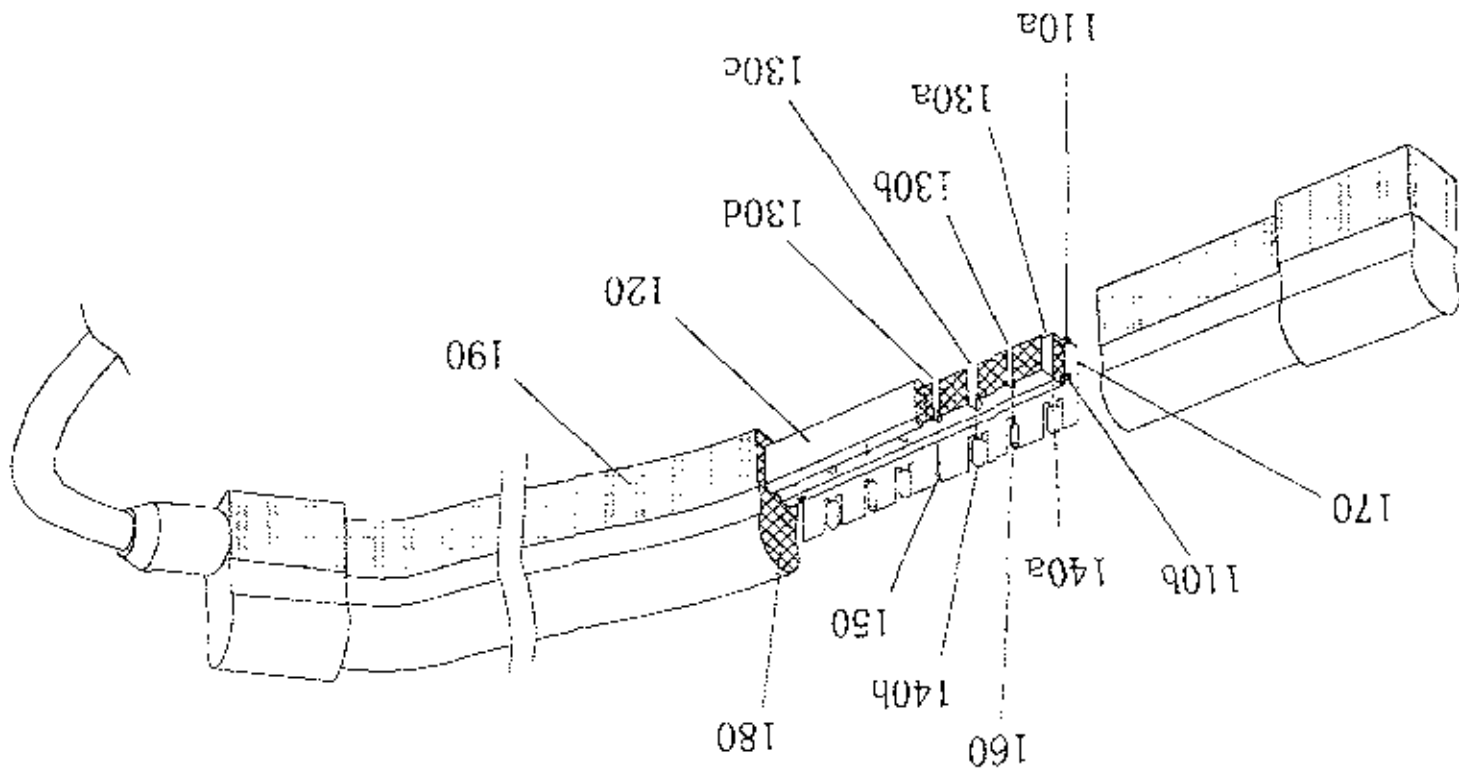

152
154
156

FIG. 9

