

Title: Elongated pin for application of an external fixator

DESCRIPTION

Technical field

5 The present invention relates to an elongated pin for an external fixator having the function of a monocortical pin.

Prior Art

10 External fixation systems are widely used to treat bone fractures and to connect two or more bone fragments together. Known systems use bone screws, screws and/or wires which are inserted inside the bones and which use external structural elements as fixing clamps, fixing bars or annular bars to ensure a rigid structure which keeps the bone fragments stationary and therefore allows permanent healing by means of an external fixator or by means of internal stabilization systems such endomedullary plates or nails.

15 In some types of treatment, particular local conditions in the fracture zone may occasionally preclude the use of permanent fixators, or the fracture may be present along with other fractures due to an injury which requires fairly lengthy surgical treatment before a permanent internal fixation system may be used.

20 In these cases also, some or all the fractures may be treated with external fixation systems which are specifically designed for temporary fixing and which therefore may be regarded as temporary systems, as for example described in EP 2,319,436 in the name of the same Applicant.

25 In any case it is very important that, at the end of treatment, each fracture is contained in a stable manner.

In this technical sector there are also many fixing systems which are used mainly as permanent fixing systems for allowing bone fractures to heal, such as the system described in EP 1,284,666 in the name of the

same Applicant.

In general the temporary fixing systems are lighter and simpler, but are also less stable compared to the known permanent external fixation systems. Moreover, temporary and permanent external fixation systems
5 may often differ in terms of the form and structure of the respective clamps.

Still in general terms, permanent external fixation systems offer a high degree of rigidity and stability for managing the lateral flexural forces and twisting torque during treatment.

- 10 Such rigidity and stability are derived partly from the alignment of the bars of the fixator along the longitudinal axis of the bone which is treated, partly from the intrinsic rigidity of the system and partly from the number of screws used.

- 15 It would be highly desirable to have the possibility of using an external fixator which combines the characteristics of simplicity and lightness of a temporary fixing system and the robustness and stability characteristics of a permanent fixing system, which damages as little as possible the bone structure so as not to adversely affect the definitive internal or external stabilization, but hitherto all the methods known
20 from the known solutions have not produced satisfactory results.

- The technical problem of the present invention is that of providing an elongated pin for an external fixator which is able to ensure stable and robust fixing of the bone fragments and which affects as little as possible the bone structure in order to avoid subsequent infection and
25 stabilization problems, while at the same time keeping the entire system extremely light and also ensuring easy application for the surgeon.

- Another object of the present invention is to provide an elongated pin for a fixing system which may be inserted in the bone without the use of conventional bone screws, which allows the gripping action to be limited
30 to the cortical portion alone of the fractured bone in the zone where there is a cortical bone of certain thickness and which at the same is

able to ensure a good grip also in the spongy bone.

Summary of the invention

These objects are achieved by an elongated pin for an external fixator, in accordance with claim 1 of the present invention.

- 5 The dependent claims define preferred and particularly advantageous embodiments of the elongated pin according to the invention.

Further characteristic features and advantages will emerge more clearly from the detailed description provided hereinbelow of a preferred, but not exclusive embodiment of the present invention, with reference to the
10 attached figures, provided by way of a non-limiting example.

Brief description of the drawings

- Figures 1 to 3 show various views of the tip of an elongated pin for an external fixator in accordance with the present invention;
- Figure 4 shows a perspective view of the elongated pin;
- 15 - Figure 5 shows a plan view of the elongated pin according to Figure 4;
- Figures 6 and 7 show a respective detailed view of the tip of the pin according to Figure 4;
- Figures 8 and 9 show in detail two pins with different angles of the tip of the pin in accordance with a preferred embodiment of the present
20 invention.

Detailed description

With reference to the attached figures, the reference number 1 indicates overall an elongated pin comprising an elongated cylindrical stem 2 extending along a longitudinal axis X and a conical end portion 3 with a
25 tip and an external thread for inserting the pin 1 into a bone.

In accordance with the present invention said conical end portion 3 with a tip has an overall length, measured along the longitudinal axis X,

equal to the diameter d of the stem $\pm 20\%$ of said diameter d . Preferably, the length of the conical tip end portion 3 of the pin 1 is equal to the length of the diameter of the stem $\pm 10\%$ of said diameter and more preferably is equal to the length of the diameter of the stem $\pm 5\%$ of said diameter.

Essentially, the length of the conical threaded end portion 3 of the pin extends over a smaller distance so as to allow insertion thereof only into the cortical portion of the bone without penetrating into the medullary cavity.

10 In other words, the elongated pin 1 may be defined as being a "monocortical pin".

In accordance with the present invention, the stem 2 has a cylindrical end area 4 extending adjacent to the conical portion 3. This cylindrical end area of the stem has an external thread which extends over a length, measured along the longitudinal axis X , equal to the diameter d of the stem $\pm 25\%$ of said diameter d .

Preferably, the length of the threaded cylindrical end area 4 is equal to the length of the diameter of the stem $\pm 20\%$ of the length of said diameter and more preferably is equal to the length of the diameter of the stem $\pm 10\%$ of said diameter.

Essentially, the stem has an external thread in the end zone 4 continuous with the thread of the conical portion 3. This thread on the stem 2 adjacent to the thread of the conical portion 3 allows a good grip to be achieved also in the spongy bone.

25 The pin according to the present invention could be defined as being a monocortical pin with the thread which extends partially along the stem.

The spongy bone, unlike the cortical bone, does not have a strength sufficient to allow stabilization with only the conical end and therefore requires a larger gripping volume in order to ensure the necessary stability comparable with the gripping action on the cortical bone.

This stability is obtained by fully exploiting the compression and the profile of the monocortical tip which enters into the spongy bone without removal of bone material.

5 The spongy bone is compressed over a length such as not to be excessively invasive for the subsequent application of a nail or a plate.

10 The gripping performance of the elongated pin 1 according to the present invention is sufficient to ensure a stability equivalent to a bicortical pin inserted in spongy bone with a length of the threaded area 5-10 mm greater than the length of the threaded area which can be used with the pin according to the present invention.

In order to guarantee better the penetration of the pin, preferably the thread on the conical end portion 3 and the thread on the cylindrical end area 4 of the stem 2 are formed continuously; basically there are no interruptions in the thread crest.

15 The diameter of the stem 2 may be between 3 mm and 6.0 mm depending on the application. Preferred diameters of the stem are 3 mm, 4 mm, 5 mm and 6 mm.

20 The length of the elongated pin 1 may range from 50 mm to 180 mm depending on the requirements of its particular application and the dimensions of the shank.

With reference to the figures, the length of the pin is equal to 115 mm, the length of the threaded conical end portion 3 is equal to 7 mm, with a diameter d of the stem of 6 mm and length of the threaded end area 4 of the stem equal to 8 mm.

25 Therefore the overall thread of the end area 4 of the stem 2 and conical portion 3 is equal to 15 mm.

The numerical values indicated in Figures 5 and 7 are to be understood as being in millimetres.

As is clear, the elongated pin 1 according to the present invention has a

particularly thin appearance owing to the smaller diameter.

Preferably the pin 1 is made of stainless steel with a relatively high modulus of elasticity which provides the stem 2 with a predetermined rigidity and at the same time the threaded conical end 3 with a good strength.

The threaded conical end portion 3 is of the self-drilling and self-tapping type.

In order to allow better handling of the pin 1, the profile of the end 5 opposite to the stem tip is shaped so as to allow engagement of a spanner or be inserted inside a drill to allow drilling of the bone.

In order to allow easy and correct engagement of the tip with the cortical bone, the tip of the threaded conical end 3 has a cutaway portion, i.e. undercut 6, as can be clearly seen in Figures 8 and 9.

Basically, the first part of the thread (on the tipped end) is eliminated by the undercut 6 on the tip so that the tip operates as a centring punch for the first tenths of a millimetre. The harder (outer) part of the cortical bone is thus removed, allowing engagement of the thread.

To conclude, the elongated pin of the present invention has:

- a ratio between the length of the threaded conical end portion 3 of the stem and the diameter d of the stem ranging between 0.8 and 1.2 and preferably between 1 and 1.2, and more preferably equal to 1;

- a ratio between the length of the cylindrical threaded end area 4 of the stem 2 and the diameter d of the stem ranging between 0.8 and 1.25 and preferably between 1 and 1.2, and more preferably equal to 1.1.

Owing to the particular configuration shown, the elongated pin 1 according to the present invention may be fixed onto the cortical bone without entering into the medullary cavity, thus reducing the risks of infection.

Moreover, also owing to the thread on the area 4 of the stem 2 close to

the conical tipped end 3, the pin 1 is able to ensure a good grip also on the spongy bone even if there is no cortical bone of suitable thickness.

As can be understood from the above description, the elongated pin according to the present invention is able to meet the requirements and overcome the drawbacks mentioned above in the introductory part of the present description with reference to the prior art.

Obviously a person skilled in the art, in order to satisfy any specific requirements which might arise, may make numerous modifications and variations to the invention described above, all of which are contained moreover within the scope of protection of the invention, as defined by the following claims.

CLAIMS

1. Elongated pin (1) for an external fixator for temporary and/or permanent fixation applications to treat bone fractures and to connect two or more bone fragments to each other, comprising an elongated
5 cylindrical stem (2) extending along a longitudinal axis (X) and a conical end portion (3) with a tip and an external thread for inserting the pin (1) into a bone, said stem (2) comprising a cylindrical end area (4) extending adjacent to the end portion (3), said cylindrical end area (4) having an external thread, characterized in that said conical end
10 portion (3) with a tip has an overall length, measured along the longitudinal axis (X), equal to the diameter (d) of the stem (2) $\pm 20\%$ of said diameter (d) and in that the threaded cylindrical end area (4) of the stem (2) has a length, measured along the longitudinal axis (X), equal to the diameter (d) of the stem (2) $\pm 25\%$ of said diameter (d).
- 15 2. Elongated pin (1) according to claim 1, wherein the conical end portion (3) with a tip extends over a total length, measured along the longitudinal axis, equal to the diameter (d) of the stem (2) $\pm 10\%$ of said diameter (d).
- 20 3. Elongated pin (1) according to claim 1 or 2, wherein the ratio between the length of the threaded conical end portion (3) of the stem (2) and the diameter (d) of the stem (2) is between 1 and 1.2.
4. Elongated pin (1) according to any one of the preceding claims, wherein the ratio between the length of the threaded end area (4) of the stem (2) and the diameter (d) of the stem (2) is between 1 and 1.25.
- 25 5. Elongated pin (1) according to any one of the preceding claims, wherein the conical end portion (3) is self-drilling and self-tapping.
6. Elongated pin (1) according to any one of the preceding claims, wherein the thread on the conical end portion (3) and the thread on the cylindrical end area (4) of the stem (2) are continuous without
30 interruptions.

7. Elongated pin (1) according to any one of the preceding claims, wherein the diameter (d) of the stem (2) of the pin is between 3 and 6 mm.

5 8. Elongated pin (1) according to any one of the preceding claims, wherein the stem (2) comprises an end (5), opposite to the end portion (3) with a tip, shaped so that it may be coupled in a removable manner with a screwing tool.

10 9. Elongated pin (1) according to any one of the preceding claims, wherein the tip of the threaded conical end portion (3) has a cutaway portion.

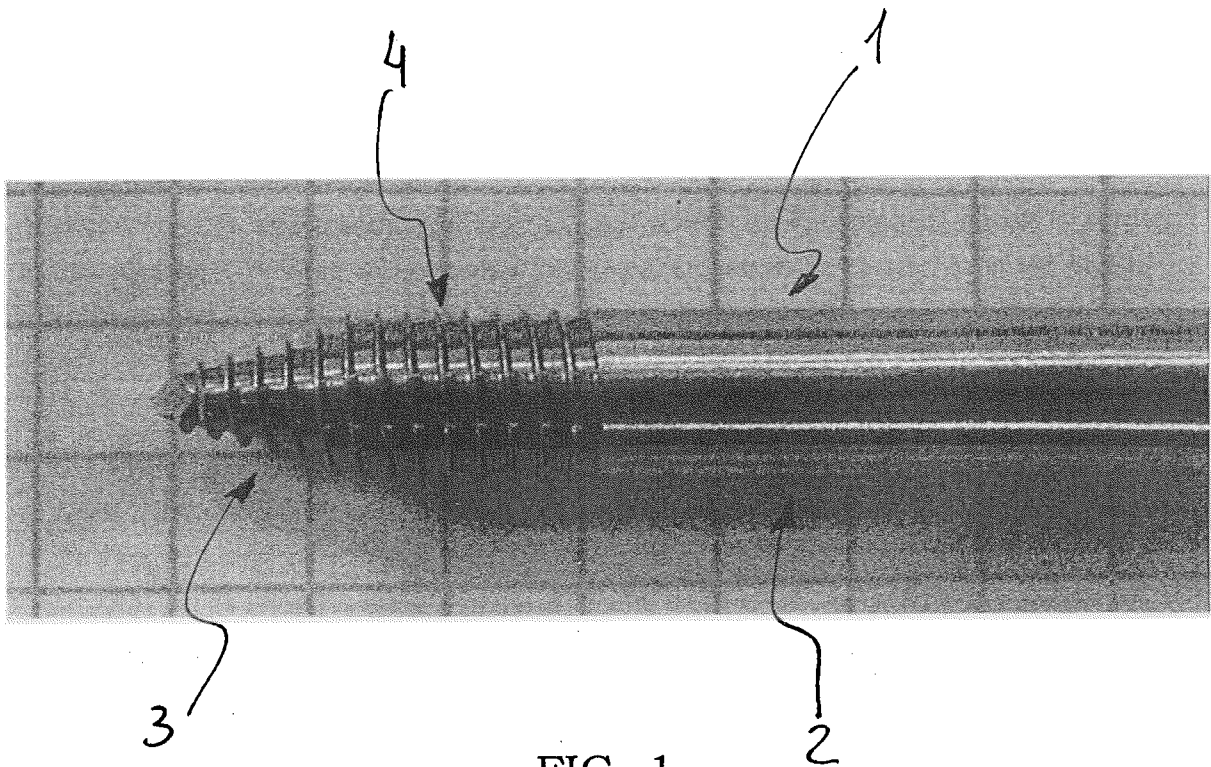


FIG. 1

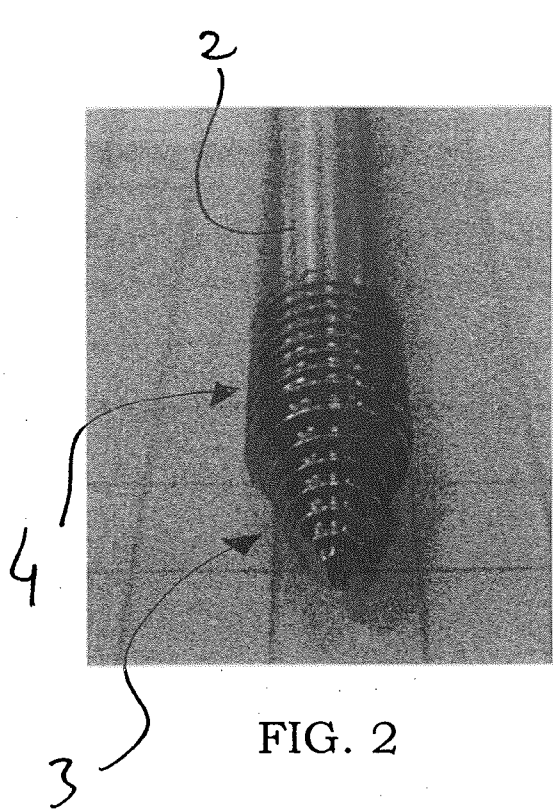


FIG. 2

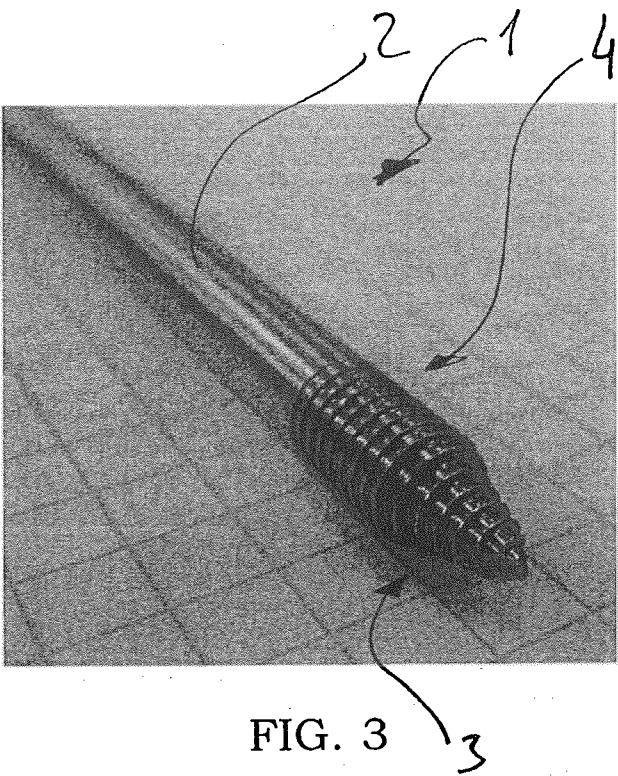


FIG. 3

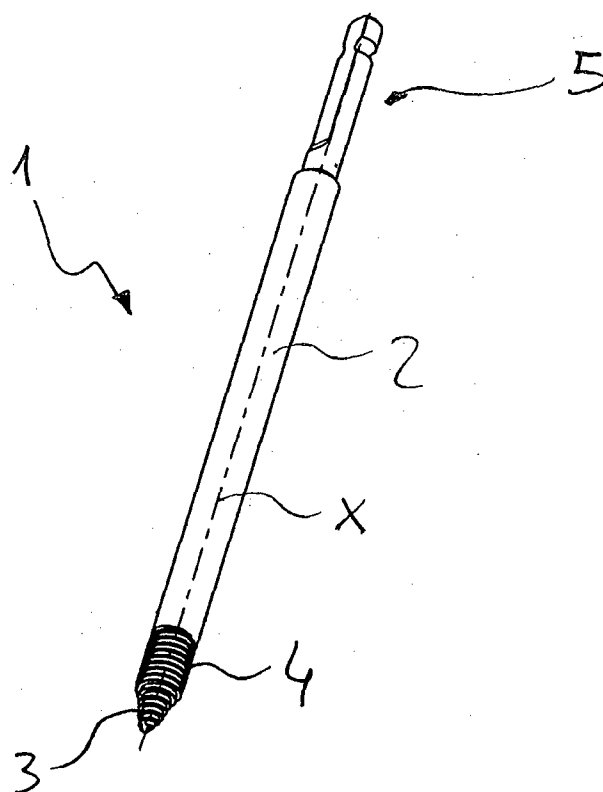


FIG. 4

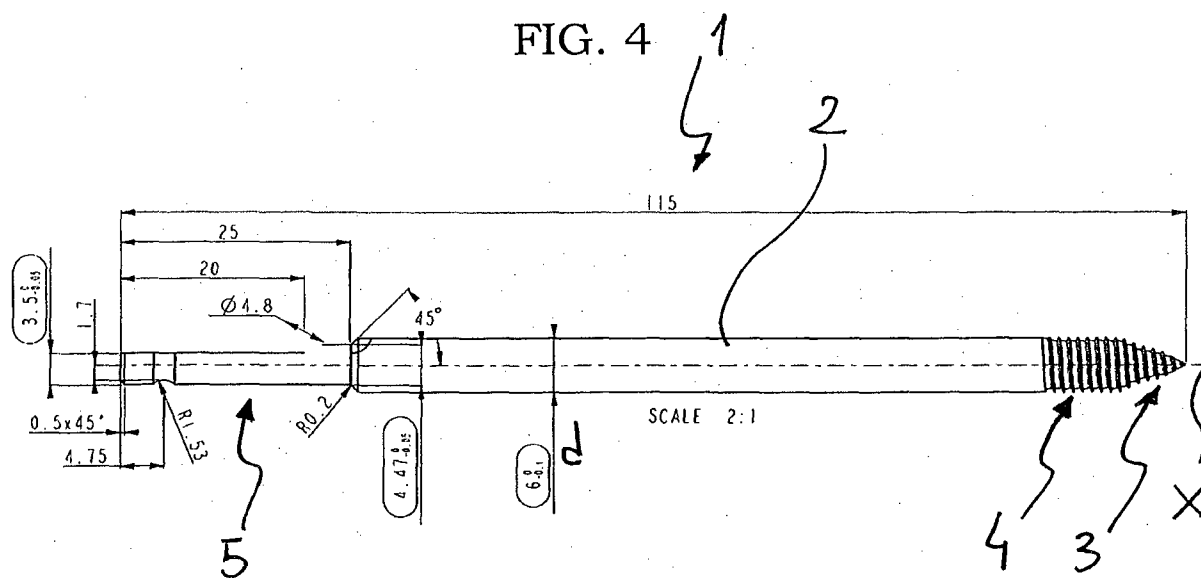


FIG. 5

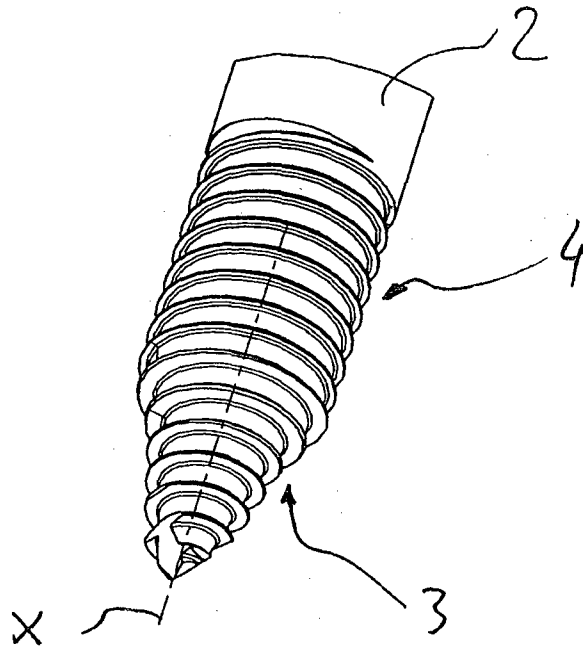


FIG. 6



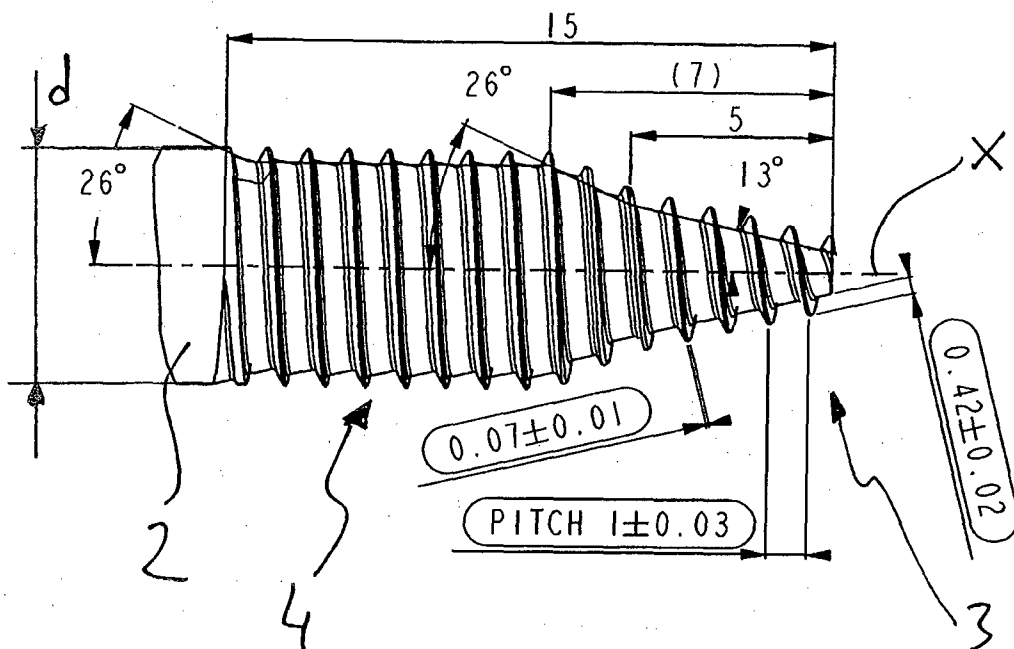


FIG. 7

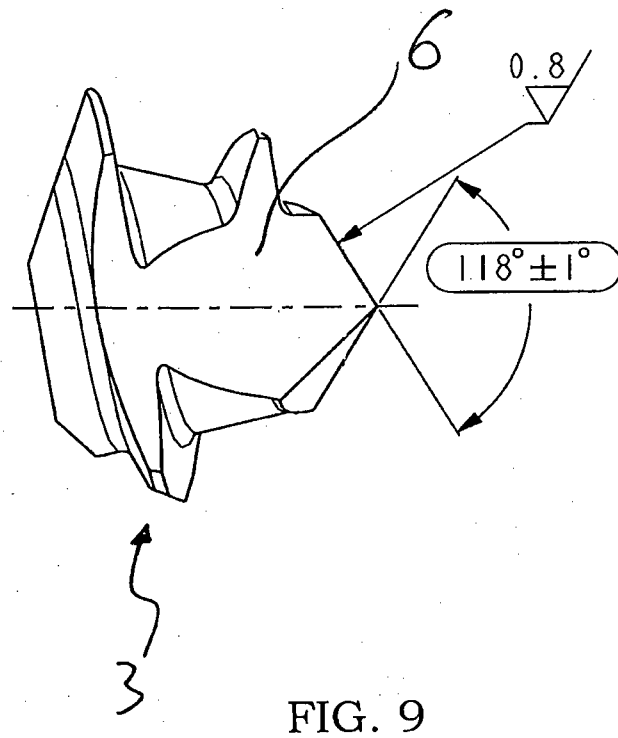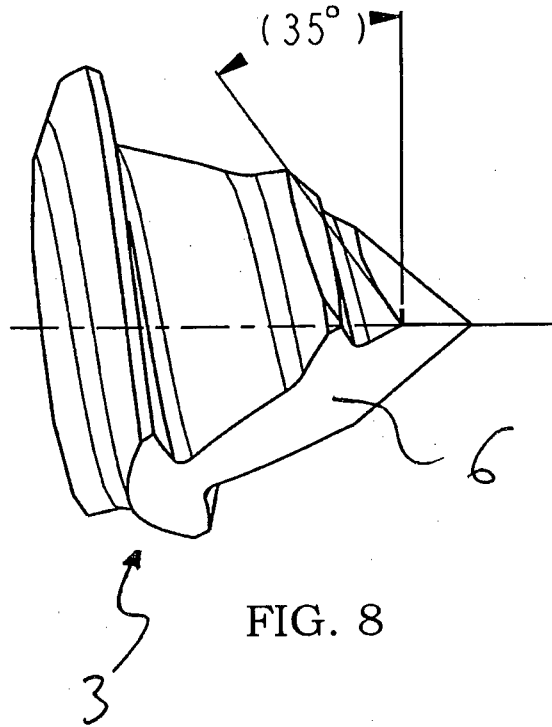

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2015/000118

A. CLASSIFICATION OF SUBJECT MATTER

INV. A61B17/86 A61B17/84 A61B17/64
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2005/085754 A1 (WERDING GERD [DE] ET AL) 21 April 2005 (2005-04-21) paragraphs [0014], [0015]; figure 2 -----	1-9
A	US 5 443 464 A (RUSSELL THOMAS A [US] ET AL) 22 August 1995 (1995-08-22) column 4, lines 25-50; figures 2,6-8 -----	1-9
A	US 2011/264149 A1 (PAPPALARDO DANA [US] ET AL) 27 October 2011 (2011-10-27) paragraphs [0115], [0151]; figures 6A,6B,12A,12B -----	1
A	US 2011/125198 A1 (GRIFFIN T HALL [US]) 26 May 2011 (2011-05-26) figures 4A,4B -----	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 April 2015

Date of mailing of the international search report

29/04/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Fourcade, Olivier

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/000118

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005085754	A1	21-04-2005	AU 2003208824 A1 04-09-2003
		CA 2475636 A1	21-08-2003
		CN 1630489 A	22-06-2005
		DE 20202049 U1	13-06-2002
		EP 1478289 A1	24-11-2004
		US 2005085754 A1	21-04-2005
		WO 03068084 A1	21-08-2003

US 5443464	A	22-08-1995	NONE

US 2011264149	A1	27-10-2011	CA 2795819 A1 03-11-2011
		CN 102858263 A	02-01-2013
		EP 2563250 A1	06-03-2013
		JP 2013525026 A	20-06-2013
		KR 20130069578 A	26-06-2013
		TW 201206390 A	16-02-2012
		US 2011264149 A1	27-10-2011
		US 2015080968 A1	19-03-2015
		WO 2011137163 A1	03-11-2011

US 2011125198	A1	26-05-2011	NONE
