



- (51) International Patent Classification:
G02B 23/02 (2006.01)
- (21) International Application Number:
PCT/US2015/021996
- (22) International Filing Date:
23 March 2015 (23.03.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14/224,134 25 March 2014 (25.03.2014) US
- (71) Applicant: UNIVERSITY OF FLORIDA RESEARCH
FOUNDATION, INCORPORATED [US/US]; 223
Grinter Hall, Gainesville, Florida 32611 (US).
- (72) Inventors: ZHAO, Bo; 7819 SW 79th Drive, Gainesville,
Florida 32608 (US). GUZMAN, Rafael; 5311 NW 98th
Terrace, Gainesville, Florida 32653 (US).
- (74) Agents: LIGHTNER, Christopher P. et al.; Alston &
Bird LLP, Bank of America Plaza, 101 South Tryon Street,
Suite 4000, Charlotte, North Carolina 28280-4000 (US).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: TELESCOPE AND TELESCOPE ARRAY FOR USE IN SPACECRAFT

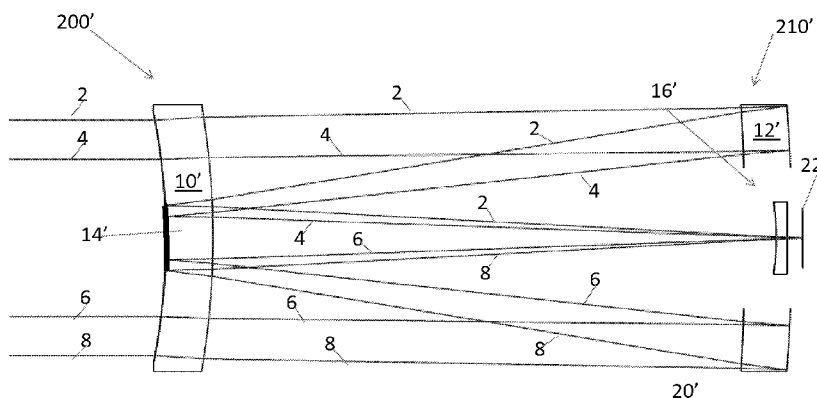


FIG. 2

(57) Abstract: A catadioptric telescope is a modified version of a conventional Maksutov-Cassegrain optical telescope. In accordance with the invention, the reflecting surfaces of the primary mirror and the secondary spot mirror are on the second surfaces of the primary mirror and correcting lens, respectively. In further accordance with the invention, two of these telescopes can be joined together to form a binocular telescope array. The array can be easily customized to suit different remote sensing/satellite applications.

TELESCOPE AND TELESCOPE ARRAY FOR USE IN SPACECRAFT

Background of the Invention

The invention relates to telescopes, and more particularly relates to optical telescopes that are capable of operation in the visible and near-infrared portions of the electromagnetic spectrum. In its most immediate sense, the invention relates to optical
5 telescopes and optical telescope arrays that are suitable for use in spacecraft (such as satellites) and other remote sensing applications.

Universities use nanosatellites for research in astronomy, climatology, and earth science. And, use of nanosatellites for both commercial and governmental purposes has been contemplated. For example, a nanosatellite network could be used to monitor the
10 entire length of a pipeline in order to prevent oil or gasoline thefts by detecting persons who bring unauthorized truck-sized vehicles in the pipeline's vicinity. Alternatively, nanosatellites can be used for e.g. border control (monitoring aircraft that may be transporting drugs, monitoring movements of guerrillas) or prevention of environmental disasters (such as international fires in large extensions of protected forests).

15 An optical telescope intended for use in a spacecraft such as a nanosatellite must meet demanding constraints. It must be small, light, well-balanced, and mechanically robust. It must also be easily customizable; some nanosatellite applications will require a wide field of view, while others will require high resolution images, and still others will require the ability to acquire spectroscopic data or polarimetry data.

20 Therefore, objects of the invention are to provide an optical telescope and an optical telescope array for use in spacecraft and remote sensing applications such as nanosatellites, which telescope and array are small, light, well-balanced, mechanically robust, and easily customizable.

Conventional catadioptric optical telescopes of the Maksutov-Cassegrain type have
25 excellent mechanical features; they are small, light, well-balanced, and mechanically robust. However, when used at wavelengths of between 400 and 1000 nm (visible to near-infrared radiation, which are required for nanosatellite applications) they have unacceptable levels of astigmatism, coma, and color spherical aberrations. And customizing a conventional Maksutov-Cassegrain telescope to meet the requirements of
30 different nanosatellite applications would be quite difficult.

The invention proceeds from two realizations. The first of these is the realization that if a conventional Maksutov-Cassegrain telescope design is modified to employ

second-surface reflection for the primary mirror and the secondary spot mirror (instead of first-surface reflection, which is conventional) the optical aberrations of the original design can be brought within acceptable limits while still preserving its advantageous features insofar as size, weight, balance, and robust character are concerned.

5 The second realization is that by using a binocular array made up of two telescopes having such a modified design, customization can be accomplished easily and inexpensively. This can be done by changing the orientation of the telescopes with respect to each other, changing the coatings on the lenses, and changing the filters that are used. If for example the telescopes are parallel with each other so that their fields of view
10 coincide to be the same at the intended distance from the satellite, a high-resolution image can be obtained. Alternatively, if an image of a large area is desired, the telescopes can be precisely disinclined so that the fields of view at the intended distance are non-overlapping. Acquisition of spectroscopic and polarimetry data can be accomplished by using suitable coatings on the lenses and suitable filters, and it is possible to acquire both
15 image data and spectroscopic or polarimetry data by configuring one telescope to acquire an image while configuring the other to acquire the non-image data desired.

Brief Description of the Drawings

The invention will be better understood with reference to the following illustrative
20 and non-limiting drawings, in which:

Fig. 1 is a schematic representation of the operation of a conventional catadioptric Maksutov-Cassegrain optical telescope;

Fig. 2 is a schematic representation of the operation of a catadioptric optical telescope in accordance with the invention;

25 Fig. 3 is a schematic diagram of a telescope in accordance with an exemplary embodiment of the invention;

Fig. 4 is a schematic diagram of a binocular telescope array in accordance with the invention;

30 Fig. 5A is a schematic illustration of the operation of a first exemplary embodiment of a binocular telescope array in accordance with the invention; and

Fig. 5B is a schematic illustration of the operation of a first exemplary embodiment of a binocular telescope array in accordance with the invention.

Detailed Description of Various Embodiments

In all the Figures, each element is always identified by the same reference numeral, and corresponding elements are identified using primed reference numerals. The Figures are not to scale; dimensions have been enlarged or reduced for clarity.

5 Fig. 1 shows a schematic representation of how a conventional catadioptric Maksutov-Cassegrain optical telescope operates in the wavelength range of 400 nm to 1000 nm. Incoming rays 2, 4, 6, and 8 enter the entrance end 200 of the telescope through its spherical meniscus corrector lens 10, which is made of optical glass and disperses them radially outwardly. They then strike the spherical reflective surface of the primary mirror
10 12 (which has an aperture 16 in its center) and are reflected back toward the corrector lens 10, where they are made incident upon a secondary “spot” mirror 14. After reflection from the secondary spot mirror 14, the rays 2, 4, 6, and 8 are directed towards a circular aperture 16 that is located in the center of the primary mirror 12.

Each of the mirrors 12 and 14 is formed by a layer of reflective material located on
15 the first surface of the mirror. (The term “first surface” is used because the ray of light is reflected from the first surface it encounters.) As a result, by the time the rays 2, 4, 6, and 8 have reflected off the secondary spot mirror 14, the image formed by those rays suffers from aberrations, which include distortion, astigmatism, coma, and color spherical aberration. Corrector lenses 18 are used to correct for these aberrations, and the rays 2, 4,
20 6, and 8 then pass through a field flattener lens 20 to become incident upon a sensor 22 (such as a CMOS sensor) at the exit end 210 of the telescope.

Fig. 2 is a schematic illustration of the operation of a telescope in accordance with the invention. Here, rays 2, 4, 6, and 8 are dispersed radially outwardly by a spherical meniscus corrector lens 10' at the entrance end 200' of the telescope and are incident upon
25 the primary mirror 12'. The primary mirror 12', is of the Mangin type; it is a negative meniscus lens with a circular aperture 16' in its center. Here, the reflection is from the second surface of the primary mirror 12'; the primary mirror 12' is made of optical glass and the rays 2, 4, 6, and 8 pass through its first surface and are reflected only when they reach its second surface. The primary mirror 12' thus acts not only as a mirror, but also as
30 a triplet lens (because the light rays are deflected twice, once when they enter the primary mirror 12' and once when they leave it).

After reflection from the second surface of the primary mirror 12', the rays 2, 4, 6, and 8 are made incident upon a secondary spot mirror 14' that is located on the second surface of the corrector lens 10'. As in the case of the primary mirror 12', the secondary

spot mirror 14' also functions as a lens because the corrector lens 10' is a spherical meniscus lens.

As can be seen by comparing Fig. 1 and Fig. 2, a telescope in accordance with the invention does not require corrector lenses located between the corrector lens 10 or 10' and the primary mirror 12 or 12'. It requires only a field flattener lens 20', which is
5 located ahead of the CMOS sensor 22 at the exit end 210' of the telescope.

Fig. 3 is a diagram schematically illustrating the dimensions of an exemplary embodiment of a telescope in accordance with the invention. In this exemplary embodiment:

- 10 a cylindrical baffle 30 is located in front of the corrector lens 10';
- another cylindrical baffle 32 is located in front of the primary mirror 12';
- a conical baffle 34 is located behind the corrector lens 10'; and
- a filter 24 is interposed between the field flattener lens 20' and the detector 22.

Baffles such as 30, 32, and 34 are conventionally used in Maksutov-Cassegrain optical
15 telescopes; the baffles are made of aluminum and they block stray light. As will be discussed below, the filter 24 is selected in accordance with the data to be captured by the detector 22.

The glass used in the exemplary embodiment shown in Fig. 3 is N-BK7, which has a refractive index $n=1.5168$. The focal length of this exemplary embodiment is 1500 mm
20 and its speed is $f/10$. At an intended observation distance of 700 km (i.e. the distance between a microsatellite in a 700 km orbit and at the earth) the exemplary embodiment has a field of view that is 20 km in diameter.

In accordance with the invention, a binocular array of catadioptric optical telescopes is constructed. Advantageously, each of the telescopes is the above-discussed
25 exemplary embodiment of a telescope in accordance with the invention. As will become evident below, this permits the array to be easily and inexpensively customized for particular applications.

An array in accordance with the exemplary embodiment is made up of two telescopes as described above. The telescopes 100 and 110 are mounted in a housing 120
30 (Fig. 4) made of a ceramic having the same thermal coefficient as the glass in the corrector lenses 10' and the primary mirrors 12'. The housing 120 has an entrance end 120A where the corrector lenses 10' are located and an exit end 120B where the CMOS sensors 22 are located.

If a particular application requires a high-definition visual image, the housing 120 can be constructed with the axes of the telescopes 100 and 110 being non-parallel, whereby the telescopes 100 and 110 have the same approximately 20 km field of view at an intended observation distance of 700 km (Fig. 5A). At that distance, an array in accordance with the exemplary embodiment can produce an image having a resolution of approximately 3 m. Alternatively, if it is more important to have a larger field of view, the housing 120' can be constructed with the axes of the telescopes 100 and 110 being parallel, whereby the array has a field of view that is approximately 40 km wide (Fig. 5B).

A telescope in accordance with the exemplary embodiment can operate in the visual and near-infrared portions of the electromagnetic spectrum, between wavelengths of 400 nm and 1000 nm. To customize a telescope and a telescope array in accordance with the invention, the coatings on the various lenses and the filters 24 are chosen to correspond to optimize the performance of the telescope and array in the portion(s) of the electromagnetic spectrum that is or are of interest. Advantageously, BBAR antireflection coating is used on lens surfaces that transmit light, and protected silver is used for surfaces that reflect light. Typical filters 24 are precision band-pass filters working at different wavelength bands, such as 400 nm - 700 nm and 700 nm - 1000 nm. Furthermore, an array in accordance with the invention can be customized in such a manner that one of the telescopes is optimized to operate in the visual portion of the electromagnetic spectrum while the other is optimized to operate in the near-infrared so as to collect spectroscopic or polarimetry data. Alternatively, the array can be customized in such a manner that one of the telescopes is optimized to collect spectroscopic data while the other is optimized to collect polarimetric data. In such instances, the two telescopes will usually share the same field of view, so that acquired image data correlates with acquired infra-red data and so that acquired data from one portion of the electromagnetic spectrum correlates with acquired data from another portion.

CLAIMS

1. A catadioptric optical telescope having a modified Maksutov-Cassegrain optical structure, comprising:
 - a. an axially elongated housing having a generally cylindrical interior and entrance and exit ends;
 - b. a corrector lens mounted at the entrance end of the housing, the corrector lens comprising:
 - i. first and second surfaces, and
 - ii. a centrally located reflective coating located on the second surface;
 - c. a primary mirror mounted at the exit end of the housing, the primary mirror being a Mangin mirror and comprising
 - i. a central aperture,
 - ii. first and second surfaces, and
 - iii. a reflective coating located on the second surface; and
 - d. the corrector lens and primary mirror being axially aligned and having their first surfaces facing each other within the interior of the housing.
2. The telescope of claim 1, further comprising a field flattener lens located within the central aperture of the primary mirror and being axially aligned with the corrector lens and primary mirror.
3. The telescope of claim 2, further comprising a CMOS sensor that is in axial alignment with the field flattener lens and is located rearwardly thereof.
4. The telescope of claim 2, further comprising a filter that is in axial alignment with the field flattener lens and is located rearwardly thereof.
5. The telescope of claim 1, wherein the housing, corrector lens, primary mirror, and reflective coatings are chosen to optimize the telescope for use with radiation having wavelengths from approximately 400 nm to 1000 nm.
6. The telescope of claim 1, wherein the housing is of a ceramic, the lenses are of glass, and wherein the thermal coefficient of the ceramic is the same as the thermal coefficient of the glass.

7. The telescope of claim 1, further comprising:
- a. a conical baffle located adjacent the first surface of the corrector lens;
 - b. a cylindrical baffle located adjacent the first surface of the primary mirror;
and
 - 5 c. a cylindrical baffle located adjacent the second surface of the corrector lens.
8. A binocular telescope array for use in a spacecraft, comprising:
- a. two catadioptric optical telescopes, each having a modified Maksutov-Cassegrain optical structure and each comprising:
10
 - i. an axially elongated housing having a generally cylindrical interior and entrance and exit ends;
 - ii. a corrector lens mounted at the entrance end of the housing, the corrector lens comprising:
15
 - 1. first and second surfaces, and
 - 2. a centrally located reflective coating located on the second surface;
 - iii. a primary mirror mounted at the exit end of the housing, the primary mirror being a Mangin mirror and comprising:
20
 - 1. a central aperture,
 - 2. first and second surfaces, and
 - 3. a reflective coating located on the second surface; and
 - iv. the corrector lens and primary mirror of each telescope being axially aligned in the telescope and having their first surfaces facing
25 each other within the interior of the housing.
9. The telescope array of claim 8, wherein both telescopes are oriented to have the same field of view at an intended observation distance.
- 30 10. The telescope array of claim 8, wherein both telescopes are oriented to have different fields of view at an intended observation distance.

11. The telescope array of claim 9, wherein one of the telescopes is configured to output image data and another one of the telescopes is configured to output spectroscopy data.
- 5 12. The telescope array of claim 9, wherein one of the telescopes is configured to output image data and another one of the telescopes is configured to output polarimetry data.
- 10 13. The telescope array of claim 9, wherein the telescopes are configured to observe different portions of the electromagnetic spectrum.

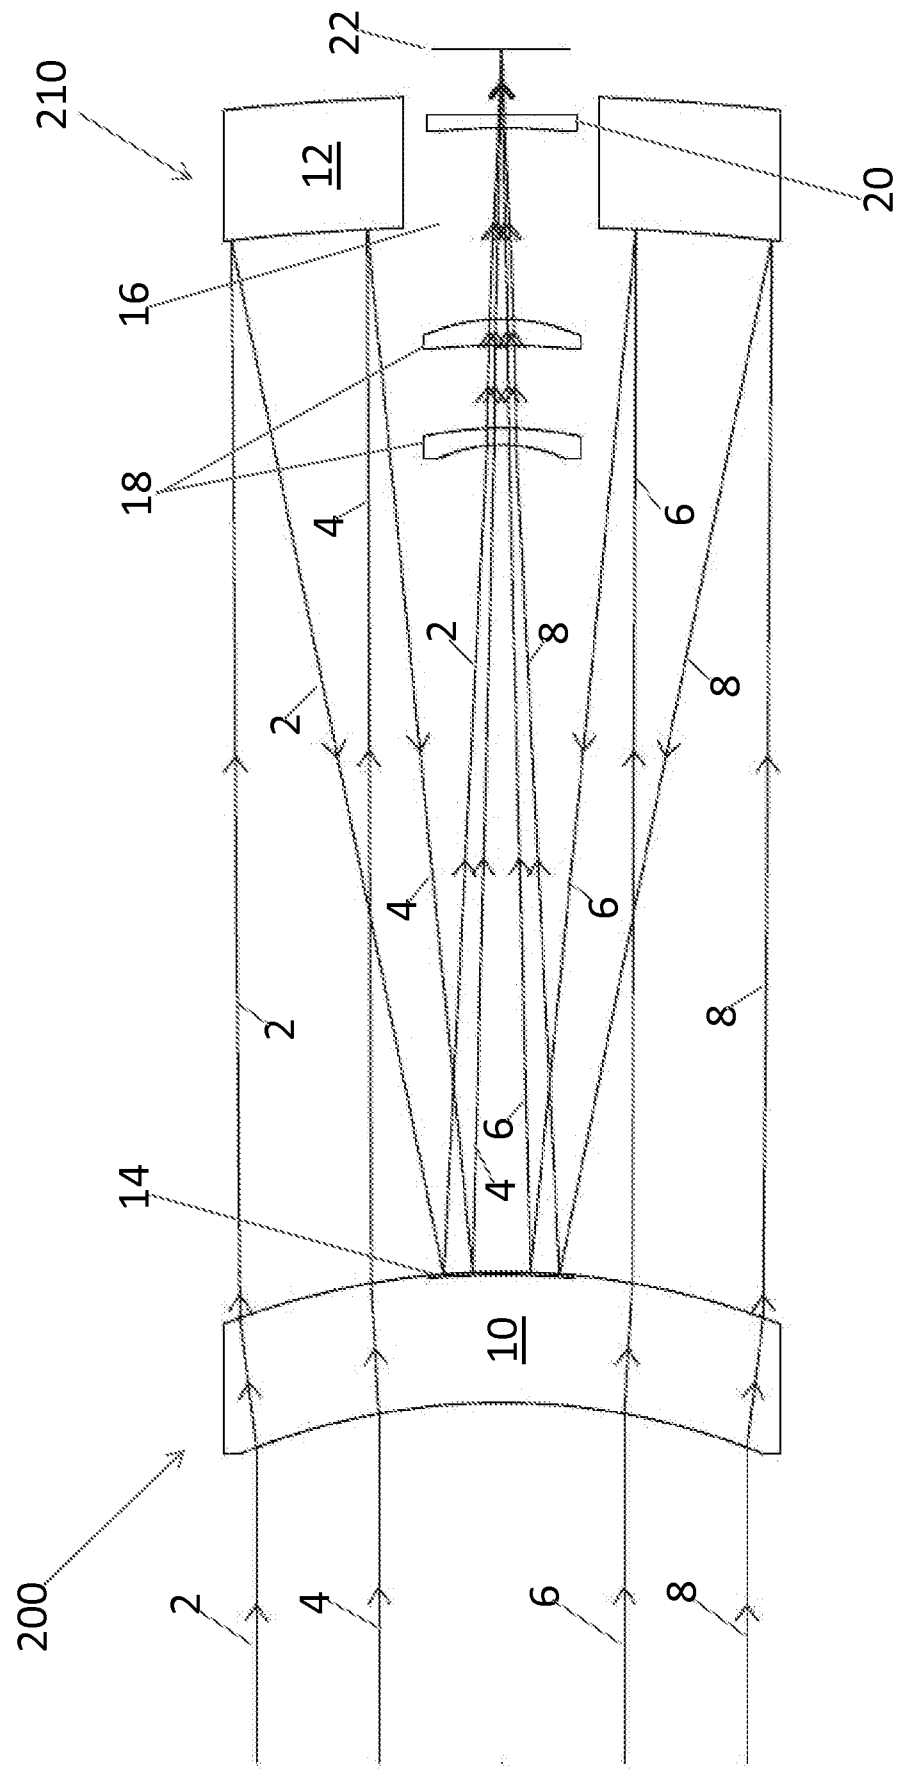


FIG. 1

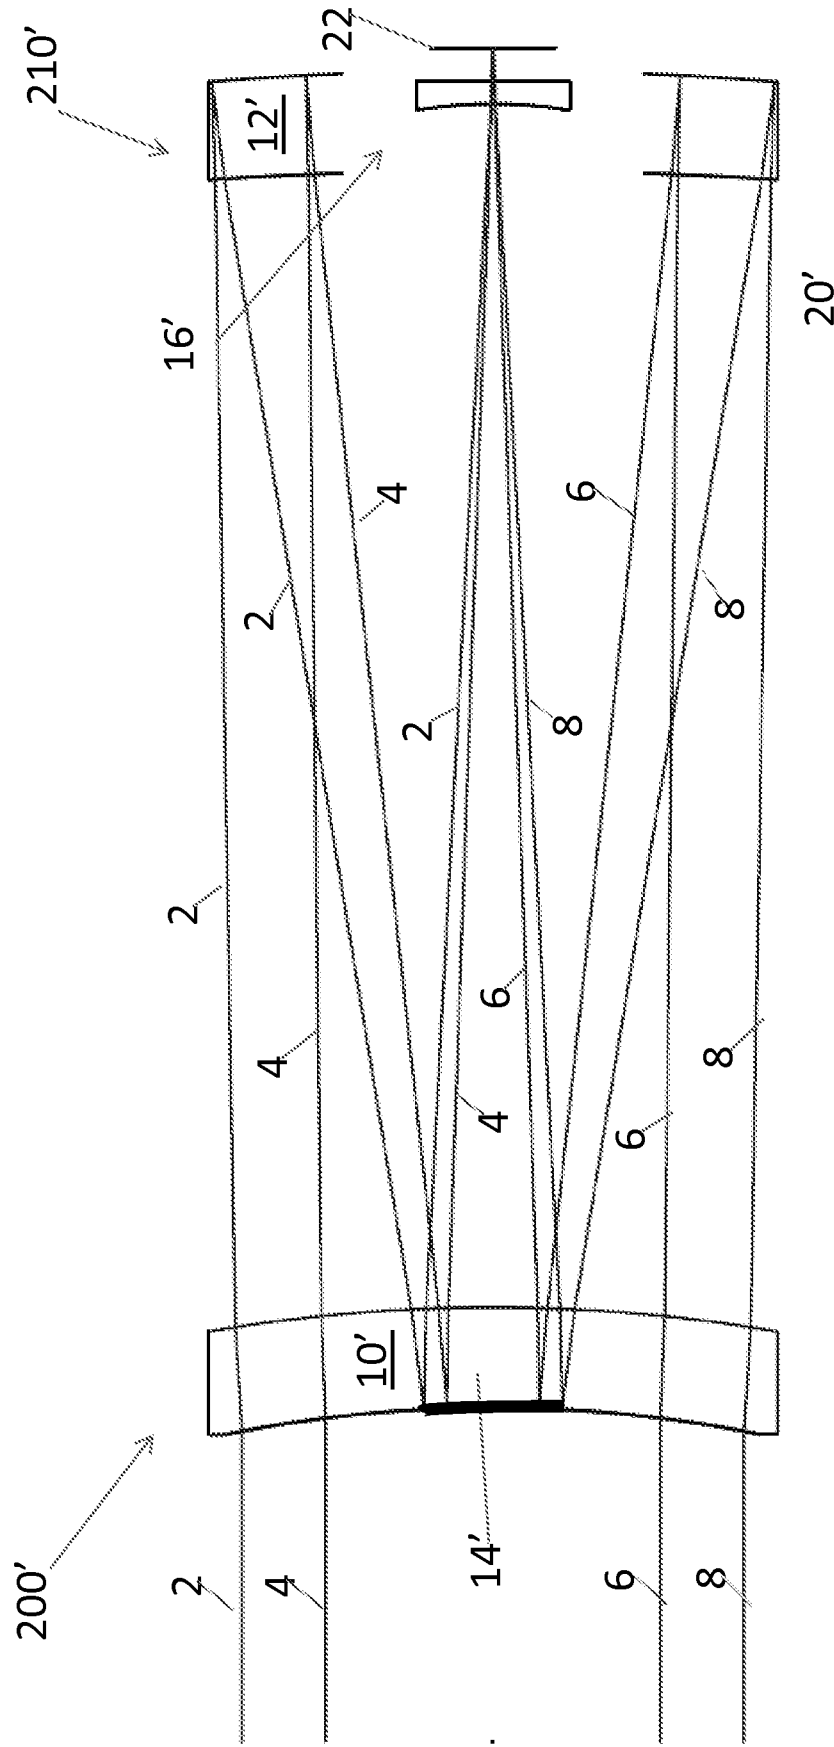


FIG. 2

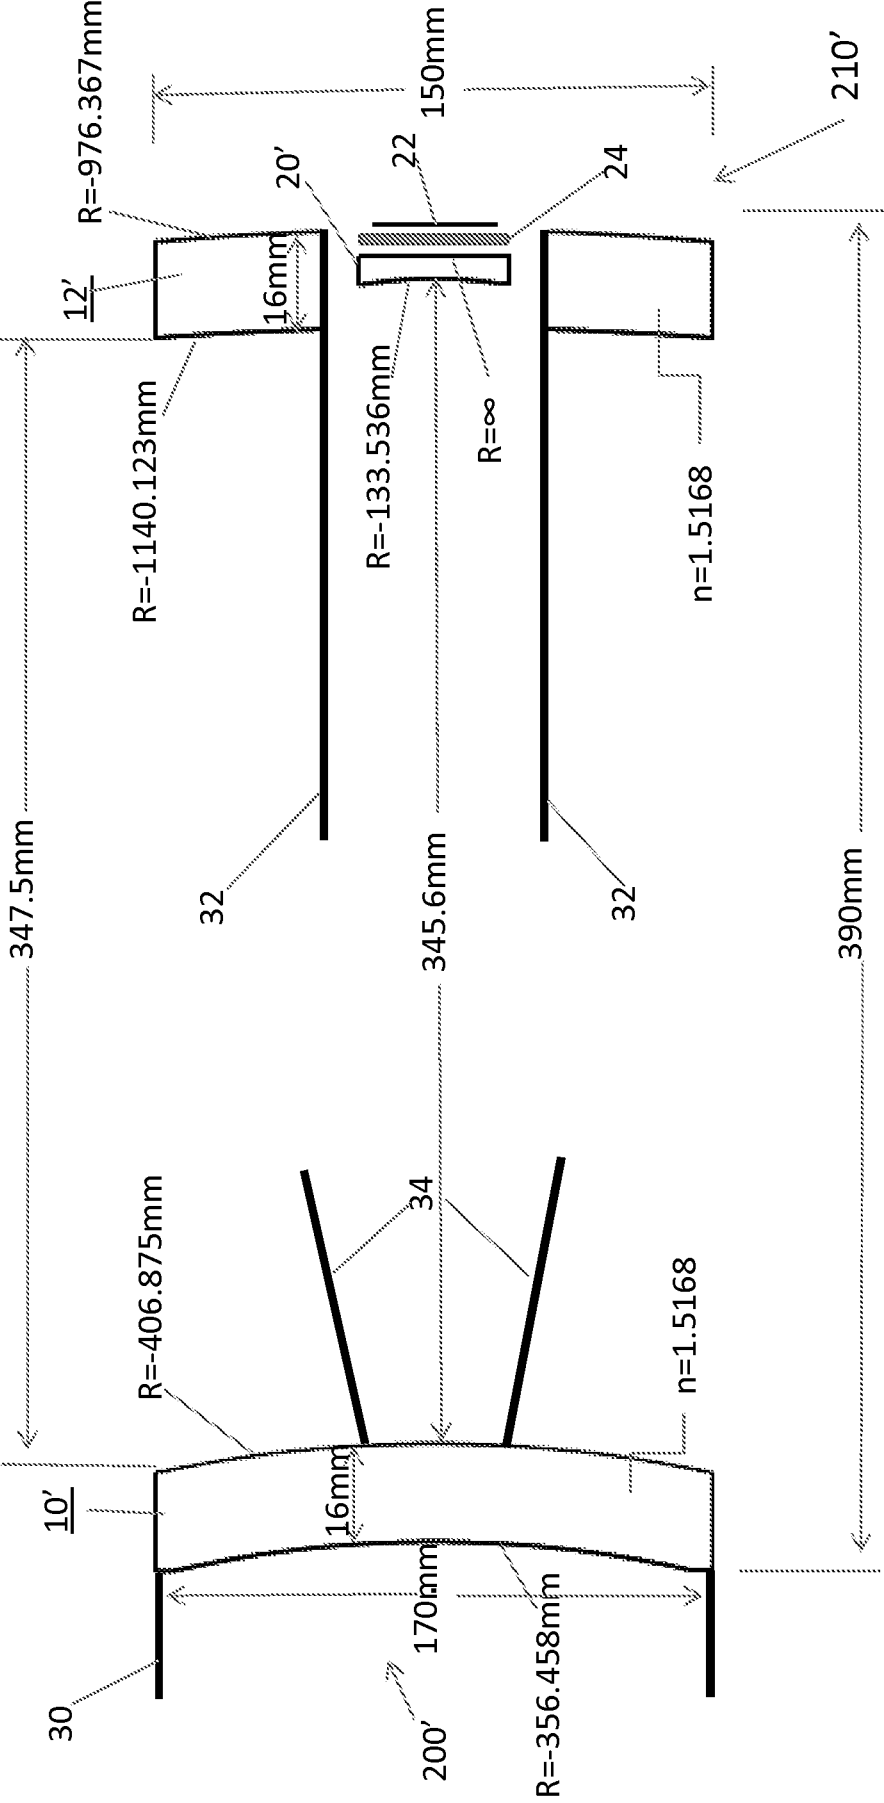


FIG. 3

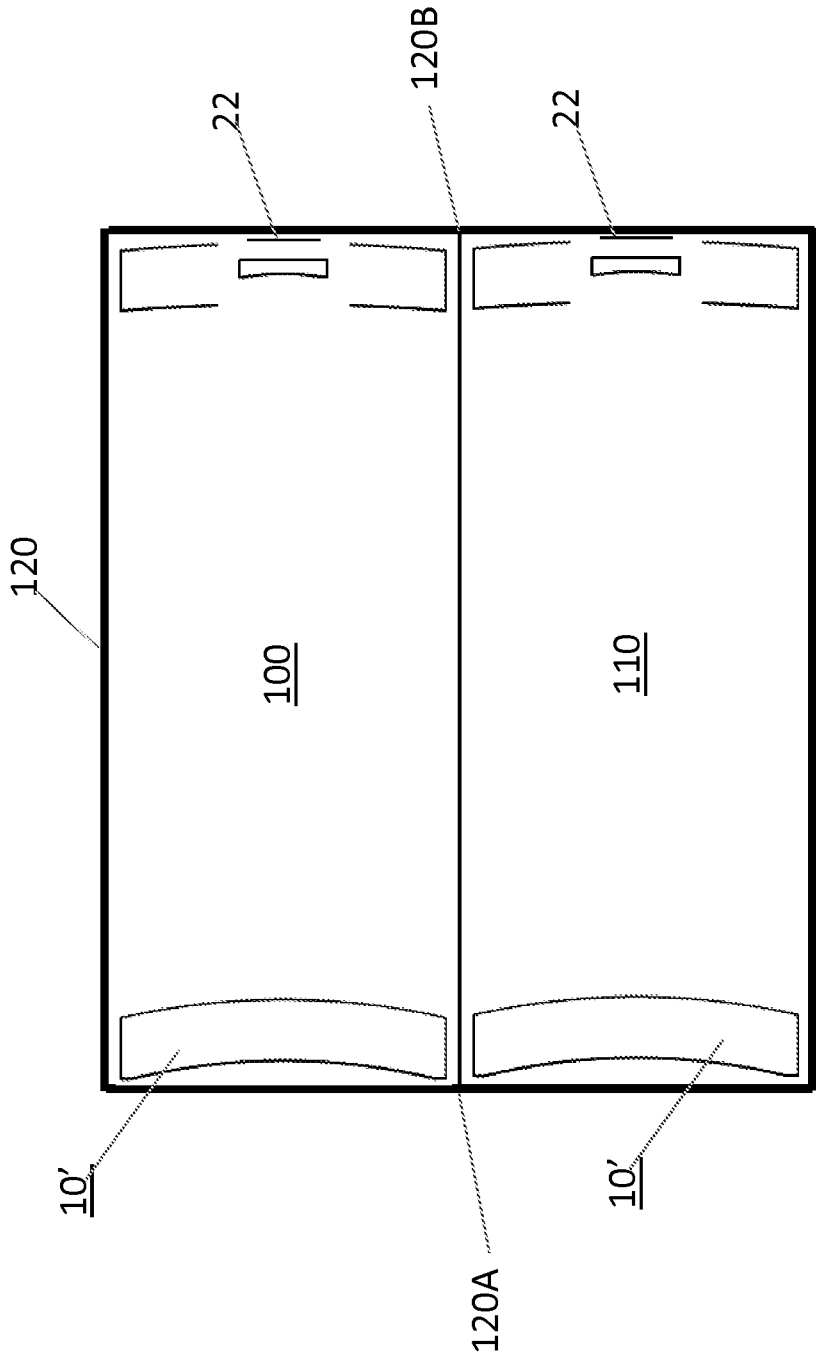


FIG. 4

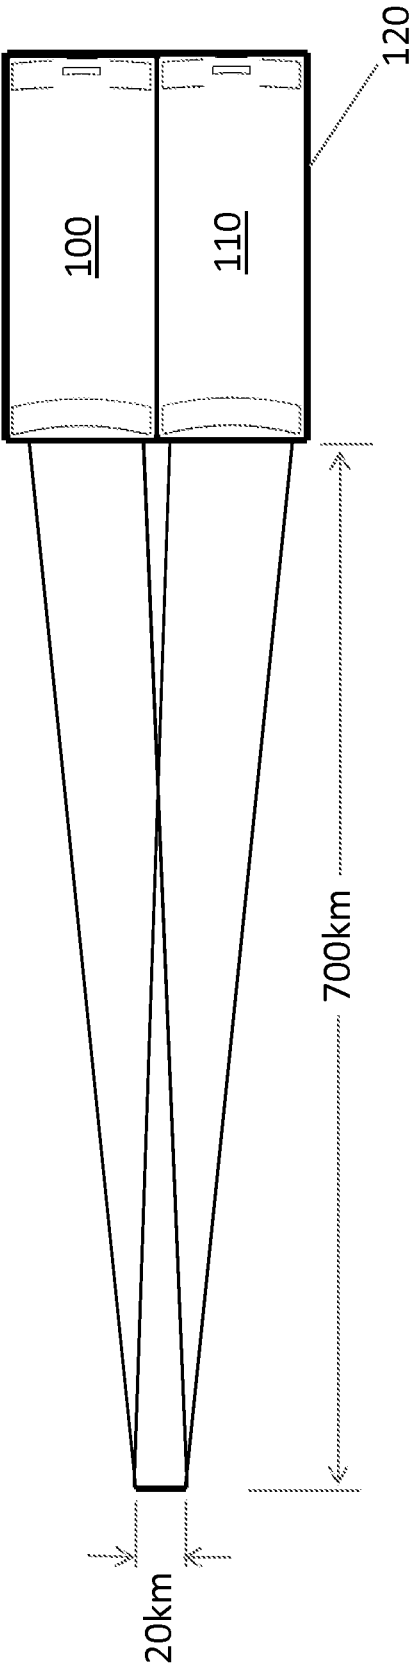


FIG. 5A

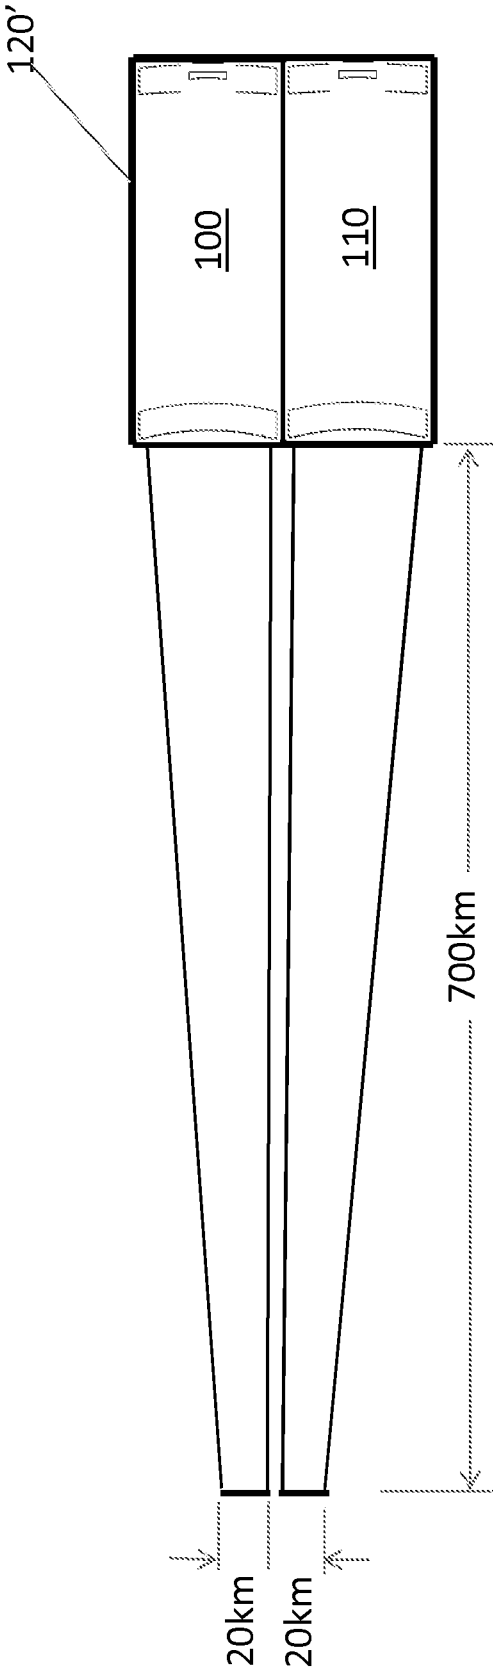


FIG. 5B

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2015/021996**A. CLASSIFICATION OF SUBJECT MATTER****G02B 23/02(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G02B 23/02; G02B 17/00; G02B 23/00; G02B 7/02; G02B 17/08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: catadioptric, telescope, Maksutov-Cassegrain, corrector lens, reflective coating and primary mirror

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2007-0177261 A1 (MURDOCK, STEVEN G.) 02 August 2007	1,5-8
Y	See abstract, paragraphs [0002], [0022]-[0060], claim 1 and figures 1-2.	2-4,9-13
Y	US 2004-0233550 A1 (BURR, JAMES D.) 25 November 2004	2-4,9-13
	See abstract, paragraphs [0020]-[0034], claim 38 and figures 1-11c.	
A	US 2007-0001103 A1 (LABELLE, JOHN) 04 January 2007	1-13
	See abstract, paragraphs [0009]-[0013] and figures 1-4.	
A	US 4881801 A (GEBELEIN, ROLIN J.) 21 November 1989	1-13
	See abstract, column 3, line 10 - column 4, line 55 and figures 1-2.	
A	US 2007-0115564 A1 (MARESE, ZEEV) 24 May 2007	1-13
	See abstract, paragraphs [0008]-[0011] and figures 2-5.	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 July 2015 (22.07.2015)

Date of mailing of the international search report

22 July 2015 (22.07.2015)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

LEE, Hun Gil

Telephone No. +82-42-481-8525



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2015/021996

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007-0177261 A1	02/08/2007	WO 2007-067701 A1	14/06/2007
US 2004-0233550 A1	25/11/2004	None	
US 2007-0001103 A1	04/01/2007	WO 2007-005425 A2 WO 2007-005425 A3	11/01/2007 29/11/2007
US 4881801 A	21/11/1989	US 4477156 A US 4571036 A US 4718753 A	16/10/1984 18/02/1986 12/01/1988
US 2007-0115564 A1	24/05/2007	US 7391580 B2	24/06/2008