



(51) International Patent Classification:

E21B 33/12 (2006.01) *E21B 17/00* (2006.01)
E21B 33/128 (2006.01)

(21) International Application Number:

PCT/US2014/072840

(22) International Filing Date:

30 December 2014 (30.12.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 3000 N. Sam Houston Parkway E., Houston, Texas 77032 (US).

(72) Inventors: **HUMPHREY, Ryan Thomas**; 4330 McKenny Ave., Dallas, Texas 75205 (US). **STAUTZENBERGER, Arthur Terry**; 2701 Hereford Road, Denton, Texas 76210 (US). **JACKSON, Alan Tancel**; 16100 Custer Trail, Frisco, Texas 75035 (US).

(74) Agent: **HEYMAN, Paula D.**; Baker Botts L.L.P., 98 San Jacinto Blvd., Suite 1500, Austin, Texas 78701 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: EXTRUSION PREVENTION RING FOR A LINER HANGER SYSTEM

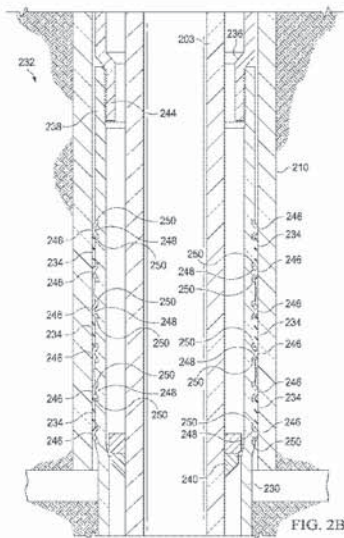

(57) Abstract: In accordance with some embodiments of the present disclosure, an extrusion prevention ring for a liner hanger system is disclosed. The liner hanger includes an elongate body, a first groove in the elongate body, a first extrusion prevention ring disposed about the elongate body and selectively deformable between a first configuration, where the first extrusion prevention ring is moveable along the length of the elongate body, and a second configuration, where the first extrusion prevention ring is deformed to be received within the first groove, and a seal member disposed about the elongate body and adjacent to the first extrusion prevention ring when the first extrusion prevention ring is in the second configuration, the first extrusion prevention ring configured to prevent movement of the seal member along the length of the elongate body.