



(51) International Patent Classification:
B65D 47/20 (2006.01)

(21) International Application Number:
PCT/US2015/018864

(22) International Filing Date:
5 March 2015 (05.03.2015)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **APTARGROUP, INC.** [US/US]; 475 West
Terra Cotta, Suite E, Crystal Lake, IL 60014-9695 (US).

(72) Inventors: **MAZURKIEWICZ, Timothy**; C/o Aptar-
group, Inc., 475 West Terra Cotta, Suite E, Crystal Lake,
IL 60014-9695 (US). **WISNIEWSKI, John**; C/o Aptar-
group, Inc., 475 West Terra Cotta, Suite E, Crystal Lake,
IL 60014-9695 (US).

(74) Agents: **ODELL, Paul, M.** et al.; Wood, Phillips, Katz,
Clark & Mortimer, 500 West Madison Street, Suite 1130,
Chicago, IL 60661 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: FITMENT AND OVERCAP THEREFOR

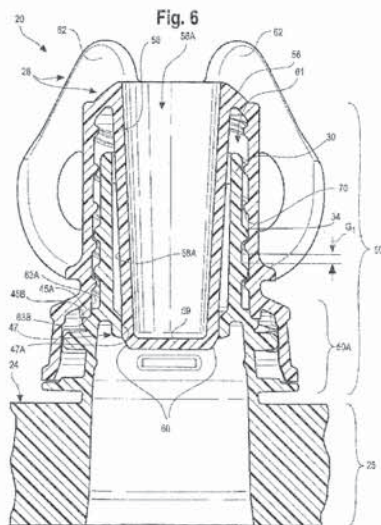

(57) Abstract: A closure assembly (20) that includes a cap or overcap (28) and a fitment (24) for a container is provided wherein the fitment (24) has a laterally projecting shear member (40), and the overcap (28) has an aperture (74) for initially receiving the shear member (40) when the overcap (28) and fitment (24) are in an initially assembled orientation or condition. The aperture (74) and the shear member (40) cooperate in the initially assembled orientation or condition such that when subjected to a flow of a sterilizing gas, turbulence is created in the sterilizing gas flow to enhance sterilization of the combination.