

DOCUMENT MADE AVAILABLE UNDER THE PATENT COOPERATION TREATY (PCT)

International application number:	PCT/US2016/051345
International filing date:	12 September 2016 (12.09.2016)
Document type:	Certified copy of priority document
Document details:	Country/Office: US
	Number: 62/220,680
	Filing date: 18 September 2015 (18.09.2015)
Date of receipt at the International Bureau:	22 September 2016 (22.09.2016)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a),(b) or (b-bis)

806777

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

September 21, 2016

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: *62/220,680*

FILING DATE: *September 18, 2015*

RELATED PCT APPLICATION NUMBER: *PCT/US16/51345*

THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS CONVENTION, IS *US62/220,680*



Certified by

Michelle K. Lee

Under Secretary of Commerce
for Intellectual Property
and Director of the United States
Patent and Trademark Office

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	SBUX1.388PR
		Application Number	
Title of Invention	BEVERAGE DISPENSING SYSTEMS AND METHODS		
The application data sheet is part of the provisional or nonprovisional application for which it is being submitted. The following form contains the bibliographic data arranged in a format specified by the United States Patent and Trademark Office as outlined in 37 CFR 1.76. This document may be completed electronically and submitted to the Office in electronic format using the Electronic Filing System (EFS) or the document may be printed and included in a paper filed application.			

Secrecy Order 37 CFR 5.2

☐	Portions or all of the application associated with this Application Data Sheet may fall under a Secrecy Order pursuant to 37 CFR 5.2 (Paper filers only. Applications that fall under Secrecy Order may not be filed electronically.)
--------------------------	---

Inventor Information:

Inventor 1					Remove
Legal Name					
Prefix	Given Name	Middle Name	Family Name	Suffix	
	Dan		Apone		
Residence Information (Select One) ☒ US Residency ☐ Non US Residency ☐ Active US Military Service					
City	Seattle	State/Province	WA	Country of Residence i	US
Mailing Address of Inventor:					
Address 1		722 12th Avenue East			
Address 2					
City	Seattle	State/Province	WA		
Postal Code	98102	Country i	US		
Inventor 2					Remove
Legal Name					
Prefix	Given Name	Middle Name	Family Name	Suffix	
	Izaak		Koller		
Residence Information (Select One) ☒ US Residency ☐ Non US Residency ☐ Active US Military Service					
City	Seattle	State/Province	WA	Country of Residence i	US
Mailing Address of Inventor:					
Address 1		7355 - 23rd Avenue NW			
Address 2					
City	Seattle	State/Province	WA		
Postal Code	98117	Country i	US		
Inventor 3					Remove
Legal Name					
Prefix	Given Name	Middle Name	Family Name	Suffix	
	Michael		Cummer		
Residence Information (Select One) ☒ US Residency ☐ Non US Residency ☐ Active US Military Service					

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	SBUX1.388PR
		Application Number	
Title of Invention	BEVERAGE DISPENSING SYSTEMS AND METHODS		

City	Seattle	State/Province	WA	Country of Residence i	US
-------------	---------	-----------------------	----	-------------------------------	----

Mailing Address of Inventor:

Address 1					
Address 2					
City		State/Province			
Postal Code		Country i			
Inventor 4					Remove

Legal Name

Prefix	Given Name	Middle Name	Family Name	Suffix
	Rick		Riday	

Residence Information (Select One) ☒ US Residency ☐ Non US Residency ☐ Active US Military Service

City	Seattle	State/Province	WA	Country of Residence i	US
-------------	---------	-----------------------	----	-------------------------------	----

Mailing Address of Inventor:

Address 1					
Address 2					
City		State/Province			
Postal Code		Country i			
Inventor 5					Remove

Legal Name

Prefix	Given Name	Middle Name	Family Name	Suffix
	William		Crossland	

Residence Information (Select One) ☒ US Residency ☐ Non US Residency ☐ Active US Military Service

City	Seattle	State/Province	WA	Country of Residence i	US
-------------	---------	-----------------------	----	-------------------------------	----

Mailing Address of Inventor:

Address 1					
Address 2					
City		State/Province			
Postal Code		Country i			

All Inventors Must Be Listed - Additional Inventor Information blocks may be generated within this form by selecting the **Add** button.**Correspondence Information:**Enter either Customer Number or complete the Correspondence Information section below.
For further information see 37 CFR 1.33(a).☐ An Address is being provided for the correspondence Information of this application.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	SBUX1.388PR	
		Application Number		
Title of Invention	BEVERAGE DISPENSING SYSTEMS AND METHODS			
Customer Number	20995			
Email Address	efiling@knobbe.com		Add Email	Remove Email

Application Information:

Title of the Invention	BEVERAGE DISPENSING SYSTEMS AND METHODS			
Attorney Docket Number	SBUX1.388PR	Small Entity Status Claimed ☐		
Application Type	Provisional			
Subject Matter	Utility			
Total Number of Drawing Sheets (if any)	8	Suggested Figure for Publication (if any)		

Filing By Reference :

Only complete this section when filing an application by reference under 35 U.S.C. 111(c) and 37 CFR 1.57(a). Do not complete this section if application papers including a specification and any drawings are being filed. Any domestic benefit or foreign priority information must be provided in the appropriate section(s) below (i.e., "Domestic Benefit/National Stage Information" and "Foreign Priority Information").

For the purposes of a filing date under 37 CFR 1.53(b), the description and any drawings of the present application are replaced by this reference to the previously filed application, subject to conditions and requirements of 37 CFR 1.57(a).

Application number of the previously filed application	Filing date (YYYY-MM-DD)	Intellectual Property Authority or Country

Publication Information:

☐ Request Early Publication (Fee required at time of Request 37 CFR 1.219)
☐ Request Not to Publish. I hereby request that the attached application not be published under 35 U.S.C. 122(b) and certify that the invention disclosed in the attached application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.

Representative Information:

Representative information should be provided for all practitioners having a power of attorney in the application. Providing this information in the Application Data Sheet does not constitute a power of attorney in the application (see 37 CFR 1.32). Either enter Customer Number or complete the Representative Name section below. If both sections are completed the customer Number will be used for the Representative Information during processing.			
Please Select One:	☒ Customer Number	☐ US Patent Practitioner	☐ Limited Recognition (37 CFR 11.9)
Customer Number	20995		

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	SBUX1.388PR
		Application Number	
Title of Invention	BEVERAGE DISPENSING SYSTEMS AND METHODS		

Domestic Benefit/National Stage Information:

This section allows for the applicant to either claim benefit under 35 U.S.C. 119(e), 120, 121, 365(c), or 386(c) or indicate National Stage entry from a PCT application. Providing this information in the application data sheet constitutes the specific reference required by 35 U.S.C. 119(e) or 120, and 37 CFR 1.78.

When referring to the current application, please leave the application number blank.

Prior Application Status		Remove	
Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)
Additional Domestic Benefit/National Stage Data may be generated within this form by selecting the Add button.			Add

Foreign Priority Information:

This section allows for the applicant to claim priority to a foreign application. Providing this information in the application data sheet constitutes the claim for priority as required by 35 U.S.C. 119(b) and 37 CFR 1.55. When priority is claimed to a foreign application that is eligible for retrieval under the priority document exchange program (PDX) the information will be used by the Office to automatically attempt retrieval pursuant to 37 CFR 1.55(i)(1) and (2). Under the PDX program, applicant bears the ultimate responsibility for ensuring that a copy of the foreign application is received by the Office from the participating foreign intellectual property office, or a certified copy of the foreign priority application is filed, within the time period specified in 37 CFR 1.55(g)(1).

Application Number	Country ⁱ	Filing Date (YYYY-MM-DD)	Remove
			Access Code ^j (if applicable)
Additional Foreign Priority Data may be generated within this form by selecting the Add button.			Add

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications

☐ This application (1) claims priority to or the benefit of an application filed before March 16, 2013 and (2) also contains, or contained at any time, a claim to a claimed invention that has an effective filing date on or after March 16, 2013. NOTE: By providing this statement under 37 CFR 1.55 or 1.78, this application, with a filing date on or after March 16, 2013, will be examined under the first inventor to file provisions of the AIA.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	SBUX1.388PR
		Application Number	
Title of Invention	BEVERAGE DISPENSING SYSTEMS AND METHODS		

Authorization to Permit Access:

☒ Authorization to Permit Access to the Instant Application by the Participating Offices
If checked, the undersigned hereby grants the USPTO authority to provide the European Patent Office (EPO), the Japan Patent Office (JPO), the Korean Intellectual Property Office (KIPO), the World Intellectual Property Office (WIPO), and any other intellectual property offices in which a foreign application claiming priority to the instant patent application is filed access to the instant patent application. See 37 CFR 1.14(c) and (h). This box should not be checked if the applicant does not wish the EPO, JPO, KIPO, WIPO, or other intellectual property office in which a foreign application claiming priority to the instant patent application is filed to have access to the instant patent application. In accordance with 37 CFR 1.14(h)(3), access will be provided to a copy of the instant patent application with respect to: 1) the instant patent application-as-filed; 2) any foreign application to which the instant patent application claims priority under 35 U.S.C. 119(a)-(d) if a copy of the foreign application that satisfies the certified copy requirement of 37 CFR 1.55 has been filed in the instant patent application; and 3) any U.S. application-as-filed from which benefit is sought in the instant patent application. In accordance with 37 CFR 1.14(c), access may be provided to information concerning the date of filing this Authorization.

Applicant Information:

Providing assignment information in this section does not substitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.		
Applicant 1		Remove
If the applicant is the inventor (or the remaining joint inventor or inventors under 37 CFR 1.45), this section should not be completed. The information to be provided in this section is the name and address of the legal representative who is the applicant under 37 CFR 1.43; or the name and address of the assignee, person to whom the inventor is under an obligation to assign the invention, or person who otherwise shows sufficient proprietary interest in the matter who is the applicant under 37 CFR 1.46. If the applicant is an applicant under 37 CFR 1.46 (assignee, person to whom the inventor is obligated to assign, or person who otherwise shows sufficient proprietary interest) together with one or more joint inventors, then the joint inventor or inventors who are also the applicant should be identified in this section.		
Clear		
☒ Assignee	☐ Legal Representative under 35 U.S.C. 117	☐ Joint Inventor
☐ Person to whom the inventor is obligated to assign.	☐ Person who shows sufficient proprietary interest	
If applicant is the legal representative, indicate the authority to file the patent application, the inventor is:		
Name of the Deceased or Legally Incapacitated Inventor :		
If the Applicant is an Organization check here. ☒		
Organization Name	Starbucks Corporation dba Starbucks Coffee Company	

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	SBUX1.388PR
		Application Number	
Title of Invention	BEVERAGE DISPENSING SYSTEMS AND METHODS		

Mailing Address Information For Applicant:			
Address 1	2401 Utah Avenue South		
Address 2			
City	Seattle	State/Province	WA
Country i	US	Postal Code	98134-1435
Phone Number		Fax Number	
Email Address			
Additional Applicant Data may be generated within this form by selecting the Add button. Add			

Assignee Information including Non-Applicant Assignee Information:

Providing assignment information in this section does not substitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.

Assignee 1				
Complete this section if assignee information, including non-applicant assignee information, is desired to be included on the patent application publication. An assignee-applicant identified in the "Applicant Information" section will appear on the patent application publication as an applicant. For an assignee-applicant, complete this section only if identification as an assignee is also desired on the patent application publication.				
				Remove
If the Assignee or Non-Applicant Assignee is an Organization check here.				☐
Prefix	Given Name	Middle Name	Family Name	Suffix
Mailing Address Information For Assignee including Non-Applicant Assignee:				
Address 1				
Address 2				
City		State/Province		
Country i		Postal Code		
Phone Number		Fax Number		
Email Address				
Additional Assignee or Non-Applicant Assignee Data may be generated within this form by selecting the Add button.				Add

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	SBUX1.388PR
		Application Number	
Title of Invention	BEVERAGE DISPENSING SYSTEMS AND METHODS		

Signature:[Remove](#)

NOTE: This form must be signed in accordance with 37 CFR 1.33. See 37 CFR 1.4 for signature requirements and certifications.

Signature	/Jason R. Swartz/		Date (YYYY-MM-DD)	2015-09-18	
First Name	Jason	Last Name	Swartz	Registration Number	64420

Additional Signature may be generated within this form by selecting the Add button.

[Add](#)

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether the Freedom of Information Act requires disclosure of these records.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspections or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

BEVERAGE DISPENSING SYSTEMS AND METHODS**BACKGROUND**Field

[0001] The present disclosure relates to systems and methods for dispensing beverages, such as systems and methods for dispensing servings of espresso.

Description of Certain Related Art

[0002] Espresso is a coffee beverage brewed by forcing steam or hot water through ground coffee. Espresso is typically of thicker consistency than drip coffee, having a higher amount of dissolved solids than drip coffee per relative volume, and a serving size that is usually measured in shots. When producing a serving of espresso (called a “shot”), ground coffee is subjected to high pressure in a beverage preparation machine. This transforms the ground coffee into a firm puck. Hot water is then forced through the puck to produce the espresso, which typically flows directly from the machine into a cup. The cup with the espresso is then removed from the machine for consumption, sale, etc.

BRIEF DESCRIPTION OF THE DRAWINGS

[0003] Various embodiments are depicted in the accompanying drawings for illustrative purposes, and should in no way be interpreted as limiting the scope of the embodiments. Various features of different disclosed embodiments can be combined to form additional embodiments, which are part of this disclosure.

[0004] Figure 1 schematically illustrates an embodiment of a beverage dispensing system.

[0005] Figures 2A-2F illustrate portions of the beverage dispensing system of Figure 1 in various operational states.

[0006] Figure 3 illustrates an embodiment of a double-shot beverage dispensing assembly.

[0007] Figure 4 schematically illustrates another embodiment of a beverage dispensing system, such as a system that includes the assembly of Figure 3.

[0008] Figure 5 illustrates a cross-sectional view of an example of the double-shot beverage dispensing assembly of Figure 3.

[0009] Figure 6 schematically illustrates an embodiment of a method related to certain of the beverage dispensing systems.

[0010] Figure 7 schematically illustrates another embodiment of a beverage dispensing system, such as a system comprising a base that is configured to engage with, and introduce fluid through, a bottom of a container.

[0011] Figure 8 illustrates a cross-sectional view of an example of the base of the system of Figure 7 engaged with the container.

DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS

[0012] Various beverage dispensing systems and methods are described below to illustrate various examples that may achieve one or more desired improvements. These examples are only illustrative and not intended in any way to restrict the general disclosure presented and the various aspects and features of this disclosure. The general principles described herein may be applied to embodiments and applications other than those discussed herein without departing from the spirit and scope of the disclosure. Indeed, this disclosure is not limited to the particular embodiments shown, but is instead to be accorded the widest scope consistent with the principles and features that are disclosed or suggested herein.

[0013] Although certain aspects, advantages, and features are described herein, it is not necessary that any particular embodiment include or achieve any or all of those aspects, advantages, and features. Some embodiments may not achieve the advantages described herein, but may achieve other advantages instead. Any structure, feature, or step in any embodiment can be used in place of, or in addition to, any structure, feature, or step in any other embodiment, or omitted. This disclosure contemplates all combinations of features from the various disclosed embodiments. No feature, structure, or step is essential or indispensable.

Overview (Figure 1)

[0014] Figure 1 schematically illustrates an embodiment of a beverage dispensing system 10. To facilitate presentation, the system 10 is discussed in connection with dispensing an espresso beverage, such as a shot of espresso. But various embodiments can be applied in many other contexts as well, such as in dispensing brewed-coffee, tea, juice, alcohol, and other types of beverages.

[0015] As illustrated, the system 10 can include a dispensing unit 12 and a beverage preparation machine 14, such as a machine for preparing espresso. The dispensing unit 12 can be connected with tubing 16, such as flexible or rigid piping, to enable delivery of the beverage from the beverage preparation machine 14 to the dispensing unit 12. As shown, the dispensing unit 12 can be spaced apart from the beverage preparation machine 14. For example, the dispensing unit 12 can be positioned above a counter and/or generally visible from a front side and a rear side of the counter, and the beverage preparation machine 14 can be positioned below the counter, inside a cabinet, and/or otherwise generally obscured from view from at least one of the front and rear sides. In various embodiments, the dispensing unit 12 is not received in, part of, and/or coupled directly to the beverage preparation machine 14.

[0016] The dispensing unit 12 can receive the beverage from the beverage preparation machine 14 via a fluid communication path through the tubing 16. In some embodiments, the dispensing unit 12 is configured to hold and/or dispense the beverage. For example, the dispensing unit 12 can receive a shot of espresso, hold the espresso for a period, and dispense the espresso into a cup or other vessel. In certain implementations, the dispensing unit 12 is configured to contain a single serving of a beverage, such as a single shot of espresso. In some variants, the dispensing unit 12 is configured to contain multiple servings of a beverage.

[0017] In some embodiments, the dispensing unit 12 comprises a generally elongate hollow member. The dispensing unit 12 can be open on one end and closed on the other end. For example, the dispensing unit 12 can include a hollow tube that is open on a first end 18 and closed on a second end 20. In certain implementations, such as is schematically illustrated in Figure 1, when the dispensing unit 12 is in an upright configuration, the first end 18 is the upper or uppermost end of the dispensing unit 12 and the second end 20 is the lower or lowermost end of the dispensing unit 12. In some embodiments, the dispensing unit 12 is transparent or semi-transparent. For example, the dispensing unit 12 can be made of transparent or semi-transparent plastic or glass.

[0018] As illustrated, the dispensing unit 12 can be configured to pivot about a rotation point 22. For example, the dispensing unit 12 can be pivotally connected to a base or support member (not shown). As will be described in further detail below, such pivoting can

enable the dispensing unit 12 to rotate between various operational states, such as dispensing the beverage from the dispensing unit 12 into a cup or other vessel. The system 10 can include one or more position sensors configured to detect the location of the dispensing unit 12. For example, the system 10 can detect when the dispensing unit 12 is in a receiving (e.g., upright) position, a dispensing position, and/or a cleaning (e.g., inverted) position. In some embodiments, the system 10 can determine whether the dispensing unit 12 is in a position to receive beverage from the beverage preparation machine 14 and/or to receive cleansing fluid from a source.

[0019] The system 10 can include a flow control device, such as a check valve 24. The check valve 24 can be located in the second end 20 of the dispensing unit 12. The check valve 24 can allow fluid to flow through the second end 20 and into the dispensing unit 12 and/or can inhibit or prevent fluid from passing out of the second end 20 of the dispensing unit 12. In certain implementations, the check valve 24 is configured to close in certain orientations of the dispensing unit 12. For example, the check valve 24 can close (e.g., due to the force of gravity acting on a movable sealing component of the check valve 24) when the dispensing unit 12 is in the upright configuration and there is less than a minimum amount of fluid pressure in the tubing 16. In certain embodiments, the check valve 24 is configured to removably couple with, and close, the second end 20 of the dispensing unit 12, as will be discussed in more detail below. In some implementations, the check valve 24 is a ball check valve, diaphragm valve, duckbill valve, or otherwise. In certain embodiments, the check valve 24 is rotatably connected with the tubing 16, such as with a rotatable coupling. This can allow the check valve 24 and the dispensing unit 12 to rotate relative to the tubing 16.

[0020] In some embodiments, the system 10 includes a pump 26, such as a peristaltic pump. The pump 26 can encourage the beverage from the beverage preparation machine 14 to the dispensing unit 12. Some embodiments do not include a pump 26. For example, in certain variants, pressure that occurs during the beverage preparation process (e.g., the pressure that occurs during the preparation of espresso) is used to encourage the beverage from the beverage preparation machine 14 to the dispensing unit 12 without the need for a pump 26.

[0021] As also illustrated, certain embodiments include a control valve 28, such as a three-way valve. The control valve 28 can be adapted to switch between a first position

and a second position. In the first position, the control valve 28 can permit beverage to flow into the dispensing unit 12. In the second position, the control valve 28 can permit cleansing fluid (e.g., potable water) to flow into the dispensing unit 12. In some implementations, the flow of cleansing fluid flushes or otherwise cleanses some or all of the tubing 16, control valve 28, check valve 24, container 12, and/or other components of the system 10. In some implementations, the control valve 28 is an electronic valve, such as a solenoid valve.

[0022] As shown, certain embodiments include a controller 30, such as a processor and a memory. The controller 30 can be electrically coupled with various other components of the system 10, such as through one or more cables or wires 32. In some embodiment, the controller 130 communicates with one or more other components wirelessly, such as via wi-fi, Bluetooth®, etc. The controller 30 can control aspects of certain components of the system 10. For example, the controller 30 can control operation of the control valve 28 and/or pump 26. In some embodiments, the controller 30 can instruct the beverage preparation machine 14 to prepare a type of beverage, size of beverage, strength of beverage, etc. In some embodiments, the controller 30 and the beverage preparation machine 14 can communicate bi-directionally. For example, the controller 30 can send instructions to the beverage preparation machine 14 and can receive information from the beverage preparation machine 14, such as status information (e.g., number of espresso shots produced in a certain period, bean hopper status, etc.), health information (e.g., fault codes and/or descriptions), etc.

Certain Methods Of Dispensing A Beverage (Figures 2A-2F)

[0023] Figures 2A-2F depict illustrative operational states of the beverage dispensing system 10. As will be described in more details, the system 10 can be configured to introduce beverage B through the bottom of the dispensing unit 12 when the unit 12 is in an upright configuration. Certain embodiments are configured to rotate, or to at least allow rotation of, the dispensing unit 12 to dispense the beverage contained in the dispensing unit 12 into a cup C or other vessel. Some embodiments are configured to introduce cleansing fluid through the top of the dispensing unit 12 when the unit is in an inverted configuration.

[0024] Figure 2A illustrates an example of introducing the beverage B into the dispensing unit 12. In some embodiments, during the introduction operation, beverage from

the beverage preparation machine 14 can flow through the tubing 16 (e.g., in response to the encouragement by the pump 26) and the control valve 28 can be toggled to allow the beverage to flow toward the dispensing unit 12. The flow of beverage can open the check valve 24, thereby allowing the beverage to flow into the dispensing unit 12.

[0025] As shown, the dispensing unit 12 can receive the beverage in the upright configuration (e.g., an orientation in which a longitudinal axis of the dispensing unit 12 is generally parallel with vertical). For example, the beverage can enter the dispensing unit 12 through the second end 20, which is the bottom end of the dispensing unit 12 in the upright configuration. In some implementations, the beverage is introduced into the dispensing unit 12 through a lower or lowermost portion of the dispensing unit 12. During the course of the beverage being introduced into the dispensing unit 12, the top surface of the beverage in the dispensing unit 12 can be seen to progress upwardly towards the top of the dispensing unit 12. This can provide a visual appearance of the beverage welling-up, growing, and/or rising within the dispensing unit 12.

[0026] As shown in Figure 2B, the dispensing unit 12 can be partially, substantially, or completely filled with the beverage. For example, in some embodiments, the dispensing unit 12 is substantially filled after receiving a shot of espresso. In certain implementations, the beverage preparation machine 14 is configured to provide an amount of beverage that is less than, or substantially equal, to the volume of the dispensing unit 12. In some embodiments, after a certain amount of time has elapsed and/or a certain volume of beverage has been introduced into the dispensing unit 12, the flow of beverage ceases or decreases and/or the check valve 24 closes. For example, the controller 30 can instruct the beverage preparation machine 14 to stop preparation of the beverage. In some embodiments, the beverage can be maintained in the dispensing unit 12 for a period of time. This can allow modifications to the beverage in the dispensing unit 12. For example, additives can be introduced into the beverage held in the dispensing unit 12, such as sugar, flavoring (e.g., cinnamon, chocolate, vanilla extract, etc.), dairy products, ice, etc. Certain embodiments include a cap (e.g., a removable stopper) that can be used to close the first end 18 of the dispensing unit 12, so that the dispensing unit 12 can be shaken and/or pivoted to facilitate mixing.

[0027] As mentioned above, the dispensing unit 12 can be rotated to facilitate pouring the beverage from the dispensing unit 12 into a cup C or other vessel. For example, as shown in Figures 2C and 2D, the dispensing unit 12 can be pivoted in a first direction about the rotation point 22, such as at least about: 90°, 120°, 150°, 170°, 180°, 190°, 210°, values between the aforementioned values, or otherwise. In some embodiments, the rotation point 22 is positioned at or near the lower or lowermost portion of the dispensing unit 12. In certain variants, the rotation point 22 is positioned at about the middle of the longitudinal length of the dispensing unit 12. Some embodiments pivot about an axis that is generally parallel with horizontal and/or that passes through the second end 20 of the dispensing unit 12. In various embodiments, the dispensing unit 12 is configured to pour beverage directly into the cup or other vessel, without intervening tubing 16 or other structures.

[0028] In some embodiments, the system 10 includes a drain or catch basin, which can collect splashes and spills that occur during the course of pouring. The drain or catch basin can be covered with a grate, on which the cup or other vessel is placed to receive the beverage. The grate can include indicia (e.g., words or symbols) that indicate to a user where to position the cup or other vessel to receive the beverage from the dispensing unit 12.

[0029] In certain embodiments, the system 10 is configured to wash the dispensing unit 12. For example, as shown in Figure 2E, the dispensing unit 12 can be rotated to an approximately inverted position. In some embodiments, the control valve 28 is toggled to allow cleansing fluid to pass into the dispensing unit 12, for example to allow potable water to flow through the tubing 16 and check valve 24 and into the dispensing unit 12. As shown, in some embodiments, the cleansing fluid enters the second end 20 of the dispensing unit 12, which is the top end of the dispensing unit 12 when in the inverted position. The cleansing fluid can pass down the interior walls of the dispensing unit 12. In some embodiments, the cleansing fluid can be discharged out of the first end 18 of the dispensing unit 12 and into the drain or catch basin.

[0030] Certain implementations are configured to spray, or otherwise distribute, the cleansing fluid around the entire, or at least substantially the entire, internal circumference of the shell of the dispensing unit 12. This can increase the likelihood that cleansing fluid will reach substantially the entire internal surface area of the dispensing unit 12. Some embodiments include a diffuser configured to direct the cleansing fluid around

substantially the entire internal circumference of the dispensing unit 12. In certain implementations, the cleansing fluid is sprayed against the internal surface of the dispensing unit 12 at a substantially perpendicular angle and/or at or near the second end 20 of the dispensing unit 12. Some embodiments are configured to spray the cleansing fluid in a downward direction.

[0031] In some variants, the system 10 includes jets and/or nozzles adapted to spray cleansing fluid into the dispensing unit 12. For example, the jets and/or nozzles can spray cleansing fluid generally upwardly into the first end 18 of the dispensing unit 12. The cleansing fluid can fall downward via force of gravity into the drain or catch basin. Some embodiments do not include jets or nozzles configured to spray cleansing fluid upwardly into the dispensing unit 12.

[0032] Some implementations include drying functionality. For example, some embodiments include an active drying feature, such as a blower. The blower can be configured to direct a flow of air around and/or into the dispensing unit 12 (e.g., through the first end 18) to facilitate drying of the dispensing unit 12. Some implementations include a passive drying feature, such as a rest period. For example, movement and/or use of the dispensing unit 12 can be stopped for a period to facilitate drying, such as for at least about: 5 seconds, 10 seconds, or otherwise. In some embodiments, the rest period occurs when the dispensing unit 12 is in the inverted position.

[0033] As shown in Figure 2F, the dispensing unit 12 can be rotated (e.g., in a second direction opposite the first direction), such as to about the upright position shown in Figure 1. This can put the dispensing unit 12 in a position to be ready to receive another amount of beverage from the beverage preparation machine 14, and to progress again through some or all of the above-described operational states.

Multi-Shot Dispensing Assembly (Figures 3 and 4)

[0034] Certain beverage preparation machines are adapted to produce multiple servings of a beverage at a time, such as two shots of espresso. Thus, it can be advantageous for a beverage preparation system to be configured to receive, hold, and/or dispense multiple servings of the beverage, such as being configured to receive, hold, and dispense two shots of espresso. An example of a double-shot beverage dispensing assembly 111 is illustrated in Figure 3 and an example of a system 110 including the assembly 111 is illustrated in Figure

4. As shown, the assembly 111 can include a first dispensing unit 112A and a second dispensing unit 112B.

[0035] Many of the features of the system 110 are the same as, or similar to, the features described above in connection with the system 10. To illustrate such correspondence, many of the numerals used to identify features of the system 110 are incremented by a factor of one hundred relative to the numerals used in connection with the system 10. The system 110 can include one, some, or all of the features of the system 10, including all combinations and sub-combinations. Moreover, any of the components of the system 110 can be similar to the corresponding components of the system 10. For example, the first dispensing unit 112A and the second dispensing unit 112B can each be similar to the dispensing unit 12 discussed above, including all combinations and sub-combinations. Any component or step disclosed in any embodiment in this specification can be used in other embodiment.

[0036] As illustrated, the first and second dispensing units 112A, 112B can each include an open first end 118A, 120A and a closed second end 118B, 120B. The second end 118B, 120B of the first and second dispensing units 112A, 112B can be connected to a rotating member 134, which in turn can be supported by a base 136. The rotating member 134 can enable the first and second dispensing units 112A, 112B to rotate relative to the base 136. In some embodiments, the rotating member 134 is coupled with tubing 116 through which beverage from the beverage preparation machine 14 can be delivered to the first and second dispensing units 112A, 112B. For example, as shown, the rotating member 134 can connect with the tubing 116 via an elbow connector. In various embodiments, the rotating member 134, as well as the dispensing units 112A, 112B, can rotate relative to the tubing 116.

[0037] As shown, the base 136 can project upwardly, which can raise the dispensing units 112A, 112B above a countertop CT on which the base 136 is positioned. This can position the dispensing units 112A, 112B at an elevation that is higher than the top of the cup or vessel in which the beverage is to be poured, thereby allowing the beverage to flow by force of gravity into the cup or other vessel when the dispensing units 112A, 112B are rotated downward. In some embodiments, raising the dispensing units 112A, 112B above the countertop provide space to allow the dispensing units 112A, 112B to rotate without

contacting the countertop. For example, in certain embodiments, the dispensing units 112A, 112B can be inverted without hitting, impacting, and/or physically touching the countertop.

[0038] In some embodiments, the dispensing units 112A, 112B include a handle 140 or other type of grip. The handle 140 can enable a user to rotate the first and second dispensing units 112A, 112B manually. In certain embodiments, the first and second dispensing units 112A, 112B rotate together. In some embodiments, the first and second dispensing units 112A, 112B rotate independently, such as the first dispensing unit 112A being able to rotate relative to the second dispensing unit 112B and vice versa. In some embodiments, the first and second dispensing units 112A, 112B each have a handle 140 or grip. In certain variants, the assembly 111 includes one or more motors or actuators (e.g., springs) configured to rotate the first and second dispensing units 112A, 112B, either together or independently. For example, certain variants include one or more motors or actuators configured to return one or both of the dispensing units 112A, 112B to the upright position, such as after one or both of the dispensing units 112A, 112B have been rinsed with cleaning fluid and/or after a period has elapsed. Some implementations include a mechanism (e.g., a releasable detent) that holds one or both of the dispensing units 112A, 112B in a lower position, such as in a pouring position or the inverted position.

[0039] Figure 4 schematically illustrates an embodiment of a beverage dispensing system 110 that includes the double-shot beverage dispensing assembly 111 of Figure 3. As shown, and similar to the discussion above in connection with the system 10, the system 110 can include a controller 130 and a beverage preparation machine 14. Some embodiments include a pump 126 configured to encourage a flow of beverage from the beverage preparation machine 14 to the dispensing unit. Certain embodiments include a control valve 128 that is configured to switch between allowing the beverage to be communicated into the dispensing unit and allowing a cleansing fluid to enter the tubing 116 and be communicated into the dispensing unit. In some embodiments, the control valve 128 is a solenoid or other electronically operated valve.

[0040] In some embodiments, the system 110 includes a selector valve 142 configured to direct flow between the first and second dispensing units 112A, 112B. For example, as shown in Figure 4, the system 110 can include a three-way valve that toggles between allowing beverage to flow to the first dispensing unit and the second dispensing

unit 112A, 112B. In some embodiments, the selector valve 142 is a solenoid or other electronically operated valve. The selector valve 142 can be controlled by the controller 130 or can be manually operated. In some implementations, the system 110 automatically alternates the flow of beverage between the dispensing units 112A, 112B, such as directing a first serving of beverage to the first dispensing unit, a second serving of beverage to the second dispensing unit, a third serving of beverage to the first dispensing unit, etc.

[0041] In various embodiments, the dispensing unit is readily visible. For example, in a retail environment, such as a coffee shop, the dispensing unit can be readily visible to a customer. In this regard, as mentioned above, in some embodiments, the dispensing unit is positioned on a countertop. In certain variants, the dispensing unit is visible from a first side of the countertop (e.g., a user side) and from an opposite second side of the countertop (e.g., a customer side). In some implementations, some or all other components of the system 110 are positioned below the countertop and/or otherwise out of sight from at least the second side of the countertop. For example, the beverage preparation machine 14, controller 130, control and/or selector valve 142, and pump 126 can be located below the countertop, inside of a cabinet, and/or otherwise out of view from at least the second side of the countertop. In some embodiments, during an operation of the filling of the dispensing units 112A, 112B, the beverage can appear to a customer to materialize in the dispensing units 112A, 112B, as if from nowhere. The customer can view the beverage welling-up from the bottom of the upright dispensing unit and/or progressively collecting inside the dispensing unit. In some implementations, the customer can view the dispensing unit being rotated and the beverage being poured into a cup or other vessel. In some embodiments, the customer can view the dispensing unit being inverted and/or the washed, such as from the top down.

Removable Dispensing Unit (Figure 5)

[0042] Figure 5 illustrates a cross-sectional view of the first dispensing unit 112A and an associated check valve 124. Similar or identical components can be used in the system 10. In various embodiments, the dispensing unit 112A is separable from other components of the system 110. For example, the dispensing unit 112A can be configured to be removed from the check valve 124. This can facilitate cleaning or replacement of the dispensing unit 112A and/or the check valve 124.

[0043] As shown, the dispensing unit 112A can include a generally elongate hollow body with an open first end 118A and a generally closed second end 120A. The second end 120A can include an aperture 144, such as a hole in about the center of the second end 120A. As illustrated, the aperture 144 can be adapted to receive a projection 146 of the check valve 124. The check valve 124 or the dispensing unit 112A can include a sealing member 148 (e.g., an O-ring, gasket, or other type of seal) configured to provide a generally liquid-tight seal between the dispensing unit 112A and the check valve 124. For example, the aperture 144 can include a rubber or plastic O-ring that seals against an outer wall of the projection 146 of the check valve 124 when the projection 146 of the check valve 124 is received in the aperture 144 of the dispensing unit 112A.

[0044] As mentioned above, the dispensing unit 112A can be configured to be removed from the check valve 124. For example, in some embodiments, the dispensing unit 112A can be separated from the check valve 124 by applying a pulling force generally along the longitudinal axis A of the dispensing unit 112A, thereby slidably disconnecting the dispensing unit 112A and the check valve 124. In some embodiments, the dispensing unit 112A is configured to be disconnected by translating (e.g., sliding) the dispensing unit 112A generally parallel with the longitudinal axis A. In some embodiments, the dispensing unit 112A is configured to be disconnected by rotating the dispensing unit 112A around the longitudinal axis A. For example, in some embodiments, the dispensing unit 112A is threadably connected with the check valve 124 and/or the rotating member 134, and is configured to be disconnected by rotating the dispensing unit 112A around the longitudinal axis A. Certain implementations are configured to connect and/or disconnect the dispensing unit 112A and the check valve 124 without relative rotation of the dispensing unit 112A and the check valve 124. In some embodiments, the dispensing unit 112A is configured to contain fluid after being disconnected from the check valve 124. For example, the dispensing unit 112A can include a closure mechanism (e.g., a flapper valve, umbrella valve, duckbill valve, etc.) configured to close the aperture 144, thereby inhibiting liquid in the dispensing unit 112A from being discharged through the aperture 144. In certain implementations, the dispensing unit 112A can be disconnected from the check valve 124 and contents of the dispensing unit 112A can be poured by hand into a cup or other vessel. In some embodiments, extent of travel of the dispensing unit 112A is limited. For example, the

dispensing unit 112A can be tethered to the base 136 or other component of the system 110, such as with a cord, chain, cable, or otherwise.

[0045] As illustrated, in some embodiments, the check valve 124 includes a housing 150 with an inner chamber 152 that includes a tapered wall 154. The chamber 152 can include a sealing member, such as a ball 156, which can seat against the tapered wall. In some embodiments, the ball 156 is glass, plastic, or metal. As shown, in the upright orientation of the dispensing unit 112A, the ball 156 can seal against the tapered wall 154, such as by the force of gravity. When fluid is encouraged through the tubing 116, fluid can displace the ball 156, thereby opening the check valve 124 and allowing the fluid to flow into the dispensing unit 112A. When the flow of fluid decreases or ends, the ball 156 can again seat against the tapered wall 154, thereby inhibiting or preventing fluid from flowing in the opposite direction.

[0046] In certain embodiments, as the dispensing unit 112A is pivoted, gravity displaces the ball 156 from being seated against the tapered wall 154, thereby opening the check valve 124. In certain embodiments, such opening of the check valve 124 does not occur until a certain amount of rotation of the dispensing unit 112A has occurred, such as at least about: about: 30°, 60°, 70°, 80°, 85°, 90°, 95°, values between the aforementioned values, or otherwise. In some variants, such opening of the check valve 124 does not occur until a majority, or at least some, of the beverage in the dispensing unit 112A has been poured out of the first end 118A of the dispensing unit 112A.

[0047] In various embodiments, opening of the check valve 124 can result in and/or facilitate automatically clearing a portion of the tubing 116. For example, opening of the check valve 124 can permit ambient air to enter the tubing 116. This can aid in equalizing the pressure between the inside of the tubing 116 and ambient and/or can reduce or eliminate a pressure differential (e.g., vacuum) in the tubing 116. In some embodiments, permitting air to enter the tubing 116 can allow at least a portion of the beverage in the tubing 116 to flow back into the beverage preparation machine 14, into a container, and/or into the drain or catch basin. In various embodiments, rotating the dispensing unit 112A to pour the beverage into the cup or other vessel automatically results in opening of the check valve 124, such as without requiring additional steps or actions by a user.

[0048] In some embodiments, when the dispensing unit 112A is at or near the inverted position (see Figure 2E), the check valve 124 is open. For example, when the dispensing unit 112A is in the inverted position, the ball 156 can be spaced apart from the tapered wall 154 of the inner chamber 152 and fluid can be allowed to pass through the check valve 124. This can allow cleansing fluid to flow through the check valve 124 and into the inverted dispensing unit 112A, as discussed above.

Certain Methods Related to Beverage Dispensing Systems (Figure 6)

[0049] Figure 6 illustrates an example method 200 related to various beverage dispensing systems. As shown, in some embodiments, the method 200 includes introducing a beverage through a second end of the dispensing unit 202. This can be performed when the dispensing unit is in the upright position, such that the second end is at the bottom of the dispensing unit and/or is below the first end. In certain implementations, the beverage is introduced generally upwardly into the dispensing unit (e.g., upward and generally parallel with a vertical axis). Some embodiments include receiving, in the dispensing unit, at least about 1 shot of beverage and/or at least about 25 ml of beverage. Certain variants include filling a substantial volume of the dispensing unit with the beverage, such as at least about: 75%, 80%, 85%, 90%, 95%, percentages between the aforementioned percentages, or other percentages. Before block 202, some embodiments include preparing the beverage and/or transporting the beverage to the dispensing unit.

[0050] The method 200 can include rotating the dispensing unit to an intermediate position 204. For example, the dispensing unit can be rotated at least about: 60°, 75°, 90°, 105°, 120°, values between the aforementioned values, or otherwise. Some embodiments of the method 200 include dispensing the beverage from the dispensing unit 206, such as by pouring the beverage directly into a cup or other vessel. In some embodiments, all or substantially all of the beverage is dispensed from the dispensing unit 206. For example, of the pre-dispensed volume of beverage contained in the dispensing unit, certain implementations include dispensing at least about: 90%, 95%, 99%, percentages between the aforementioned percentages, or other percentages.

[0051] In some embodiments, the method 200 includes rotating the dispensing unit to a cleansing position, such as an approximately inverted position 208. In some embodiments, the dispensing unit is not perfectly inverted. For example, the dispensing unit

can be offset from perfectly inverted by at least about: 1°, 3°, 5°, 10°, values between the aforementioned values, or otherwise. In some embodiments, between block 202 and 208, the method 200 includes rotating the dispensing unit at least about: 120°, 140°, 160°, 180°, 200°, values between the aforementioned values, or otherwise.

[0052] Certain embodiments include introducing the cleansing fluid through a second end of the dispensing unit 210. This can be performed when the dispensing unit is in the inverted position, such that the second end is at the top of the dispensing unit and/or is above the first end. Some embodiments include positioning a control valve to allow cleansing fluid, such as water, to pass through the valve and into the dispensing unit. Certain implementations include flowing the cleansing fluid downward along some or all of the length of the dispensing unit. Some embodiments include carrying-away, with the cleansing fluid, residue from the internal surface of the dispensing unit. Certain implementations include discharging the cleansing fluid from the first end of the dispensing unit, such as into a drain or catch basin.

[0053] In some embodiments, the method 200 includes rotating the dispensing unit 212, such as to the upright position. For example, the dispensing unit can be rotated approximately 180°. In some embodiments, the dispensing unit is rotated in opposite rotational directions when rotating from the upright position to the inverted position, and from the inverted position to the upright position. In some variants, the dispensing unit is rotated in the same rotational direction when rotating from the upright position to the inverted position, and from the inverted position to the upright position. Certain embodiments include positioning a control valve to allow beverage to pass through the control valve and into the dispensing unit. In some embodiments, such as embodiments with more than one dispensing unit, the method can include positioning a selector valve to change which dispensing unit is configured to receive the next flow of beverage.

[0054] As illustrated, the method 200 can include a decision block 214, which can ask whether there are additional beverage servings to be prepared and/or dispensed. If the answer is yes, then the method 200 can return to block 202 to introduce additional beverage into the dispensing unit and the method 200 can continue. In some embodiments, if the answer to the decision block 214 is no, then the method 200 ends.

Certain Beverage Dispensing Systems with Removable Containers (Figures 7 and 8)

[0055] Figure 7 illustrates an example of a beverage dispensing system 310. Many of the features of the system 310 are the same as, or similar to, the features described above in connection with the systems 10, 110. To illustrate such correspondence, many of the numerals used to identify features of the system 310 are incremented by a factor of one hundred relative to the numerals used in connection with the systems 10, 110. The system 310 can include one, some, or all of the features of the system 10 and/or the system 110, including all combinations and sub-combinations. Moreover, any of the components of the system 310 can be similar to the corresponding components of the systems 10, 110.

[0056] The system 310 can include, and/or engage with, a removable container 312, such as a pitcher, jug, cup, or other vessel. The container 312 can be configured to hold and/or dispense a beverage, such as a coffee drink, dairy drink (e.g., milk, cream, half-and-half, or otherwise), juice, or another beverage. In some embodiments, the container 312 is configured to hold multiple servings of the beverage, such as two, three, four, five, six, or more servings. As illustrated, the container 312 can include an upper end 318 and a lower end 320, which can include the bottom of the container 312. An interior of the container 312 can be in communication with a beverage source through tubing 316. For example, a flow of milk from a milk dispenser can pass through the tubing 316 and into the container 312. The interior of the container 312 can hold a volume of liquid L, such as at least about: 250 ml, 500 ml, 750 ml, 1 liter, volumes between the aforementioned volumes, or other volumes.

[0057] Some variants of the system 310 include a control valve 328, such as a three-way valve. The control valve 328 can be configured to permit a flow of cleansing fluid (e.g., potable water) to enter the tubing 316. In some implementations, the flow of cleansing fluid flushes or otherwise cleanses some or all of the tubing 316, control valve 328, container 312, and/or other components of the system 310. Certain implementations of the system 310 have additional valves or other components, such as a pump and/or controller. In some embodiments, the system 310 is configured to automatically provide a predetermined amount of beverage to the container 312, such as at least about: 50 ml, 100 ml, 200 ml,

400 ml, 600 ml, 800 ml, 1 liter, volumes between the aforementioned volumes, or other volumes.

[0058] As shown, the lower end 320 of the container 312 can engage with a base 336 of the system 310. Such engagement can open a fluid passage into an interior of the container. In some implementations, the fluid passage extends through the base 336 and through the lower end 320 (e.g., the bottom) of the container 312. In some embodiments, the engagement of the container 312 and the base 336, and/or a flow of fluid, opens one or more flow-control valves, such as a check valve 324A in the base 336 and/or a check valve 324B in the container 312.

[0059] Figure 8 illustrates a partial cross-sectional view of an example of the base 336 engaged (e.g., mated) with an example of the container 312. As shown, the base 336 can include a platform configured to receive the container 312, such as a generally planar and horizontal tray that stably supports the container 312. Some embodiments include a sealing member 348, such as an O-ring. The sealing member 348 can provide a generally liquid tight seal between the container 312 and the base 336. As shown, the sealing member 348 can be positioned in a groove in an upper face of the base 336. In certain variants, the sealing member 348 is positioned in a groove in the bottom of the container 312.

[0060] The base 336 can include the check valve 324A, such as a duckbill valve, diaphragm valve, umbrella valve, ball check valve, or other type of flow control valve. In various embodiments, the check valve 324A is configured to open in response to fluid flowing in a direction toward the container 312 and to close in response to fluid flow in the opposite direction and/or in response to substantially no fluid flow. Thus, the check valve 324A can inhibit or prevent backflow of fluid.

[0061] As illustrated, the container 312 can include the check valve 324B. The check valve 324B can be configured to inhibit or prevent liquid from exiting the container 312 when the container 312 is disengaged from the base 336. In some embodiments, the check valve 324B includes an inner chamber 352 with a tapered wall 354. The chamber 352 can include a sealing member, such as a ball 356, which can seat against the tapered wall 354. The ball 356 can be engaged with (e.g., pressed against) the tapered 354 wall by a biasing member, such as a helical spring 358. This can close the check valve 324B

and provide a generally liquid tight seal. Thus, the liquid L in the interior of the container 312 can be inhibited or prevented from exiting through the check valve 324B.

[0062] In some embodiments, the check valve 324B in the container 312 is automatically opened when the container 312 is engaged with the base 336. For example, as shown, a projection 360 of the base 336 can engage with the ball 356 of the check valve 324B. This can move the ball 356 against the bias of the spring 358, which can open a flow path through the check valve 324B. In certain embodiments, as shown in Figure 8, when the container 312 is engaged with the base 336 and the flow of liquid is in a direction toward the container 312, the liquid can flow through the check valves 324A, 324B and into an interior of the container 312. In various implementations, the system 310 is configured to introduce liquid into the container 312 through the bottom of the container 312.

[0063] In some embodiments, the check valve 324B is automatically closed when the container 312 is disengaged with the base 336. For example, when the container 312 is removed from the base 336, the projection 360 of the base 336 is disengaged from the ball 356 and the bias of the spring moves the ball back into engagement with the tapered wall 354. This can result in the check valve 324B closing and inhibiting or preventing backflow of the liquid L. Thus, the container 312 can be moved to another location without the liquid L spilling out through the bottom of the container 312.

[0064] As mentioned above, in some embodiments, the base 336 includes the projection 360. In certain embodiments, having the projection in the base 336 can allow the container 312 to have a generally planar bottom, which can allow the container 312 to be stably placed on a countertop or other location. In some variants, the container 312 includes the projection 360 and check valve 324A and the base 336 includes the check valve 324B, such as the tapered wall 354 and spring-loaded ball 356.

[0065] Various embodiments include certain other aspects, advantages, or features. For example, in some embodiments, the container 312 does not include a magnetic seal. For example, in some embodiments, the check valve 324A in the container 312 is not a magnetically operated valve. In some embodiments, the check valve 324A is not a valve comprising a diaphragm that is magnetically attracted to a bottom of the container, wherein the diaphragm is spaced apart from the bottom of the container 312 (e.g., by a pillar) when the container 312 is engaged with the base 336, and wherein the diaphragm moves (due to

the magnetic attraction) into sealing engagement with the bottom of the container 312 when the container 312 is disengaged with the base 336. In some embodiments, substantially the entire, the entire, or at least the bottom of the container 312 is made of a magnetic material. In certain variants, substantially the entire, the entire, or at least the bottom of container 312 is made of glass or a metal, such as stainless steel. Various embodiments do not require the container 312 to be rotated with respect to the base 336 during engagement and/or disengagement between the container 312 and base 336. In some implementations, the surface of the base 336 that receives the container 312 is generally flat and/or does not comprise an upwardly extending pillar. In various embodiments, the container 312 is configured to be used for preparing a beverage and/or is not the vessel from which the beverage is consumed. In certain embodiments, the system 310 is configured to introduce the liquid into the container 312 in a generally vertical direction and/or not in a substantially radially outward direction in the container 312. In certain embodiments, the system 310 is configured to heat the liquid, such as with a heating element that heats (e.g., to at least about 45°C) the liquid flowing through the tubing. In some implementations, the beverage source is not a pressurized carbonated beverage supply, such as a beer keg.

Certain Terminology

[0066] As used herein, the term “beverage” has its ordinary and customary meaning, and includes, among other things, any edible liquid or substantially liquid substance or product having a flowing quality (e.g., juices, coffee beverages, teas, frozen yogurt, beer, wine, cocktails, liqueurs, spirits, cider, soft drinks, flavored water, energy drinks, soups, broths, combinations of the same, or the like).

[0067] Conditional language, such as “can,” “could,” “might,” or “may,” unless specifically stated otherwise, or otherwise understood within the context as used, is generally intended to convey that certain embodiments include, while other embodiments do not include, certain features, elements, and/or steps. Thus, such conditional language is not generally intended to imply that features, elements, and/or steps are in any way required for one or more embodiments or that one or more embodiments necessarily include logic for deciding, with or without user input or prompting, whether these features, elements, and/or steps are included or are to be performed in any particular embodiment.

[0068] Conjunctive language such as the phrase “at least one of X, Y, and Z,” unless specifically stated otherwise, is otherwise understood with the context as used in general to convey that an item, term, etc. may be either X, Y, or Z. Thus, such conjunctive language is not generally intended to imply that certain embodiments require the presence of at least one of X, at least one of Y, and at least one of Z.

[0069] Unless otherwise explicitly stated, articles such as “a” or “an” should generally be interpreted to include one or more described items. Accordingly, phrases such as “a device configured to” are intended to include one or more recited devices. Such one or more recited devices can also be collectively configured to carry out the stated recitations. For example, “a processor configured to carry out recitations A, B, and C” can include a first processor configured to carry out recitation A working in conjunction with a second processor configured to carry out recitations B and C.

[0070] The terms “comprising,” “including,” “having,” and the like are synonymous and are used inclusively, in an open-ended fashion, and do not exclude additional elements, features, acts, operations, and so forth. Likewise, the terms “some,” “certain,” and the like are synonymous and are used in an open-ended fashion. Also, the term “or” is used in its inclusive sense (and not in its exclusive sense) so that when used, for example, to connect a list of elements, the term “or” means one, some, or all of the elements in the list.

[0071] The terms “approximately,” “about,” and “substantially” as used herein represent an amount close to the stated amount that still performs a desired function or achieves a desired result. For example, in some embodiments, as the context may dictate, the terms “approximately”, “about”, and “substantially” may refer to an amount that is within less than or equal to 10% of the stated amount. The term “generally” as used herein represents a value, amount, or characteristic that predominantly includes, or tends toward, a particular value, amount, or characteristic. As an example, in certain embodiments, as the context may dictate, the term “generally parallel” can refer to something that departs from exactly parallel by less than or equal to 20 degrees and/or the term “generally perpendicular” can refer to something that departs from exactly perpendicular by less than or equal to 20 degrees.

[0072] Overall, the language of the claims is to be interpreted broadly based on the language employed in the claims. The claims are not to be limited to the non-exclusive embodiments and examples that are illustrated and described in this disclosure, or that are discussed during the prosecution of the application.

Summary

[0073] Although this disclosure describes certain embodiments and examples of beverage dispensing systems and methods, many aspects of the above-described systems and methods may be combined differently and/or modified to form still further embodiments or acceptable examples. All such modifications and variations are intended to be included herein within the scope of this disclosure. Indeed, a wide variety of designs and approaches are possible and are within the scope of this disclosure. For example, although the dispensing units shown in the figures have one or two dispensing units, certain other embodiments include additional dispensing units. Some embodiments have three, four, five, or more dispensing units, as well as one or more appropriate control and/or selector valves to direct the flow of beverage to the various dispensing units, such as in lieu of or in addition to the three-way control and selector valves shown in Figure 4. As another example, although the controller is illustrated as having wired connections to other components, in some embodiments, the controller communicates wirelessly with one or more of the components, such as through radio frequency transmissions. As a further example, although some embodiments have discussed cleaning the dispensing unit in the inverted position, some embodiments are configured to clean the dispensing unit in a non-inverted position. For example, cleaning fluid can be introduced into the dispensing unit in the upright position and the dispensing unit can then be rotated to dump the cleaning fluid out of the dispensing unit. As yet another example, while some embodiments described above include a cleaning operation, certain embodiments do not include a cleaning operation. For example, the dispensing unit can be configured such that substantially all of the liquid (e.g., at least 99.99% by volume) is discharged out of the dispensing unit, thereby reducing or eliminating a need to clean the dispensing unit. In some implementations, the dispensing unit includes a surface treatment (e.g., a hydrophobic and/or oleophobic coating) on the inside of the dispensing unit. While illustrative embodiments have been described herein, the scope of all embodiments having equivalent elements, modifications, omissions, combinations (e.g., of

aspects across various embodiments), adaptations and/or alterations as would be appreciated by those in the art based on the present disclosure. Additionally, note that this application incorporates by reference the entirety of the U.S. provisional patent application titled “BEVERAGE PREPARATION SYSTEMS AND METHODS,” filed on the same day as this application, attorney reference number SBUX1.411PR.

[0074] Also, although there may be some embodiments within the scope of this disclosure that are not expressly recited above or elsewhere herein, this disclosure contemplates and includes all embodiments within the scope of what this disclosure shows and describes. Further, this disclosure contemplates and includes embodiments comprising any combination of any structure, material, step, or other feature disclosed anywhere herein with any other structure, material, step, or other feature disclosed anywhere herein.

[0075] Furthermore, certain features that are described in this disclosure in the context of separate implementations can also be implemented in combination in a single implementation. Conversely, various features that are described in the context of a single implementation can also be implemented in multiple implementations separately or in any suitable subcombination. Moreover, although features may be described above as acting in certain combinations, one or more features from a claimed combination can, in some cases, be excised from the combination, and the combination may be claimed as a subcombination or variation of a subcombination.

[0076] For purposes of this disclosure, certain aspects, advantages, and features are described herein. Not necessarily all such aspects, advantages, and features may be achieved in accordance with any particular embodiment. For example, some embodiments of any of the various disclosed systems include the container and/or include pluralities of the container; some embodiments do not include the container. Those skilled in the art will recognize that the disclosure may be embodied or carried out in a manner that achieves one advantage or a group of advantages as taught herein without necessarily achieving other advantages as may be taught or suggested herein.

[0077] Some embodiments have been described in connection with the accompanying drawings. The figures are drawn to scale, but such scale should not be interpreted to be limiting. Distances, angles, etc. are merely illustrative and do not necessarily bear an exact relationship to actual dimensions and layout of the devices

illustrated. Components can be added, removed, and/or rearranged. Further, the disclosure herein of any particular feature, aspect, method, property, characteristic, quality, attribute, element, or the like in connection with various embodiments can be used in all other embodiments set forth herein. Also, any methods described herein may be practiced using any device suitable for performing the recited steps.

[0078] Moreover, while components and operations may be depicted in the drawings or described in the specification in a particular arrangement or order, such components and operations need not be arranged and performed in the particular arrangement and order shown, nor in sequential order, nor include all of the components and operations, to achieve desirable results. Other components and operations that are not depicted or described can be incorporated in the embodiments and examples. For example, one or more additional operations can be performed before, after, simultaneously, or between any of the described operations. Further, the operations may be rearranged or reordered in other implementations. Also, the separation of various system components in the implementations described above should not be understood as requiring such separation in all implementations, and it should be understood that the described components and systems can generally be integrated together in a single product or packaged into multiple products.

[0079] In summary, various illustrative embodiments and examples of beverage dispensing systems and methods have been disclosed. Although the systems and methods have been disclosed in the context of those embodiments and examples, this disclosure extends beyond the specifically disclosed embodiments to other alternative embodiments and/or other uses of the embodiments, as well as to certain modifications and equivalents thereof. This disclosure expressly contemplates that various features and aspects of the disclosed embodiments can be combined with, or substituted for, one another. Accordingly, the scope of this disclosure should not be limited by the particular disclosed embodiments described above, but should be determined only by a fair reading of the claims that follow as well as their full scope of equivalents.

THE FOLLOWING IS CLAIMED:

1. A beverage preparation system configured to dispense a beverage into a cup or other drinking vessel, the system comprising:

a beverage preparation machine configured to prepare the beverage;

a dispensing assembly comprising:

a base;

a dispensing unit rotatably coupled to the base, the dispensing unit comprising a hollow elongate shell with an open first end and a closed second end, the second end comprising a check valve; and

the dispensing unit configured to pivot between an upright position and an inverted position, wherein the first end is substantially directly above the second end in the upright position and the second end is substantially directly above the first end in the inverted position;

a control valve configured to switch between a first state and a second state, wherein a flow of the beverage is allowed to pass through the control valve in the first state and a flow of cleansing fluid is allowed to pass through the control valve in the second state;

wherein, when the dispensing unit is in the upright position and the control valve is in the first state, the dispensing unit is configured to receive a portion of the beverage through the second end;

wherein, when the dispensing unit is in the inverted position and the control valve is in the second state, the dispensing unit is configured to receive cleansing fluid through the second end and to dispense the cleansing fluid from the first end; and

wherein, when the dispensing unit is in an intermediate position between the upright and inverted positions, the dispensing unit is configured to dispense the portion of the beverage through the first end and into the cup or other vessel.

2. The system of Claim 1, wherein the dispensing unit is configured to rotate about a pivot axis that is substantially horizontal.

3. The system of Claim 1, wherein the hollow elongate shell of the dispensing unit is configured to disconnect from the check valve.

4. The system of Claim 1, wherein the dispensing unit further comprises a second dispensing unit.

5. The system of Claim 4, further comprising a selector valve configured to switch between allowing the beverage to flow to the dispensing unit and allowing the beverage to flow to the second dispensing unit.

6. The system of Claim 1, wherein:

the check valve is closed when the dispensing unit is in the upright position and the flow of the beverage is less than or equal to a minimum value; and

the check valve is open when the dispensing unit is in the inverted position.

7. The system of Claim 1, wherein the check valve comprises a housing and a ball, the housing comprising an inner chamber with a tapered wall, the ball being positioned in the inner chamber and configured to seat against the tapered wall to close the check valve.

8. The system of Claim 7, wherein the check valve is configured such that at least one of gravity and a spring seats the ball against the tapered wall when the dispensing unit is in the upright position.

9. The system of Claim 1, further comprising a pump configured to encourage the beverage to flow from the beverage preparation machine to the dispensing unit.

10. The system of Claim 1, further comprising a controller configured to control operation of the control valve between the first and second states.

11. The system of Claim 1, wherein the base of the dispensing assembly is configured to mount on a countertop, the countertop having a customer side and a server side, the dispensing unit being located above the countertop and visible from the customer side and the server side.

12. The system of Claim 11, wherein the beverage preparation machine is located below the countertop.

13. A dispensing assembly configured to receive a flow of beverage from a beverage preparation machine, the dispensing assembly comprising:

a base;

a rotation assembly pivotably coupled to the base and configured to pivot about a pivot axis;

- a dispensing unit comprising a first end and a second end, the second end coupled with the rotation assembly, the dispensing unit configured to pivot about the pivot axis between a first position and a second position;
- the dispensing unit configured such that:
- in the first position, the dispensing unit is adapted to receive the beverage through the second end;
 - during rotation from the first position to the second position, the dispensing unit discharges the beverage through the first end; and
 - in the second position, the dispensing unit is adapted to receive cleansing fluid through the second end and to discharge the cleansing fluid through the first end.
14. The dispensing unit of Claim 13, wherein:
- the first position is an upright position in which a longitudinal axis of the dispensing unit is generally parallel with vertical and the first end is higher than the second end; and
 - the second position is an inverted position in which the longitudinal axis of the dispensing unit is generally parallel with vertical and the second end is higher than the first end.
15. The dispensing unit of Claim 13, wherein the second end of the dispensing unit further comprises a check valve.
16. The dispensing unit of Claim 13, wherein the dispensing unit is configured to rotate at least 150° between the upright and inverted positions.
17. The dispensing unit of Claim 13, wherein the base is spaced apart from the beverage preparation machine and is configured to be mounted on a countertop.
18. The dispensing unit of Claim 13, further comprising a second dispensing unit coupled with the rotation assembly and configured to pivot about the pivot axis.
19. The dispensing unit of Claim 18, wherein the first and second dispensing units are configured to pivot independently of each other.
20. A method of dispensing a beverage from a dispensing unit comprising a first end and a second end, the dispensing unit configured to rotate between a substantially upright position and a substantially inverted position, a longitudinal axis of the dispensing unit being

generally parallel with vertical and the first end being higher than the second end in the upright position, the longitudinal axis of the dispensing unit being generally parallel with vertical and the second end being higher than the first end in the inverted position, the method comprising:

preparing a beverage with a beverage preparation machine;

introducing the beverage through the second end of the dispensing unit when the dispensing unit is in the upright position;

rotating the dispensing unit to an intermediate position between the upright position and the inverted position;

pouring the beverage out of the first end of the dispensing unit when the dispensing unit is in the intermediate position;

receiving the beverage in a vessel;

rotating the dispensing unit to the inverted position;

draining residual beverage from the dispensing unit; and

rotating the dispensing unit to the upright position.

21. The method of Claim 20, wherein:

rotating the dispensing unit to an intermediate position and rotating the dispensing unit to the inverted position occur in a first rotational direction; and

rotating the dispensing unit to the upright position occurs in a second rotational direction that is opposite the first rotational direction.

22. The method of Claim 20, further comprising:

introducing cleaning fluid through the second end of the dispensing unit; and

dispensing the cleaning fluid out of the first end of the dispensing unit.

23. The method of Claim 22, further comprising distributing the cleaning fluid substantially equally around an inside circumference of the dispensing unit.

24. The method of Claim 20, wherein:

introducing the beverage through the second end of the dispensing unit when the dispensing unit is in the upright position is performed when the dispensing unit is rotatably coupled with a base of a beverage dispensing system; and

rotating the dispensing unit to an intermediate position between the upright position and the inverted position is performed when the dispensing unit is coupled with the base.

25. The method of Claim 20, wherein the rotation from the upright position to the intermediate position and from the intermediate position to the inverted position is continuous.

26. A beverage dispensing system comprising:

a base comprising an upper surface and a first check valve;

tubing connected with the first check valve with a source of a liquid dairy product; and

a container comprising an interior, an upper end, and a lower end, the lower end comprising a second check valve, the container removably engageable with the upper surface of the base;

the container and the base being configured such that:

when the container is engaged with the base, the first and second check valves are open, and the interior cavity of the container is in fluid communication with the tubing through the first and second check valves, thereby allowing liquid dairy product to flow from the liquid dairy product source and into the interior of the container; and

when the container is disengaged from the base, at least the second check valve is closed, thereby inhibiting liquid dairy product in the interior of the container from exiting the container through the second check valve.

27. The system of Claim 26, wherein the first check valve comprises a duckbill valve.

28. The system of Claim 26, wherein the second check valve comprises a ball check valve.

29. The system of Claim 26, wherein the second check valve does not comprise a magnetic sealing valve.

30. The system of Claim 26, wherein the container and the base are further configured such that the liquid dairy product flows out of the second check valve and into the interior of the container in a substantially vertical direction.

31. The system of Claim 26, wherein the liquid dairy product comprises heated milk.

BEVERAGE DISPENSING SYSTEMS AND METHODS

ABSTRACT OF THE DISCLOSURE

Various beverage preparation systems and methods are disclosed. The beverage preparation system can include a dispensing unit configured to receive beverage, such as a shot of espresso, from a beverage preparation machine. The dispensing unit can include a dispensing unit with a first end and a second end. The dispensing unit can be rotatable between an upright position and an inverted position. The dispensing unit can be configured to receive the beverage through the second end when the dispensing unit is in the upright position, and can be configured to receive cleansing fluid through the second end when the dispensing unit is in the inverted position. In some embodiments, when the dispensing unit is in an intermediate position between the upright and inverted positions, the dispensing unit is configured to dispense the beverage out of the first end and into a cup or other vessel.

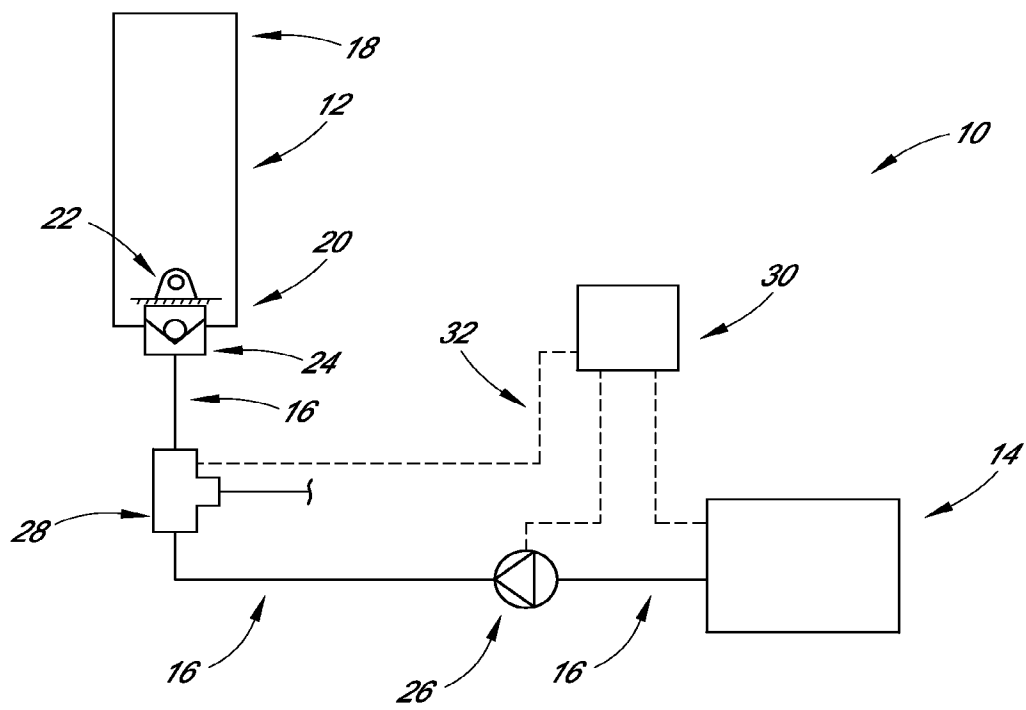


FIG. 1

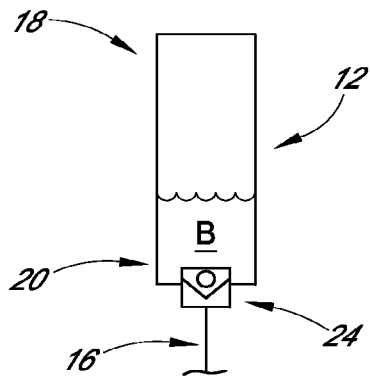


FIG. 2A

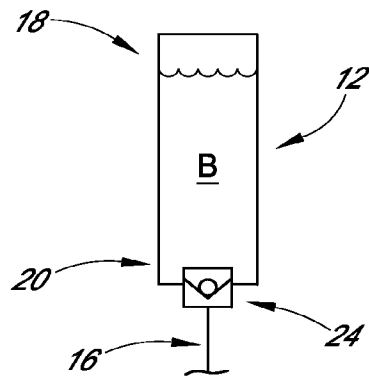


FIG. 2B

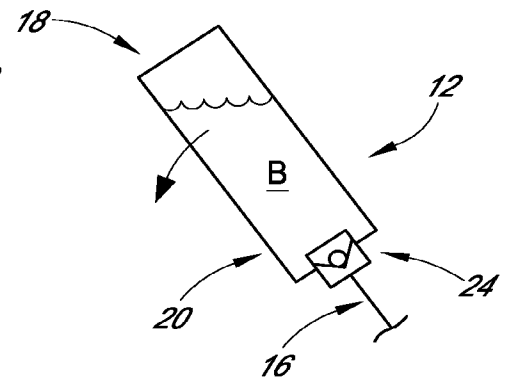


FIG. 2C

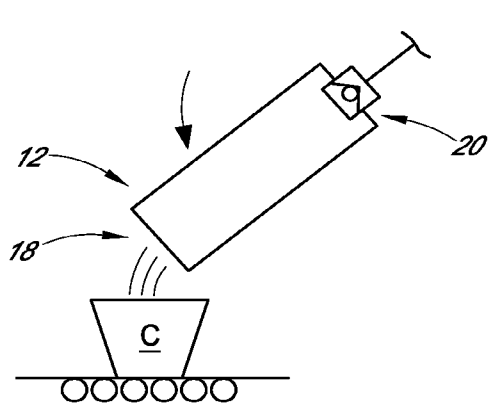


FIG. 2D

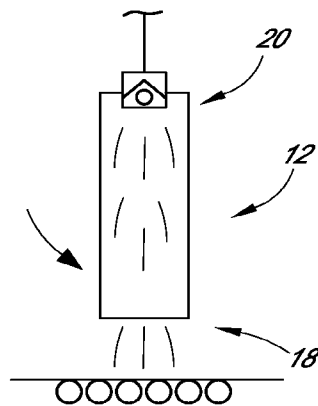


FIG. 2E


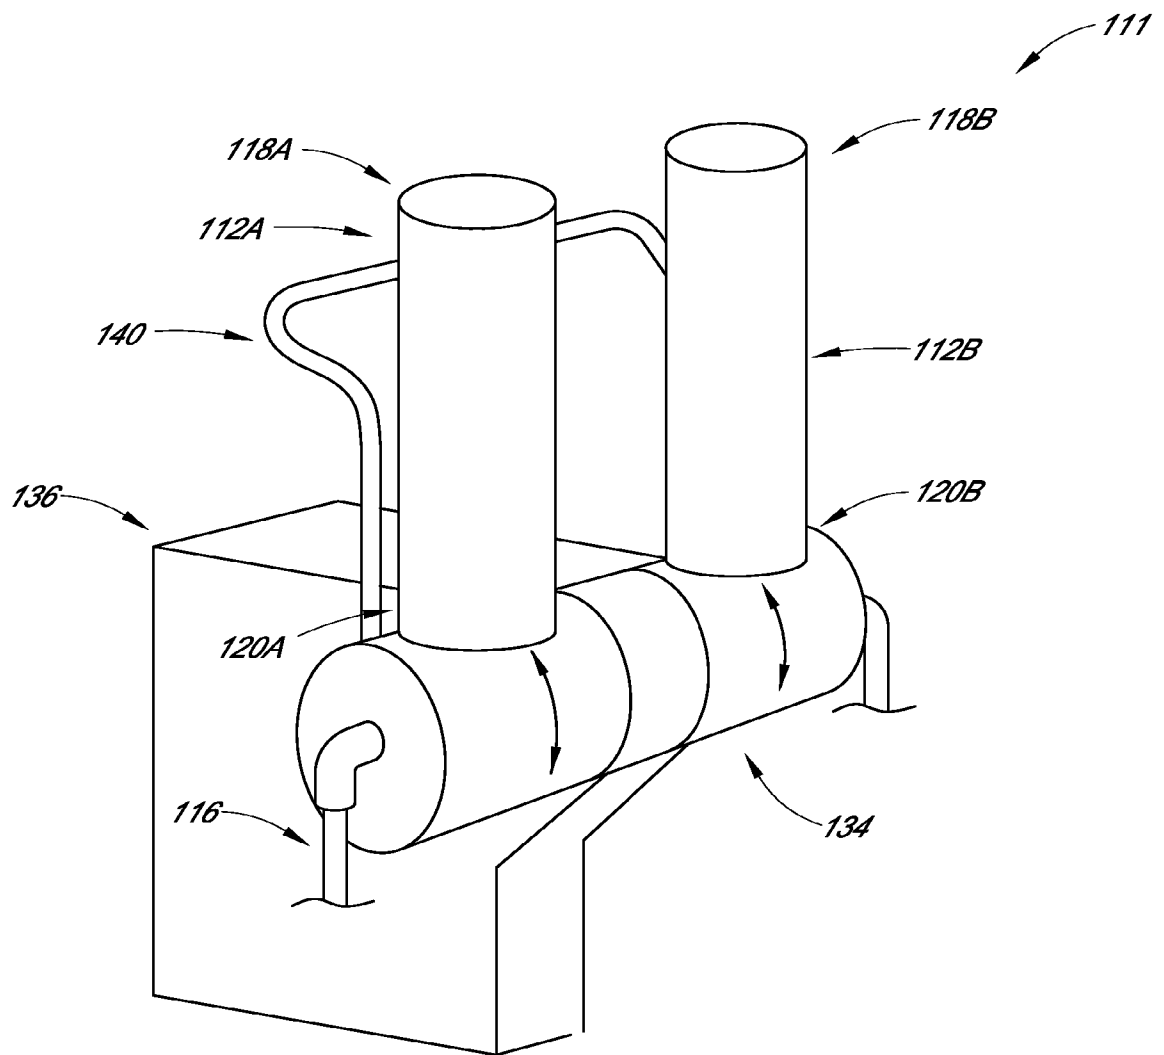
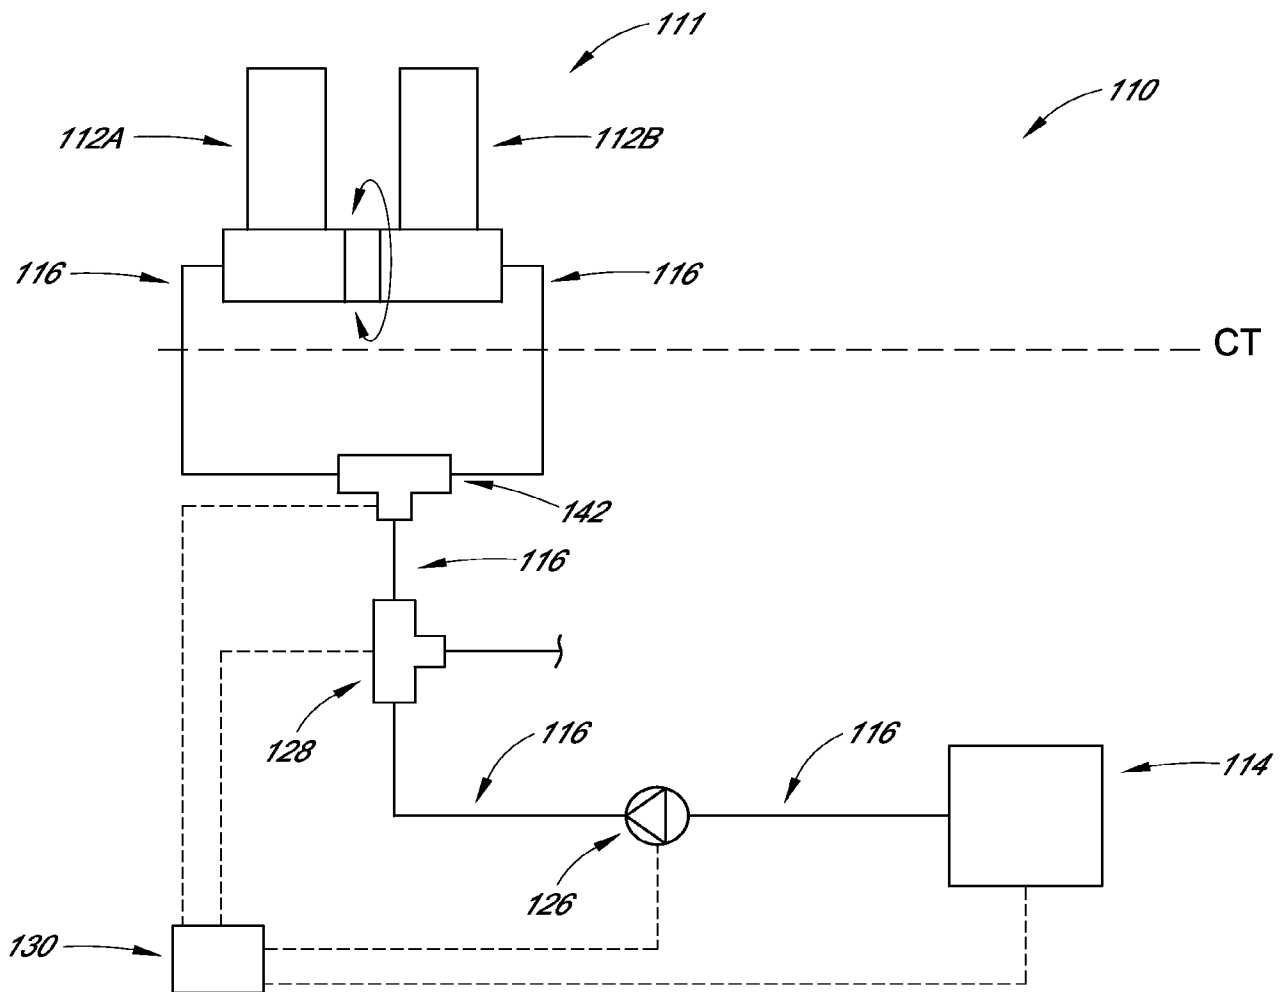
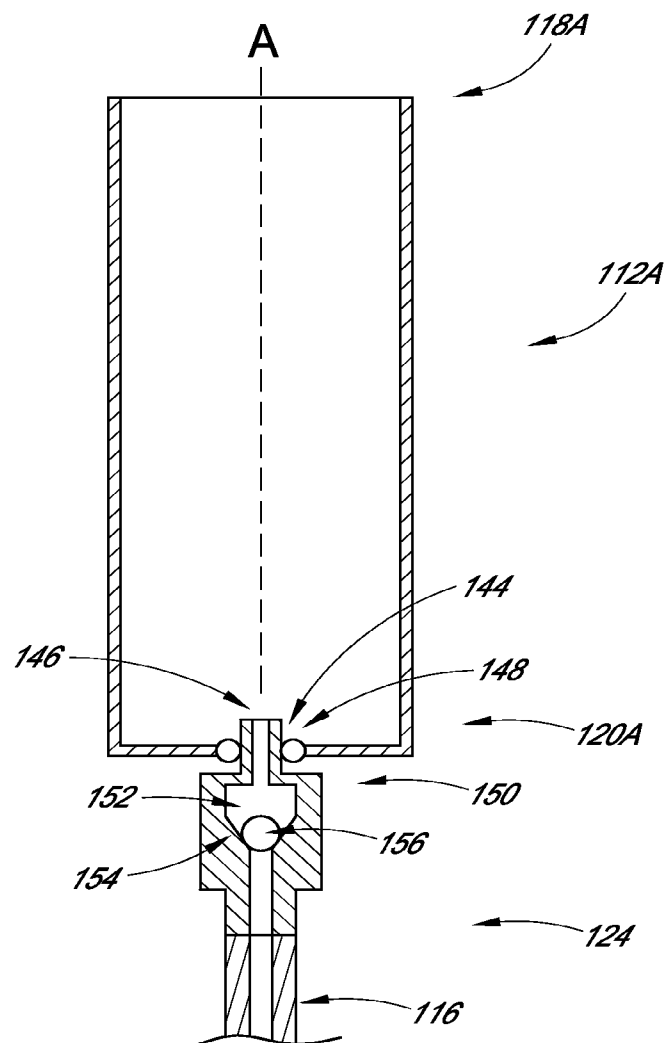
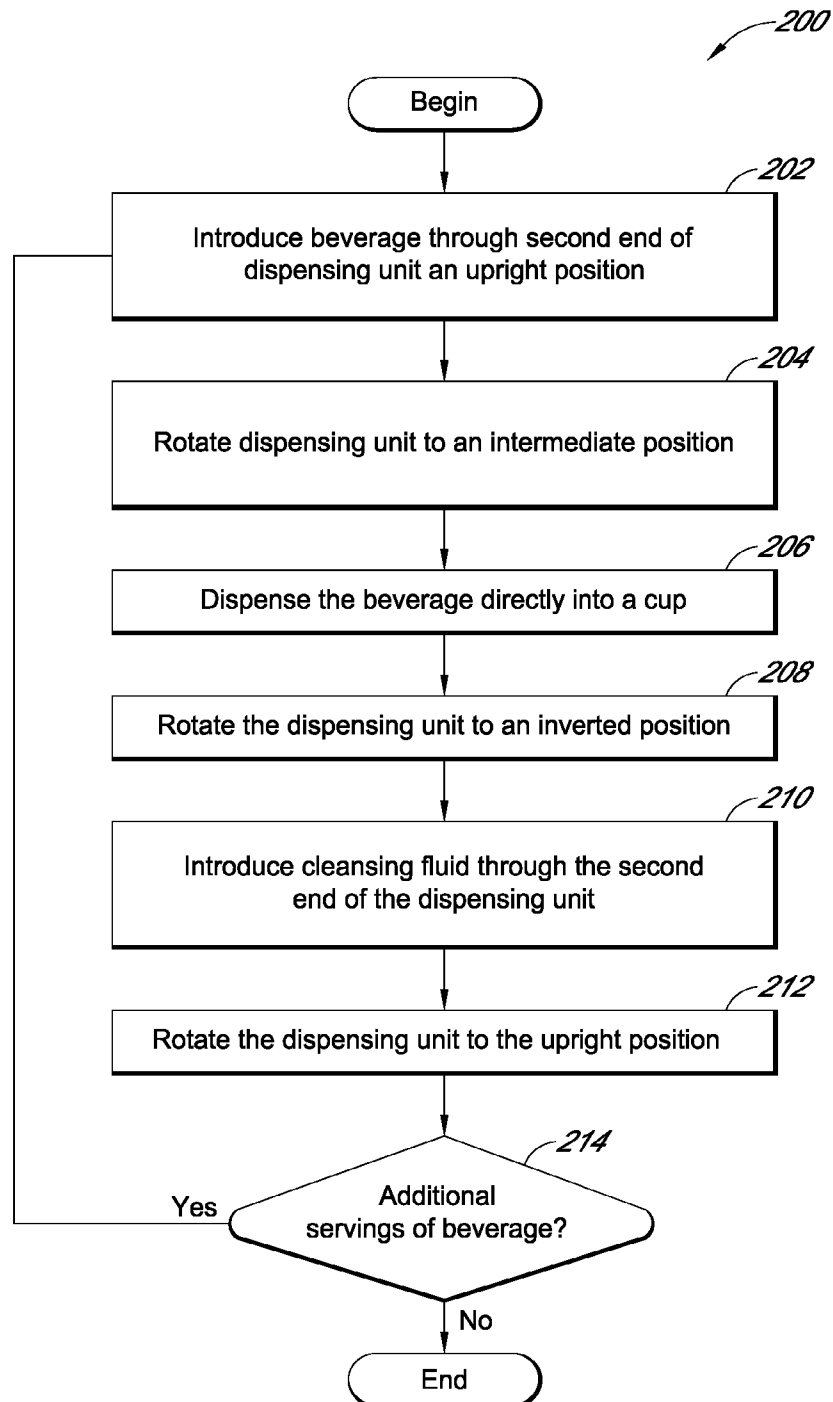



FIG. 2F


*FIG. 3*

*FIG. 4*

*FIG. 5*

*FIG. 6*

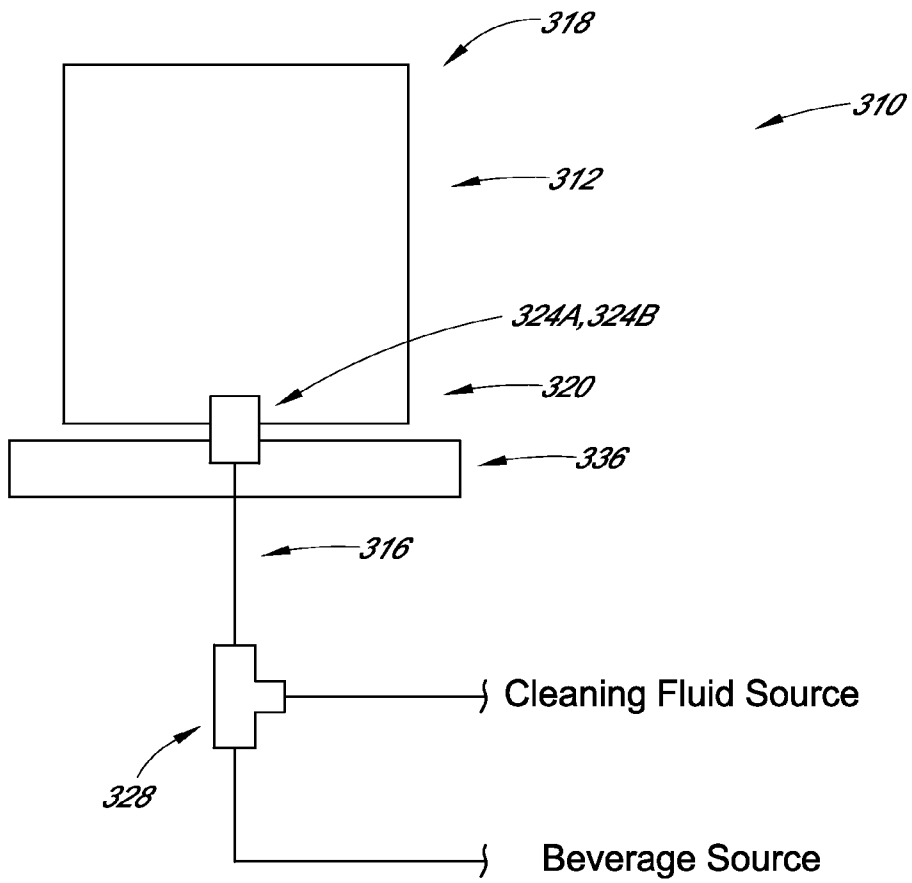*FIG. 7*

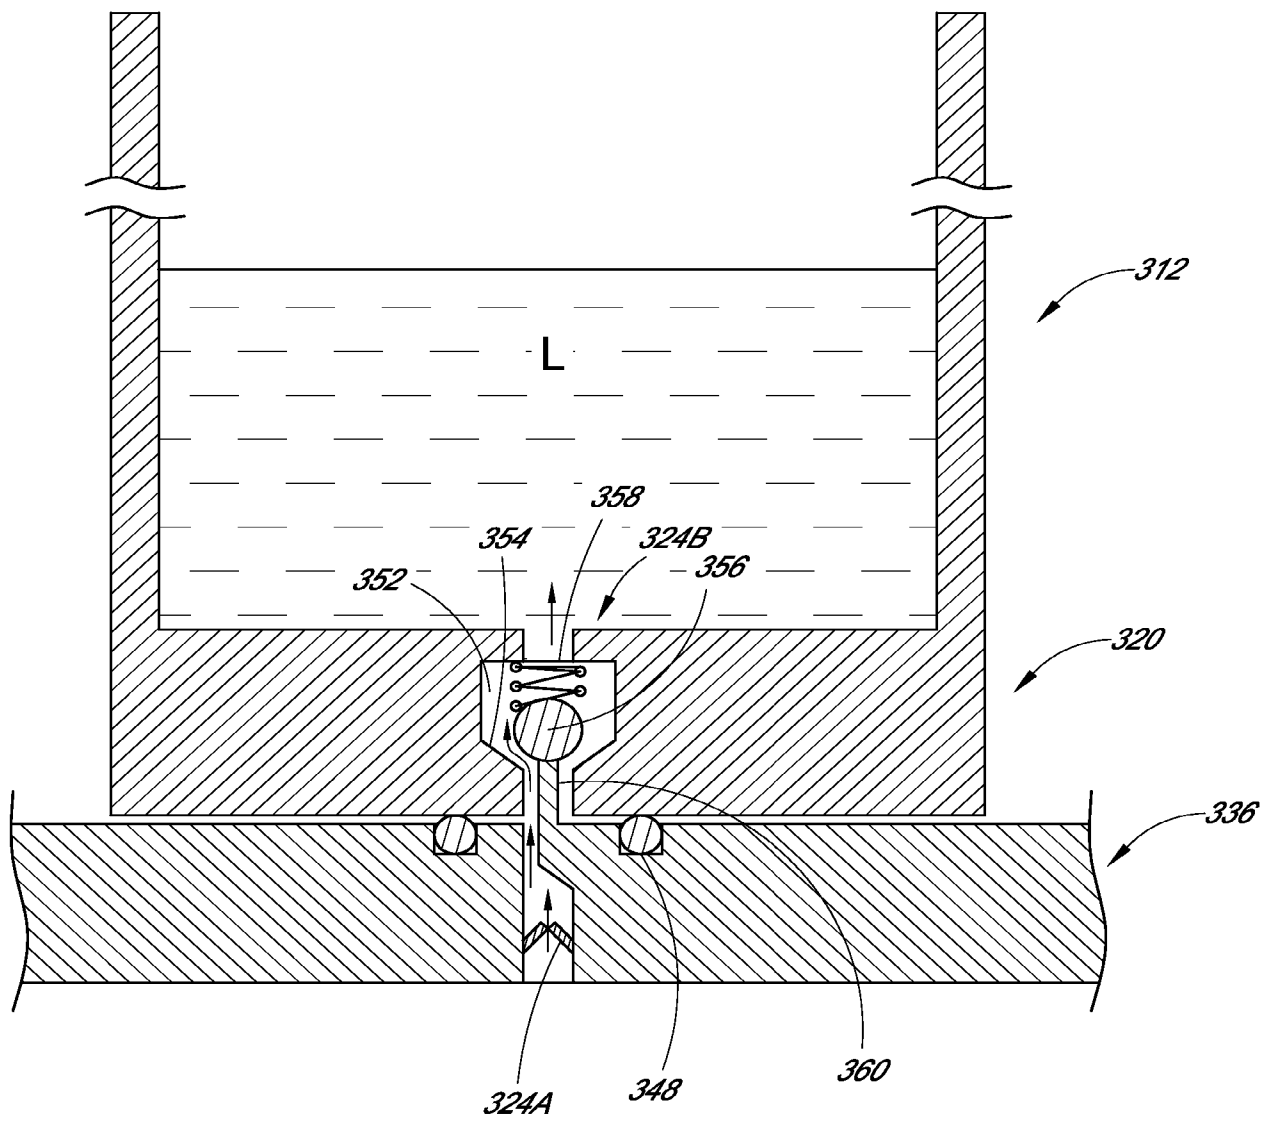*FIG. 8*

Electronic Acknowledgement Receipt

EFS ID:	23539842
Application Number:	62220680
International Application Number:	
Confirmation Number:	1071
Title of Invention:	BEVERAGE DISPENSING SYSTEMS AND METHODS
First Named Inventor/Applicant Name:	Dan Apone
Customer Number:	20995
Filer:	Jason R. Swartz/Kevin Kraus
Filer Authorized By:	Jason R. Swartz
Attorney Docket Number:	SBUX1.388PR
Receipt Date:	18-SEP-2015
Filing Date:	
Time Stamp:	17:17:00
Application Type:	Provisional

Payment information:

Submitted with Payment	yes
Payment Type	Credit Card
Payment was successfully received in RAM	\$ 260
RAM confirmation Number	4106
Deposit Account	111410
Authorized User	KNOBBE MARTENS OLSON AND BEAR

The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:

Charge any Additional Fees required under 37 C.F.R. Section 1.16 (National application filing, search, and examination fees)

Charge any Additional Fees required under 37 C.F.R. Section 1.17 (Patent application and reexamination processing fees)

File Listing:					
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Application Data Sheet	ADS_SBUX1388PR.pdf	1819187	no	8
			6555cc4ea4a1d2caa1c743116358e592566c2063		
Warnings:					
Information:					
2	Specification	Specification_SBUX1388PR.pdf	151075	no	30
			1d33cf95dccb206adb1aa14180eb4ae7f612bed		
Warnings:					
Information:					
3	Drawings-only black and white line drawings	Drawings_SBUX1388PR.pdf	704463	no	8
			707377de1e8c0a558332a394ba61d566e0d8e7f7		
Warnings:					
Information:					
4	Fee Worksheet (SB06)	fee-info.pdf	30070	no	2
			90c3687ea1f010bc075cd90bc6c04f255b55bd35e		
Warnings:					
Information:					
Total Files Size (in bytes):			2704795		
This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503. <u>New Applications Under 35 U.S.C. 111</u> If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application. <u>National Stage of an International Application under 35 U.S.C. 371</u> If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course. <u>New International Application Filed with the USPTO as a Receiving Office</u> If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.					