

(10) International Publication Number
WO 2017/112840 A1(43) International Publication Date
29 June 2017 (29.06.2017)

(51) International Patent Classification:

A01F 25/14 (2006.01) *B65D 85/34* (2006.01)
B65D 45/16 (2006.01) *E05C 19/10* (2006.01)
B65D 25/04 (2006.01) *E05C 19/02* (2006.01)

(21) International Application Number:

PCT/US2016/068192

(22) International Filing Date:

22 December 2016 (22.12.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/387,285 23 December 2015 (23.12.2015) US

(71) Applicant: ARENA PACKAGING, LLC [US/US]; 2101 Mt. Read Boulevard, Rochester, NY 14615 (US).

(72) Inventor: WILCOX, Donald, E.; 293 Old Meadow Drive, Rochester, NY 14626 (US).

(74) Agent: POWERS, Jeffrey B.; Bond, Schoeneck & King PLLC, 350 Linden Oaks, Third Floor, Rochester, NY 14624 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: PRODUCE SHIPPING CONTAINER

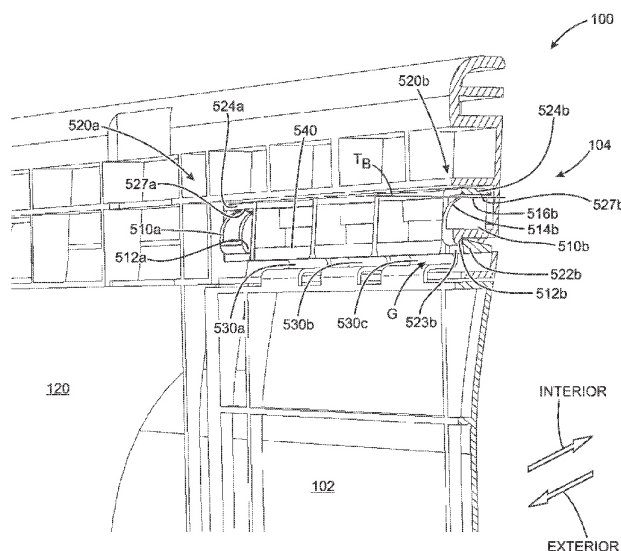


Fig. 5

(57) Abstract: A container having walls, one having a projection including a hook and an exterior surface opposite the hook having an external contact location, the hook extending away from the contact surface, the contact location disposed interiorly of the hook. The container includes a door, and a latch coupled to the door by a spring. The latch comprises a catch and a binding arm, and has a contact surface positioned to fit the projection between the catch and contact surface. The latch has a locked position in which the catch and hook maintain the door in the closed position, and an unlocked position in which the door is movable. The spring biases the latch into the locked position. Sufficient pressure on the latch overcomes the biasing to achieve the unlocked position, to allow the open position to be attained. When in the locked position, the contact surface faces the contact location.