



(51) International Patent Classification:

A61K 9/00 (2006.01) A61K 47/34 (2017.01)

(21) International Application Number:

PCT/EP2016/081701

(22) International Filing Date:

19 December 2016 (19.12.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15201507.9 21 December 2015 (21.12.2015) EP

(71) Applicant: BAYER OY [FI/FI]; Pansiontie 47, 20210
Turku (FI).

(72) Inventor: KOIVULA, Lasse; Linnankatu 19b A1, 20100
Turku (FI).

(74) Agent: BIP PATENTS; c/o Bayer Intellectual Property
GmbH, Alfred-Nobel-Str. 10, 40789 Monheim am Rhein
(DE).

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY,
TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,

(54) Title: A METHOD OF MANUFACTURING A VAGINAL RING

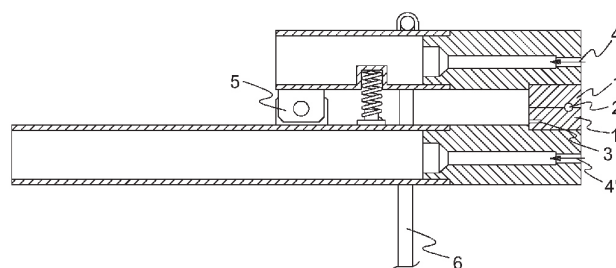


Fig. 1

(57) Abstract: The present invention relates to a method of manufacturing a vaginal ring, wherein the vaginal ring comprises at least one therapeutically active agent and a body comprising a crosslinked siloxane elastomer. The method comprises manufacturing the body in the form of a rod having a first end and a second end and forming the body into a ring by arranging an attachment part between the first end of the body and the second end of the body, wherein the attachment part comprises a non-crosslinked siloxane elastomer having a weight average molecular weight of 650-850 g/mol and a cross-linking catalyst, and curing the attachment part for a period of time of 1-30 second using a temperature of 125-220°.

