

Search history


Search FT = ((buckle OR bracket) W4 (strap OR band OR belt)) NEAR (wall OR floor) (Results 174)
1:
Search 1 AND (FT = fix* OR anchor* OR attach*) (Results 149)
2:
Search CPC = A61G7/* (Results 18542)
3:
Search 2 AND 3 (Results 0)
4:
Search CPC = A61G* (Results 52017)
5:
Search 2 AND 5 (Results 2)
6:
Search 2 AND (FT = tube NEAR hold*) (Results 3)
7:
Search CPC = (Y10T24/* OR Y10T24/40*) (Results 84305)
8:
Search 1 and 8 (Results 13)
9:
Search 8 AND (FT = bed OR gurney) (Results 1157)
10:
Search 10 AND (FT = (wall OR floor) NEAR (anchor* OR fix* OR attach*)) (Results 89)
11:
Search FT = gurney NEAR restrain* (Results 7)
12:
Search CPC = A61G1/044 (Results 338)
13:
Search (CPC = A61G1/044) AND (PD<20170719) (Results 313)
14:
Search FT = stretcher NEAR anchorage (Results 27)
15:
Search (FT = A61G3/0891 OR A61G3/0883) (Results 0)
16:
Search (CPC = A61G3/0891 OR A61G3/0883) (Results 137)
17:
Search CPC = (A61G3/0891 OR A61G3/0883) (Results 224)
18:
Search 18 AND (FT = strap OR belt OR band or leash) (Results 22)
19:
Search CPC = (B60R2021/0246 OR A61G3/08 OR B60P7/00 OR B60R21/00) (Results 1870)
20:
Search 20 AND (FT = strap OR belt OR band or leash) (Results 230)
21:
Search 21 AND (FT = stretcher OR bed OR gurney) (Results 9)
22:
Search CPC = B60P7/00 (Results 115)
23:
Search (23) AND CC=(US OR CA OR MX OR ES) (Results 30)
24:
Search fn=(70231304:30 or 69908707:30 or 69831265:30 or 68877469:30 or 68840090:30 or 68723621:30 or 68083976:30 or 67281269:30 or 67236350:30 or 66949214:30 or 66948975:30 or 66518986:30 or 66457430:30 or 64893193:30 or 64776519:30 or 64775471:30 or 64629663:30 or 64516385:30 or 64426082:30 or 64425218:30 or 64147257:30 or 63899342:30 or 63444919:30 or 62995869:30 or 62926920:30 or 62567333:30 or 61846961:30 or 61267494:30 or 59937884:30 or 56089056:30 or 55759094:30 or 53425170:30 or 52821466:30 or 49398381:30 or 49375192:30 or 48092313:30 or 48089730:30 or 48087271:30 or 48086594:30 or 48084468:30 or 48082522:30 or 48081825:30 or 48081223:30 or 48079176:30 or 48078699:30 or 48078097:30 or 48072950:30 or 48072943:30 or 48063925:30 or 48063763:30 or 48063253:30 or 48059458:30 or 48059047:30 or 48057348:30 or 48050396:30 or 48045372:30 or 48041002:30 or 47400423:30 or 47123852:30 or 47054059:30 or 44577494:30 or 44569901:30 or 44515036:30 or 36003057:30 or 33869844:30 or 33816274:30 or 30440058:30 or 30359729:30 or 28966698:30 or 28963352:30 or 28403577:30 or 22687859:30 or 22478214:30 or 21218361:30 or 17619824:30 or 17380865:30 or 17380834:30 or 17298445:30 or 17277125:30 or 17270229:30 or 16989994:30 or 16624905:30 or 16516703:30 or 16211420:30 or 15584017:30 or 10839273:30 or 10838816:30 or 9082794:30 or 6753296:30 or 6624779:30 or 4823758:30 or 4417838:30 or 3693065:30 or 3412094:30 or 3412092:30 or 2047315:30 or 1659115:30 or 1616735:30 or 1388895:30 or 1202369:30) (Results 100)
25:
Search 25 AND (PD<20170719) (Results 87)
26:
Search 21 AND (FT = (stretcher OR bed OR gurney OR chair) NEAR (anchor* OR attach* OR fix* OR restrain)) (Results 6)
27:
Search RF=(NC20170007265) (Results 10)
28:

Title: SILLA DE TRANSPORTE SANITARIO, DISPOSITIVO DE ANCLAJE PARA SUJETAR UNA SILLA Y CONJUNTO DE SILLA DE TRANSPORTE SANITARIO

Abstract: Source: ES2617261B [ES] Silla de transporte sanitario provista de un medio motriz, en particular prevista para ser transportada en vehiculos de transporte sanitario, caracterizada por comprender una silla (1) que presenta una estructura plegable (2) configurada para ser plegable y desplegada, que incluye una base de asiento (3), un respaldo (5) y unas ruedas de desplazamiento (8) situadas en la parte inferior de la estructura plegable (2). Tambien presenta un modulo oruga (13) acoplable en la estructura plegable de la silla por unos medios de union liberables, tal que el modulo oruga esta configurado para acoplarse/desacoplarse de la silla, estando el modulo oruga (13) configurado para proporcionar motricidad a la silla, de modo que es capaz de superar obstaculos o desniveles en el terreno por donde transcurre la silla.

Classifications:

International (IPC 8-9): A61G3/08 A61G5/06 A61G5/08 B62D55/084 (Advanced/Invention)
CPC: A61G5/06 A61G3/08 A61G5/08 B62D55/084

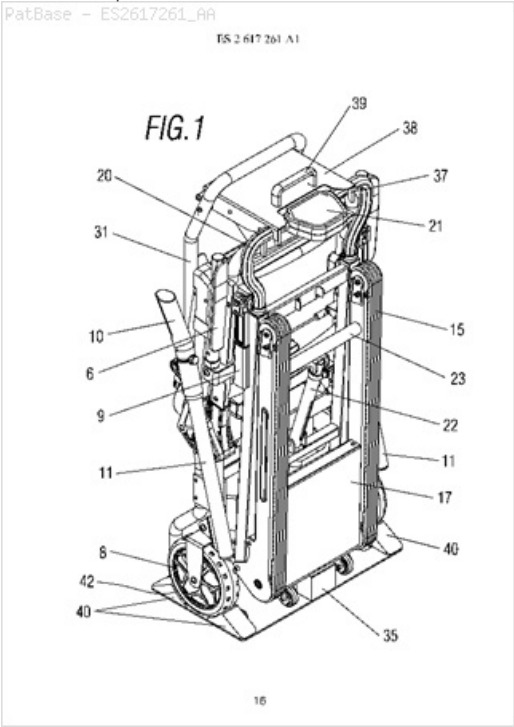

Family:

Publication number	Publication date	Application number	Application date
ES2617261 AA	20170616	ES20170030244	20170224
ES2617261 BA	20171110	ES20170030244	20170224

Priority:

ES20170030244 20170224


Probable Assignee: METALICOS DEL BAGES S L PROD
Assignee(s): (std): METALICOS DEL BAGES S L PROD
Assignee(s): METALICOS DEL BAGES SL PROD
Inventor(s): (std): DE MIGUEL GARCIA ANTONIO
Inventor(s): ANTONIO DE MIGUEL GARCIA

Title: PASSIVE SAFETY SYSTEM FOR PUSHCHAIRS IN PUBLIC TRANSPORT VEHICLES

Abstract: Passive safety system for pushchairs (7) in public transport vehicles, which comprises a first panel (3), arranged perpendicularly with respect to a wall (6) of the public transport vehicle, when said panel (3) is in service, and at least one element for fastening the first panel (3) to the wall (6) of the public transport vehicle. The passive safety system further comprises a second panel (1) which is connected to the first panel (3), and at least one first articulation (2), as connection element between the first panel (3) and the second panel (1). The at least first articulation (2) allows relative rotation of the second panel (1) with respect to the first panel (3), preventing undesired lateral movement of a pushchair (7) located between the wall (6) of the vehicle and the second panel (1).

Classifications:

International (IPC 8-9): A61G3/08 B60N2/24 B60P7/00 B60R21/00 (Advanced/Invention)
CPC: B60R21/02 B60R2021/0246 A61G3/0808 A61G3/0883 A61G3/0891 B60N2/245 A61G3/08 B60N2/24 B60P7/00 B60R21/00 B60R2021/0293

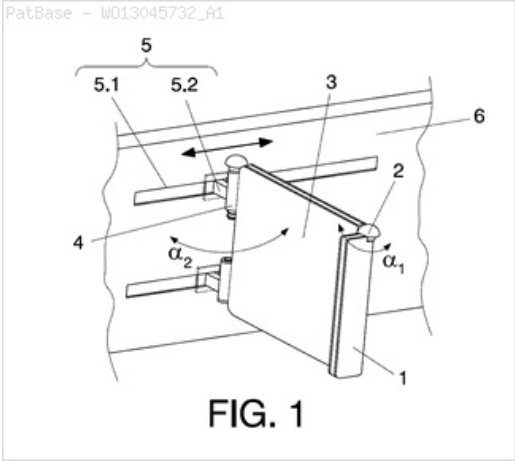

Family:

Publication number	Publication date	Application number	Application date
ES2403161 AB	20130514	ES20110031557	20110927
ES2403161 BA	20140613	ES20110031557	20110927
ES2403161 R1	20130719	ES20110031557	20110927
WO13045732 A1	20130404	WO2012ES70667	20120926

Priority:

ES20110031557 20110927

Probable Assignee: UNIV MADRID POLITECNICA

Assignee(s): (std): UNIV MADRID POLITECNICA ; UNIV VALENCIA POLITECNICA

Assignee(s): UNIVERSIDAD POLITECNICA DE MADRID ; UNIVERSIDAD POLITECNICA DE VALENCIA

Inventor(s): (std): DOLS RUIZ JUAN FRANCISCO ; MARTIN LOPEZ ANGEL LUIS ; MARTINEZ SAEZ LUIS ; PONS SENDRA VICENTE ; VALLES FERNANDEZ BEATRIZ ; ALCALA FAZIO ENRIQUE

Inventor(s): ANGEL LUIS MARTIN LOPEZ ; BEATRIZ VALLES FERNANDEZ ; VICENTE PONS SENDRA ; ENRIQUE ALCALA FAZIO ; JUAN FRANCISCO DOLS RUIZ ; LUIS MARTINEZ SAEZ

Agent(s): UNGRIA JAVIER; UNGRIA LOPEZ JAVIER


Designated states: AE AG AL AM AO AT AU AZ BA BB BE BF BG BH BJ BN BR BW BY BZ CA CF CG CH CI CL CM CN CO CR CU CY CZ DE DK DM DO DZ EC EE EG ES FI FR GA GB GD GE GH GM GN GQ GR GT GW HN HR HU ID IE IL IN IS IT JP KE KG KM KN KP KR KZ LA LC LK LR LS LT LU LV LY MA MC MD ME MG MK ML MN MR MT MW MX MY MZ NA NE NG NI NL NO NZ OM PA PE PG PH PL PT QA RO RS RU RW SC SD SE SG SI SK SL SM SN ST SV SY SZ TD TG TH TJ TM TN TR TT TZ UA UG US UZ VC VN ZA ZM ZW

Title: RESTRAINT WITH SHOULDER HARNESS ADJUSTER

Abstract: A restraint for holding a person atop a gurney or on a vehicle seat. A harness includes a pair of straps slidably mounted to a main frame. The straps are connected to an adjuster. A slide plate is mounted to the frame with the straps extending therethrough. A spring loaded device normally positions the plate to position the straps apart from the shoulders of a person positioned beneath the straps until the straps are pulled relative to an adjuster moving the plate and the straps adjacent the shoulders of the person.

Classifications:

International (IPC 8-9): A47B7/00 A61G1/04 A61G7/05 A62B35/00 B60R21/00 (Advanced/Invention); A61G1/00 A62B35/00 B60R21/00 (Core/Invention)
CPC: A61G1/044 B60N2/2812 B60R22/20
European: A61G1/044 B60N2/28B4 L60R22/20
US: 297/250.1 297/484 297/484S 5/621 5/621P 5/628 5/628P 5/655

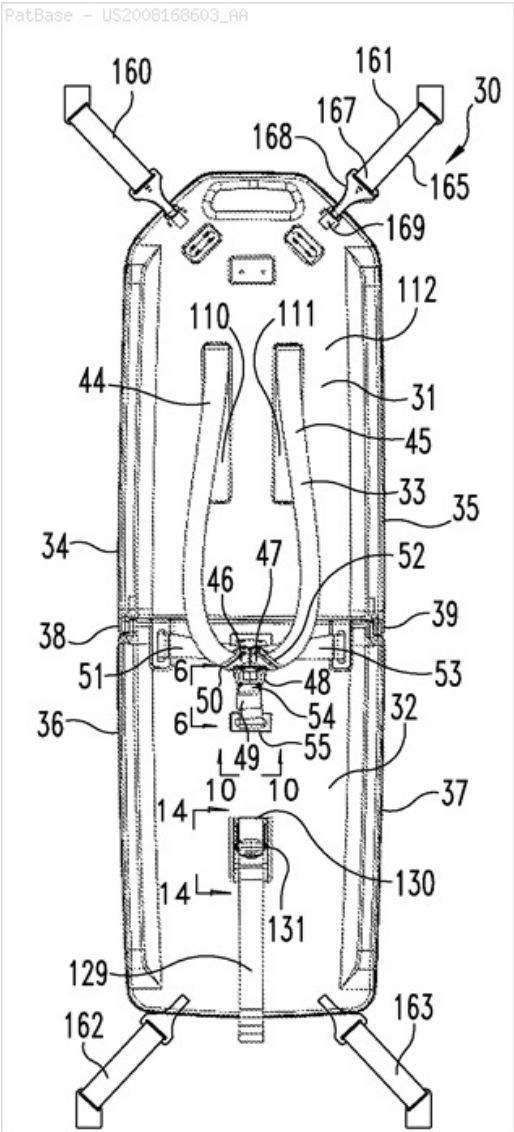

Family:

Publication number	Publication date	Application number	Application date
US2008168603 AA	20080717	US20070624039	20070117
US2011056022 AA	20110310	US20100947123	20101116
US7861341 BB	20110104	US20070624039	20070117
US8001634 BB	20110823	US20100947123	20101116
WO08088608 A2	20080724	WO2007US83801	20071106
WO08088608 A3	20081127	WO2007US83801	20071106

Priority:

US20070624039 20070117 US20100947123 20101116

Probable Assignee: INDIANA MILLS AND MFG INC

Assignee(s): (std): AYETTE MICHAEL W ; DINGMAN GUY R ; INDIANA MILLS AND MFG

Assignee(s): INDIANA MILLS AND MFG INC ; INDIANA MILLS AND MANUFACTURING INC

Inventor(s): (std): DINGMAN GUY R ; AYETTE MICHAEL W


Agent(s): WOODARD EMHARDT MORIARTY MCNETT AND HENRY LLP; WOODARD EMHARDT NAUGHTON MORIARTY MCNETT AND HENRY LLP; MORIARTY JOHN V ET AL

Designated states: AE AG AL AM AT AU AZ BA BB BE BF BG BH BJ BR BW BY BZ CA CF CG CH CI CM CN CO CR CU CY CZ DE DK DM DO DZ EC EE EG ES FI FR GA GB GD GE GH GM GN GQ GR GT GW HN HR HU ID IE IL IN IS IT JP KE KG KM KN KP KR KZ LA LC LK LR LS LT LU LV LY MA MC MD ME MG MK ML MN MR MW MX MY MZ NA NE NG NI NL NO NZ OM PG PH PL PT RO RS RU SC SD SE SG SI SK SL SM SN SV SY SZ TD TG TJ TM TN TR TT TZ UA UG US UZ VC VN ZA ZM ZW

Title: WATER HEATER SECURITY SYSTEM

Abstract: A water heater security system includes a woven, flexible strap disposed around a water heater to maintain the water heater in a fixed relationship with an adjacent wall. The system includes a pair of wall brackets and may include a buckle assembly. The strap may be formed with two or four ends at least one of which is adjustably attachable to one of the wall brackets or buckle. The buckle can be stamped from metal and bent back on itself to form a slide channel with two sidebars and a crossbar. A slide is disposed within the channel. Side flanges can be formed on the buckle portions or the slide.

Classifications:
International (IPC 8-9): A44B11/10 F24H9/06 (Advanced/Invention);
A44B11/00 F24H9/06 (Core/Invention)
International (IPC 1-7): A47G23/02
CPC: Y10T24/2175 Y10T24/4019 Y10T24/4084 F24H9/06
European: F24H9/06
US: 24/171 24/196 24/68CD 248/154 248/313 248/500

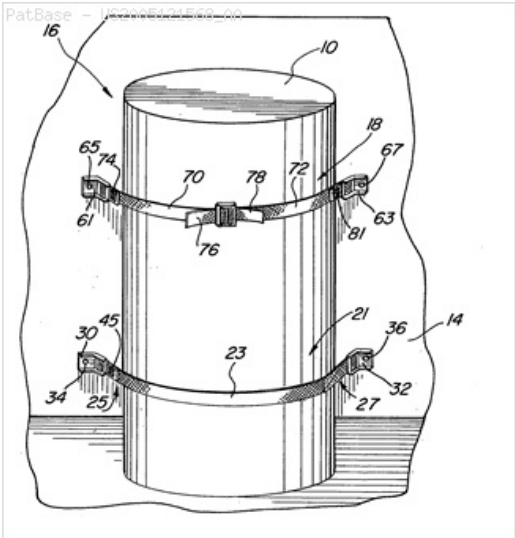

Family:

Publication number	Publication date	Application number	Application date
US2005121568 AA	20050609	US20030728709	20031205
US7103942 BB	20060912	US20030728709	20031205

Priority:

US20030728709 20031205

Probable Assignee: LITTLE FIREFIGHTER CORP

Assignee(s): (std): LITTLE FIREFIGHTER CORP ; YOUNGBERG ERIC E

Inventor(s): (std): YOUNGBERG ERIC E ; YOUNGBERG ERIC EZRA


Inventor(s): YOUNGBERG ERIC

Agent(s): RICHARD L MYERS MYERS DAWES ANDRAS AND SHERMAN LLP; VIC Y; MYERS DAWES ANDRAS AND SHERMAN LLP

Title: Cargo fixture of the truck loading area (Machine translation)

Abstract: Source: KR19980044403U **Machine translation:** In the truck bed of the present invention and then wound around a fixed belt after the charger installed in the cargo loaded fixing belt using fasteners, to improve the workability by fastening the truck relates to the cargo loading area, which is a first mounting hole (14) provided with a first receiving groove 12 is formed, and the first side door 6 to the first mounting hole 14 by a spring first inserted into the fixing pin 20 is wound around the fixing belt 22 elastically and opposite to the first side 6 and the second mounting hole 18, a second receiving groove 16 is formed, and a second side door (8) is inserted into the second mounting hole 18 by the second fixing pin 30 of the second receiving groove 16, which is pivotably mounted to the mobile frame 34 in accordance with the rotational operation of the latch 42 to be fixed by a fastener (31) is composed of a belt 22.

Classifications:
International (IPC 8-9): B60P7/00 (Advanced/Non-invention)
International (IPC 1-7): B60P7/00
CPC: B60P7/00

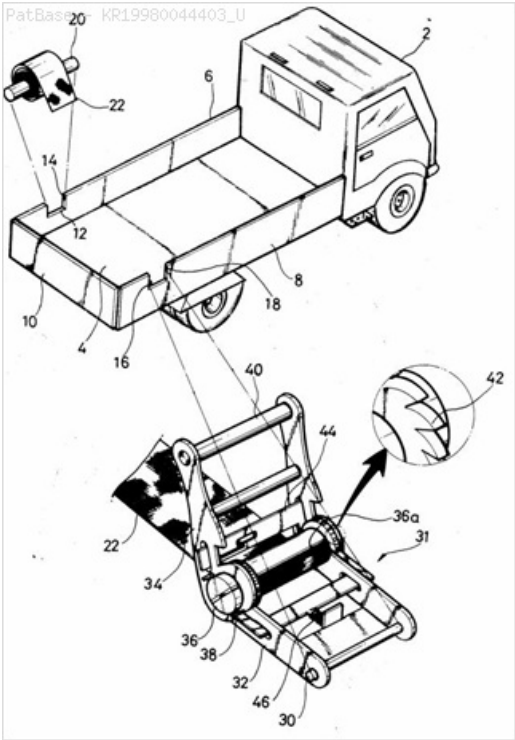

Family:

Publication number	Publication date	Application number	Application date
KR19980044403 U	19980925	KR19960057538U	19961226

Priority:

KR19960057538U 19961226


Probable Assignee: DAEWOO MOTOR CO LTD

Assignee(s): AND GT I PERCENT PERCENT AND GT I PERCENT PERCENT ; DAEWOO MOTOR CO LTD

Title: Seat belt adjustment device

Abstract: A safety belt adjustment device and a safety belt system are disclosed in which an automobile shoulder belt is adjusted by a device mountable on the shoulder belt itself engages the belt so as to reduce the angle at which the belt crosses the passenger's chest, thereby lowering the point at which the belt crosses the center of the passenger's chest, thus allowing the shoulder belt to be safely and comfortably used by people who, for physical reasons such as shortness, would otherwise be unable to use the shoulder belt.

Classifications:
International (IPC 8-9): B60R22/02 (Advanced/Invention); B60R22/02 (Core/Invention)
International (IPC 1-7): B60R22/10
CPC: B60R22/024
European: B60R22/02F2
US: 280/808 297/483

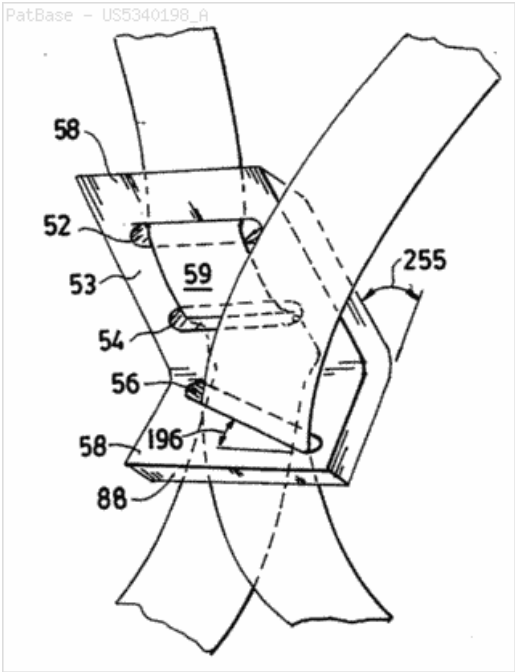

Family:

Publication number	Publication date	Application number	Application date
US5340198 A	19940823	US19910754920	19910905

Priority:
US19910754920 19910905


Probable Assignee: BENSKE GREGORY A
Assignee(s): (std): BENSKE GREGORY A ; GAUDIANO JUAN ; MCGEEHAN MICHAEL J ; MURPHY JOSEPH F
Inventor(s): (std): BENSKE GREGORY A ; GAUDIANO JUAN ; MCGEEHAN MICHAEL J ; MURPHY JOSEPH F

Title: PASSENGER AND WHEELCHAIR SECUREMENT SYSTEM FOR VEHICLES

Abstract: Wheelchair and wheelchair occupant restraint and securement system (10) for vehicles in which a track (12,14) in two sections is disposed in spaced apart, parallel relationship on the vehicle floor. A frame securement belt (40) is attached to each of the four corners of the wheelchair frame so that four belts (40) secure the chair to the track sections (12,14). Independent occupant securement is provided with a lap belt (70) which attaches on each side of chair (C) to a track section (12,14). A shoulder harness (90) attaches to the floor behind the occupant of the chair and rearwardly of the occupant separates into two shoulder sections (98) which have buckle loops (102) which secure to the releasable buckle (78,80) of the lap belt (70). A rear stanchion (120) may be provided by attaching the same to the track sections and passing the rearward part of the shoulder harness over the upper part (122) of the stanchion.

Classifications:

International (IPC 8-9): A61G3/08 B60R22/00 B60R22/18 B60R22/20 (Advanced/Invention); A61G3/00 B60R22/00 B60R22/18 (Core/Invention)
International (IPC 1-7): B60P7/08
CPC: A61G3/0808 B60R22/18 A61G2200/54 B60R22/00 B60R22/201 B60R2022/207
European: A61G3/08 B60R22/00 B60R22/18 B60R22/20B K61G200/54 L60R22/20H
US: 280/304.1 280/808 296/65.04 296/65.1 410/10 410/23 410/51

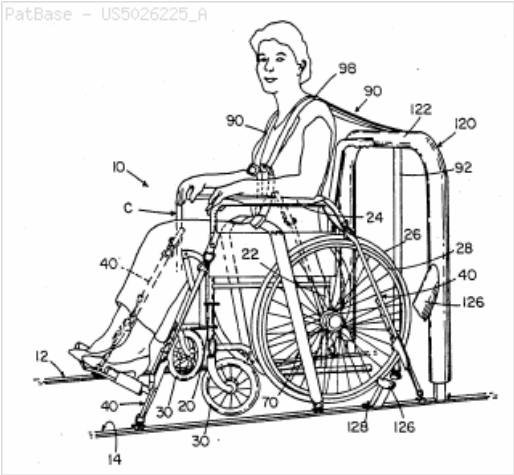

Family:

Publication number	Publication date	Application number	Application date
US5026225 A	19910625	US19890319369	19890303

Priority:

US19880181562 19880414 US19890319369 19890303

Probable Assignee: MCINTYRE JACK L

Assignee(s): (std): MCINTYRE JACK L


Inventor(s): (std): MCINTYRE JACK L

Title: AMBULANCE STRETCHER SUPPORT

Abstract: The stretcher support (4) has guides (8) that laterally position the stretcher, wedge devices (11) that clamp it to the floor, and stops (10) which define its longitudinal position. The other end of the stretcher is made captive by a catch which positively engages around a leg as the stretcher is moved into its final position and which is quickly released when the stretcher is to be removed.

Classifications:

International (IPC 8-9): A61G3/00 (Advanced/Invention);
A61G3/08 (Advanced/Non-invention);
A61G3/00 (Core/Invention)
International (IPC 1-7): A61G3/00
CPC: A61G3/0891 A61G3/0883 A61G2220/10 B64D2011/0092
European: A61G3/00 K61G220/10 K61G3/08 L64D11/00L6

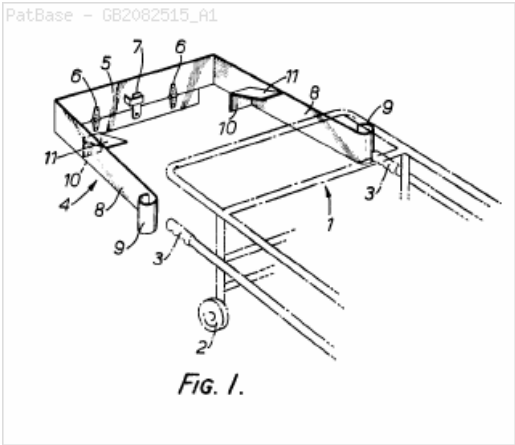

Family:

Publication number	Publication date	Application number	Application date
GB2082515 A1	19820310	GB19810024122	19810806

Priority:

GB19800025750 19800807 GB19800030671 19800923 GB19810024122 19810806

Probable Assignee: UNWIN C N LTD

Assignee(s): (std): UNWIN C N LTD

Title: VERRIEGELUNGSVORRICHTUNG MIT HANDHEBEL FÜR TRAGBAHREN ODER SONSTIGE AUF FAHRZEUGE AUFSETZBARE GERÄTE LOCKING DEVICE WITH HANDLE FOR Stretchers OR OTHER DEVICE ON VEHICLES attachable (Machine translation)

Abstract: Source: DE465049A [DE] (Claim 1) 1.PATENTANSPRUCH: Verriegelungsvorrichtung mit Hand hebel fuer Tragbahren oder sonstige auf Fahrzeuge aufsetzbare Gerate, gekenn zeichnet durch mindestens zwei mit dem Handhebel (e) gekuppelte und mittels desselben gleichzeitig verschiebbare Sperr- bolzen (h), welche in ihrer Schliessstel lung die Tragbahre o. dgl. mit entspre chend ausgebildeten Teilen des Fahr zeuges starr zu verbinden vermoegen.

Machine translation: (claim 1) 1.PATENTANSPRUCH: hand lever with locking device for stretchers and other features to vehicles attachable devices, marked by at least two with the hand lever (s) and coupled by the same same verschiebbare Sperr bolts (h), which in its ment Schliessstel the stretcher or the like connected to corresponding parts of the appropriately trained to drive rigid tool assets.


Classifications:

International (IPC 8-9): A61G1/06 A61G3/00 (Advanced/Invention); A61G1/00 A61G3/00 (Core/Invention)

International (IPC 1-7): A61G1/02

CPC: A61G1/0225 A61G1/0231 A61G3/0891 A61G1/0293 A61G1/042

European: A61G1/02P A61G1/06B A61G3/00

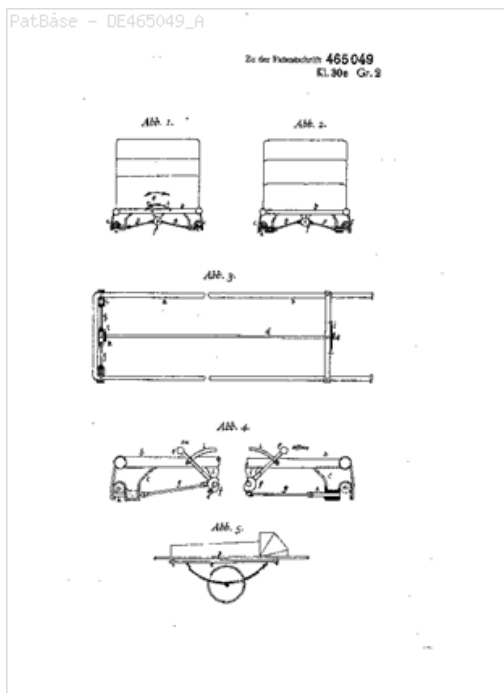

Family:

Publication number	Publication date	Application number	Application date
DE465049 A	19280904		00000000

Probable Assignee: OSKAR HEISE

Assignee(s): (std): OSKAR HEISE