



(51) International Patent Classification:

E21B 33/13 (2006.01) E21B 34/06 (2006.01)
E21B 33/138 (2006.01)

(21) International Application Number:

PCT/US2016/041257

(22) International Filing Date:

07 July 2016 (07.07.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 3000 N. Sam Houston Pkwy E., Houston, TX 77032 (US).

(72) Inventors: **TILLEY, David, Jon**; 2710 Irish Bend Rd., Franklin, LA 70538 (US). **MORGAN, Phillip, Michael**; 206 Autumn Oak Bend, Lafayette, LA 70508 (US). **JOHNSON, James, Todd**; 106 Meadowbrook Drive, Broussard, LA 70518 (US). **JOHNSON, Michael, Rick**; 100 Presidential Court, Lafayette, LA 70508 (US). **STROHLA, Nicholas, Lee**; 5219 Maple Ave., Apt. 1202, Dallas, TX 75235 (US). **GRAY, Matthew, Ryan**; 18788 Marsh Lane, Apt. 632, Dallas, TX 75287 (US).


MOELLER, Daniel, Keith; 1180 Noble Ave., Argyle, TX 76226 (US).

(74) Agent: **HILTON, Robert** et al.; McGuireWoods LLP, 1750 Tysons Blvd., Suite 1800, Tysons Corner, VA 22102 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(81) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: TOP-DOWN SQUEEZE SYSTEM AND METHOD

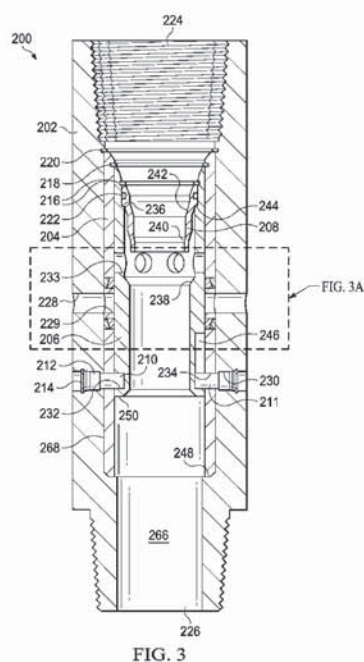

(57) Abstract: A diverter assembly includes a tubing segment and one or more sleeve members disposed therein. The tubing segment includes apertures that are selectively alignable with apertures of an inner sleeve disposed within the tubing segment. The tubing segment includes a series of stops (e.g., shear pins) to arrest movement of the first sleeve within the bore of the tubing segment. A first one or more ball seats are included in the first sleeve such that deployment of a first ball and pressurization of the well above the first ball causes a first set of shear pins to fail, thereby allowing the first sleeve to slide downhole to cause apertures of the sleeve to align with apertures of the tubing segment, thereby causing fluid to flow to an annulus between the tubing segment and wellbore wall.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*