



(51) International Patent Classification:

B65D 19/44 (2006.01) *B60P 7/06* (2006.01)
B21C 47/22 (2006.01) *B60P 7/12* (2006.01)
B60P 7/00 (2006.01) *B65D 19/28* (2006.01)

(21) International Application Number:

PCT/US2017/039104

(22) International Filing Date:

23 June 2017 (23.06.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/356,397 29 June 2016 (29.06.2016) US

(71) Applicant: **FLEXSTEEL PIPELINE TECHNOLOGIES, INC.** [US/US]; Suite 2700, 1201 Louisiana St, Houston, Texas 77002 (US).

(72) Inventors: **REEDY, Max**; 1420 Marina Bay Drive, Unit A, Kemah, Texas 77565 (US). **WINN, Alex**; 5103 N. Ossineke Drive, Spring, Texas 77386 (US). **PARKER, Peter**; 427 Masden Hollow Road, Beech Creek, Pennsylvania 16822 (US).

(74) Agent: **WALKER, David** et al.; Greenberg Traurig, LLP, Suite 1700, 1000 Louisiana St, Houston, Texas 77002 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: PIPE COIL SKID AND METHOD OF USE

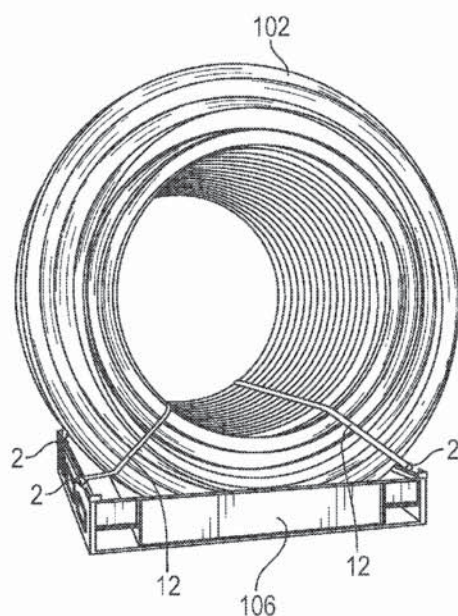


FIG. 1

(57) Abstract: A pipe coil skid comprises a plurality of beams affixably connected together to form a rectangular shaped base with a platform disposed within the base, the platform having a concave upward shape on its upward facing side when the skid sits on a horizontal surface such that the coil of pipe positioned upon the platform contacts the platform within the base. In other aspects, the pipe coil skid has an upward facing side generally corresponding to the outer circumferential shape of a coil of pipe. The beams and the platform may be formed of a steel material. The platform may be coated with a non-stick material or a rubberized material. The pipe coil skid may have a plurality of tie-down points for securing the coil of pipe. The pipe coil skid may have stackable corners disposed on the skids to enable stacking of pipe coil skids.

Declarations under Rule 4.17:

- *as to the identity of the inventor (Rule 4.17(i))*
- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*