

Search query (10): fn=(69992248:150 or 65292093:60 or 71283267:50 or 71046297:50 or 70806565:50 or 70584860:50 or 70136334:50 or 70136331:50 or 69626474:50 or 69076217:50 or 67388188:50 or 67036402:50 or 66380057:50 or 65532620:50 or 64793932:50 or 64752182:50 or 62645143:50 or 60818007:50 or 59246276:50 or 58801381:50 or 58556058:50 or 56547712:50 or 55761546:50 or 51603257:50 or 69739953:40 or 66993914:40 or 65373980:40 or 65373978:40 or 64405055:40 or 63189173:40 or 61700683:40 or 59606490:40 or 58221818:40 or 58129656:40 or 55474756:40 or 54819587:40 or 53536314:40 or 52887485:40 or 52882658:40 or 51932500:40 or 51715028:40 or 51597278:40 or 51277538:40 or 51092156:40 or 49807171:40 or 49746668:40 or 49711033:40 or 48439466:40 or 46873241:40 or 45115935:40 or 45032594:40 or 44987913:40 or 44904834:40 or 42650823:40 or 34049552:40 or 32484139:40 or 31714390:40 or 16669363:40 or 3199114:40 or 3029431:40 or 2196490:40 or 1356204:40 or 1257702:40 or 641926:40 or 73334150:30 or 73137472:30 or 72975432:30 or 72880763:30 or 72880761:30 or 72870234:30 or 72659906:30 or 72494378:30 or 72483189:30 or 72483186:30 or 72483184:30 or 72260658:30 or 72255954:30 or 72219282:30 or 72185353:30 or 72070546:30 or 72049842:30 or 72049828:30 or 72001483:30 or 71999256:30 or 71998260:30 or 71996880:30 or 71948284:30 or 71907521:30 or 71891717:30 or 71831033:30 or 71802365:30 or 71681155:30 or 71681153:30 or 71625789:30 or 71623655:30 or 71606831:30 or 71562958:30 or 71554789:30 or 71541865:30 or 71541306:30)

Results: 100

1) Family number: 60818007 (US2017148537A)

© PatBase

Title: ELECTRICAL APPARATUS

Abstract: Electrical Apparatus (100) includes an end of a cable (500) being connected to a transmission optimizer (20), and the cable (500) conducts a current in the range of 0.01 mA to 800 A at a voltage ranges from 12V to 140 KV for the transmission of power, data and signal. The cable (500) includes at least one insulated conductor core formed with an innermost insulating layer (220) disposing around the outside of a conducting layer (210) having carbon fibre or graphite fibre as a conductor core (210). The cable (500) includes a single insulated conductor core to form a single-core cable (300). A reinforcement layer (250) and or a shielding layer (230), (232) being provided around the outside of the innermost insulating layer (220). An outer insulating layer (240) disposes around the outside of the reinforcement layer (250) and the shielding layer. The cable (500) includes multiple numbers of single insulated conductor core to form a multi-core cable (400). A certain number of the multiple numbers can be loaded together to form as a group by a wrapping layer (260) with a screen material in tape form and or a binder tape. An inner jacketing (225) is provided around the outside of the wrapping layer (260). A shielding layer (230) (232) and or an reinforcement layer (250) being provided in between the inner jacketing (225) and the outer jacketing (240?).

Classifications:

International (IPC 8-9): G02B6/44 H01B1/04 H01B3/00 H01B7/00


H01B7/02 H01B7/04 H01B7/17 H01B7/18 H01B7/28 H01B7/295

H01B9/00 H01B9/02 (Advanced/Invention);

H01B9/04 (Advanced/Non-invention)

CPC: H01B9/003 H01B9/005 H01B9/024 H01B7/1825 H01B7/0225
H01B7/295 H01B7/28 G02B6/4416 G02B6/443 H01B1/04 H01B9/04

PatBase - US2017148537_AA

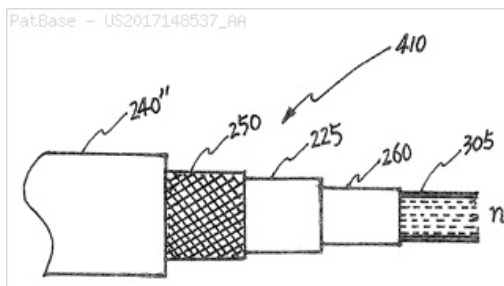

Family:

Publication number	Publication date	Application number	Application date
US2017148537 AA	20170525	US20140311780	20140516
US10128020 BB	20181113	US20140311780	20140516
WO15174818 A1	20151119	WO2014MY00104	20140516

Priority:

WO2014MY00104 20140516

Probable Assignee: LAM LUK MUI JOE

Assignee(s): (std): LAM LUK MUI JOE ; WONG SOOW KHEEN

Inventor(s): (std): LAM LUK MUI JOE

Agent(s): HAMRE SCHUMANN MUELLER AND LARSON PC; TEO BONG KWANG

Designated states: AE AG AL AM AO AT AU AZ BA BB BE BF BG BH BJ BN BR BW BY BZ CA CF CG CH CI CL CM CN CO CR CU CY CZ DE DK DM DO DZ EC EE EG ES FI FR GA GB GD GE GH GM GN GQ GR GT GW HN HR HU ID IE IL IN IR IS IT JP KE KG KM KN KP KR KZ LA LC LK LR LS LT LU LV LY MA MC MD ME MG MK ML MN MR MT MW MX MY MZ NA NE NG NI NL NO NZ OM PA PE PG PH PL PT QA RO RS RU RW SA SC SD SE SG SI SK SL SM SN ST SV SY SZ TD TG TH TJ TM TN TR TT TZ UA UG US UZ VC VN ZA ZM ZW

2) Family number: 51715028 (US2013306351A)

© PatBase

Title: INSULATED ELECTRIC CABLE

Abstract: An insulated cable is disclosed which comprises an electrical core conductor (1) having arranged coaxially around it at least three extruded layers of polymer-based material, which layers comprise an insulating layer (3) comprising a copolymer of polyethylene and an acrylate, an outer layer (5) of a semi-conductive material, and an intermediate layer (4) between the insulating and outer layers which comprises polyethylene and is substantially free of any acrylate or conducting material, such that the outer layer (5) is strippable from the intermediate layer (4).

Classifications:


International (IPC 8-9): H01B3/44 H01B7/00 H01B7/02

H01B7/38 (Advanced/Invention)

CPC: H01B7/00 H01B3/44 H01B7/38 H01B9/028

European: H01B3/44

US: 174/120SC

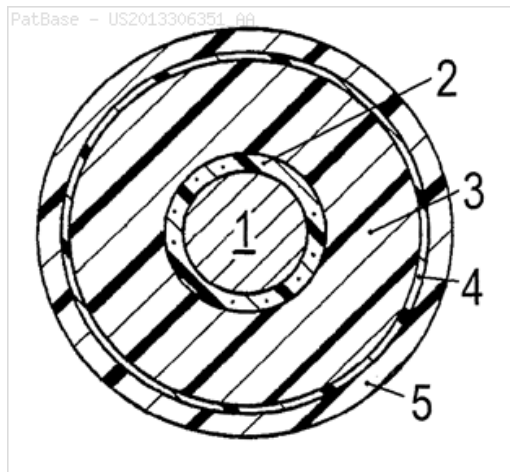**Family:**

Publication number	Publication date	Application number	Application date
DE602012017283 D1	20160609	DE201260017283T	20120202
EP2671231 A1	20131211	EP20120702521	20120202
EP2671231 B1	20160420	EP20120702521	20120202
US2013306351 AA	20131121	US20120982637	20120202
WO12104382 A1	20120809	WO2012EP51782	20120202

Priority:

EP20110153321 20110204 EP20120702521 20120202 WO2012EP51782 20120202

Probable Assignee: INEOS MFG BELGIUM NV

Assignee(s): (std): INEOS MFG BELGIUM NV ; LAMBERT YVES JULIEN ; SCHOMBOURG JACQUES JEAN FRANCOIS JOSEPH

Assignee(s): INEOS MANUFACTURING BELGIUM NV

Inventor(s): (std): LAMBERT YVES JULIEN ; SCHOMBOURG JACQUES JEAN FRANCOIS JOSEPH

Agent(s): SMITH JULIAN PHILIP HOWARD

Designated states: AE AG AL AM AO AT AU AZ BA BB BE BF BG BH BJ BR BW BY BZ CA CF CG CH CI CL CM CN CO CR CU CY CZ DE DK DM DO DZ EC EE EG ES FI FR GA GB GD GE GH GM GN GQ GR GT GW HN HR HU ID IE IL IN IS IT JP KE KG KM KN KP KR KZ LA LC LI LK LR LS LT LU LV LY MA MC MD ME MG MK ML MN MR MT MW MX MY MZ NA NE NG NI NL NO NZ OM PE PG PH PL PT QA RO RS RU RW SC SD SE SG SI SK SL SM SN ST SV SY SZ TD TG TH TJ TM TN TR TT TZ UA UG US UZ VC VN ZA ZM ZW

3) Family number: 49711033 (KR20110108490A)

© PatBase

Title: ELECTRIC WIRE


Abstract: PURPOSE: An electric wire is provided to increase the displacement surface of current through a porous hole. CONSTITUTION: In an electric wire, a wire has a circular cross-section. The wire is formed with a porous metal material. The porous holes(12) is formed with the porous metal. A current passing surface area is increased through the porous hole. Large current is passed through the surface area of the porous hole.

Classifications:

International (IPC 8-9): H01B9/00 H01B9/04 (Advanced/Invention)

CPC: H01B9/00 H01B9/04 H01B1/02 H01B9/006

PatBase - KR20110108490_A

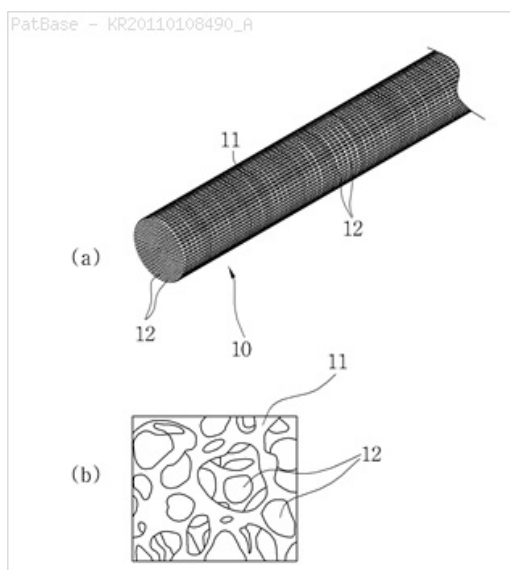**Family:**

Publication number	Publication date	Application number	Application date
KR20110108490 A	20111006	KR20100027702	20100329

Priority:

KR20100027702 20100329

Probable Assignee:

LEE DAE IL

Assignee(s): (std):

LEE DAE IL

Inventor(s): (std):

LEE DAE IL

4) Family number: 71831033 (CN108806844A)


© PatBase

Title: HIGH-FLEXIBILITY LOW-SMOKE FLAME-RETARDANT POWER CABLE

Abstract: The invention relates to a high-flexibility low-smoke flame-retardant power cable. The cable comprises a conductor, three insulating layers, an inner sheath and an outer sheath; the three insulating layers are disposed outside the conductor; the three insulating layers are a mineral insulating flame-retardant layer, a silicone rubber layer and a silicone rubber tape which are sequentially distributed from inside to outside; the three insulating layers are disposed outside the conductor, so that an insulating wire core can be formed; the inner sheath is arranged outside the insulating wire core; and the outer sheath is arranged outside the inner sheath. The high-flexibility low-smoke flame-retardant power cable of the invention has the advantages of simple structure, good insulation effect, long service life, stable work, fireproof and flame-retardant performance and low production cost.

Classifications:

International (IPC 8-9): H01B1/02 H01B7/02 H01B7/18
H01B7/295 (Advanced/Invention)

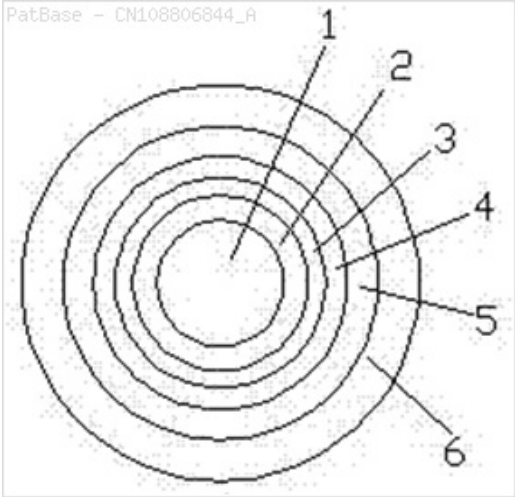

Family:

Publication number	Publication date	Application number	Application date
CN108806844 A	20181113	CN201710284587	20170427

Priority:

CN201710284587 20170427

Probable Assignee:

JIANG PING

Assignee(s): (std):

JIANG PING

Inventor(s): (std):

JIANG PING

5) Family number: 64405055 (CN205920778U)


© PatBase

Title: POLYURETHANE NYLON ENAMELED WIRE OF SKINNING CONVENIENTLY

Abstract: The utility model discloses a polyurethane nylon enameled wire of skinning conveniently, it includes sinle silk (1), sinle silk (1) outside is provided with nylon layer (2), nylon layer (2) outside is provided with polyurethane and moulds plastics layer (3), and polyurethane is moulded plastics and is connected with epoxy layer (4) between the layer (3) and nylon layer (2), epoxy layer (4) and polyurethane are moulded plastics the layer and are connected with the line of skinning (5) between (3), and the line of skinning (5) are gone up and are corresponded polyurethane and mould plastics the position department of layer (3) one side and be provided with and be conical cut off muscle (6). Utility model not only can conveniently skin, still has the good and convenient advantage of processing of structural stability.

Classifications:

International (IPC 8-9): H01B7/02 H01B7/38 (Advanced/Invention)
CPC: H01B7/385 H01B7/0225 H01B7/0291

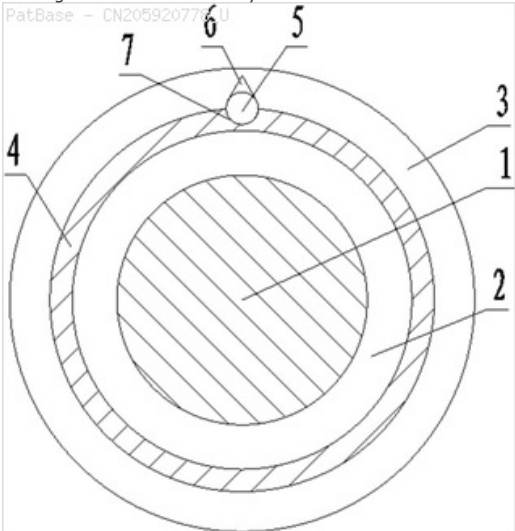

Family:

Publication number	Publication date	Application number	Application date
CN106229045 A	20161214	CN201610751453	20160829
CN106229045 B	20180109	CN201610751453	20160829
CN205920778 U	20170201	CN201620990336U	20160829

Priority:

CN201610751453 20160829 CN201620990336U 20160829

Probable Assignee: ZHEJIANG HONGBO TECH CO LTD

Assignee(s): (std): ZHEJIANG HONGBO TECH CO LTD

Assignee(s): ZHEJIANG HONGBO TECHNOLOGY CO ; ZHEJIANG HONGBO TECHNOLOGY CO LTD

Inventor(s): (std): GAN XINRONG ; HE HUILAN ; SHEN WEI ; SHEN YONGLIANG ; WANG XIAOMEI ; YAN QINHUA

6) Family number: 66380057 (CN206849524U)

© PatBase


Title: COMPOUND REEL CABLE OF LOW PRESSURE

Abstract: The utility model provides a compound reel cable of low pressure, including the power core conductor, sinle silk and control core group, the outer cladding isolation layer of power core conductor andinsulating layer constitute power core, and stretching resistant element be the wire rope crowded inoxidizing coating component of wrapping outward, power core, sinle silk, control core group and stretching resistant element transposition constitute the cable core, stretching resistant element is the triangle and arranges in the cable core, the cable core outward in proper order the cladding haveenhancement layer and oversheath. Through be equipped with isolation layer and insulating layer outside the power core conductor, make the power core conductor possess good electric property and mechanical properties like this, stretching resistant element be wire rope outward crowded package inoxidizing coating constitute, ensure that the cable can bear to pull frequently, stretching resistant element is the triangle and arranges in the cable core, guarantee that the stretching resistant element of cable is symmetrical three -core design, not only further increases the tensile strength of cable, has strengthened the structural strength of cable moreover, has prolonged the life of cable greatly.

Classifications:

International (IPC 8-9): H01B7/00 H01B7/02 H01B7/04 H01B7/18 H01B7/22 H01B9/00 (Advanced/Invention)

CPC: H01B9/006 H01B7/0045 H01B7/04 H01B7/041 H01B7/18 H01B7/223 H01B7/0225

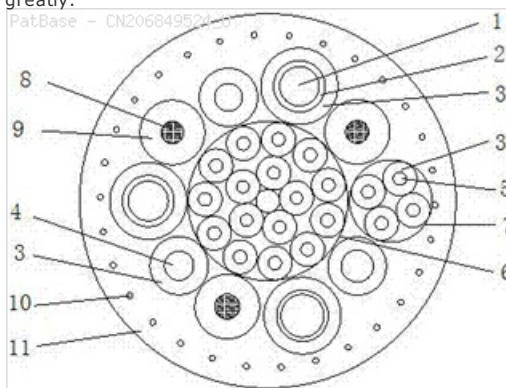

Family:

Publication number	Publication date	Application number	Application date
CN106960696 A	20170718	CN201710191354	20170328
CN206849524 U	20180105	CN201720308901U	20170328

Priority:

CN201710191354 20170328 CN201720308901U 20170328

Probable Assignee: ANHUI LINGYU CABLE TECHNOLOGY CO LTD

Assignee(s): (std): ANHUI LINGYU CABLE TECH CO LTD ; ANHUI LINGYU CABLE TECHNOLOGY CO LTD

Assignee(s): ANHUI LINGYU CABLE TECHNOLOGY CO

Inventor(s): (std): ZHU FENGLIN ; YE LEI ; LI BING

7) Family number: 58556058 (CN106098170A)

© PatBase

Title: ANTI-SEEPAGE SUBMARINE HIGH-VOLTAGE CABLE


Abstract: The invention belongs to the technical field of cables, and particularly relates to an anti-seepage submarine high-voltage cable. The anti-seepage submarine high-voltage cable comprises conductive units, a metal shielding layer, a water-resisting layer, an inner sheath, an armor layer, an outer sheath and an outer sheath protection layer which are sequentially arranged from the inside to the outside, wherein each conductive unit comprises a conductor, an insulating layer, an insulation shielding layer and a conductor protection layer; the circle center of each conductor overlaps with that of the corresponding insulating layer on any cross section; the diameter of each insulating layer is 1.5-5 times that of the corresponding conductor and the minimum value of the thickness is 1.5mm; filling rope groups and reinforcer groups are alternately distributed outside the inner sheath and are clung to the inner sheath; the material of the outer sheath protection layer is polyamide; and the material of the insulating layer is silane crosslinked polyethylene or a special material. The invention further discloses a manufacturing method of the anti-seepage submarine high-voltage cable. The anti-seepage submarine high-voltage cable has the main beneficial effects that the mechanical property redundancy is more appropriate, more resources are saved, the wear-resisting property is better, the anti-seepage property is better, the seawater resistance is better, the shielding property is better and high voltage can be transmitted.

Classifications:

International (IPC 8-9): C08K13/02 C08K3/22 C08K3/24 C08K3/36 C08L23/06 C08L23/08 H01B11/06 H01B11/16 H01B13/00 H01B13/02 H01B13/06 H01B13/14 H01B13/22 H01B13/24 H01B13/26 H01B13/32 H01B3/42 H01B3/44 H01B7/02 H01B7/14 H01B7/17 H01B7/18 H01B7/22 H01B7/28 H01B7/282 H01B7/285 H01B9/00 H01B9/02 (Advanced/Invention)

CPC: Y02A30/14 H01B7/14 H01B3/421 H01B3/441 H01B7/0275 H01B7/1875 H01B7/282 H01B7/285 H01B9/022 H01B9/023

H01B13/148 H01B13/24 H01B13/2613 H01B13/262 H01B3/44
H01B7/02 H01B7/17 H01B7/18 H01B9/02 H01B13/02 H01B13/06
H01B13/14 H01B13/22 H01B13/26 H01B7/28 H01B7/183 H01B7/225
H01B7/2825 H01B9/006 H01B13/00 H01B7/0225 C08K2201/014
C08L23/06 C08L2203/202 C08L2205/03 C08L2207/062 H01B7/1895
H01B11/16 H01B7/22 H01B11/06 H01B9/021

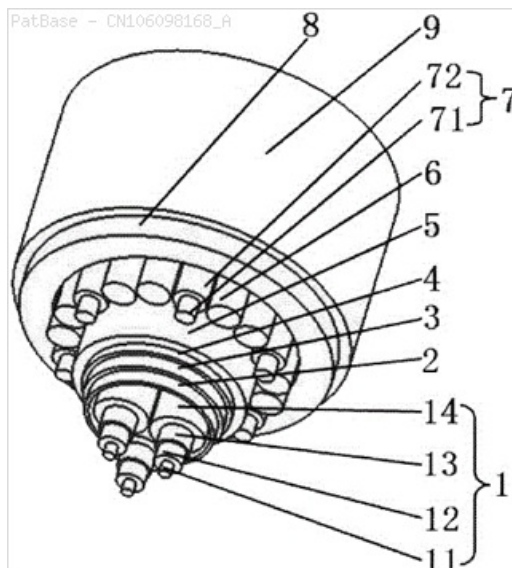

Family:

Publication number	Publication date	Application number	Application date
CN104376904 A	20150225	CN201410467691	20140915
CN104376904 B	20170222	CN201410467691	20140915
CN104700934 A	20150610	CN201510049118	20140915
CN104700935 A	20150610	CN201510049122	20140915
CN104700936 A	20150610	CN201510049124	20140915
CN105825928 A	20160803	CN201610324922	20140915
CN105825954 A	20160803	CN201610397078	20140915
CN105913907 A	20160831	CN201610398241	20140915
CN105931745 A	20160907	CN201610397375	20140915
CN105957589 A	20160921	CN201610398242	20140915
CN105957607 A	20160921	CN201610398243	20140915
CN105976912 A	20160928	CN201610254161	20140915
CN106024104 A	20161012	CN201610361002	20140915
CN106098168 A	20161109	CN201610361003	20140915
CN106098170 A	20161109	CN201610397407	20140915

Priority:

CN201410467691 20140915	CN201510049118 20140915	CN201510049122 20140915
CN201510049124 20140915	CN201610324922 20140915	CN201610254161 20140915
CN201610397078 20140915	CN201610398241 20140915	CN201610397375 20140915
CN201610398242 20140915	CN201610398243 20140915	CN201610361002 20140915
CN201610361003 20140915	CN201610397407 20140915	

Probable Assignee: ZHOU JIE

Assignee(s): (std): SHEN QUNHUA ; SUZHOU GAOJING TEZHUAN INFORMATION TECH CO LTD ; ZHOU JIE ; SUZHOU GAOJING TEZHUAN INFORMATION TECHNOLOGY CO LTD

Assignee(s): SUZHOU GAOJING TEZHUAN INFORMATION TECHNOLOGY CO ; HUA CHEN QUN

Inventor(s): (std): SHEN QUNHUA

Inventor(s): INVENTOR HAS WAIVED RIGHT TO BE MENTIONED

8) Family number: 65292093 (CN106548823A)

© PatBase


Title: MANUFACTURING METHOD OF COMPOSITE CABLE

Abstract: The invention relates to a manufacturing method of a composite cable. A power cable core, a control cable core and an instrument cable core are mutually twisted to form the composite cable; the periphery of the composite cable is coated with a low-intensity non-woven fabric longitudinal covering; an inner sheath is extruded on the periphery of the low-intensity non-woven fabric longitudinal covering; the periphery of the inner sheath is coated with an armored braid; and an outer sheath is extruded on the periphery of the armored braid. The low-intensity non-woven fabric longitudinal covering is completely coincided with the shape of an insulated conductor so as to eliminate a gap between the low-intensity non-woven fabric longitudinal covering and the insulated conductor and facilitate preventing inward spread of flame; and meanwhile, the inner sheath and the insulated conductor are guaranteed not to be adhered so as to facilitate not damaging the insulated conductor when the sheaths are stripped off in the construction process.

Classifications:

International (IPC 8-9): C08K13/02 C08K3/22 C08K3/34 C08K3/36
C08K3/40 C08K5/3437 C08K5/37 C08K5/5425 C08L23/16
C08L91/00 H01B13/00 H01B7/00 H01B7/285 H01B7/295
H01B7/38 (Advanced/Invention)

CPC: H01B7/295 C08L23/16 C08L2201/02 C08L2203/202
H01B7/0045 H01B7/0225 H01B7/0275 H01B7/285 H01B7/38
H01B13/00

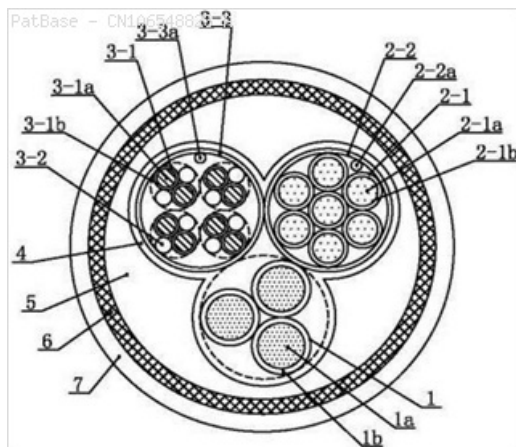

Family:

Publication number	Publication date	Application number	Application date
CN106548823 A	20170329	CN201610982909	20161109

Priority:

CN201610982909 20161109

Probable Assignee: CHONGQING LBZB CABLE STOCK CO LTD

Assignee(s): (std): CHONGQING LBZB CABLE STOCK CO LTD

Assignee(s): CHONGQING NORTH IN FEDERAL CABLE CO LTD ; CHONGQING LBZB CABLE STOCK CO

Inventor(s): (std): LI XIN

9) Family number: 3199114 (FR2241129A)

© PatBase

Title: POLYETHYLENE-INSULATED CONDUCTORS WITH POLYETHYLENEOXIDE - STRIPPING LAYER FOR RAPID REMOVAL OF INSULATION, E.G. FOR SPLICING

Abstract: A polyethylene oxide is used as release agent between an electric conductor and a cross-linked ethylene polymer insulation. The insulation can easily be stripped from the conductor, e.g. for splicing. The release agent is relatively cheap. The release agent is applied to the conductor as a uniform layer before the polyethylene insulation. The ethylene oxide (EO) polymer contains is not 50 weight percent EO units and is not >50 weight percent of units of structure -R-O-, where R is a 3-6C hydrocarbon gp. A polyethylene oxide with mol. wt. 570-630, or a copolymer of EO and propylene oxide in ratio by wt. of 1-3: 1 are claimed. The ethylene polymer used as insulant has density 0.915-0.945 g./cc. and melt index 1-25 g./10 mins. Cross-linking may be at 150-180 degrees C. using 1-3 weight percent of a peroxide, e.g. dicumyl peroxide, as cross-linking agent, or at 23-150 degrees C. by irradiation with an electron beam. The insulating composition pref. contains 0.001-1 (0.02-0.05) weight percent of a lubricant, e.g. a fatty acid or its (semi)-ester, a mineral oil, or a natural or synthetic wax, pref. 13-docosenamide; an antioxidant, e.g. 4, 4'-thiobis-6-tert. butyl-m-cresol, is pref. also added.

Classifications:

International (IPC 8-9): H01B3/30 H01B7/02 H01B7/38 (Advanced/Invention);

H01B3/30 H01B7/00 H01B7/02 (Core/Invention)

International (IPC 1-7): H01B13/22 H01B3/18 H01B7/18

CPC: H01B3/308 H01B7/02 H01B7/38

European: H01B3/30F H01B7/02 H01B7/38

Family:

Publication number	Publication date	Application number	Application date
FR2241129 A1	19750314	FR19730029585	19730813
FR2241129 B1	19760618	FR19730029585	19730813

Priority:

FR19730029585 19730813

Probable Assignee: UNION CARBIDE CANADA LTD

Assignee(s): (std): UNION CARBIDE CANADA LTD

Assignee(s): UNION CARBIDE CANADA LTD CA

10) Family number: 32484139 (US2005274539A)

© PatBase

Title: CABLE INCLUDING A PLURALITY OF INSULATED CONDUCTORS ENCLOSED IN THE SAME SHEATH AND METHOD OF FABRICATING THIS KIND OF CABLE

Abstract: The present invention relates to a cable 1 comprising two or more insulated conductors 2s grouped together in a common sheath 3, each insulated conductor 2 comprising a conductive member 4 inside an insulative member 5. The invention is noteworthy in that each insulated conductor 2 is covered with a skin 6 that is attached to the insulative member 5 and is non-stick with reference to the sheath 3.

Classifications:

International (IPC 8-9): H01B13/14 H01B13/24 H01B3/30 H01B7/00

H01B7/02 H01B7/17 H01B7/18 H01B7/38 (Advanced/Invention);

H01B13/22 H01B7/00 H01B7/02 H01B7/17 H01B7/18 (Core/Invention)


International (IPC 1-7): H01B11/02 H01B13/14 H01B13/24

H01B3/00 H01B3/30 H01B7/00 H01B7/02 H01B7/17 H01B7/38

CPC: H01B7/0208 H01B7/0275 H01B7/38

European: H01B7/02B H01B7/02K H01B7/18P3 H01B7/38

US: 174/113R 174/120R

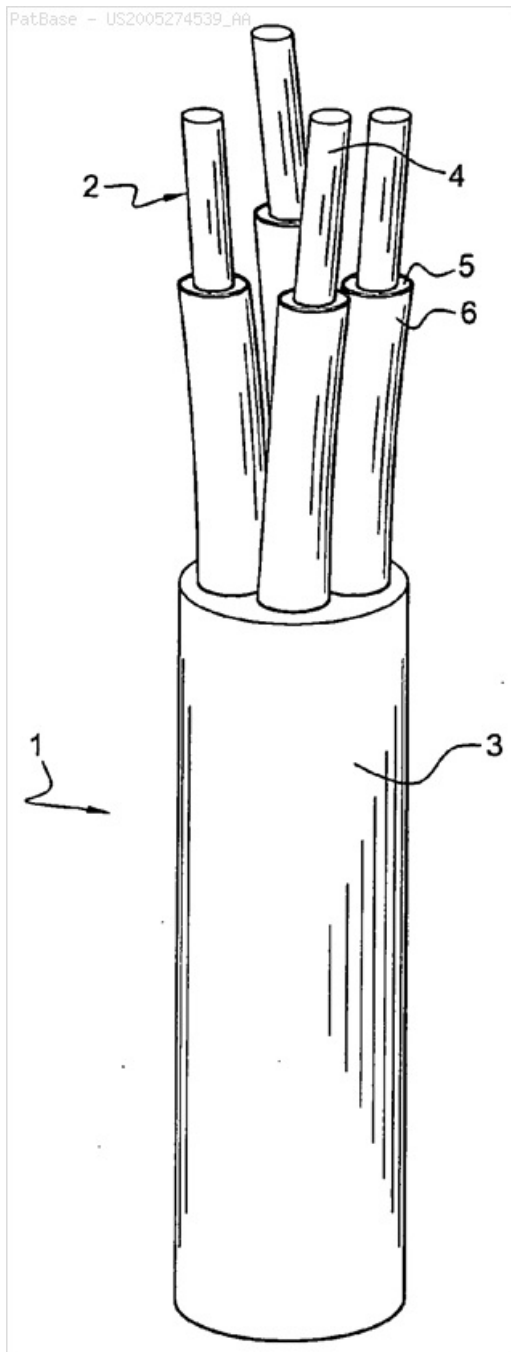**Family:**

Publication number	Publication date	Application number	Application date
CA2508499 AA	20051204	CA20052508499	20050527
EP1605474 A2	20051214	EP20050300448	20050602
EP1605474 A3	20060222	EP20050300448	20050602
EP1605474 B1	20180314	EP20050300448	20050602
ES2673175 T3	20180620	ES20050300448T	20050602
FR2871285 A1	20051209	FR20040006090	20040607
FR2871285 B1	20060908	FR20040006090	20040607
NO20052667 A	20051205	NO20050002667	20050603
NO20052667 A0	20050603	NO20050002667	20050603
US2005274539 AA	20051215	US20050143097	20050602
US7586044 BB	20090908	US20050143097	20050602

Priority:

FR20040006090 20040604 FR20040006090 20040607 CA20052508499 20050527

Probable Assignee: NEXANS

Assignee(s): (std): KENSICHER CHRISTELE ; NEXANS ; NEXANS SA ; ODOT PATRICK

Assignee(s): NEXANS SOC ANONYME ; NEXANS SOCIETE ANONYME

Inventor(s): (std): KENSICHER CHRISTELE ; ODOT PATRICK

Agent(s): ROBIC ; FERAY VALERIE ; LEHMANN MARIA ISABEL ; SOFER AND HAROUN LLP

Designated states: AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR


Title: SAVING ENERGY AND DECREASING LOSS LARGE SIZE CONDUCTOR SUITABLE FOR EXCHANGE SUBMARINE CABLE

Abstract: The utility model discloses a saving energy and decreasing loss large size conductor suitable for exchange submarine cable, including being the central round copper wire layer that the concentric circles distributes from inside to outside in proper order, first enameled wire isolation layer, a round copper wire layer, second enameled wire isolation layer, the 2nd round copper wire layer, third enameled wire isolation layer and the 3rd round copper wire layer, through enameled wire and for cable fiber insulation paper, it waits and to cut apart a plurality of concentric rings that the area is similar with big cross -section cable?conductor to block water the area, reduce skin effect, reduce the increase of resistance, big cross -section interchange submarine cable's operation loss can reduce substantially, reduce the line loss, the efficiency of the transmission of electricity is improved, and has a good application prospect.

Classifications:

International (IPC 8-9): H01B7/02 H01B7/14 H01B7/282 H01B7/285 H01B7/30 H01B9/00 (Advanced/Invention)

CPC: H01B9/006 H01B7/0225 H01B7/14 H01B7/2825 H01B7/285 H01B7/303 Y02A30/14

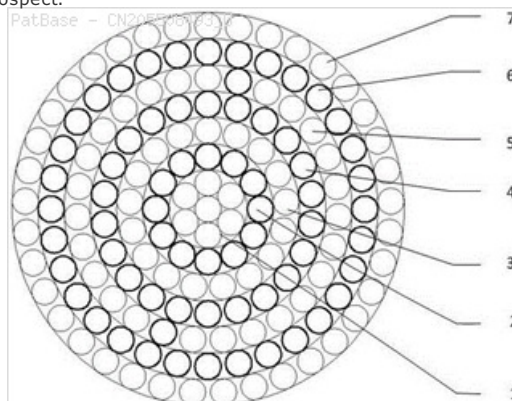

Family:

Publication number	Publication date	Application number	Application date
CN105679450 A	20160615	CN201610177281	20160328
CN205508493 U	20160824	CN201620238533U	20160328

Priority:

CN201610177281 20160328 CN201620238533U 20160328

Probable Assignee: NANJING NARI GROUP CORP

Assignee(s): (std): NANJING NARI GROUP CORP

Inventor(s): (std): JIANG ZHENXING ; LI DONG ; YANG LIMING ; ZHU ZHIEN


Title: CABLE INSULATION REMOVING DEVICE

Abstract: Source: KR20190020309A **Machine translation:** Cable insulator removing device is disclosed. According to an embodiment of the present invention apparatus for removing a cable insulator is installed on the upper portion of the body portion; and a head portion having an inner blank; receiving portion is mounted on the receiving portion to remove the cable insulator comprising an insulator, the insulator remover (mutually interlocking structure to which the first cutting body and the second body comprises cutting the first cutting body and the second body, respectively, a pair of cutting a straight line parallel to the longitudinal direction of the cable on the cable so that the mutual spacing corresponding to the diameter of the seam, the cutter; the linear cutter disposed straight mounted on the rear of the cable is semicircular in shape corresponding to the diameter of the seam along the concave groove includes a semicircular blade is provided in a circular cutter, the straight line between the cutter and the circular cutter (gap) is the cable insulator jamming of the phenomenon it can be prevented.

Classifications:

International (IPC 8-9): H01B7/38 H02G1/12 (Advanced/Invention)

CPC: H02G1/1253 H01B7/38

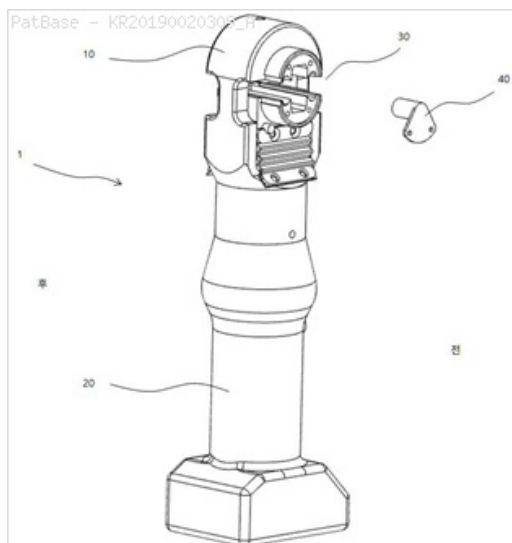

Family:

Publication number	Publication date	Application number	Application date
KR20190020309 A	20190228	KR20190019019	20190219

Priority:

KR20190019019 20190219

Probable Assignee:

SAMSUNG HEAVY IND

Assignee(s): (std):

SAMSUNG HEAVY IND