



(51) International Patent Classification:

B65D 77/20 (2006.01)

(21) International Application Number:

PCT/US2018/020832

(22) International Filing Date:

05 March 2018 (05.03.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/452,409	07 March 2017 (07.03.2017)	US
62/511,458	26 May 2017 (26.05.2017)	US

(71) Applicant: **OWENS-BROCKWAY GLASS CONTAINER INC.** [US/US]; One Michael Owens Way, Perrysburg, OH 43551 (US).

(72) Inventor: **CHISHOLM, Brian, J.**; 6131 White Eagle W., Sylvania, OH 43560 (US).

(74) Agent: **SMITH, Susan, L.**; Owens-illinois, INC., One Michael Owens Way, Perrysburg, OH 43551 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: **PEELABLE FOIL CONTAINER CLOSURE HAVING A WAVY EDGE**

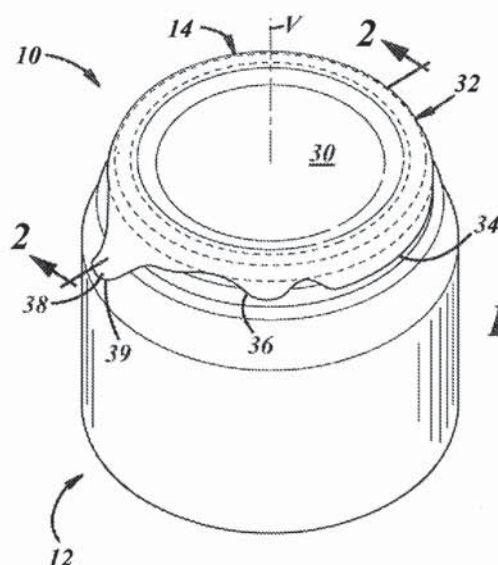


FIG. 1

(57) Abstract: A peelable foil closure (14, 114) includes a base (30, 130) extending longitudinally along a first, longitudinal axis (A) and laterally along a second, lateral axis (B), and a skirt (32, 132) extending from the base. The skirt includes a first portion (40, 140) including a circular edge (34, 134) having a predominant portion located on a first side of the second axis. The skirt also includes a second portion (42, 142) including a wavy edge (36, 136), and a pull tab (38, 138) located on a second side of the second axis.