



(51) International Patent Classification:

H04B 7/024 (2017.01) H04B 7/06 (2006.01)

(21) International Application Number:

PCT/SE2018/050302

(22) International Filing Date:

23 March 2018 (23.03.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/476,657 24 March 2017 (24.03.2017) US

(71) Applicant: TELEFONAKTIEBOLAGET LM
ERICSSON (PUBL) [SE/SE]; Torshamnsgatan 23, 164 83
Stockholm (SE).

(72) Inventors: FRENNE, Mattias; Arkeologvägen 20, SE-754
43 UPPSALA (SE). GRANT, Stephen; 848 Sylvaner Drive,
PLEASANTON, California CA 94566 (US).

(74) Agent: BOU FAICAL, Roger; Ericsson AB, Patent Unit
Kista RAN 1, SE- 164 80 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,


CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- in black and white; the international application as filed
contained color or greyscale and is available for download
from PATENTSCOPE

(54) Title: SYSTEMS AND METHODS FOR DETERMINING TRANSMITTER AND RECEIVER CONFIGURATIONS FOR A WIRELESS DEVICE

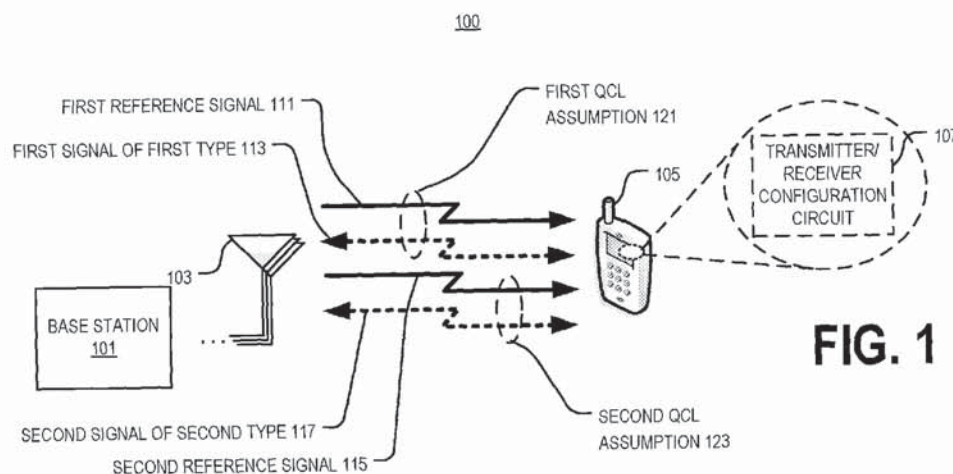

(57) Abstract: Systems and methods of determining transmitter and receiver configurations for a wire- less device are provided. In one exemplary embodiment, a method performed by a wireless device (105, 200, 300a-b, 500, 605) in a wireless communications system (100) comprises transmitting or receiving (403) a first signal of a first type (113) using a first transmitter or receiver configuration based on a first quasi co-location (QCL) assumption (121) associating the first signal with a first reference signal (111) received by the wireless device. Further, the method includes transmitting or receiving (407) a second signal of a second type (117) using a second transmitter or receiver configuration based on a second QCL assumption (123) associating the second signal with a second reference signal (115) received by the wireless device.