

DOCUMENT MADE AVAILABLE UNDER THE PATENT COOPERATION TREATY (PCT)

International application number:	PCT/EP2017/065994
International filing date:	28 June 2017 (28.06.2017)
Document type:	Certified copy of priority document
Document details:	Country/Office: EP
	Number: 16176599.5
	Filing date: 28 June 2016 (28.06.2016)
Date of receipt at the International Bureau:	11 July 2017 (11.07.2017)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a),(b) or (b-bis)

Bescheinigung

Die angehefteten
Unterlagen stimmen mit der
als ursprünglich eingereicht
geltenden Fassung der auf
dem nächsten Blatt
bezeichneten europäischen
Patentanmeldung überein.

Certificate

The attached documents are
exact copies of the text in
which the European patent
application described on the
following page is deemed to
have been filed.

Attestation

Les documents joints à la
présente attestation sont
conformes au texte,
considéré comme
initialement déposé, de la
demande de brevet
européen qui est spécifiée à
la page suivante.

Patentanmeldung Nr.

Patent application No.

Demande de brevet n°

16176599.5 / EP16176599

The organization code and number of your priority application, to be used for filing abroad under the Paris Convention, is EP16176599.

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.



V. Joseph

Anmeldung Nr:
Application no.: 16176599.5
Demande no :

Anmeldetag:
Date of filing: 28.06.16
Date de dépôt :

Anmelder / Applicant(s) / Demandeur(s):

CarbonX B.V.
Rembrandt Tower
35th Floor, Amstelplein 1
1096 HA Amsterdam/NL

Bezeichnung der Erfindung / Title of the invention / Titre de l'invention:

(Falls die Bezeichnung der Erfindung nicht angegeben ist, oder falls die Anmeldung in einer Nicht-Amtssprache des EPA eingereicht wurde, siehe Beschreibung bezüglich ursprünglicher Bezeichnung.

If no title is shown, or if the application has been filed in a non-EPO language, please refer to the description for the original title.

Si aucun titre n'est indiqué, ou si la demande a été déposée dans une langue autre qu'une langue officielle de l'OEB, se référer à la description pour le titre original.)

PRODUCTION OF CRYSTALLINE CARBON STRUCTURE NETWORKS

In Anspruch genommene Priorität(en) / Priority(Priorities) claimed / Priorité(s) revendiquée(s)

Staat/Tag/Aktenzeichen / State/Date/File no. / Pays/Date/Numéro de dépôt:

Am Anmeldetag benannte Vertragsstaaten / Contracting States designated at date of filing / Etats contractants désignées lors du dépôt:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO RS SE SI SK SM TR

Production of crystalline carbon structure networks

FIELD OF THE INVENTION

The invention is in the field of manufacturing crystalline carbon structure networks with improved properties, and directed to new methods for manufacturing such structure networks. The invention is particularly in the field of carbon black manufacturing.

BACKGROUND TO THE INVENTION

Carbon black industry focuses on providing an allotrope of carbon mainly differing from graphite and amorphous carbon by its physical arrangement, for use in manufacturing rubber articles, such as tires, etc., in polygraphy, electronics and cable coatings, in the production of varnishes and paints, including use applications in which reinforcing and/or pigmentary properties of carbon black are required.

Various different processes or techniques are known in the art for producing carbon black. Carbon black is mainly produced by partial combustion processes, starting from acetylene. This process is sometimes referred to as a furnace carbon black producing process, and it employs a furnace having a burner or combustion chamber followed by a reactor. The furnace process is typically characterized by low oxygen levels, low densities, short residence times and high temperatures. As a first step of the furnace carbon black production process, hydrocarbons are atomized at typical temperatures from 1200 to 1900 °C, as is described in Ullmanns Encyklopadie der technischen Chemie, Volume 14, page 637-640 (1977). To that end, a zone having a high energy density is produced by burning a fuel gas or a liquid fuel with oxygen or air, and the carbon black raw material is injected thereto. The carbon black feedstock is atomized in these hot combustion conditions; oxygen levels are on average supplied at a rate of two volumes of carbon black feedstock to about one volume of oxygen, in order to achieve the oxygen being completely consumed in the combustion process. The structure and/or the porosity of the carbon black end product may be influenced by the presence of alkali metal or alkaline earth metal ions during the carbon black formation, and such additives are therefore frequently added in the form of aqueous solutions, which are sprayed onto the carbon black raw material agglomerates. The reaction is terminated only by the injection of water (quenching) and the carbon black is collected at a temperature of about 200 – 250 °C, and separated from the waste gas by means of conventional separators or filters. Because of its low bulk density, the resulting carbon black is then granulated, for instance carried out in a pelletizing machine with the addition of water to which small amounts of a pelletizing auxiliary may be added. In chronological order, and by now means limiting the art on furnace carbon black technology, US2672402, US4292291, US4636375, WO2000/032701 and US 2004/0248731 provide a description of traditional or conventional carbon black production. Their contents are herewith incorporated by reference. Of note, there are also alternative processes such as the lamp black process, thermal black, acetylene black and channel black process which all are variations

on the process described above, in the end producing a type of carbon black. Most innovative is the plasma black carbon process, advantageously avoiding direct carbon dioxide emissions, and reducing fossil fuel consumption. In essence, these oxygen-poor carbon black manufacture methods are very similar, except for finding different ways of yielding pyrolysis temperature conditions. Hitherto the industry is however still struggling to produce carbon black through oxygen-poor reducing processes with parameters comparable to those of carbon black produced through traditional partial combustion.

SUMMARY TO THE INVENTION

10 The inventors found that well-established reducing (pyrolysis) or oxidizing (combustion) carbon black manufacturing processes can be used to produce networks of crystalline carbon structures having all kinds of advantageously improved electrical, mechanical and thermal properties, by introducing the concept of (single-phase) emulsification to conventional (furnace) carbon black production. The invention thus relates to a process for producing crystalline carbon structure
15 networks by providing a thermodynamically or kinetically stable single-phase emulsion comprising an oil, preferably C14 or higher, more preferably a carbon black feedstock oil, water and at least one surfactant, and subjecting the emulsion, preferably the emulsified carbon black feedstock, to a carbon black manufacturing process, carbonizing said carbon black feedstock at increased temperatures above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more
20 preferably above 1000 °C, most preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, particularly up to 2000 °C. In a related aspect, the invention pertains to the use of a single-phase emulsion, preferably an emulsified carbon black feedstock (i.e. a single-phase emulsion comprising carbon black feedstock) for carbonizing the emulsion in a carbon black manufacture process, preferably a furnace carbon black manufacture process, thus obtaining
25 crystalline carbon structure networks. The emulsion is preferably sprayed and atomized into the reactor at the above elevated temperatures.

Through the eyes of the skilled person, the use of water should at least be minimized and preferably banned from the reaction sector in a traditional carbon black manufacturing process to obtain proper
30 yields and preferred spherical carbon black structures, where water is only to be used for terminating the carbon black reaction further downstream in the reactor. At best water is sometimes used as a carrier in spraying alkali metal and alkaline earth metal ions onto the carbon black material, where in the final stages of the agglomeration process the porosity of the carbon black product could be fine-tuned to the market needs. Depending on the source, carbon black feedstock
35 may in fact even be dewatered prior to introduction to the process, in order to increasing the fuel density and optimizing atomization. With that wide-spread reluctance of using any – let alone much – water during traditional carbon black manufacture, other than for quenching purposes in the closing stages, the idea of emulsifying the carbon black feedstock prior to atomization goes beyond the skilled person's imaginations. However, the inventors found that amending the conventional
40 carbon black manufacture by atomizing a stable one-phase emulsion comprising a carbon black

feedstock oil into the reactor has a dramatic impact in that a novel crystalline carbon material is obtained comprising of a network of structures, typically nanofibers, instead of the normally obtained amorphous carbon black based on aggregates from spherical particles. The crystalline carbon network structures are so different in morphology that they constitute properties that are different and even superior to carbon black aggregates, some of which have been exploited further below.

Without wishing to be bound by any theory, the inventors believe that the orientation and structuring of the surfactant molecules, oil phase and water phase give rise to the network-forming process that is unique to the new material and to the process. The micro- and macro-structures of the emulsions (either oil-in-water, water-in-oil, bicontinuous, etc.) are thought to act as a precursor/blue-print for the final carbon structure network, of which the carbon-containing fractions (oil phase and surfactant) will form the fibers and junctions, whilst the water fraction helps orienting the oil/surfactant phase and network porosity. After all, a blend of two immiscible oil and water phases will not yield these structures. Once the emulsion is atomized at high temperatures the carbonization process instantly freezes the carbon fractions in its emulsion-structure while the water evaporates, leaving a network of (nano)fibers. In that process, the inventors found it is key to provide the carbon raw material, i.e. the oil, such as carbon black feedstock, in the form of a single-phase emulsion, to the atomization process. The inventors also found that a mere mixture of water and feedstock or otherwise instable emulsions are detriment to the process, and will not yield the crystalline carbon structure networks. Further evidence is provided below.

The inventors also found that production yields can further be improved when the single-phase emulsions subjected to atomization and subsequent carbonization comprise metal nanoparticles which act as catalyzers in forming these crystalline networks, and within these embodiments an increasing concentration of metal nanoparticles further enhances yields. To that end it is particularly preferred to use bicontinuous micro-emulsions, which comprise of a continuous oil/surfactant phase thus already forming a network structure.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1a is a schematic diagram of a continuous furnace carbon black producing process in accordance with the present invention which contains, along the axis of the reactor **3**, a combustion zone **3a**, a reaction zone **3b** and a termination zone **3c**, by producing a stream of hot waste gas **a1** in the combustion zone by burning a fuel **a** in an oxygen-containing gas **b** and passing the waste gas **a1** from the combustion zone **3a** into the reaction zone **3b**, spraying (atomizing) a single-phase emulsion **c** in the reaction zone **3b** containing the hot waste gas, carbonizing said emulsion at increased temperature, and quenching or stopping the reaction in the termination zone **3c** by spraying in water **d**, to obtain crystalline carbon structure networks **e** according to the invention; Fig. 1b is a schematic diagram of a semi-batch carbon black producing process where a single-phase emulsion **c** is atomized through a nozzle **4** at the top of the reactor **3** into the reactor zone **3b** at elevated temperatures, carbonizing said emulsion at the elevated temperature in the reactor

zone **3b**, and collecting the crystalline carbon structure networks **e** at the bottom of the reactor. Additionally two gas-inlets are present that enter the reactor from the top, for adding inert gas **f**, preferably nitrogen for controlling and/or depletion of oxygen-levels, and for introducing a carbon-containing gas **g** into the reactor, preferably acetylene or ethylene.

- 5 Fig. 2A and 2B are SEM pictures of carbon black and carbon structure networks, respectively; Fig. 3 shows a SEM picture of crystalline carbon structure networks obtained in a bicontinuous microemulsion with 100 mM FeCl₃ metal catalyst; Fig. 4 depicts the elasticity modulus according to ISO 527 for carbon networks (squares) and glass fibers (circles), showing mechanical strength for the crystalline networks that is comparable to that of the fibers. Carbon black was found not to bring any reinforcing properties to the composite; and Fig. 5 shows volume resistivity for different compounds (polyamide PA6; squares; PET: circles) prepared with different loadings of crystalline carbon structure networks prepared using the recipe according to example 1.

15 EMBODIMENTS OF THE INVENTION

embodiment 1. A process for the production of crystalline carbon structure networks in a reactor **3'** which contains a reaction zone **3'b** and a termination zone **3'c**, by injecting a single-phase emulsion **c**, preferably a carbon black feedstock (CBFS)-comprising emulsion, into the reaction zone **3'b** which is at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, to produce crystalline carbon structure networks **e**, transferring these networks **e** to the termination zone **3'c**, and quenching or stopping the formation of crystalline carbon structure networks in the termination zone by spraying in water **d**.

embodiment 2. The process according to embodiment 1, said reactor being a furnace carbon black reactor **3** which contains, along the axis of the reactor **3**, a combustion zone **3a**, a reaction zone **3b** and a termination zone **3c**, by producing a stream of hot waste gas **a1** in the combustion zone by burning a fuel **a** in an oxygen-containing gas **b** and passing the waste gas **a1** from the combustion zone **3a** into the reaction zone **3b**, spraying a single-phase emulsion **c**, preferably a CBFS-comprising emulsion, in the reaction zone **3b** containing the hot waste gas, carbonizing said emulsion at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, and quenching or stopping the reaction in the termination zone **3c** by spraying in water **d**, to yield crystalline carbon structure networks **e**.

embodiment 3. The process according to any one of the preceding embodiments, wherein the oil phase in the emulsion is aromatic and/or aliphatic, preferably comprising at least 70 wt% C₁₄ or higher, based on the total weight of the oil phase.

- embodiment 4. The process according to any one of the preceding embodiments, said emulsion being thermodynamically or kinetically stable.
- embodiment 5. The process according to any one of the preceding embodiments, wherein said single-phase emulsion shows no physical separation visible to the eye, preferably reflected in terms of the emulsion not showing any change in pH by more than 1.0 pH unit and/or the emulsion not showing any change in viscosity by more than 20%, over a period of time that exceeds the carbon structure network production time.
- embodiment 6. The process according to any one of the preceding embodiments, said single-phase emulsion being a bicontinuous or water-in-oil micro-emulsion.
- embodiment 7. The process according to any one of the preceding embodiments, said single-phase emulsion comprising metal catalyst nanoparticles having an average particle size between 1 and 100 nm.
- embodiment 8. A crystalline carbon structure network obtainable by the process according to any one of the preceding embodiments, wherein said carbon structures are chemically interconnected through a multitude of junctions, including Y- and H-junctions.
- embodiment 9. The network according to embodiment 8, wherein said structures have an average thickness of 50 – 400 nm, preferably between 100 and 350 nm, and/or an average length in the range of 100 – 10000 nm, preferably 200 - 5000 nm, more preferably 500 – 5000 nm; and/or wherein the structures have an average aspect ratio of length to thickness of at least 2.
- embodiment 10. A composite comprising carbon structure networks according to embodiment 8 or 9, further comprising one or more polymers, for instance for adding mechanical strength, electrical conductivity or thermal conductivity to said polymer-based composite, and wherein said networks are in any amount of 1 – 70 wt%, preferably 10 – 50 wt%, more preferably between 20 - 40 wt%, based on the total polymer weight in the composite.
- embodiment 11. The composite according to embodiment 10, showing an E modulus increasing with network concentration as measured according to ISO 527.
- embodiment 12. Use of an emulsified carbon black feedstock in a carbon black manufacture process, preferably a furnace carbon black manufacture process, for producing crystalline carbon structure networks.
- embodiment 13. A process for the semi-batch production of the crystalline carbon structure networks in a reactor **3** where a single-phase emulsion **c** according to the invention is injected from the top of the reactor **3**, preferably through spraying using an aerosol inlet **4**, to obtain an aerosol, and wherein said networks **e** are formed at an increased temperature of at least 600 °C, preferably 700 – 1200 °C and deposited at the bottom of the reactor, and wherein the increased temperature is obtained using pyrolysis (e.g. heat source outside reactor, using N₂, depleted of oxygen) or by combustion (heat source inside reactor, using air or oxygen).

DETAILED DESCRIPTION

The invention can be described best as a modified carbon black manufacturing process, wherein 'modified' is understood that a suitable oil, preferably an oil comprising at least 14 C atoms (>C14) such as carbon black feedstock oil (CBFS), is provided to the reaction zone of a carbon black reactor as part of a single-phase emulsion, preferably a thermodynamically or kinetically stable emulsion (micro- or macro-emulsion). The emulsion is preferably provided to the reaction zone by spraying, thus atomizing the emulsion to droplets. While the process can be carried out batch or semi-batch wise, the modified carbon black manufacturing process is advantageously carried out as a continuous process. The preferred single-phase emulsion comprises CBFS oil, and may be referred to as 'emulsified CBFS in the context of the invention.

In one embodiment, the invention pertains to a process for the production of the crystalline carbon structure networks according to the invention in a reactor **3** which contains a reaction zone **3b** and a termination zone **3c**, by injecting a single-phase emulsion **c**, preferably a CBFS-comprising emulsion, according to the invention into the reaction zone **3b** which is at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, to produce crystalline carbon structure networks **e**, transferring these networks **e** to the termination zone **3c**, and quenching or stopping the formation of crystalline carbon structure networks in the termination zone by spraying in water **d**. The single-phase emulsion is preferably sprayed into the reaction zone. Reference is made to figure 1A.

In a preferred embodiment, the invention pertains to a process for the production of the crystalline carbon structure networks according to the invention in a furnace carbon black reactor **3** which contains, along the axis of the reactor **3**, a combustion zone **3a**, a reaction zone **3b** and a termination zone **3c**, by producing a stream of hot waste gas **a1** in the combustion zone by burning a fuel **a** in an oxygen-containing gas **b** and passing the waste gas **a1** from the combustion zone **3a** into the reaction zone **3b**, spraying (atomizing) a single-phase emulsion **c** according to the invention, preferably a CBFS-comprising emulsion, in the reaction zone **3b** containing the hot waste gas, carbonizing said emulsion at increased temperatures (at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C), and quenching or stopping the reaction (i.e. the formation of crystalline carbon structure networks **e**) in the termination zone **3c** by spraying in water **d**. The reaction zone **3b** comprises at least one inlet (preferably a nozzle) for introducing the emulsion, preferably by atomization. Reference is made to figure 1A.

In accordance with conventional carbon black manufacturing processes, the oil phase can be aromatic and/or aliphatic, preferably comprising at least 70 wt% C14 or higher (based on the total weight of the oil). List of typical oils which can be used, but not limited to obtain stable emulsions

are carbon black feedstock oils (CBFS), anthracene oils, (short-medium-long chain) fatty acids, fatty acids esters and paraffins. The oil is preferably a C14 or higher. In one embodiment, the oil preferably has high aromaticity. Within the field, the aromaticity is preferably characterized in terms of the Bureau of Mines Correlation Index (BMCI). The oil preferably has a BMCI > 50. In one
 5 embodiment, the oil is low in aromaticity, preferably having a BMCI < 15.

CBFS is an economically attractive oil source in the context of the invention, and is preferably a heavy hydrocarbon mix comprising predominantly C14 to C50, the sum of C14 – C50 preferably amounting to at least 70 wt% of the feedstock. Some of the most important feedstocks used for
 10 producing carbon black include clarified slurry oil (CSO) obtained from fluid catalytic cracking of gas oils, ethylene cracker residue from naphtha steam cracking and coal tar oils. The presence of paraffins (<C15) substantially reduces their suitability, and a higher aromaticity is preferred. The concentration of aromatics determines the rate at which carbon nuclei are formed. The carbon black feedstock preferably has a high BMCI to be able to offer a high yield with minimum heat input hence
 15 reducing the cost of manufacturing. In a preferred embodiment, and in accordance with current CBFS specifications, the oil, including mixtures of oil, has a BMCI value of more than 120. While the skilled person has no difficulties understanding which are suitable CBFS, merely as a guide it is noted that – from a yield perspective - a BMCI value for CBFS is preferably more than 120, even more preferably more than 132. The amount of asphaltene in the oil is preferably lower than 10
 20 wt%, preferably lower than 5.0 wt% of the CBFS weight. The CBFS preferably has low sulfur content, as sulfur adversely affects the product quality, leads to lower yield and corrodes the equipment. It is preferred that the sulfur content of the oil according to ASTM D1619 is less than 8.0 wt%, more preferably less than 4.0 wt%.

25 The emulsion, preferably a CBFS-comprising emulsion, is a “single-phase emulsion” which is understood to mean that the oil phase and the water phase optically appear as one miscible mixture showing no physical separation of oil, water or surfactant to the naked eye. The single-phase emulsion can be a macro-emulsion or a micro-emulsion, and can be either kinetically or thermodynamically stable. The process by which an emulsion completely breaks (coalescence), i.e.
 30 the system separates into bulk oil and water phases, is generally considered to be controlled by four different droplet loss mechanisms, i.e., Brownian flocculation, creaming, sedimentation flocculation and disproportionation.

A ‘stable single-phase emulsion’ within the context of the invention is understood to mean that the
 35 emulsion shows no physical separation visible to the eye, preferably reflected in terms of the emulsion not showing any change in pH by more than 1.0 pH unit and/or the emulsion not showing any change in viscosity by more than 20%, over a period of time that exceeds the carbon structure network production time. The term ‘stable’ can mean ‘thermodynamically stable’ or ‘kinetically stable’ (by adding energy, i.e. through mixing). In practice, the single-phase emulsion is regarded
 40 stable if no de-mixing optically arises, i.e. a single-phase is retained, for a period of at least 1 minute

after preparation of the emulsion. It is thus preferred that the emulsion maintains its pH within 1.0 pH unit and/or its viscosity with less than 20 % variation over a period of time of at least 1 minute, preferably at least 5 minutes after preparation. While for handling purposes an extended stability is preferred, it is noted that the manufacturing process can still benefit from using emulsions stable over relatively short time spans of 1 minute, preferably 5 minutes: By adding energy (mixing) the stability of the emulsion can be extended, and short-term stability can be extended using in-line mixing. While macro-emulsions are not thermodynamically stable, and will always revert to their original, immiscible separate oil and water phases, the break down rate can be sufficiently slow to render it kinetically stable for the length of the manufacturing process.

Provided that a stable, single-phase emulsion is obtained, the amounts of water and oil are not regarded limiting, but it is noted that reduced amounts of water (and increased amounts of oil) improve yields. The water content is typically between 5 and 50 wt% of the emulsion, preferably 10 – 40 wt%, even more preferably up to 30 wt% of the emulsion. While higher amounts of water can be considered, it will be at the cost of yield. Without wishing to be bound by any theory, the inventors believe that the water phase attributes to the shape and morphology of the networks thus obtained.

The choice of surfactant(s) is not regarded a limiting factor, provided that the combination of the oil, water and surfactant(s) results in a stable emulsion as defined here above. As further guidance to the skilled person, it is noted that the surfactant can be selected on the basis of the hydrophobicity or hydrophilicity of the system, i.e. the hydrophilic-lipophilic balance (HLB). The HLB of a surfactant is a measure of the degree to which it is hydrophilic or lipophilic, determined by calculating values for the different regions of the molecule, according to the Griffin or Davies method. The appropriate HLB value depends on the type of oil and the amount of oil and water in the emulsion, and can be readily determined by the skilled person on the basis of the requirements of retaining a stable, single phase emulsion as defined above. It is found that an emulsion comprising more than 50 wt% oil, preferably having less than 30 wt% water phase, would be stabilized best with a surfactant having an HLB value above 7, preferably above 8, more preferably above 9, most preferably above 10. On the other hand, an emulsion with at most 50 wt% oil would be stabilized best with a surfactant having an HLB value below 12, preferably below 11, more preferably below 10, most preferably below 9, particularly below 8. The surfactant is preferably selected to be compatible with the oil phase. In case the oil is a CBFS-comprising emulsion with a CBFS, a surfactant with high aromaticity is preferred, while an oil with low BMCI, such as characterized by $BMCI < 15$, would be stabilized best using aliphatic surfactants. The surfactant(s) can be cationic, anionic or non-ionic, or a mixture thereof. One or more non-ionic surfactants are preferred, in order to increase the yields since no residual ions will be left in the final product. In order to obtain a clean tail gas stream, the surfactant structure is preferably low in sulfur and nitrogen, preferably free from sulfur and nitrogen. Non-limiting examples of typical non-ionic surfactants which can be used to obtain stable emulsions are commercially available series of tween, span, Hypermer, Pluronic, Emulan, Neodol, Triton X and Tergitol.

In one embodiment, the emulsion is preferably a micro-emulsion. In the context of the invention, a micro-emulsion is a dispersion made of water, oil (preferably CBFS), and surfactant(s) that is a single optically isotropic and thermodynamically stable liquid with dispersed domain diameter varying approximately from 1 to 100 nm, usually 10 to 50 nm. In a micro-emulsion the domains of the dispersed phase are either globular (i.e. droplets) or interconnected (to give a bicontinuous micro-emulsion). In a preferred embodiment, the surfactant tails form a continuous network in the oil-phase of a water-in-oil (w/o) emulsion or bicontinuous emulsion. Network yields are improved with increased carbon content in the emulsion.

In a preferred embodiment, the single-phase emulsion, preferably a micro-emulsion, more preferably a bicontinuous micro-emulsion, further comprises metal nanoparticles having an average particle size between 1 and 100 nm. The skilled person will find ample guidance in the field of carbon nanotubes (CNTs). These metal nanoparticles are found to improve network formation in terms of both rates and yields. Methods for manufacturing suitable metal nanoparticles are found in Vinciguerra *et al.* "Growth mechanisms in chemical vapour deposited carbon nanotubes" Nanotechnology (2003) 14, 655; Perez-Cabero *et al.* "Growing mechanism of CNTs: a kinetic approach" J. Catal. (2004) 224, 197-205; Gavillet *et al.* "Microscopic mechanisms for the catalyst assisted growth of single-wall carbon nanotubes" Carbon. (2002) 40, 1649-1663 and Amelinckx *et al.* "A formation mechanism for catalytically grown helix-shaped graphite nanotubes" Science (1994) 265, 635-639, their contents about manufacturing metal nanoparticles herein incorporated by reference.

The metal nanoparticles are preferably used in a bicontinuous microemulsion, preferably a CBFS-comprising bicontinuous micro-emulsion. Advantageously, the uniformity of the metal particles is controlled in said (bicontinuous) micro-emulsion by mixing a first (bicontinuous) micro-emulsion in which the aqueous phase contains a metal complex salt capable of being reduced to the ultimate metal particles, and a second (bicontinuous) micro-emulsion in which the aqueous phase contains a reductor capable of reducing said metal complex salt; upon mixing the metal complex is reduced, thus forming metal particles. The controlled (bicontinuous) emulsion environment stabilizes the particles against sintering or Ostwald ripening. Size, concentrations and durability of the catalyst particles are readily controlled. It is considered routine experimentation to tune the average metal particle size within the above range, for instance by amending the molar ratio of metal precursor vs. the reducing agent. An increase in the relative amount of reducing agent yields smaller particles. The metal particles thus obtained are monodisperse, deviations from the average particle size are preferably within 10 %, more preferably within 5 %. Also, the present technology provides no restraint on the actual metal precursor, provided it can be reduced. Non-limiting examples of effective catalyst species are the noble metals (Pt, Pd, Au, Ag), iron-family elements (Fe, Co and Ni), Ru, and Cu. Suitable metal complexes are but are not limited to (i) platinum precursors such as H_2PtCl_6 ; $\text{H}_2\text{PtCl}_6 \cdot x\text{H}_2\text{O}$; K_2PtCl_4 ; $\text{K}_2\text{PtCl}_4 \cdot x\text{H}_2\text{O}$; $\text{Pt}(\text{NH}_3)_4(\text{NO}_3)_2$; $\text{Pt}(\text{C}_5\text{H}_7\text{O}_2)_2$, (ii)

ruthenium precursors such as $\text{Ru}(\text{NO})(\text{NO}_3)_3$; $\text{Ru}(\text{dip})_3\text{Cl}_2$ [dip = 4,7-diphenyl-1,10-phenanthroline]; RuCl_3 , or (iii) palladium precursors such as $\text{Pd}(\text{NO}_3)_2$, or (iv) nickel precursors such as NiCl_2 or $\text{NiCl}_2 \cdot x\text{H}_2\text{O}$; $\text{Ni}(\text{NO}_3)_2$; $\text{Ni}(\text{NO}_3)_2 \cdot x\text{H}_2\text{O}$; $\text{Ni}(\text{CH}_3\text{COO})_2$; $\text{Ni}(\text{CH}_3\text{COO})_2 \cdot x\text{H}_2\text{O}$; $\text{Ni}(\text{AOT})_2$ [AOT = bis(2-ethylhexyl)sulphosuccinate]. Non-limiting suitable reducing agents are hydrogen gas, sodium boron hydride, sodium bisulphate, hydrazine or hydrazine hydrate, ethylene glycol, methanol and ethanol. Also suited are citric acid and dodecylamine. The type of metal precursor is not an essential part of the invention. The metal of the particles of the (bicontinuous) micro-emulsion are preferably selected from the group consisting of Pt, Pd, Au, Ag, Fe, Co, Ni, Ru and Cu, and mixtures thereof, in order to control morphology of the carbon structures networks ultimately formed. The metal nanoparticles end up embedded inside these structures where the metal particles are physically attached to the structures. While there is no minimum concentration of metal particles at which these networks are formed – in fact networks are formed using the modified carbon black manufacturing process according to the invention – it was found that the yields increase with the metal particle concentrations. In a preferred embodiment, the active metal concentration is at least 5 mM, preferably at least 10 mM, more preferably at least 15 mM, more preferably at least 20 mM, particularly at least 25 mM, most preferably up to 250 mM. These are concentrations of the catalyst relative to the amount of the aqueous phase of the (bicontinuous) micro-emulsion.

In one embodiment, the invention involves a process where the single-phase emulsion, preferably said CBFS-comprising emulsion, is (substantially) void from the above metal nanoparticles. Also in the absence of such catalyst particles network structures were obtained in the modified carbon black manufacturing process. Although the inventors do not wish to be tied down to any theory, the reason is believed that mechanisms of “carbonization” and “carbon-growth by catalysis” compete with each other, and carbonization at elevated temperatures associated with carbon black manufacture is so fast that the carbonaceous molecules from the emulsion (i.e. surfactant(s) and oil, preferably CBFS) instantly react to form a network structure. Absent any metal nanoparticles, the emulsion is preferably subjected to atomization at a temperature above 900 °C, more preferably above 1100 °C. Typically, atomization temperatures are below 3000 °C, preferably below 2500 °C, most preferably below 2000 °C.

Atomization of the emulsion, preferably a CBFS-comprising emulsion, is preferably realized by spraying, using a nozzle-system **4**, which allows the emulsion droplets to come in contact with the hot waste gas **a1** in the reaction zone **3b**, resulting in traditional carbonization, network formation and subsequent agglomeration, to produce crystalline carbon structure networks **e** according to the invention. The injection step preferably involves increased temperatures above 600 °C, preferably between 700 and 3000 °C, more preferably between 900 and 2500 °C, more preferably between 1100 and 2000 °C.

In a different but related aspect of the invention, the invention pertains to a process for the semi-batch production of the crystalline carbon structure networks according to the invention in a reactor

3 where a single-phase emulsion **c** according to the invention is injected from the top of the reactor
 3, preferably through spraying using an aerosol inlet **4**, to obtain an aerosol, and wherein said
 networks **e** are formed at a temperature of at least 600 °C, preferably 700 – 1200 °C and deposited
 at the bottom of the reactor furnace. The elevated temperature and reaction conditions may be
 5 achieved using pyrolysis (e.g. heat source outside reactor, using N₂, depleted of oxygen) or by
 combustion (heat source inside reactor, using air or oxygen). In a further embodiment, the semi-
 batch process is conveniently operated with a carbon feed gas above its cracking temperature such
 as methane, ethane, propane, butane, ethylene, acetylene and propylene, carbon monoxide,
 oxygenated hydrocarbons such as methanol; aromatic hydrocarbons such as toluene, benzene and
 10 naphthalene, and mixtures of the above, for example carbon monoxide and methane. Reference is
 made to figure 1B.

According to the above semi-batch and continuous processes of the invention, crystalline carbon
 structure networks (i.e. networks of crystalline carbon structures) can be produced. In a related
 15 aspect, the invention thus pertains to crystalline carbon structure networks obtained by or
 obtainable by the process of the invention. The term “carbon structures” are understood to comprise
 crystalline sp²-based carbon allotropes, i.e. substances in which a carbon atom is bonded to
 neighbouring three carbon atoms in a hexagonal pattern, including graphene, fullerene, carbon
 nanofibers and carbon nanotubes. The method of the invention allows for the growth of crystalline
 20 carbon structure networks formed from carbon structures that are chemically interconnected
 through a multitude of junctions, including Y- and H-junctions. In the context of the invention, a
 ‘network’ is preferably understood to comprise at least 100, preferably at least 500 chemically
 connected nodes. In one embodiment, these structures forming the network may be described as
 nanofibers, which are solid (i.e. non-hollow), preferably having an average diameter or thickness of
 25 50 – 400 nm, more preferably between 100 and 350 nm, and/or an average fiber length (i.e. the
 average distance between two junctions) preferably in the range of 100 – 10000 nm, more
 preferably 200 - 5000 nm, more preferably 500 – 5000 nm, as for instance can be determined using
 SEM. Alternatively, the nanofibers or structures may preferably be described in terms of an average
 aspect ratio of fiber length-to-thickness of at least 2, preferably at least 3, more preferably at least
 30 4, most preferably at least 5; in sharp contrast with the amorphous (physically associated)
 aggregates formed from spherical particles obtained through conventional carbon black
 manufacturing. The aggregates of carbon structure networks according to the invention are typically
 of the order of 1- 100 microns, preferably 1 – 50 microns, which is observed with Laser Diffraction
 and Dynamic Light Scattering analysis, compared to the average particle size of 8 – 500 nm for
 35 spherical carbon black particles.

The invention also pertains to a composite comprising carbon structure networks according to the
 invention, further comprising one or more polymers, for instance for adding mechanical strength,
 electrical conductivity or thermal conductivity to said polymer-based composite. The networks may
 40 be added in any amount adapted to the desired performance, e.g. 1 – 70 wt%, more preferably 10

– 50 wt%, even more preferably between 20 - 40 wt%, based on the total polymer weight in the composite. In one aspect, the composite shows a network concentration-dependent elasticity modulus (E-modulus, i.e. an increase with increasing concentration of networks) for instance as measured according to ISO 527.

5

EXAMPLES

Example 1. Preparation of crystalline carbon structure network.

5-10 g of a feedstock were prepared:

- 10 a) CBFS oil (Sabic, REACH registration number 01-2119485585-24-0016),
 b) water, and
 c) emulsified CBFS based on components (a), (b) and surfactant (TritonX; HLB 13.4). The exact composition of the emulsions (c1) and (c2) was detailed below:

CBFS (CBO Sabic)	TritonX-100	Water
80%	10%	10%
70%	20%	10%

15

For both (c1) and (c2), a single-phase emulsion was obtained which was stable for more than one hour, which was longer than the entire length of the experiment.

Each of the above feedstocks was inserted in to a quartz-tube of a horizontal tube reactor. The reactor was heated up to 750°C (3 K/min) under 130 sccm of nitrogen flow and kept for 90 min at the same temperature. In the first 60 min the nitrogen gas flow was reduced to 100 sccm and ethylene gas was added at 100 sccm flow. During the last 30 minutes at 750°C the ethylene was purged out from nitrogen at 130 sccm for the last 30 min and the reactor was then cooled down.

25 It is only for both (c1) and (c2) (the emulsified CBFS) that a crystalline carbon network was obtained. Non-emulsified oil blend (a) resulted in carbon black, no networks were obtained.

Example 2. Carbon black vs network

30 The carbon networks (c1) and (c2) according to example 1 were compared to conventional carbon black produced using (a).

The morphology of the carbon networks was assessed by Scanning Electron Microscopy (SEM). It was found that the carbon network building blocks were chemically covalently linked carbon (nano)fibers with fibre diameter between 50-400 nm and fibre length between 10 nm- 10000 nm. On the other hand, the carbon black building blocks were nodules in which graphitic layers are organized in a spherical shape (8-300 nm diameter). SEM pictures of carbon black and carbon

35

networks building blocks are shown in figure 2A and 2B, respectively. It was found that the carbon networks were organized in aggregate size 1-100 μm , while carbon blacks aggregates ranged typically from 85-500 nm.

- 5 The decomposition temperature determined by TGA (under air, 10 K/min) was higher for carbon networks than for carbon black. This is linked to the effective surface area and the particle size. Smaller the particle size, higher surface area and consequently the particles are more likely to burn. The bulk density of carbon networks was measured according to ASTM D1513. Values of 80-600 kg/m^3 were obtained, whereas carbon black density is 20-380 kg/m^3 for powder.

10

Example 3: Effect of metal nanoparticles

- The metal catalyst concentration had an effect on the final yields of the reactions: 3 20 g bicontinuous micro-emulsions were made from isopropylpalmitate (35%wt), butanol (11.25%wt), Tween 80 (33.75%wt), water (20%wt). While the first batch was prepared without any metal
15 nanoparticles, two batches involved 50 and 200 mM FeCl_3 metal nanoparticles (based on citric acid and FeCl_3 with ratio 10:1). Each of the emulsions were stable over the full length of the experiments.

- In each case, the emulsions were introduced in the middle of a quartz-tube of a thermal horizontal tube reactor. The reactor was heated up to 750°C (3 K/min) under 130 sccm of nitrogen flow and
20 kept for 90 min at the same temperature. In the first 60 min the nitrogen gas flow was reduced to 100 sccm and ethylene gas was added at 100 sccm flow. During the last 30 minutes at 750°C the ethylene was purged out from nitrogen at 130 sccm for the last 30 min and the reactor was then cooled down. Both with and without the metal nanoparticles carbon structure networks were obtained. The test done in the presence of 50 and 200 mM FeCl_3 showed a yield increase of approx
25 40 and 60 wt% carbon structure networks, respectively, compared to the batch with no metal nanoparticles.

- A SEM picture of the networks obtained with a bicontinuous micro-emulsion based on isopropylpalmitate (35%wt), butanol (11.25%wt), Tween 80 (33.75%wt) and water (20%wt), with
30 100 mM Fe nanoparticles is shown in figure 3.

Example 4: Graph E-modulus in PA6

- Carbon Network powder prepared according to the recipe of example 1 was compounded in different loadings (10, 20, 30, 40%wt) in Polyamide 6 (Akulon F223D), by means of a twin screw
35 extruder (L/D= 38, D=25 mm) and compared to glass fiber (Chopvantage 3540) compounded at 10, 20, 30%wt loadings under the same conditions. The E modulus was measured according to ISO 527, dried as molded tensile bars. The results are plotted in figure 4, and indicate a performance of carbon networks, which is comparable to that of glass fibers. Carbon black was found not to provide significant reinforcement in thermoplastic, at whatever concentration.

Example 5: Graph electrical conductivity PA6 and PET

Volume resistivity was measured on different compounds prepared with carbon network prepared using the recipe according to example 1, in different loadings in Polyamide 6 (Akulon F223D) and
5 PET (Ramapet N1), by means of a twin-screw extruder (L/D= 38, D=25 mm). The results are plotted in figure 5. The percolation curves show good dosage control in the static dissipative range and that high conductive performances are achieved at high loadings. At the opposite, carbon black percolation threshold for conductive applications was found at lower dosages, i.e. < 20%wt, and dosage control in the static dissipative range was unsatisfactory. Moreover, carbon networks
10 compounds did not slough up to 30%wt loading, whereas carbon black compounds are known to be sloughing also at low filling degree.

CLAIMS

1. A process for the production of crystalline carbon structure networks in a reactor **3** which contains a reaction zone **3b** and a termination zone **3c**, by injecting a single-phase emulsion **c**, preferably a carbon black feedstock (CBFS)-comprising emulsion, into the reaction zone **3b** which is at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, to produce crystalline carbon structure networks **e**, transferring these networks **e** to the termination zone **3c**, and quenching or stopping the formation of crystalline carbon structure networks in the termination zone by spraying in water **d**.
2. The process according to claim 1, said reactor being a furnace carbon black reactor **3** which contains, along the axis of the reactor **3**, a combustion zone **3a**, a reaction zone **3b** and a termination zone **3c**, by producing a stream of hot waste gas **a1** in the combustion zone by burning a fuel **a** in an oxygen-containing gas **b** and passing the waste gas **a1** from the combustion zone **3a** into the reaction zone **3b**, spraying a single-phase emulsion **c**, preferably a CBFS-comprising emulsion, in the reaction zone **3b** containing the hot waste gas, carbonizing said emulsion at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, and quenching or stopping the reaction in the termination zone **3c** by spraying in water **d**, to yield crystalline carbon structure networks **e**.
3. The process according to any one of the preceding claims, wherein the oil phase in the emulsion is aromatic and/or aliphatic, preferably comprising at least 70 wt% C14 or higher, based on the total weight of the oil phase.
4. The process according to any one of the preceding claims, said emulsion being thermodynamically or kinetically stable.
5. The process according to any one of the preceding claims, wherein said single-phase emulsion shows no physical separation visible to the eye, preferably reflected in terms of the emulsion not showing any change in pH by more than 1.0 pH unit and/or the emulsion not showing any change in viscosity by more than 20%, over a period of time that exceeds the carbon structure network production time.
6. The process according to any one of the preceding claims, said single-phase emulsion being a bicontinuous or water-in-oil micro-emulsion.

7. The process according to any one of the preceding claims, said single-phase emulsion comprising metal catalyst nanoparticles having an average particle size between 1 and 100 nm.
- 5 8. A crystalline carbon structure network obtainable by the process according to any one of the preceding claims, wherein said carbon structures are chemically interconnected through a multitude of junctions, including Y- and H-junctions.
9. The network according to claim 8, wherein said structures have an average thickness of 50 – 400 nm, preferably between 100 and 350 nm, and/or an average length in the range of 100 – 10000 nm, preferably 200 - 5000 nm, more preferably 500 – 5000 nm; and/or wherein the
10 structures have an average aspect ratio of length to thickness of at least 2.
10. A composite comprising carbon structure networks according to claim 8 or 9, further comprising one or more polymers, for instance for adding mechanical strength, electrical conductivity or
15 thermal conductivity to said polymer-based composite, and wherein said networks are in any amount of 1 – 70 wt%, preferably 10 – 50 wt%, more preferably between 20 - 40 wt%, based on the total polymer weight in the composite.
11. The composite according to claim 10, showing an E modulus increasing with network
20 concentration as measured according to ISO 527.
12. Use of an emulsified carbon black feedstock in a carbon black manufacture process, preferably a furnace carbon black manufacture process, for producing crystalline carbon structure
25 networks.
13. A process for the semi-batch production of the crystalline carbon structure networks in a reactor **3** where a single-phase emulsion **c** according to the invention is injected from the top of the reactor **3**, preferably through spraying using an aerosol inlet **4**, to obtain an aerosol, and wherein said networks **e** are formed at an increased temperature of at least 600 °C, preferably 700 –
30 1200 °C and deposited at the bottom of the reactor, and wherein the increased temperature is obtained using pyrolysis (e.g. heat source outside reactor, using N₂, depleted of oxygen) or by combustion (heat source inside reactor, using air or oxygen).

ABSTRACT

The invention pertains to a process for the production of crystalline carbon structure networks in a reactor **3** which contains a reaction zone **3b** and a termination zone **3c**, by injecting a single-phase emulsion **c**, preferably a carbon black feedstock (CBFS)-comprising emulsion, into the
5 reaction zone **3b** which is at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, to produce crystalline carbon structure networks **e**, transferring these networks **e** to the termination zone **3c**, and quenching or stopping the formation of crystalline carbon structure networks in the
10 termination zone by spraying in water **d**.

<Fig. 1A>

Fig. 1A

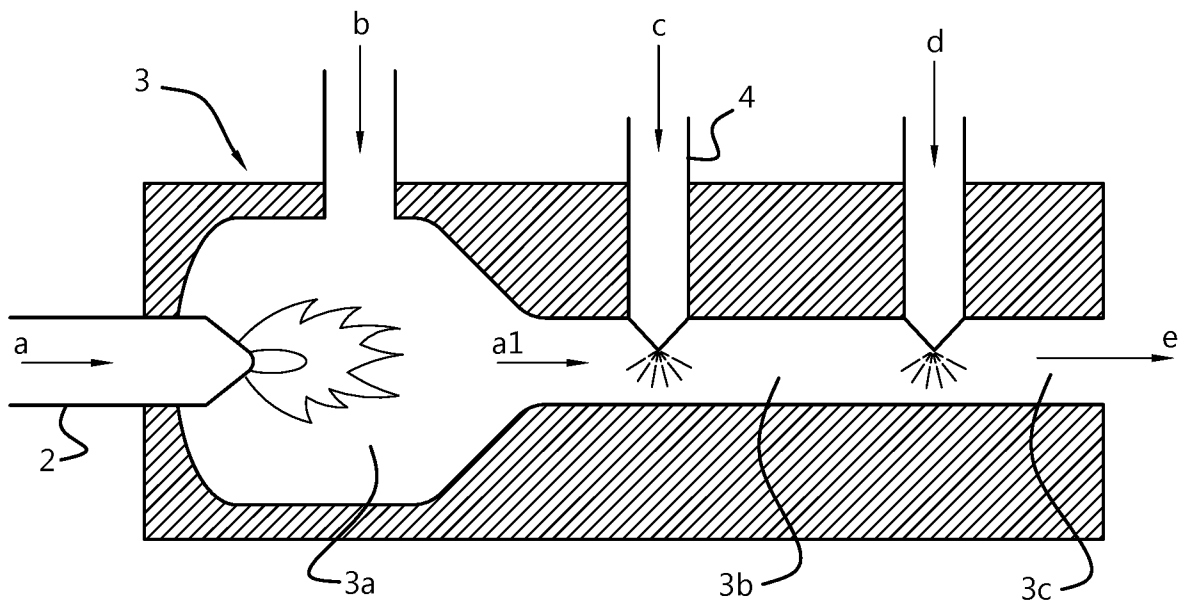


Fig. 1B

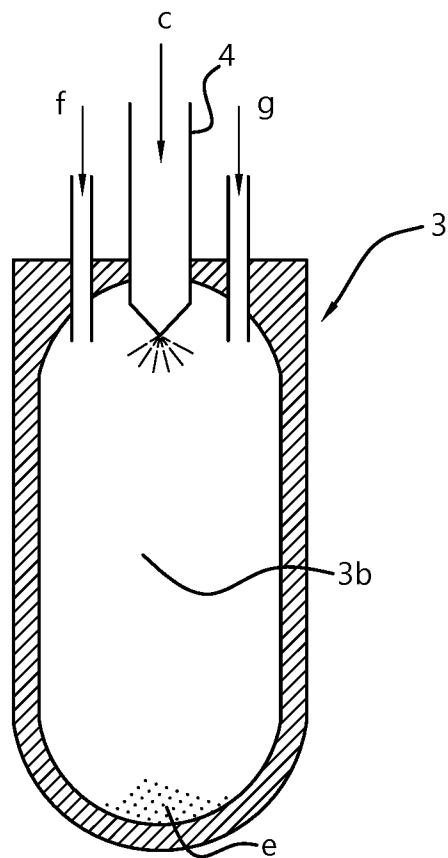


Fig. 2A

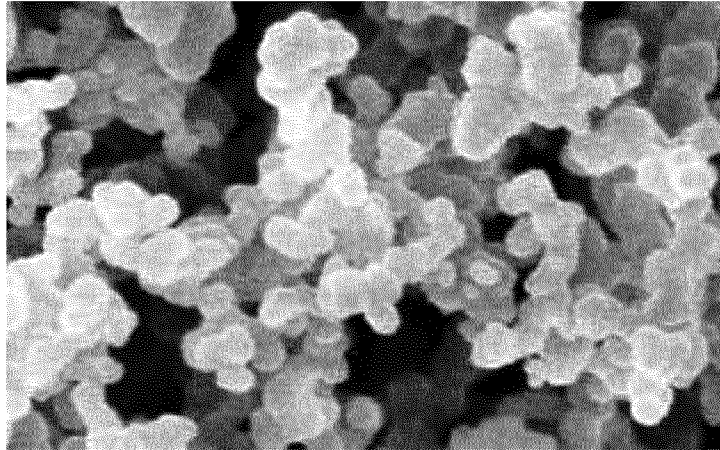


Fig. 2B

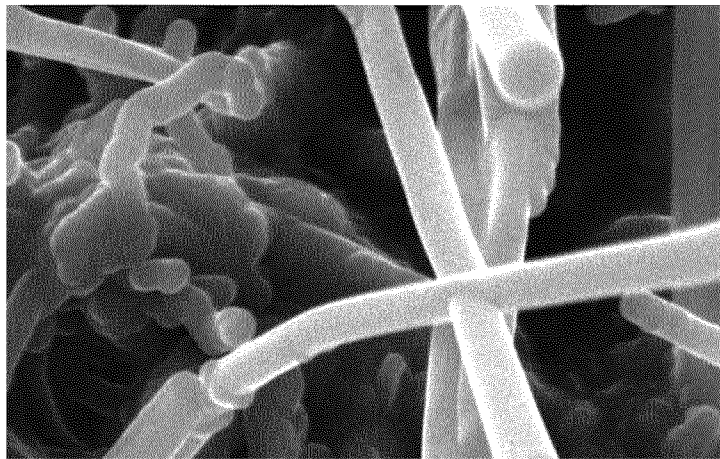


Fig. 3

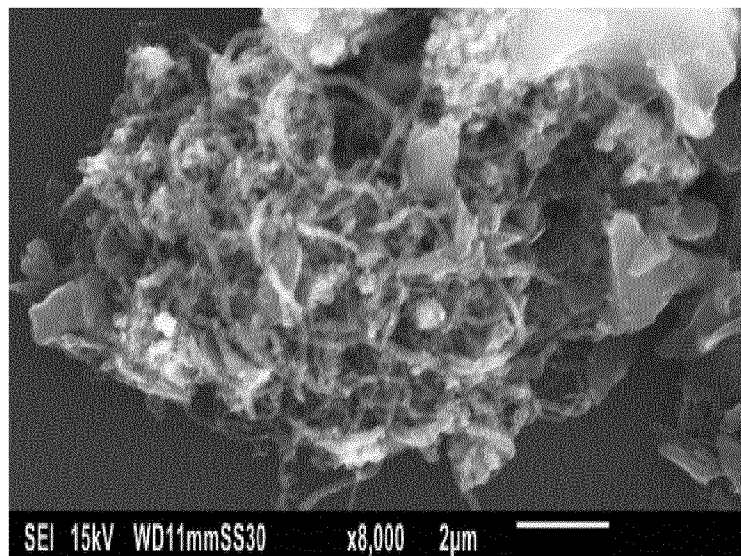


Fig. 4


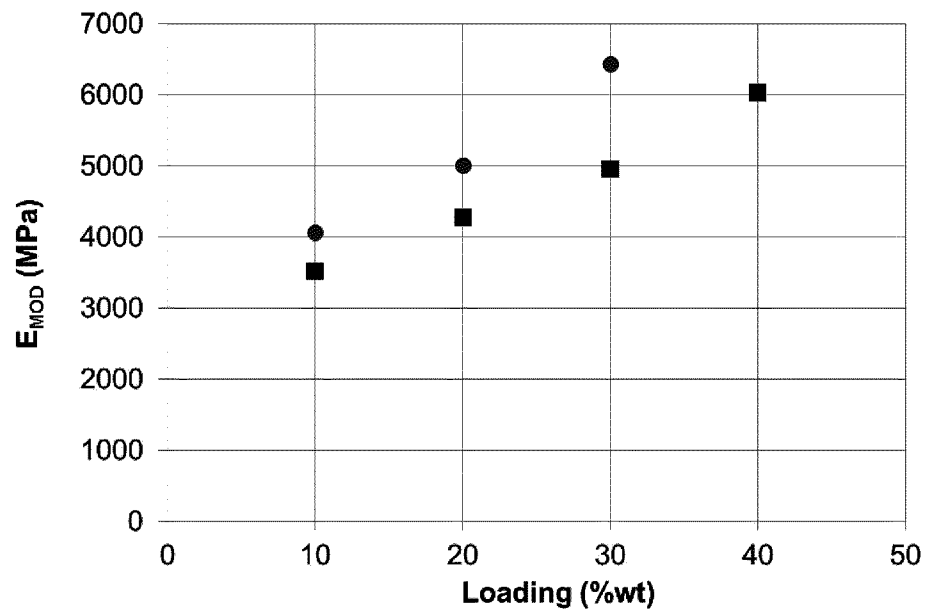


Fig. 5



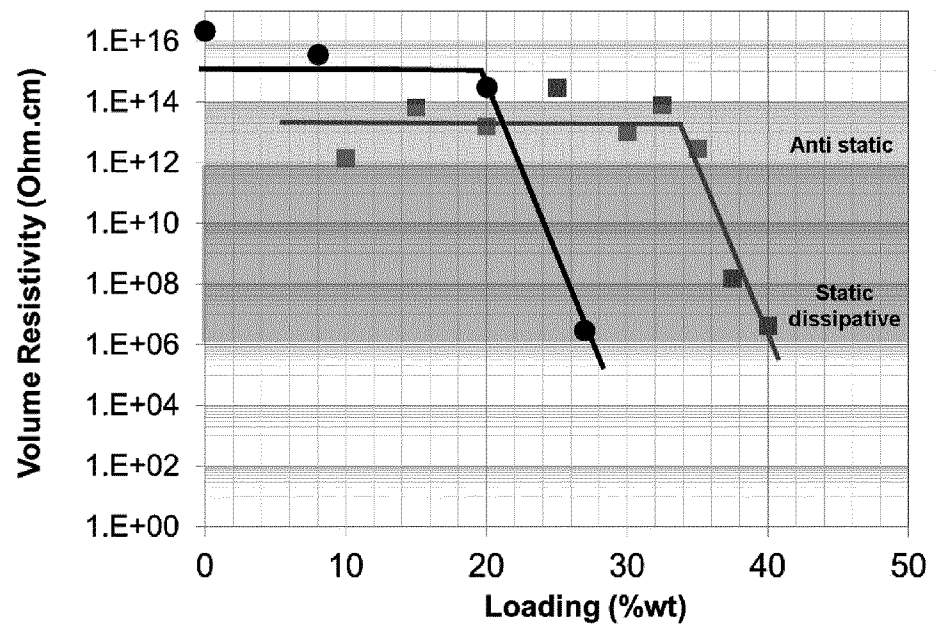

(51) International Patent Classification:

C09C 1/50 (2006.01) C01B 32/158 (2017.01)
C01B 32/05 (2017.01) C01B 32/182 (2017.01)
C01B 32/152 (2017.01)

(21) International Application Number:

PCT/EP2017/065994

(22) International Filing Date:

28 June 2017 (28.06.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16176599.5 28 June 2016 (28.06.2016) EP
17150513.4 06 January 2017 (06.01.2017) EP

(71) Applicant: CARBONX B.V. [NL/NL]; Rembrandt Tower,
35th Floor, Amstelplein 1, 1096 HA Amsterdam (NL).

(72) Inventors: VAN RAALTEN, Rutger Alexander David;
Molengraaffsingel 10, 2629 JD Delft (NL). SORDI,
Daniela; Molengraaffsingel 10, 2629 JD Delft (NL).


(74) Agent: NEDERLANDSCH OCTROOIBUREAU; P.O.
Box 29720, 2502 LS The Hague (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: Production of crystalline carbon structure networks

Fig. 1A

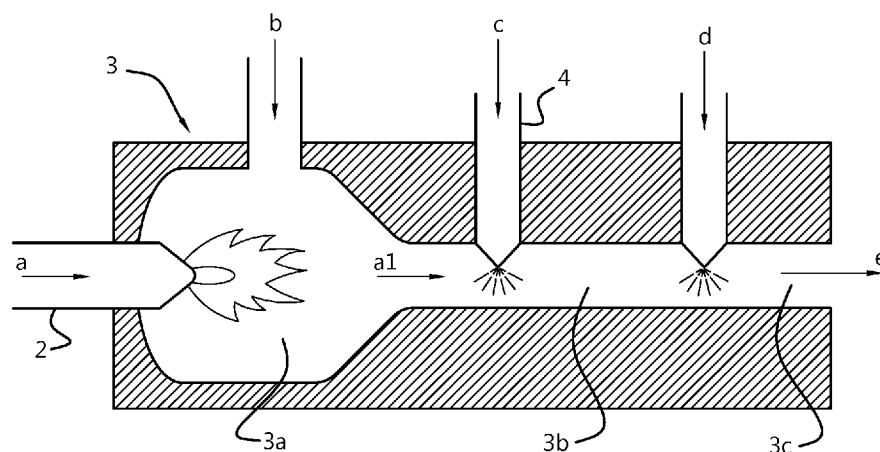

(57) Abstract: The invention pertains to a process for the production of crystalline carbon structure networks in a reactor 3 which contains a reaction zone 3b and a termination zone 3c, by injecting a thermodynamically stable micro-emulsion c, comprising metal catalyst nanoparticles, into the reaction zone 3b which is at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, to produce crystalline carbon structure networks e, transferring these networks e to the termination zone 3c, and quenching or stopping the formation of crystalline carbon structure networks in the termination zone by spraying in water d.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

Production of crystalline carbon structure networks

FIELD OF THE INVENTION

The invention is in the field of manufacturing crystalline carbon structure networks with improved
5 properties, and directed to new methods for manufacturing such structure networks. The invention
is particularly in the field of carbon black manufacturing.

BACKGROUND TO THE INVENTION

Carbon black industry focuses on providing an allotrope of carbon mainly differing from graphite
10 and amorphous carbon by its physical arrangement, for use in manufacturing rubber articles, such
as tires, etc., in polygraphy, electronics and cable coatings, in the production of varnishes and
paints, including use applications in which reinforcing and/or pigmentary properties of carbon
black are required.

15 Various different processes or techniques are known in the art for producing carbon black. Carbon
black is mainly produced by partial combustion processes, starting from a carbon containing gas
such as methane or acetylene. This process is sometimes referred to as a furnace carbon black
producing process, and it employs a furnace having a burner or combustion chamber followed by
a reactor. The furnace process is typically characterized by low oxygen levels, low densities, short
20 residence times and high temperatures. As a first step of the furnace carbon black production
process, hydrocarbons are atomized at typical temperatures from 1200 to 1900 °C, as is
described in Ullmanns Encyklopadie der technischen Chemie, Volume 14, page 637-640 (1977).
To that end, a zone having a high energy density is produced by burning a fuel gas or a liquid fuel
with oxygen or air, and the carbon black raw material is injected thereto. The carbon black
25 feedstock is atomized in these hot combustion conditions; oxygen levels are on average supplied
at a rate of two volumes of carbon black feedstock to about one volume of oxygen, in order to
achieve the oxygen being completely consumed in the combustion process. The structure and/or
the porosity of the carbon black end product may be influenced by the presence of alkali metal or
alkaline earth metal ions during the carbon black formation, and such additives are therefore
30 frequently added in the form of aqueous solutions, which are sprayed onto the carbon black raw
material agglomerates. The reaction is terminated only by the injection of water (quenching) and
the carbon black is collected at a temperature of about 200 – 250 °C, and separated from the
waste gas by means of conventional separators or filters. Because of its low bulk density, the
resulting carbon black is then granulated, for instance carried out in a pelletizing machine with the
35 addition of water to which small amounts of a pelletizing auxiliary may be added. In chronological
order, and by now means limiting the art on furnace carbon black technology, US2672402,
US4292291, US4636375, WO2000/032701 and US 2004/0248731 provide a description of
traditional or conventional carbon black production. Their contents are herewith incorporated by
reference. Of note, there are also alternative processes such as the lamp black process, thermal

black, acetylene black and channel black process which all are variations on the process described above, in the end producing a type of carbon black. Most innovative is the plasma black carbon process, advantageously avoiding direct carbon dioxide emissions, and reducing fossil fuel consumption. In essence, these oxygen-poor carbon black manufacture methods are very similar, except for finding different ways of yielding pyrolysis temperature conditions. Hitherto the industry is however still struggling to produce carbon black through oxygen-poor reducing processes with parameters comparable to those of carbon black produced through traditional partial combustion.

GB1514130 (in 1976) also discloses a method of producing carbon black from liquid hydrocarbons, by partial combustion and cracking of the hydrocarbons in a furnace plant. An emulsion of water and a liquid hydrocarbon is introduced into the combustion zone of a furnace, with an aim to use the water to optimize atomisation of the hydrocarbon. The process of the "thermal" atomisation of the liquid hydrocarbons, which themselves are only partly capable of being evaporated, is due to the explosion-like evaporation of the water at the moment when the emulsion is passed into the hot combustion zone. The process results in higher carbon black yields and shorter reaction times. The type of emulsion that could be used is not described. No different structures are reported.

US3494740 (dated 1970) also discusses carbon black production by introducing into the reaction zone of a carbon black furnace an additive comprising a metal selected from the group consisting of nickel, vanadium, iron, cobalt, and mixtures thereof, in an amount within the range of from 1 to 80 parts by weight per million parts by weight of the hydrocarbon feedstock to said furnace. The metal may be provided in water, oil or emulsion, in order to realize uniform dispersion in the hydrocarbon feed. The carbon black properties are mentioned in table 1. The type of emulsion that could be used is not described. No different structures are reported.

US2015/064099 relates to methods for production of carbon black using preheated feedstock with fouling control. Water is used for quenching.

SUMMARY TO THE INVENTION

The inventors found that well-established reducing (pyrolysis) or oxidizing (combustion) carbon black manufacturing processes can be used to produce networks of crystalline carbon structures having all kinds of advantageously improved electrical, mechanical and thermal properties, by introducing the concept of single-phase emulsification using thermodynamically stable micro-emulsions of the w/o or bicontinuous type, with metal catalyst nanoparticles, to conventional (furnace) carbon black production. The invention thus relates to a process for producing crystalline carbon structure networks by providing a thermodynamically stable single-phase emulsion comprising an oil, preferably C14 or higher, more preferably a carbon black feedstock oil, water and at least one surfactant, and also metal catalyst nanoparticles, and subjecting the

emulsion, preferably the emulsified carbon black feedstock, to a carbon black manufacturing process, carbonizing said carbon black feedstock at increased temperatures above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, most preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, particularly up to 2000 °C.

Throughout the text and claims, a 'single-phase emulsion' is a water-in-oil (w/o) micro-emulsion or a bicontinuous micro-emulsion comprising metal catalyst nanoparticles.

In a related aspect, the invention pertains to the use of such a single-phase emulsion, preferably an emulsified carbon black feedstock (i.e. a single-phase emulsion comprising carbon black feedstock) for carbonizing the emulsion in a carbon black manufacture process, preferably a furnace carbon black manufacture process, thus obtaining crystalline carbon structure networks. The emulsion is preferably sprayed and atomized into the reactor at the above elevated temperatures. Again, it was found that the single-phase emulsion should be a w/o or bicontinuous micro-emulsion comprising metal catalyst nanoparticles.

Through the eyes of the skilled person, the use of water should at least be minimized and preferably banned from the reaction sector in a traditional carbon black manufacturing process to obtain proper yields and preferred spherical carbon black structures, where water is only to be used for terminating the carbon black reaction further downstream in the reactor. At best water is sometimes used as a carrier in spraying alkali metal and alkaline earth metal ions onto the carbon black material, where in the final stages of the agglomeration process the porosity of the carbon black product could be fine-tuned to the market needs. Depending on the source, carbon black feedstock may in fact even be dewatered prior to introduction to the process, in order to increasing the fuel density and optimizing atomization. With that wide-spread reluctance of using any – let alone much - water during traditional carbon black manufacture, other than for quenching purposes in the closing stages, the idea of emulsifying the carbon black feedstock prior to atomization goes beyond the skilled person's imaginations. However, the inventors found that amending the conventional carbon black manufacture by atomizing a stable one-phase emulsion comprising a carbon black feedstock oil into the reactor has a dramatic impact in that a novel crystalline carbon material is obtained comprising of a network of structures, typically nanofibers, instead of the normally obtained amorphous carbon black based on aggregates from spherical particles. The crystalline carbon network structures are so different in morphology that they constitute properties that are different and even superior to carbon black aggregates, some of which have been exploited further below.

Without wishing to be bound by any theory, the inventors believe that the orientation and structuring of the surfactant molecules, oil phase and water phase together with the metal catalyst nanoparticles give rise to the network-forming process that is unique to the new material and to

the process. It was found that metal catalyst nanoparticles are essential. The micro- and macro-structures of the emulsions (either water-in-oil or bicontinuous) are thought to act as a precursor/blue-print for the final carbon structure network, of which the carbon-containing fractions (oil phase and surfactant) will form the fibers and junctions, whilst the water fraction helps
5 orienting the oil/surfactant phase and network porosity. The presence of a metal catalyst promotes the carbonization of the carbon components into a fiber structure instead of the normally obtained spherical orientation. A blend of an immiscible oil and water phase will not yield these structures, i.e. without a metal catalyst in a thermodynamically stable matrix present. Once the emulsion is atomized at high temperatures the carbonization process instantly “freezes” the
10 carbon fractions in its emulsion-structure in the presence of a metal catalyst, while the water evaporates, leaving a network of (nano)fibers. In that process, the inventors found it is key to provide the carbon raw material, i.e. the oil, such as carbon black feedstock, in the form of a single-phase emulsion as described above, to the atomization process. The inventors also found that a mere mixture of water and feedstock or otherwise thermodynamically instable emulsions
15 are detriment to the process, and will not yield the crystalline carbon structure networks. Further evidence is provided below.

The inventors also found that the single-phase emulsions subjected to atomization and subsequent carbonization should comprise metal nanoparticles which act as catalyzers in forming
20 these crystalline networks. An increasing concentration of metal catalyst nanoparticles further enhances yields. It is essential to use bicontinuous or water-in-oil (w/o) micro-emulsions, wherein the emulsions comprise metal catalyst nanoparticles, which emulsions comprise of a continuous oil/surfactant phase thus already forming a network structure. Bicontinuous micro-emulsions are most preferred.

25

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1A is a schematic diagram of a continuous furnace carbon black producing process in accordance with the present invention which contains, along the axis of the reactor **3**, a combustion zone **3a**, a reaction zone **3b** and a termination zone **3c**, by producing a stream of hot waste gas **a1** in the combustion zone by burning a fuel **a** in an oxygen-containing gas **b** and
30 passing the waste gas **a1** from the combustion zone **3a** into the reaction zone **3b**, spraying (atomizing) a single-phase emulsion **c** in the reaction zone **3b** containing the hot waste gas, carbonizing said emulsion at increased temperature, and quenching or stopping the reaction in the termination zone **3c** by spraying in water **d**, to obtain crystalline carbon structure networks **e**
35 according to the invention;

Fig. 1B is a schematic diagram of a semi-batch carbon black producing process where a single-phase emulsion **c** is atomized through a nozzle **4** at the top of the reactor **3** into the reactor zone **3b** at elevated temperatures, carbonizing said emulsion at the elevated temperature in the reactor zone **3b**, and collecting the crystalline carbon structure networks **e** at the bottom of the reactor.
40 Additionally two gas-inlets are present that enter the reactor from the top, for adding inert gas **f**,

preferably nitrogen for controlling and/or depletion of oxygen-levels, and for introducing a carbon-containing gas **g** into the reactor, preferably acetylene or ethylene.

Fig. 2A and 2B are SEM pictures of carbon black and carbon structure networks, respectively;

Fig. 3 shows a SEM picture of crystalline carbon structure networks obtained in a bicontinuous microemulsion with 100 mM FeCl₃ metal catalyst;

Fig. 4 depicts the elasticity modulus according to ISO 527 for carbon networks (squares) and glass fibers (circles), showing mechanical strength for the crystalline networks that is comparable to that of the fibers. Carbon black was found not to bring any reinforcing properties to the composite; and

Fig. 5 shows volume resistivity for different compounds (polyamide PA6; squares; PET: circles) prepared with different loadings of crystalline carbon structure networks prepared using the recipe according to example 1.

EMBODIMENTS OF THE INVENTION

15

1. A process for the production of crystalline carbon structure networks in a reactor **3** which contains a reaction zone **3b** and a termination zone **3c**, by injecting a water-in-oil or bicontinuous micro-emulsion **c** comprising metal catalyst nanoparticles, into the reaction zone **3b** which is at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, to produce crystalline carbon structure networks **e**, transferring these networks **e** to the termination zone **3c**, and quenching or stopping the formation of crystalline carbon structure networks in the termination zone by spraying in water **d**.
2. The process according to embodiment 1, said reactor being a furnace carbon black reactor **3** which contains, along the axis of the reactor **3**, a combustion zone **3a**, a reaction zone **3b** and a termination zone **3c**, by producing a stream of hot waste gas **a1** in the combustion zone by burning a fuel **a** in an oxygen-containing gas **b** and passing the waste gas **a1** from the combustion zone **3a** into the reaction zone **3b**, spraying a water-in-oil or bicontinuous micro-emulsion **c** comprising metal catalyst nanoparticles, in the reaction zone **3b** containing the hot waste gas, carbonizing said emulsion at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, and quenching or stopping the reaction in the termination zone **3c** by spraying in water **d**, to yield crystalline carbon structure networks **e**.
3. The process according to any one of the preceding embodiments, wherein the oil phase in the emulsion is aromatic and/or aliphatic, preferably comprising at least 50 wt% C₁₄ or higher, based on the total weight of the oil phase.

4. The process according to any one of the preceding embodiments, said emulsion comprising at least 1 mM metal catalyst nanoparticles, preferably having an average particle size between 1 and 100 nm.
5. A crystalline carbon structure network obtainable by the process according to any one of the preceding embodiments, wherein said carbon structures are chemically interconnected through a multitude of junctions, including Y- and H-junctions.
6. The network according to embodiment 5, having at least one, preferably at least two, more preferably at least three, most preferably all of the following properties:
 - (i) Iodine Adsorption Number (IAN) of at least 250 mg/g according to ASTM D1510;
 - 10 (ii) Nitrogen Surface Area (N2SA) of at least 250 m²/g according to ASTM D6556;
 - (iii) Statistical Thickness Surface Area (STSA) of at least 120 m²/g according to ASTM D6556;
 - (iv) Oil Absorption Number (OAN) of at least 150 cc/100 g according to ASTM D2414.
7. The network according to embodiment 5 or 6, wherein said structures have an average
15 thickness of 1 – 400 nm, preferably between 5 and 350 nm, more preferably up to 100 nm, in one embodiment between 50 and 100 nm, and/or an average length in the range of 100 – 10000 nm, preferably 200 - 5000 nm, more preferably 500 – 5000 nm; and/or wherein the structures have an average aspect ratio of length to thickness of at least 2.
8. A composite comprising carbon structure networks according to any one of embodiments 5 -
20 7, further comprising one or more polymers, for instance for adding mechanical strength, electrical conductivity or thermal conductivity to said polymer-based composite, and wherein said networks are in any amount of 1 – 70 wt%, preferably 10 – 50 wt%, more preferably between 20 - 40 wt%, based on the total polymer weight in the composite.
9. The composite according to embodiment 8, showing an E modulus increasing with network
25 concentration as measured according to ISO 527.
10. Use of an emulsified carbon black feedstock in a carbon black manufacture process, preferably a furnace carbon black manufacture process, for producing crystalline carbon structure networks.
11. A process for the semi-batch production of the crystalline carbon structure networks in a
30 reactor **3** where a water-in-oil or bicontinuous micro-emulsion **c** comprising metal catalyst nanoparticles is injected from the top of the reactor **3**, preferably through spraying using an aerosol inlet **4**, to obtain an aerosol, and wherein said networks **e** are formed at an increased temperature of at least 600 °C, preferably 700 – 1200 °C and deposited at the bottom of the reactor, and wherein the increased temperature is obtained using pyrolysis (e.g. heat source
35 outside reactor, using N₂, depleted of oxygen) or by combustion (heat source inside reactor, using air or oxygen).
12. A process for the continuous production of the crystalline carbon structure networks in a
40 reactor **3** where a water-in-oil or bicontinuous micro-emulsion **c** comprising metal catalyst nanoparticles is injected from the top of the reactor **3**, said reactor preferably being a thermal black reactor, preferably through spraying using an aerosol inlet **4**, to obtain an aerosol, and

wherein said networks **e** are formed at an increased temperature of at least 600 °C, preferably 700 – 1200 °C and deposited at the bottom of the reactor, and wherein the increased temperature is obtained using combustion (heat source inside reactor, using air or oxygen), but wherein the emulsion is injected only under pyrolysis conditions.

5

DETAILED DESCRIPTION

The invention can be described best as a modified carbon black manufacturing process, wherein 'modified' is understood that a suitable oil, preferably an oil comprising at least 14 C atoms (>C14) such as carbon black feedstock oil (CBFS), is provided to the reaction zone of a carbon black reactor as part of a single-phase emulsion, being a thermodynamically stable micro-emulsion, comprising metal catalyst nanoparticles. The emulsion is preferably provided to the reaction zone by spraying, thus atomizing the emulsion to droplets. While the process can be carried out batch or semi-batch wise, the modified carbon black manufacturing process is advantageously carried out as a continuous process. The single-phase emulsion is a micro-emulsion comprising metal catalyst nanoparticles. The preferred single-phase emulsion comprises CBFS oil, and may be referred to as 'emulsified CBFS' in the context of the invention..

In one embodiment, the invention pertains to a process for the production of the crystalline carbon structure networks according to the invention in a reactor **3** which contains a reaction zone **3b** and a termination zone **3c**, by injecting a single-phase emulsion **c**, being a micro-emulsion comprising metal catalyst nanoparticles, preferably a CBFS-comprising emulsion, according to the invention into the reaction zone **3b** which is at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, to produce crystalline carbon structure networks **e**, transferring these networks **e** to the termination zone **3c**, and quenching or stopping the formation of crystalline carbon structure networks in the termination zone by spraying in water **d**. The single-phase emulsion is preferably sprayed into the reaction zone. Reference is made to figure 1A.

In a preferred embodiment, the invention pertains to a process for the production of the crystalline carbon structure networks according to the invention in a furnace carbon black reactor **3** which contains, along the axis of the reactor **3**, a combustion zone **3a**, a reaction zone **3b** and a termination zone **3c**, by producing a stream of hot waste gas **a1** in the combustion zone by burning a fuel **a** in an oxygen-containing gas **b** and passing the waste gas **a1** from the combustion zone **3a** into the reaction zone **3b**, spraying (atomizing) a single-phase emulsion **c** according to the invention, preferably a micro-emulsion comprising metal catalyst nanoparticles, preferably a CBFS-comprising emulsion, in the reaction zone **3b** containing the hot waste gas, carbonizing said emulsion at increased temperatures (at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000

°C), and quenching or stopping the reaction (i.e. the formation of crystalline carbon structure networks **e**) in the termination zone **3c** by spraying in water **d**. The reaction zone **3b** comprises at least one inlet (preferably a nozzle) for introducing the emulsion, preferably by atomization. Reference is made to figure 1A.

5

Residence times for the emulsion in the reaction zone of the furnace carbon black reactor can be relatively short, preferably ranging from 1 – 1000 ms, more preferably 10 – 100 ms.

10

In accordance with conventional carbon black manufacturing processes, the oil phase can be aromatic and/or aliphatic, preferably comprising at least 50 wt% C14 or higher, more preferably at least 70 wt% C14 or higher (based on the total weight of the oil). List of typical oils which can be used, but not limited to obtain stable emulsions are carbon black feedstock oils (CBFS), phenolic oil, anthracene oils, (short-medium-long chain) fatty acids, fatty acids esters and paraffins. The oil is preferably a C14 or higher. In one embodiment, the oil preferably has high aromaticity. Within

15

the field, the aromaticity is preferably characterized in terms of the Bureau of Mines Correlation Index (BMCI). The oil preferably has a BMCI > 50. In one embodiment, the oil is low in aromaticity, preferably having a BMCI < 15.

20

CBFS is an economically attractive oil source in the context of the invention, and is preferably a heavy hydrocarbon mix comprising predominantly C14 to C50, the sum of C14 – C50 preferably amounting to at least 50 wt%, more preferably at least 70 wt% of the feedstock. Some of the most important feedstocks used for producing carbon black include clarified slurry oil (CSO) obtained from fluid catalytic cracking of gas oils, ethylene cracker residue from naphtha steam cracking and coal tar oils. The presence of paraffins (<C15) substantially reduces their suitability, and a higher aromaticity is preferred. The concentration of aromatics determines the rate at which carbon nuclei are formed. The carbon black feedstock preferably has a high BMCI to be able to offer a high yield with minimum heat input hence reducing the cost of manufacturing. In a preferred embodiment, and in accordance with current CBFS specifications, the oil, including mixtures of oil, has a BMCI value of more than 120. While the skilled person has no difficulties understanding which are suitable CBFS, merely as a guide it is noted that – from a yield perspective - a BMCI value for CBFS is preferably more than 120, even more preferably more than 132. The amount of asphaltene in the oil is preferably lower than 10 wt%, preferably lower than 5.0 wt% of the CBFS weight. The CBFS preferably has low sulfur content, as sulfur adversely affects the product quality, leads to lower yield and corrodes the equipment.

35

It is preferred that the sulfur content of the oil according to ASTM D1619 is less than 8.0 wt%, preferably below 4.0 wt% more preferably less than 2.0 wt%.

40

The emulsion, preferably a CBFS-comprising emulsion, is a “single-phase emulsion” which is understood to mean that the oil phase and the water phase optically appear as one miscible

mixture showing no physical separation of oil, water or surfactant to the naked eye. The single-phase emulsion can be a macro-emulsion or a micro-emulsion, and can be either kinetically or thermodynamically stable. The process by which an emulsion completely breaks (coalescence), i.e. the system separates into bulk oil and water phases, is generally considered to be controlled by four different droplet loss mechanisms, i.e., Brownian flocculation, creaming, sedimentation flocculation and disproportionation.

A 'stable single-phase emulsion' within the context of the invention is understood to mean that the emulsion shows no physical separation visible to the eye, preferably reflected in terms of the emulsion not showing any change in pH by more than 1.0 pH unit and/or the emulsion not showing any change in viscosity by more than 20%, over a period of time that exceeds the carbon structure network production time. The term 'stable' can mean 'thermodynamically stable' or 'kinetically stable' (by adding energy, i.e. through mixing). In practice, the single-phase emulsion is regarded stable if no de-mixing optically arises, i.e. a single-phase is retained, for a period of at least 1 minute after preparation of the emulsion. It is thus preferred that the emulsion maintains its pH within 1.0 pH unit and/or its viscosity with less than 20 % variation over a period of time of at least 1 minute, preferably at least 5 minutes after preparation. While for handling purposes an extended stability is preferred, it is noted that the manufacturing process can still benefit from using emulsions stable over relatively short time spans of 1 minute, preferably 5 minutes: By adding energy (mixing) the stability of the emulsion can be extended, and short-term stability can be extended using in-line mixing. While macro-emulsions are not thermodynamically stable, and will always revert to their original, immiscible separate oil and water phases, the break down rate can be sufficiently slow to render it kinetically stable for the length of the manufacturing process.

Provided that a stable, single-phase emulsion is obtained, the amounts of water and oil are not regarded limiting, but it is noted that reduced amounts of water (and increased amounts of oil) improve yields. The water content is typically between 5 and 50 wt% of the emulsion, preferably 10 – 40 wt%, even more preferably up to 30 wt%, more preferably 10 - 20 wt% of the emulsion. While higher amounts of water can be considered, it will be at the cost of yield. Without wishing to be bound by any theory, the inventors believe that the water phase attributes to the shape and morphology of the networks thus obtained.

The choice of surfactant(s) is not regarded a limiting factor, provided that the combination of the oil, water and surfactant(s) results in a stable micro-emulsion as defined here above. As further guidance to the skilled person, it is noted that the surfactant can be selected on the basis of the hydrophobicity or hydrophilicity of the system, i.e. the hydrophilic-lipophilic balance (HLB). The HLB of a surfactant is a measure of the degree to which it is hydrophilic or lipophilic, determined by calculating values for the different regions of the molecule, according to the Griffin or Davies method. The appropriate HLB value depends on the type of oil and the amount of oil and water in the emulsion, and can be readily determined by the skilled person on the basis of the

requirements of retaining a thermodynamically stable, single phase emulsion as defined above. It is found that an emulsion comprising more than 50 wt% oil, preferably having less than 30 wt% water phase, would be stabilized best with a surfactant having an HLB value above 7, preferably above 8, more preferably above 9, most preferably above 10. On the other hand, an emulsion with at most 50 wt% oil would be stabilized best with a surfactant having an HLB value below 12, preferably below 11, more preferably below 10, most preferably below 9, particularly below 8. The surfactant is preferably selected to be compatible with the oil phase. In case the oil is a CBFS-comprising emulsion with a CBFS, a surfactant with high aromaticity is preferred, while an oil with low BMCI, such as characterized by $BMCI < 15$, would be stabilized best using aliphatic surfactants. The surfactant(s) can be cationic, anionic or non-ionic, or a mixture thereof. One or more non-ionic surfactants are preferred, in order to increase the yields since no residual ions will be left in the final product. In order to obtain a clean tail gas stream, the surfactant structure is preferably low in sulfur and nitrogen, preferably free from sulfur and nitrogen. Non-limiting examples of typical non-ionic surfactants which can be used to obtain stable emulsions are commercially available series of tween, span, Hypermer, Pluronic, Emulan, Neodol, Triton X and Tergitol.

In the context of the invention, a micro-emulsion is a dispersion made of water, oil (preferably CBFS), and surfactant(s) that is a single optically isotropic and thermodynamically stable liquid with dispersed domain diameter varying approximately from 1 to 500 nm, preferably 1 to 100 nm, usually 10 to 50 nm. In a micro-emulsion the domains of the dispersed phase are either globular (i.e. droplets) or interconnected (to give a bicontinuous micro-emulsion). In a preferred embodiment, the surfactant tails form a continuous network in the oil-phase of a water-in-oil (w/o) emulsion or bicontinuous emulsion. The water domains should contain a metal catalyst, preferably having an average particle size between 1 nm and 100 nm.

The single-phase emulsion, i.e. a w/o or bicontinuous micro-emulsion, preferably a bicontinuous micro-emulsion, further comprises metal catalyst nanoparticles preferably having an average particle size between 1 and 100 nm. The skilled person will find ample guidance in the field of carbon nanotubes (CNTs) to produce and use these kinds of nanoparticles. These metal nanoparticles are found to improve network formation in terms of both rates and yields, and reproducibility. Methods for manufacturing suitable metal nanoparticles are found in Vinciguerra *et al.* "Growth mechanisms in chemical vapour deposited carbon nanotubes" Nanotechnology (2003) 14, 655; Perez-Cabero *et al.* "Growing mechanism of CNTs: a kinetic approach" J. Catal. (2004) 224, 197-205; Gavillet *et al.* "Microscopic mechanisms for the catalyst assisted growth of single-wall carbon nanotubes" Carbon. (2002) 40, 1649-1663 and Amelinckx *et al.* "A formation mechanism for catalytically grown helix-shaped graphite nanotubes" Science (1994) 265, 635-639, their contents about manufacturing metal nanoparticles herein incorporated by reference.

The metal catalyst nanoparticles are used in a bicontinuous or w/o microemulsion, preferably a CBFS-comprising bicontinuous or w/o micro-emulsion. In one embodiment, a bicontinuous micro-emulsion is most preferred. Advantageously, the uniformity of the metal particles is controlled in said (bicontinuous) micro-emulsion by mixing a first (bicontinuous) micro-emulsion in which the aqueous phase contains a metal complex salt capable of being reduced to the ultimate metal particles, and a second (bicontinuous) micro-emulsion in which the aqueous phase contains a reductor capable of reducing said metal complex salt; upon mixing the metal complex is reduced, thus forming metal particles. The controlled (bicontinuous) emulsion environment stabilizes the particles against sintering or Ostwald ripening. Size, concentrations and durability of the catalyst particles are readily controlled. It is considered routine experimentation to tune the average metal particle size within the above range, for instance by amending the molar ratio of metal precursor vs. the reducing agent. An increase in the relative amount of reducing agent yields smaller particles. The metal particles thus obtained are monodisperse, deviations from the average particle size are preferably within 10 %, more preferably within 5 %. Also, the present technology provides no restraint on the actual metal precursor, provided it can be reduced. Non-limiting examples of effective catalyst species are the noble metals (Pt, Pd, Au, Ag), iron-family elements (Fe, Co and Ni), Ru, and Cu. Suitable metal complexes are but are not limited to (i) platinum precursors such as H_2PtCl_6 ; $\text{H}_2\text{PtCl}_6 \cdot x\text{H}_2\text{O}$; K_2PtCl_4 ; $\text{K}_2\text{PtCl}_4 \cdot x\text{H}_2\text{O}$; $\text{Pt}(\text{NH}_3)_4(\text{NO}_3)_2$; $\text{Pt}(\text{C}_5\text{H}_7\text{O}_2)_2$, (ii) ruthenium precursors such as $\text{Ru}(\text{NO})(\text{NO}_3)_3$; $\text{Ru}(\text{dip})_3\text{Cl}_2$ [dip = 4,7-diphenyl-1,10-phenanthroline]; RuCl_3 , or (iii) palladium precursors such as $\text{Pd}(\text{NO}_3)_2$, or (iv) nickel precursors such as NiCl_2 or $\text{NiCl}_2 \cdot x\text{H}_2\text{O}$; $\text{Ni}(\text{NO}_3)_2$; $\text{Ni}(\text{NO}_3)_2 \cdot x\text{H}_2\text{O}$; $\text{Ni}(\text{CH}_3\text{COO})_2$; $\text{Ni}(\text{CH}_3\text{COO})_2 \cdot x\text{H}_2\text{O}$; $\text{Ni}(\text{AOT})_2$ [AOT = bis(2-ethylhexyl)sulphosuccinate]. Non-limiting suitable reducing agents are hydrogen gas, sodium boron hydride, sodium bisulphate, hydrazine or hydrazine hydrate, ethylene glycol, methanol and ethanol. Also suited are citric acid and dodecylamine. The type of metal precursor is not an essential part of the invention. The metal of the particles of the (bicontinuous) micro-emulsion are preferably selected from the group consisting of Pt, Pd, Au, Ag, Fe, Co, Ni, Ru and Cu, and mixtures thereof, in order to control morphology of the carbon structures networks ultimately formed. The metal nanoparticles end up embedded inside these structures where the metal particles are physically attached to the structures. While there is no minimum concentration of metal particles at which these networks are formed – in fact networks are formed using the modified carbon black manufacturing process according to the invention – it was found that the yields increase with the metal particle concentrations. In a preferred embodiment, the active metal concentration is at least 1 mM, preferably at least 5 mM, preferably at least 10 mM, more preferably at least 15 mM, more preferably at least 20 mM, particularly at least 25 mM, most preferably up to 3500 mM, preferably up to 3000 mM. In one embodiment, the metal nanoparticles comprise up to 250 mM. These are concentrations of the catalyst relative to the amount of the aqueous phase of the (bicontinuous) micro-emulsion.

Atomization of the single-phase emulsion, preferably a CBFS-comprising emulsion, is preferably realized by spraying, using a nozzle-system **4**, which allows the emulsion droplets to come in contact with the hot waste gas **a1** in the reaction zone **3b**, resulting in traditional carbonization, network formation and subsequent agglomeration, to produce crystalline carbon structure networks **e** according to the invention. The injection step preferably involves increased temperatures above 600 °C, preferably between 700 and 3000 °C, more preferably between 900 and 2500 °C, more preferably between 1100 and 2000 °C.

In a different but related aspect of the invention, the invention pertains to a process for the semi-batch production of the crystalline carbon structure networks according to the invention in a reactor **3** where a single-phase emulsion **c** according to the invention is injected from the top of the reactor **3**, preferably through spraying using an aerosol inlet **4**, to obtain an aerosol, and wherein said networks **e** are formed at a temperature of at least 600 °C, preferably 700 – 1200 °C and deposited at the bottom of the reactor furnace. The elevated temperature and reaction conditions may be achieved using pyrolysis (e.g. heat source outside reactor, using N₂, depleted of oxygen) or by combustion (heat source inside reactor, using air or oxygen). In a further embodiment, the semi-batch process is conveniently operated with a carbon feed gas above its cracking temperature such as methane, ethane, propane, butane, ethylene, acetylene and propylene, carbon monoxide, oxygenated hydrocarbons such as methanol; aromatic hydrocarbons such as toluene, benzene and naphthalene, and mixtures of the above, for example carbon monoxide and methane. Reference is made to figure 1B. Typical residence times are extended compared to the preferred furnace black process, with residence times of the emulsion in the reactor typically in the order of 1 hours to 7 days, more preferably 8 hours to 3 days. The single-phase emulsion is as defined before, i.e. a water-in-oil (w/o) micro-emulsion or a bicontinuous micro-emulsion comprising metal catalyst nanoparticles.

Related therewith, the invention also pertains to a process for the continuous production of the crystalline carbon structure networks in a reactor **3** where a single-phase emulsion **c** according to the invention is injected from the top of the reactor **3**, said reactor preferably being a thermal black reactor, preferably through spraying using an aerosol inlet **4**, to obtain an aerosol, and wherein said networks **e** are formed at an increased temperature of at least 600 °C, preferably 700 – 1200 °C and deposited at the bottom of the reactor, and wherein the increased temperature is obtained using combustion (heat source inside reactor, using air or oxygen), but wherein the emulsion is injected only under pyrolysis conditions. In a further embodiment, the continuous 'pyrolysis' process encompassing an initial combustion step is conveniently operated with a carbon feed gas above its cracking temperature such as methane, ethane, propane, butane, ethylene, acetylene and propylene, carbon monoxide, oxygenated hydrocarbons such as methanol; aromatic hydrocarbons such as toluene, benzene and naphthalene, and mixtures of the above, for example carbon monoxide and methane. Reference is made to figure 1B. The residence time for the emulsion in the reactor is preferably in the range of 1 to 600 seconds, more preferably 5 to 60

seconds. The single-phase emulsion is as defined before, i.e. a water-in-oil (w/o) micro-emulsion or a bicontinuous micro-emulsion comprising metal catalyst nanoparticles.

According to the above semi-batch and continuous processes of the invention, crystalline carbon structure networks (i.e. networks of crystalline carbon structures) can be produced. In a related aspect, the invention thus pertains to crystalline carbon structure networks obtained by or obtainable by the process of the invention. The term "carbon structures" are understood to comprise crystalline sp²-based carbon allotropes, i.e. substances in which a carbon atom is bonded to neighbouring three carbon atoms in a hexagonal pattern, including graphene, fullerene, carbon nanofibers and carbon nanotubes. The method of the invention allows for the growth of crystalline carbon structure networks formed from carbon structures that are chemically interconnected through a multitude of junctions, including Y- and H-junctions. In the context of the invention, a 'network' is preferably understood to comprise at least 3, preferably at least 5, more preferably at least 10, more preferably at least 100, more preferably at least 500 chemically connected nodes.

The networks preferably have at least one, preferably at least two, more preferably at least three, most preferably all of the following properties:

- (i) Iodine Adsorption Number (IAN) of at least 250 mg/g, more preferably at least 300 mg/g, preferably 300 – 1000 mg/g, according to ASTM D1510;
- (ii) Nitrogen Surface Area (N₂SA) of at least 250 m²/g, more preferably at least 300 m²/g, preferably 300 – 1000 m²/g, according to ASTM D6556;
- (iii) Statistical Thickness Surface Area (STSA) of at least 120 m²/g, more preferably at least 150 m²/g, preferably 150 – 1000 m²/g, according to ASTM D6556;
- (iv) Oil Absorption Number (OAN) of at least 150 cc/100g, preferably 150 – 500 cc/100 g according to ASTM D2414,

wherein:

IAN = Iodine Adsorption Number: the number of grams of iodine adsorbed per kilogram of carbon black under specified conditions as defined in ASTM D1510;

N₂SA = nitrogen surface area: the total surface area of carbon black that is calculated from nitrogen adsorption data using the B.E.T. theory, according to ASTM D6556;

STSA = statistical thickness surface area: the external surface area of carbon black that is calculated from nitrogen adsorption data using the de Boer theory and a carbon black model, according to ASTM D6556; and

OAN = Oil Absorption Number: the number of cubic centimeters of dibutyl phthalate (DBP) or paraffin oil absorbed by 100 g of carbon black under specified conditions. The OAN value is proportional to the degree of aggregation of structure level of the carbon black, determined according to ASTM D2414.

For each of IAN, N2SA (or NSA), STSA and OAN - all typical parameters for characterizing carbon black materials - the networks exhibit superior properties compared to traditional carbon black. The networks of the invention are preferably characterized by at least one, preferably at least two, more preferably all of (i), (ii) and (iii) since these are typical ways of characterizing the surface area properties of the materials. In one embodiment, the networks exhibit at least one of (i), (ii) and (iii), and further comply with (iv).

These structures forming the network may be described as nanofibers, which are solid (i.e. non-hollow), preferably having an average diameter or thickness of 1 – 400 nm, more preferably between 5 and 350 nm, more preferably up to 100 nm, in one embodiment 50 – 100 nm, compared to the average particle size of 8 – 500 nm for spherical carbon black particles. In one embodiment, the average fiber length (i.e. the average distance between two junctions) is preferably in the range of 100 – 10,000 nm, more preferably 200 - 5000 nm, more preferably 500 – 5000 nm, as for instance can be determined using SEM. Alternatively, the nanofibers or structures may preferably be described in terms of an average aspect ratio of fiber length-to-thickness of at least 2, preferably at least 3, more preferably at least 4, most preferably at least 5; in sharp contrast with the amorphous (physically associated) aggregates formed from spherical particles obtained through conventional carbon black manufacturing. The aggregates of carbon structure networks according to the invention are typically of the order of 0.1- 100 microns, preferably 1 – 50 microns, which is observed with Laser Diffraction and Dynamic Light Scattering analysis.

The invention also pertains to a composite comprising carbon structure networks according to the invention, further comprising one or more polymers, for instance for adding mechanical strength, electrical conductivity or thermal conductivity to said polymer-based composite. The networks may be added in any amount adapted to the desired performance, e.g. 1 – 70 wt%, more preferably 10 – 50 wt%, even more preferably between 20 - 40 wt%, based on the total polymer weight in the composite. In one aspect, the composite shows a network concentration-dependent elasticity modulus (E-modulus, i.e. an increase with increasing concentration of networks) for instance as measured according to ISO 527.

EXAMPLES

Example 1A. Preparation of crystalline carbon structure network.

100 gallon of feedstock were prepared comprising of:

- a) Carbon Black slurry oil (CBO or CBFS oil)
- b) Water phase containing 3500 mM metal precursor salt (FeCl_3)
- c) Water phase containing reducing agent (3650 mM citric acid)
- d) Surfactant (TritonX; HLB 13.4).

The exact composition of the micro-emulsions (a+b+d) and (a+c+d) was detailed below:

Emulsion	CBO	Water/FeCl ₃	Water/CA	TritonX
a+b+d	70%	10%	0%	20%
a+c+d	70%	0%	10%	20%

Both micro-emulsions (a+b+d) and (a+c+d) were added together and a single-phase micro-emulsion was obtained by stirring, and said micro-emulsion was stable for more than one hour, which was longer than the entire length of the experiment.

The networks thus obtained had the following characteristics:

IAN = 382.5 mg/g, according to ASTM D1510

N2SA = 350 m²/g (ASTM D6556)

STSA = 160.6 m²/g (ASTM D6556)

OAN = 170 cc/100g (ASTM D2414).

Example 2. Carbon black vs network

The carbon networks according to example 1 were compared to conventional carbon black produced using (a). Standard grade carbon black typically has a nitrogen surface area (NSA or N2SA) varying up to 150 m²/g (N100-grade rubber carbon black).

The morphology of the carbon networks was assessed by Scanning Electron Microscopy (SEM). It was found that the carbon network building blocks were chemically covalently linked solid carbon (nano)fibers with average fibre diameters below 100 nm. On the other hand, the carbon black building blocks were nodules in which graphitic layers are organized in a spherical shape (8-300 nm diameter). SEM pictures of carbon black and carbon networks building blocks are shown in figure 2A and 2B, respectively. It was found that the carbon networks were organized in aggregate size 1-100 µm, while carbon blacks aggregates ranged typically from 85-500 nm.

Example 3: Effect of metal nanoparticles

The metal catalyst concentration had an effect on the final yields of the reactions: Three 20 g bicontinuous micro-emulsions were made from isopropylpalmitate (35%wt), butanol (11.25%wt), Tween 80 (33.75%wt), water (20%wt). While the first batch was prepared without any metal nanoparticles, two batches involved 50 and 200 mM FeCl₃ metal nanoparticles (based on citric acid and FeCl₃ with ratio 10:1). Each of the emulsions were stable over the full length of the experiments. The experiment without metal nanoparticles was carried out at least 10 times.

In each case, the emulsions were introduced in the middle of a quartz-tube of a thermal horizontal tube reactor. The reactor was heated up to 750°C (3 K/min) under 130 sccm of nitrogen flow and

kept for 90 min at the same temperature. In the first 60 min the nitrogen gas flow was reduced to 100 sccm and ethylene gas was added at 100 sccm flow. During the last 30 minutes at 750°C the ethylene was purged out from nitrogen at 130 sccm for the last 30 min and the reactor was then cooled down.

5

It is only with metal nanoparticles that carbon structure networks were obtained. In none of the ten experiments without metal nanoparticles networks were found. The test done in the presence of 200 mM FeCl₃ showed a yield increase of carbon structure networks, compared to the results reported with 50 mM FeCl₃.

10

A SEM picture of the networks obtained with a bicontinuous micro-emulsion based on isopropylpalmitate (35%wt), butanol (11.25%wt), Tween 80 (33.75%wt) and water (20%wt), with 100 mM Fe nanoparticles is shown in figure 3.

15 Example 4: Graph E-modulus in PA6

Carbon Network powder such as prepared according to the recipe of example 1 was compounded in different loadings (10, 20, 30, 40%wt) in Polyamide 6 (Akulon F223D), by means of a twin screw extruder (L/D= 38, D=25 mm) and compared to glass fiber (Chopvantage 3540) compounded at 10, 20, 30%wt loadings under the same conditions. The E modulus was measured according to ISO 527, dried as molded tensile bars. The results are plotted in figure 4, and indicate a performance of carbon networks, which is comparable to that of glass fibers. Carbon black was found not to provide significant reinforcement in thermoplastic, at whatever concentration.

25 Example 5: Graph electrical conductivity PA6 and PET

Volume resistivity was measured on different compounds prepared with carbon network prepared using the recipe according to example 1, in different loadings in Polyamide 6 (Akulon F223D) and PET (Ramapet N1), by means of a twin-screw extruder (L/D= 38, D=25 mm). The results are plotted in figure 5. The percolation curves show good dosage control in the static dissipative range and that high conductive performances are achieved at high loadings. At the opposite, carbon black percolation threshold for conductive applications was found at lower dosages, i.e. < 20%wt, and dosage control in the static dissipative range was unsatisfactory. Moreover, carbon networks compounds did not slough up to 30%wt loading, whereas carbon black compounds are known to be sloughing also at low filling degree.

35

Example 6: Mechanical strength

Carbon nanofiber networks (low IAN, high crystallinity) obtained through the modified carbon black manufacturing process according to the invention were found capable of enhancing the mechanical properties of thermoplastic (and thermoset) polymer resins. Adding 10% by weight of

carbon nanofiber networks to a polypropylene co-polymer resulted in an increase in tensile strength (at break) of 15% and an elasticity modulus increase of 16% compared to the neat polymer reference. A Brabender®Plasticorder® was used for mixing sufficient amount of carbon nanofiber networks and polypropylene at 210 °C and 80 rpm. Samples were compression
5 moulded and tested with an Instron 3366 10 kN tensile tester at 23 °C, 50% RH.

<u>10% CarbonX / PP</u>	Modulus (Young's Tensile stress 0.05 % - 0.25 %)	Tensile stress at Yield (Zero Slope)	Tensile strain at Yield (Zero Slope)	Tensile stress at Break (Automatic Load Drop)	Tensile strain at Break (Automatic Load Drop)
	(MPa)	(MPa)	(%)	(MPa)	(%)
Average	1459.99	20.05	7.68	19.76	9.80
Std dev	149.72	1.13	0.20	1.14	0.91
	10.3%	5.6%	2.6%	5.8%	9.3%

<u>PP reference</u>	Modulus (Young's Tensile stress 0.05 % - 0.25 %)	Tensile stress at Yield (Zero Slope)	Tensile strain at Yield (Zero Slope)	Tensile stress at Break (Automatic Load Drop)	Tensile strain at Break (Automatic Load Drop)
	(MPa)	(MPa)	(%)	(MPa)	(%)
Average	1258.35	18.95	8.76	17.14	13.54
Std dev	141.14	1.17	0.89	1.37	4.30
	11.2%	6.2%	10.2%	8.0%	31.7%

Example 7: Production by means of plasma reactor

Carbon nanofiber networks produced by means of using a plasma instead of combustion of a carbon gas. The plasma gas used was nitrogen (N₂) at 60kW with an initial plasma flow rate of 12
10 Nm³/h. Argon flow rate was set at 0.6 Nm³/h. Feedstock (emulsion) flow rate was set at 2.5 kg/h. GC-measurements were done to monitor H₂ and progress of the carbon conversion. Temperature at injection was set at 1400 °C, approximated residence time was 4 seconds. The collected material has a density of 0.13 g/cc and showed presence of carbon nanofiber networks observed via SEM and TEM, see figures. The average fiber diameter was determined to be 70 nm, while
15 the length in-between was 5 to 10 times fiber diameter.

CLAIMS

1. A process for the production of crystalline carbon structure networks in a reactor **3** which contains a reaction zone **3b** and a termination zone **3c**, by injecting a water-in-oil or
5 bicontinuous micro-emulsion **c** comprising metal catalyst nanoparticles, into the reaction zone **3b** which is at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, to produce crystalline carbon structure networks **e**, transferring these networks **e** to the
10 termination zone **3c**, and quenching or stopping the formation of crystalline carbon structure networks in the termination zone by spraying in water **d**.
2. The process according to claim 1, said reactor being a furnace carbon black reactor **3** which contains, along the axis of the reactor **3**, a combustion zone **3a**, a reaction zone **3b** and a
15 termination zone **3c**, by producing a stream of hot waste gas **a1** in the combustion zone by burning a fuel **a** in an oxygen-containing gas **b** and passing the waste gas **a1** from the combustion zone **3a** into the reaction zone **3b**, spraying a water-in-oil or bicontinuous micro-emulsion **c** comprising metal catalyst nanoparticles, in the reaction zone **3b** containing the hot waste gas, carbonizing said emulsion at a temperature of above 600 °C, preferably above
20 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, and quenching or stopping the reaction in the termination zone **3c** by spraying in water **d**, to yield crystalline carbon structure networks **e**.
- 25 3. The process according to any one of the preceding claims, wherein the oil phase in the emulsion is aromatic and/or aliphatic, preferably comprising at least 50 wt% C14 or higher, based on the total weight of the oil phase.
4. The process according to any one of the preceding claims, said emulsion comprising at least
30 1 mM metal catalyst nanoparticles, preferably having an average particle size between 1 and 100 nm.
5. A crystalline carbon structure network obtainable by the process according to any one of the preceding claims, wherein said carbon structures are chemically interconnected through a
35 multitude of junctions, including Y- and H-junctions.
6. The network according to claim 5, having all of the following properties:
 - (i) Iodine Adsorption Number (IAN) of at least 250 mg/g according to ASTM D1510;
 - (ii) Nitrogen Surface Area (N2SA) of at least 250 m²/g according to ASTM D6556;

- (iii) Statistical Thickness Surface Area (STSA) of at least 120 m²/g according to ASTM D6556;
- (iv) Oil Absorption Number (OAN) of at least 150 cc/100 g according to ASTM D2414.
- 5 7. The network according to claim 5 or 6, wherein said structures have an average thickness of
1 – 400 nm, preferably between 5 and 350 nm, more preferably up to 100 nm, in one
embodiment between 50 and 100 nm, and/or an average length in the range of 100 – 10000
nm, preferably 200 - 5000 nm, more preferably 500 – 5000 nm; and/or wherein the structures
have an average aspect ratio of length to thickness of at least 2.
- 10 8. A composite comprising carbon structure networks according to any one of claims 5 - 7,
further comprising one or more polymers, for instance for adding mechanical strength,
electrical conductivity or thermal conductivity to said polymer-based composite, and wherein
said networks are in any amount of 1 – 70 wt%, preferably 10 – 50 wt%, more preferably
15 between 20 - 40 wt%, based on the total polymer weight in the composite.
9. The composite according to claim 8, showing an E modulus increasing with network
concentration as measured according to ISO 527.
- 20 10. Use of an emulsified carbon black feedstock in a carbon black manufacture process,
preferably a furnace carbon black manufacture process, for producing crystalline carbon
structure networks.
- 25 11. A process for the semi-batch production of the crystalline carbon structure networks in a
reactor **3** where a water-in-oil or bicontinuous micro-emulsion **c** comprising metal catalyst
nanoparticles is injected from the top of the reactor **3**, preferably through spraying using an
aerosol inlet **4**, to obtain an aerosol, and wherein said networks **e** are formed at an increased
temperature of at least 600 °C, preferably 700 – 1200 °C and deposited at the bottom of the
reactor, and wherein the increased temperature is obtained using pyrolysis (e.g. heat source
30 outside reactor, using N₂, depleted of oxygen) or by combustion (heat source inside reactor,
using air or oxygen).
- 35 12. A process for the continuous production of the crystalline carbon structure networks in a
reactor **3** where a water-in-oil or bicontinuous micro-emulsion **c** comprising metal catalyst
nanoparticles is injected from the top of the reactor **3**, said reactor preferably being a thermal
black reactor, preferably through spraying using an aerosol inlet **4**, to obtain an aerosol, and
wherein said networks **e** are formed at an increased temperature of at least 600 °C,
preferably 700 – 1200 °C and deposited at the bottom of the reactor, and wherein the
increased temperature is obtained using combustion (heat source inside reactor, using air or
40 oxygen), but wherein the emulsion is injected only under pyrolysis conditions.

Fig. 1A

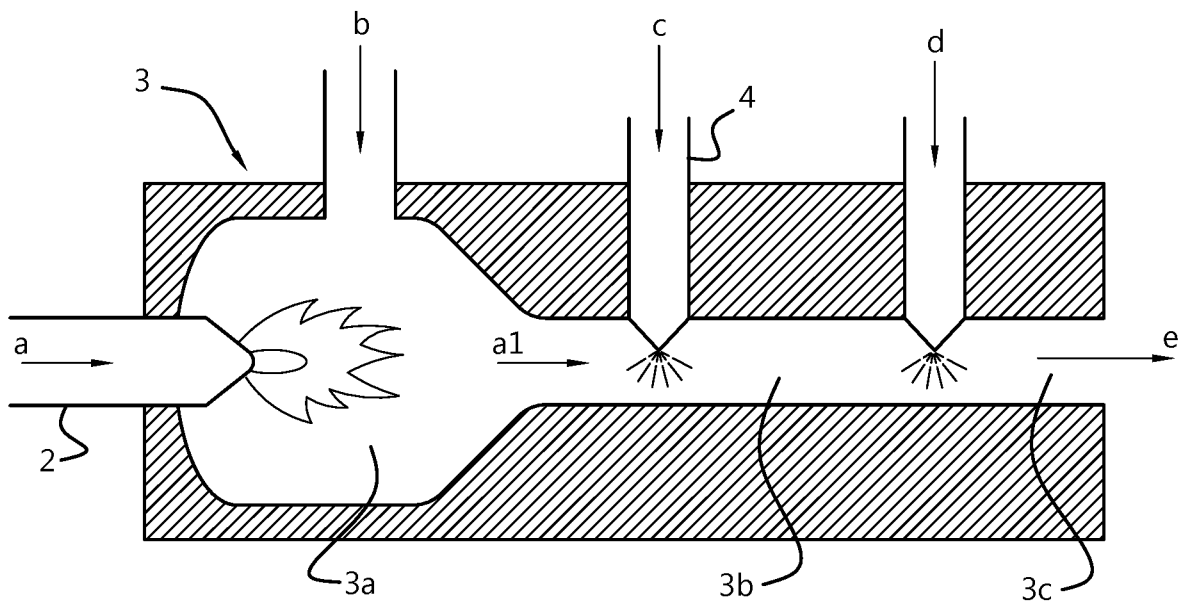


Fig. 1B

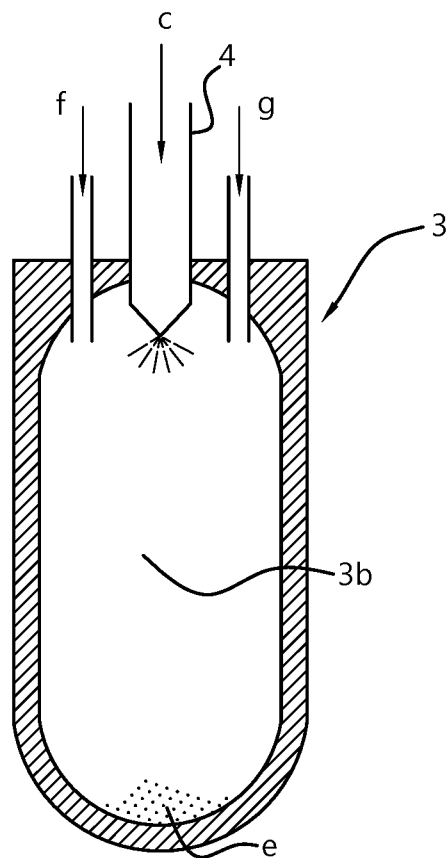


Fig. 2A

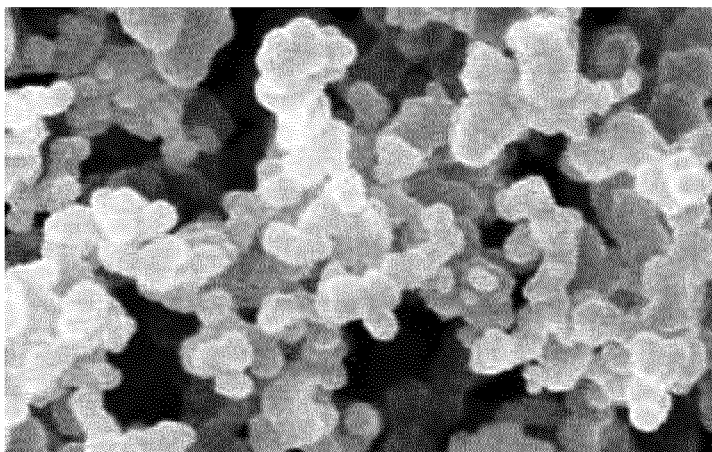


Fig. 2B

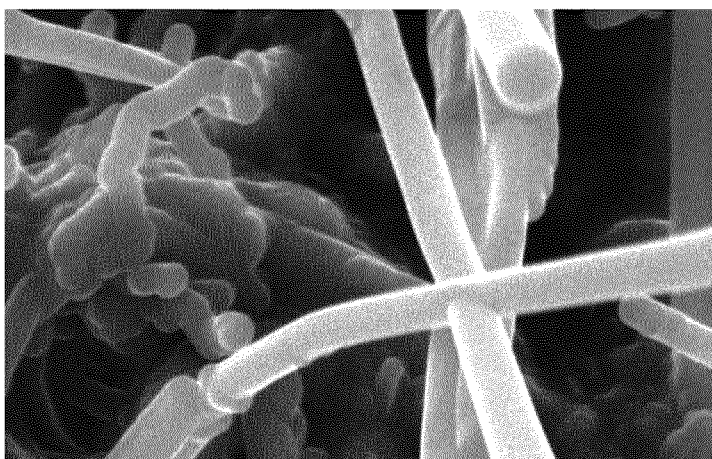


Fig. 3

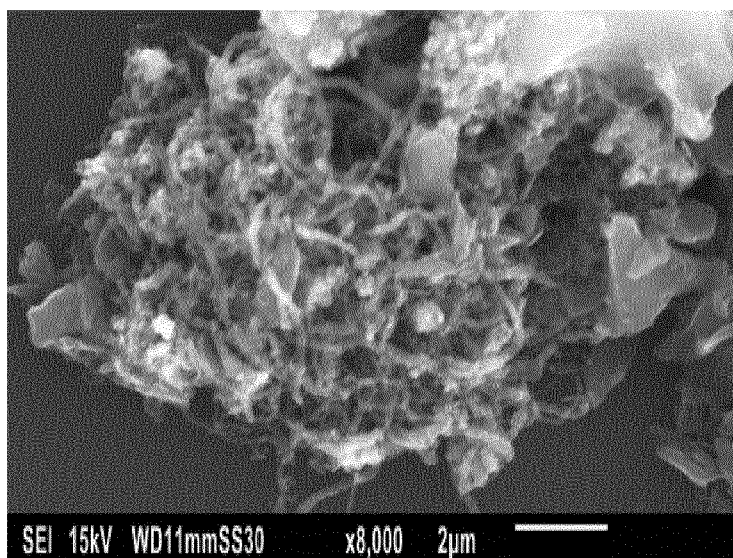


Fig. 4


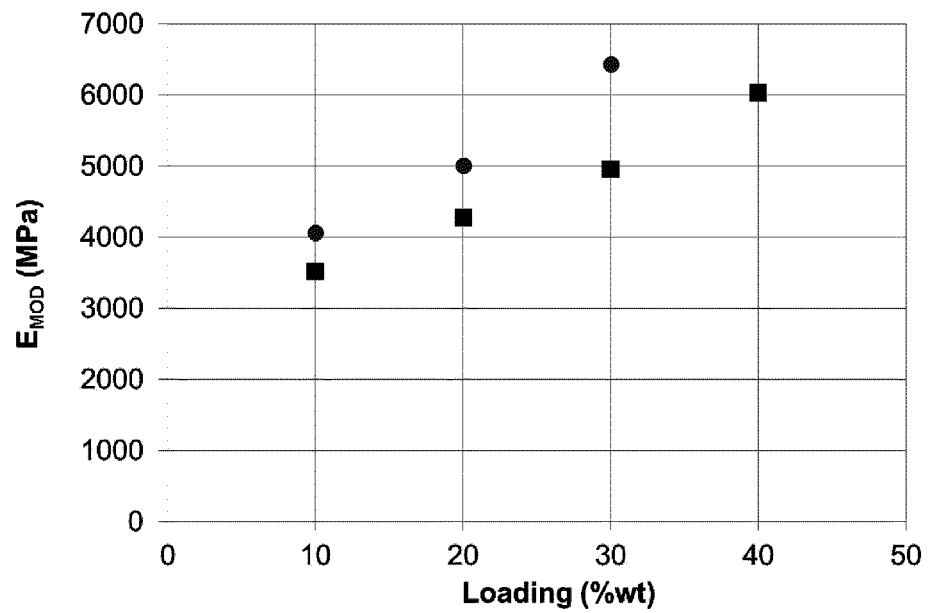


Fig. 5

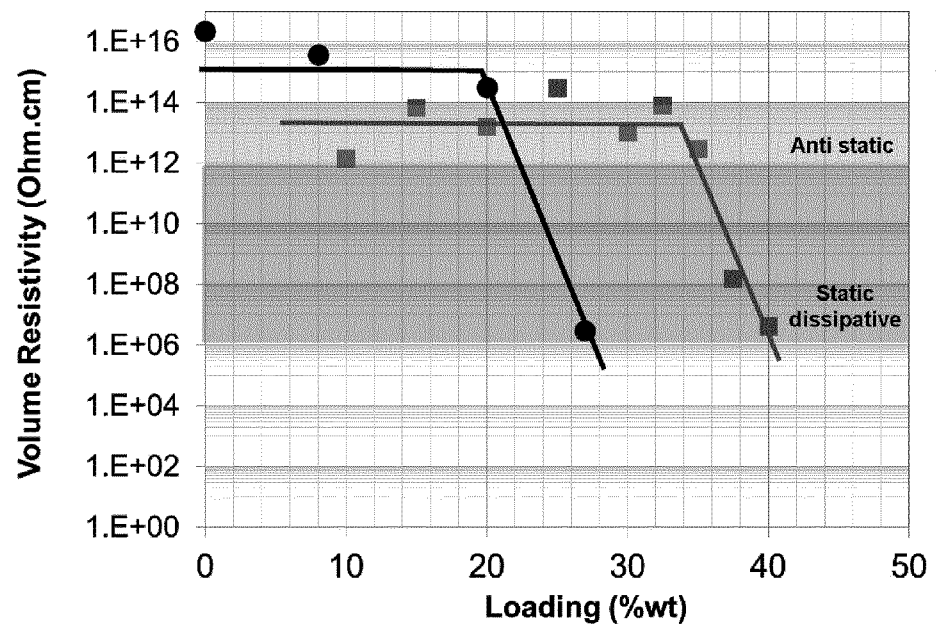

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/065994

A. CLASSIFICATION OF SUBJECT MATTER INV. C09C1/50 C01B32/05 C01B32/152 C01B32/158 C01B32/182 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) C01B C09C		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2013/244023 A1 (KOWLGI KRISHNA NARAYAN KUMAR [NL] ET AL) 19 September 2013 (2013-09-19)	5,7-9
Y	figures 1a-12 paragraphs [0011] - [0049] examples 1-9	1-4,6, 10-12
Y	----- US 3 494 740 A (SPECK MORRIS E) 10 February 1970 (1970-02-10) column 1, lines 14-24 column 2, line 14 - column 3, line 6 column 3, line 54 - column 7 tables 1-5 examples 1-7 figure 1 ----- -/-	1-4,10
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
21 September 2017		27/09/2017
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Marino, Emanuela

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/065994

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	YOUNG KYUN MOON ET AL: "Synthesis of Length-Controlled Aerosol Carbon Nanotubes and Their Dispersion Stability in Aqueous Solution", LANGMUIR, vol. 25, no. 3, 3 February 2009 (2009-02-03), pages 1739-1743, XP055407930, US ISSN: 0743-7463, DOI: 10.1021/la8031368 figures 1-4 page 1740 - page 1743 -----	11,12
Y	US 2005/249657 A1 (KUTSOVSKY YAKOV E [US] ET AL) 10 November 2005 (2005-11-10) paragraphs [0043], [0045] -----	6
Y	US 2015/064099 A1 (NESTER SERGUEI [US] ET AL) 5 March 2015 (2015-03-05) figures 1-5 paragraphs [0008] - [0227] tables 1-9 -----	1-4,10
Y	GB 1 514 130 A (HANIL ANSTALT) 14 June 1978 (1978-06-14) page 1, line 10 - page 2, line 114 -----	1-4,10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/065994

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2013244023	A1	19-09-2013	AU 2011302698 A1 02-05-2013
			BR 112013006310 A2 07-06-2016
			CA 2812166 A1 22-03-2012
			CN 103189309 A 03-07-2013
			EP 2616391 A1 24-07-2013
			JP 5922126 B2 24-05-2016
			JP 2013541489 A 14-11-2013
			KR 20140014069 A 05-02-2014
			NL 2005365 C 20-03-2012
			RU 2013117452 A 27-10-2014
			US 2013244023 A1 19-09-2013
			US 2017174518 A1 22-06-2017
			WO 2012036555 A1 22-03-2012

US 3494740	A	10-02-1970	NONE

US 2005249657	A1	10-11-2005	AR 048559 A1 03-05-2006
			AT 461251 T 15-04-2010
			BR PI0510675 A 26-12-2007
			CA 2565807 A1 17-11-2005
			CN 1981001 A 13-06-2007
			EP 1765934 A2 28-03-2007
			ES 2341262 T3 17-06-2010
			JP 5775106 B2 09-09-2015
			JP 2007536407 A 13-12-2007
			JP 2013136782 A 11-07-2013
			KR 20070005022 A 09-01-2007
			MY 143577 A 31-05-2011
			RU 2347794 C2 27-02-2009
			TW I376402 B 11-11-2012
			US 2005249657 A1 10-11-2005
			WO 2005108504 A2 17-11-2005

US 2015064099	A1	05-03-2015	AR 080215 A1 21-03-2012
			CA 2788081 A1 25-08-2011
			CN 102869730 A 09-01-2013
			CO 6571921 A2 30-11-2012
			DE 112011100607 T5 31-01-2013
			EG 26769 A 19-08-2014
			ES 2399001 A2 25-03-2013
			FR 2956666 A1 26-08-2011
			IT 1404063 B1 08-11-2013
			JP 6022944 B2 09-11-2016
			JP 2013520382 A 06-06-2013
			KR 20130004270 A 09-01-2013
			MY 162560 A 30-06-2017
			NL 2006221 C 03-01-2013
			PL 222582 B1 31-08-2016
			PT 2011103015 W 26-03-2013
			RU 2012140016 A 27-03-2014
			US 2013039841 A1 14-02-2013
			US 2015064099 A1 05-03-2015
			WO 2011103015 A2 25-08-2011

GB 1514130	A	14-06-1978	BE 841295 A1 16-08-1976
			BR 7602618 A 23-11-1976
			CH 599326 A5 31-05-1978
			DE 2518985 A1 11-11-1976

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/065994

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		DK 187676 A	30-10-1976
		FR 2309614 A1	26-11-1976
		GB 1514130 A	14-06-1978
		JP S52122294 A	14-10-1977
		LU 74839 A1	12-01-1977
		NL 7604554 A	02-11-1976

DOCUMENT MADE AVAILABLE UNDER THE PATENT COOPERATION TREATY (PCT)

International application number:	PCT/EP2017/065994
International filing date:	28 June 2017 (28.06.2017)
Document type:	Certified copy of priority document
Document details:	Country/Office: EP
	Number: 17150513.4
	Filing date: 06 January 2017 (06.01.2017)
Date of receipt at the International Bureau:	11 July 2017 (11.07.2017)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a),(b) or (b-bis)

Bescheinigung

Die angehefteten Unterlagen stimmen mit der als ursprünglich eingereicht geltenden Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

Certificate

The attached documents are exact copies of the text in which the European patent application described on the following page is deemed to have been filed.

Attestation

Les documents joints à la présente attestation sont conformes au texte, considéré comme initialement déposé, de la demande de brevet européen qui est spécifiée à la page suivante.

Patentanmeldung Nr.

Patent application No.

Demande de brevet n°

17150513.4 / EP17150513

The organization code and number of your priority application, to be used for filing abroad under the Paris Convention, is EP17150513.

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.



V. Joseph

Anmeldung Nr:
Application no.: 17150513.4
Demande no :

Anmeldetag:
Date of filing: 06.01.17
Date de dépôt :

Anmelder / Applicant(s) / Demandeur(s):

CarbonX B.V.
Rembrandt Tower
35th Floor, Amstelplein 1
1096 HA Amsterdam/NL

Bezeichnung der Erfindung / Title of the invention / Titre de l'invention:

(Falls die Bezeichnung der Erfindung nicht angegeben ist, oder falls die Anmeldung in einer Nicht-Amtssprache des EPA eingereicht wurde, siehe Beschreibung bezüglich ursprünglicher Bezeichnung.

If no title is shown, or if the application has been filed in a non-EPO language, please refer to the description for the original title.

Si aucun titre n'est indiqué, ou si la demande a été déposée dans une langue autre qu'une langue officielle de l'OEB, se référer à la description pour le titre original.)

Production of crystalline carbon structure networks

In Anspruch genommene Priorität(en) / Priority(Priorities) claimed / Priorité(s) revendiquée(s)

Staat/Tag/Aktenzeichen / State/Date/File no. / Pays/Date/Numéro de dépôt:

Am Anmeldetag benannte Vertragsstaaten / Contracting States designated at date of filing / Etats contractants désignés lors du dépôt:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL
PT RO RS SE SI SK SM TR

Production of crystalline carbon structure networks

FIELD OF THE INVENTION

The invention is in the field of manufacturing crystalline carbon structure networks with improved properties, and directed to new methods for manufacturing such structure networks. The invention is particularly in the field of carbon black manufacturing.

BACKGROUND TO THE INVENTION

Carbon black industry focuses on providing an allotrope of carbon mainly differing from graphite and amorphous carbon by its physical arrangement, for use in manufacturing rubber articles, such as tires, etc., in polygraphy, electronics and cable coatings, in the production of varnishes and paints, including use applications in which reinforcing and/or pigmentary properties of carbon black are required.

Various different processes or techniques are known in the art for producing carbon black. Carbon black is mainly produced by partial combustion processes, starting from a carbon containing gas such as methane or acetylene. This process is sometimes referred to as a furnace carbon black producing process, and it employs a furnace having a burner or combustion chamber followed by a reactor. The furnace process is typically characterized by low oxygen levels, low densities, short residence times and high temperatures. As a first step of the furnace carbon black production process, hydrocarbons are atomized at typical temperatures from 1200 to 1900 °C, as is described in Ullmanns Encyklopadie der technischen Chemie, Volume 14, page 637-640 (1977). To that end, a zone having a high energy density is produced by burning a fuel gas or a liquid fuel with oxygen or air, and the carbon black raw material is injected thereto. The carbon black feedstock is atomized in these hot combustion conditions; oxygen levels are on average supplied at a rate of two volumes of carbon black feedstock to about one volume of oxygen, in order to achieve the oxygen being completely consumed in the combustion process. The structure and/or the porosity of the carbon black end product may be influenced by the presence of alkali metal or alkaline earth metal ions during the carbon black formation, and such additives are therefore frequently added in the form of aqueous solutions, which are sprayed onto the carbon black raw material agglomerates. The reaction is terminated only by the injection of water (quenching) and the carbon black is collected at a temperature of about 200 – 250 °C, and separated from the waste gas by means of conventional separators or filters. Because of its low bulk density, the resulting carbon black is then granulated, for instance carried out in a pelletizing machine with the addition of water to which small amounts of a pelletizing auxiliary may be added. In chronological order, and by now means limiting the art on furnace carbon black technology, US2672402, US4292291, US4636375, WO2000/032701 and US 2004/0248731 provide a description of traditional or conventional carbon black production. Their contents are herewith incorporated by reference. Of note, there are also alternative processes such as the lamp black process, thermal

black, acetylene black and channel black process which all are variations on the process described above, in the end producing a type of carbon black. Most innovative is the plasma black carbon process, advantageously avoiding direct carbon dioxide emissions, and reducing fossil fuel consumption. In essence, these oxygen-poor carbon black manufacture methods are very similar, except for finding different ways of yielding pyrolysis temperature conditions. Hitherto the industry is however still struggling to produce carbon black through oxygen-poor reducing processes with parameters comparable to those of carbon black produced through traditional partial combustion.

10 SUMMARY TO THE INVENTION

The inventors found that well-established reducing (pyrolysis) or oxidizing (combustion) carbon black manufacturing processes can be used to produce networks of crystalline carbon structures having all kinds of advantageously improved electrical, mechanical and thermal properties, by introducing the concept of (single-phase) emulsification to conventional (furnace) carbon black production. The invention thus relates to a process for producing crystalline carbon structure networks by providing a thermodynamically or kinetically stable single-phase emulsion comprising an oil, preferably C14 or higher, more preferably a carbon black feedstock oil, water and at least one surfactant, and preferably also metal catalyst nanoparticles, and subjecting the emulsion, preferably the emulsified carbon black feedstock, to a carbon black manufacturing process, carbonizing said carbon black feedstock at increased temperatures above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, most preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, particularly up to 2000 °C. In a related aspect, the invention pertains to the use of a single-phase emulsion, preferably an emulsified carbon black feedstock (i.e. a single-phase emulsion comprising carbon black feedstock) for carbonizing the emulsion in a carbon black manufacture process, preferably a furnace carbon black manufacture process, thus obtaining crystalline carbon structure networks. The emulsion is preferably sprayed and atomized into the reactor at the above elevated temperatures.

Through the eyes of the skilled person, the use of water should at least be minimized and preferably banned from the reaction sector in a traditional carbon black manufacturing process to obtain proper yields and preferred spherical carbon black structures, where water is only to be used for terminating the carbon black reaction further downstream in the reactor. At best water is sometimes used as a carrier in spraying alkali metal and alkaline earth metal ions onto the carbon black material, where in the final stages of the agglomeration process the porosity of the carbon black product could be fine-tuned to the market needs. Depending on the source, carbon black feedstock may in fact even be dewatered prior to introduction to the process, in order to increasing the fuel density and optimizing atomization. With that wide-spread reluctance of using any – let alone much - water during traditional carbon black manufacture, other than for quenching purposes in the closing stages, the idea of emulsifying the carbon black feedstock prior

to atomization goes beyond the skilled person's imaginations. However, the inventors found that amending the conventional carbon black manufacture by atomizing a stable one-phase emulsion comprising a carbon black feedstock oil into the reactor has a dramatic impact in that a novel crystalline carbon material is obtained comprising of a network of structures, typically nanofibers, instead of the normally obtained amorphous carbon black based on aggregates from spherical particles. The crystalline carbon network structures are so different in morphology that they constitute properties that are different and even superior to carbon black aggregates, some of which have been exploited further below.

Without wishing to be bound by any theory, the inventors believe that the orientation and structuring of the surfactant molecules, oil phase and water phase give rise to the network-forming process that is unique to the new material and to the process. It was found that metal catalyst nanoparticles are also important. The micro- and macro-structures of the emulsions (either oil-in-water, water-in-oil, bicontinuous, etc.) are thought to act as a precursor/blue-print for the final carbon structure network, of which the carbon-containing fractions (oil phase and surfactant) will form the fibers and junctions, whilst the water fraction helps orienting the oil/surfactant phase and network porosity. The presence of a metal catalyst promotes the carbonization of the carbon components into a fiber structure instead of the normally obtained spherical orientation. A blend of an immiscible oil and water phase will not yield these structures, without a metal catalyst and surfactant present. Once the emulsion is atomized at high temperatures the carbonization process instantly "*freezes*" the carbon fractions in its emulsion-structure in the presence of a metal catalyst, while the water evaporates, leaving a network of (nano)fibers. In that process, the inventors found it is key to provide the carbon raw material, i.e. the oil, such as carbon black feedstock, in the form of a single-phase emulsion, to the atomization process. The inventors also found that a mere mixture of water and feedstock or otherwise instable emulsions are detrimental to the process, and will not yield the crystalline carbon structure networks. Further evidence is provided below.

The inventors also found that the single-phase emulsions subjected to atomization and subsequent carbonization should comprise metal nanoparticles which act as catalyzers in forming these crystalline networks, and within these embodiments an increasing concentration of metal nanoparticles further enhances yields. In one embodiment, it is preferred to use bicontinuous or water-in-oil (w/o) micro-emulsions, which comprise of a continuous oil/surfactant phase thus already forming a network structure. Bicontinuous micro-emulsions are most preferred.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1a is a schematic diagram of a continuous furnace carbon black producing process in accordance with the present invention which contains, along the axis of the reactor **3**, a combustion zone **3a**, a reaction zone **3b** and a termination zone **3c**, by producing a stream of hot waste gas **a1** in the combustion zone by burning a fuel **a** in an oxygen-containing gas **b** and

passing the waste gas **a1** from the combustion zone **3a** into the reaction zone **3b**, spraying (atomizing) a single-phase emulsion **c** in the reaction zone **3b** containing the hot waste gas, carbonizing said emulsion at increased temperature, and quenching or stopping the reaction in the termination zone **3c** by spraying in water **d**, to obtain crystalline carbon structure networks **e** according to the invention;

Fig. 1b is a schematic diagram of a semi-batch carbon black producing process where a single-phase emulsion **c** is atomized through a nozzle **4** at the top of the reactor **3** into the reactor zone **3b** at elevated temperatures, carbonizing said emulsion at the elevated temperature in the reactor zone **3b**, and collecting the crystalline carbon structure networks **e** at the bottom of the reactor. Additionally two gas-inlets are present that enter the reactor from the top, for adding inert gas **f**, preferably nitrogen for controlling and/or depletion of oxygen-levels, and for introducing a carbon-containing gas **g** into the reactor, preferably acetylene or ethylene.

Fig. 2A and 2B are SEM pictures of carbon black and carbon structure networks, respectively;

Fig. 3 shows a SEM picture of crystalline carbon structure networks obtained in a bicontinuous microemulsion with 100 mM FeCl₃ metal catalyst;

Fig. 4 depicts the elasticity modulus according to ISO 527 for carbon networks (squares) and glass fibers (circles), showing mechanical strength for the crystalline networks that is comparable to that of the fibers. Carbon black was found not to bring any reinforcing properties to the composite; and

Fig. 5 shows volume resistivity for different compounds (polyamide PA6; squares; PET: circles) prepared with different loadings of crystalline carbon structure networks prepared using the recipe according to example 1.

EMBODIMENTS OF THE INVENTION

embodiment 1. A process for the production of crystalline carbon structure networks in a reactor **3'** which contains a reaction zone **3'b** and a termination zone **3'c**, by injecting a single-phase emulsion **c**, preferably a w/o or bicontinuous micro-emulsion, said emulsion preferably comprising metal catalyst nanoparticles, said emulsion preferably being a carbon black feedstock (CBFS)-comprising emulsion, into the reaction zone **3'b** which is at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, to produce crystalline carbon structure networks **e**, transferring these networks **e** to the termination zone **3'c**, and quenching or stopping the formation of crystalline carbon structure networks in the termination zone by spraying in water **d**.

embodiment 2. The process according to embodiment 1, said reactor being a furnace carbon black reactor **3** which contains, along the axis of the reactor **3**, a combustion zone **3a**, a reaction zone **3b** and a termination zone **3c**, by producing a stream of hot waste gas **a1** in the combustion zone by burning a fuel **a** in an oxygen-containing gas **b** and passing the waste

gas **a1** from the combustion zone **3a** into the reaction zone **3b**, spraying a single-phase emulsion **c**, preferably a w/o or bicontinuous micro-emulsion, said emulsion preferably comprising metal catalyst nanoparticles, said emulsion preferably being a CBFS-comprising emulsion, in the reaction zone **3b** containing the hot waste gas, carbonizing said emulsion at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, and quenching or stopping the reaction in the termination zone **3c** by spraying in water **d**, preferably having short residence times in the range of 1 ms to 1000 ms, more preferably 10 ms to 100 ms, to yield crystalline carbon structure networks **e**.

embodiment 3. The process according to any one of the preceding embodiments, wherein the oil phase in the emulsion is aromatic and/or aliphatic, preferably comprising at least 50 wt% C14 or higher, preferably at least 70 wt% C14 or higher, based on the total weight of the oil phase.

embodiment 4. The process according to any one of the preceding embodiments, said emulsion being thermodynamically or kinetically stable.

embodiment 5. The process according to any one of the preceding embodiments, wherein said single-phase emulsion shows no physical separation visible to the eye, preferably reflected in terms of the emulsion not showing any change in pH by more than 1.0 pH unit and/or the emulsion not showing any change in viscosity by more than 20%, over a period of time that exceeds the carbon structure network production time.

embodiment 6. The process according to any one of the preceding embodiments, said single-phase emulsion being a bicontinuous or water-in-oil micro-emulsion.

embodiment 7. The process according to any one of the preceding embodiments, said single-phase emulsion comprising at least 1 mM metal catalyst nanoparticles, preferably having an average particle size between 1 and 100 nm.

embodiment 8. A crystalline carbon structure network obtainable by the process according to any one of the preceding embodiments, wherein said carbon structures are chemically interconnected through a multitude of junctions, including Y- and H-junctions.

embodiment 9. The network according to embodiment 8, having at least one, preferably at least two, more preferably at least three, most preferably all of the following properties:

- (i) Iodine Adsorption Number (IAN) of at least 250 mg/g according to ASTM D1510;
- (ii) Nitrogen Surface Area (N2SA) of at least 250 m²/g according to ASTM D6556;
- (iii) Statistical Thickness Surface Area (STSA) of at least 120 m²/g according to ASTM D6556;
- (iv) Oil Absorption Number (OAN) of at least 150 cc/100 g according to ASTM D2414.

embodiment 10. The network according to embodiment 8 or 9, wherein said structures have an average thickness of 1 – 400 nm, preferably between 5 and 350 nm, more preferably up to 100 nm, in one embodiment between 50 and 100 nm, and/or an average length in the range of 100 – 10000 nm, preferably 200 - 5000 nm, more preferably 500 – 5000 nm; and/or wherein the structures have an average aspect ratio of length to thickness of at least 2.

embodiment 11. A composite comprising carbon structure networks according to any one of embodiments 8 - 10, further comprising one or more polymers, for instance for adding mechanical strength, electrical conductivity or thermal conductivity to said polymer-based composite, and wherein said networks are in any amount of 1 – 70 wt%, preferably 10 – 50 wt%, more preferably between 20 - 40 wt%, based on the total polymer weight in the composite.

embodiment 12. The composite according to embodiment 11, showing an E modulus increasing with network concentration as measured according to ISO 527.

embodiment 13. Use of an emulsified carbon black feedstock, preferably comprising metal catalyst nanoparticles, in a carbon black manufacture process, preferably a furnace carbon black manufacture process, for producing crystalline carbon structure networks.

embodiment 14. A process for the semi-batch production of the crystalline carbon structure networks in a reactor **3** where a single-phase emulsion **c** according to the invention is injected from the top of the reactor **3**, preferably through spraying using an aerosol inlet **4**, to obtain an aerosol, and wherein said networks **e** are formed at an increased temperature of at least 600 °C, preferably 700 – 1200 °C and deposited at the bottom of the reactor, and wherein the increased temperature is obtained using pyrolysis (e.g. heat source outside reactor, using N₂, depleted of oxygen) or by combustion (heat source inside reactor, using air or oxygen), preferably having long residence times in the range of 1 hours to 7 days, more preferably 8 hours to 3 days.

embodiment 15. A process for the continuous production of the crystalline carbon structure networks in a reactor **3** where a single-phase emulsion **c** according to the invention is injected from the top of the reactor **3**, said reactor preferably being a thermal black reactor, preferably through spraying using an aerosol inlet **4**, to obtain an aerosol, and wherein said networks **e** are formed at an increased temperature of at least 600 °C, preferably 700 – 1200 °C and deposited at the bottom of the reactor, and wherein the increased temperature is obtained using combustion (heat source inside reactor, using air or oxygen), but wherein the emulsion is injected only under pyrolysis conditions, preferably having residence times in the range of 1 second to 600 seconds, more preferably 5 seconds to 60 seconds.

DETAILED DESCRIPTION

The invention can be described best as a modified carbon black manufacturing process, wherein 'modified' is understood that a suitable oil, preferably an oil comprising at least 14 C atoms (>C₁₄) such as carbon black feedstock oil (CBFS), is provided to the reaction zone of a carbon black reactor as part of a single-phase emulsion, preferably a thermodynamically or kinetically stable emulsion (micro- or macro-emulsion), preferably comprising metal catalyst nanoparticles. The emulsion is preferably provided to the reaction zone by spraying, thus atomizing the emulsion to droplets. While the process can be carried out batch or semi-batch wise, the modified carbon black manufacturing process is advantageously carried out as a continuous process. The emulsion is preferably a micro-emulsion comprising metal catalyst nanoparticles. The preferred

single-phase emulsion comprises CBFS oil, and may be referred to as 'emulsified CBFS in the context of the invention..

In one embodiment, the invention pertains to a process for the production of the crystalline carbon structure networks according to the invention in a reactor **3** which contains a reaction zone **3b** and a termination zone **3c**, by injecting a single-phase emulsion **c**, preferably a micro-emulsion comprising metal catalyst nanoparticles, preferably a CBFS-comprising emulsion, according to the invention into the reaction zone **3b** which is at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, to produce crystalline carbon structure networks **e**, transferring these networks **e** to the termination zone **3c**, and quenching or stopping the formation of crystalline carbon structure networks in the termination zone by spraying in water **d**. The single-phase emulsion is preferably sprayed into the reaction zone. Reference is made to figure 1A.

In a preferred embodiment, the invention pertains to a process for the production of the crystalline carbon structure networks according to the invention in a furnace carbon black reactor **3** which contains, along the axis of the reactor **3**, a combustion zone **3a**, a reaction zone **3b** and a termination zone **3c**, by producing a stream of hot waste gas **a1** in the combustion zone by burning a fuel **a** in an oxygen-containing gas **b** and passing the waste gas **a1** from the combustion zone **3a** into the reaction zone **3b**, spraying (atomizing) a single-phase emulsion **c** according to the invention, preferably a micro-emulsion comprising metal catalyst nanoparticles, preferably a CBFS-comprising emulsion, in the reaction zone **3b** containing the hot waste gas, carbonizing said emulsion at increased temperatures (at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C), and quenching or stopping the reaction (i.e. the formation of crystalline carbon structure networks **e**) in the termination zone **3c** by spraying in water **d**. The reaction zone **3b** comprises at least one inlet (preferably a nozzle) for introducing the emulsion, preferably by atomization. Reference is made to figure 1A.

Residence times for the emulsion in the reaction zone of the furnace carbon black reactor can be relatively short, preferably ranging from 1 – 1000 ms, more preferably 10 – 100 ms.

In accordance with conventional carbon black manufacturing processes, the oil phase can be aromatic and/or aliphatic, preferably comprising at least 50 wt% C14 or higher, more preferably at least 70 wt% C14 or higher (based on the total weight of the oil). List of typical oils which can be used, but not limited to obtain stable emulsions are carbon black feedstock oils (CBFS), phenolic oil, anthracene oils, (short-medium-long chain) fatty acids, fatty acids esters and paraffins. The oil is preferably a C14 or higher. In one embodiment, the oil preferably has high aromaticity. Within

the field, the aromaticity is preferably characterized in terms of the Bureau of Mines Correlation Index (BMCI). The oil preferably has a BMCI > 50. In one embodiment, the oil is low in aromaticity, preferably having a BMCI < 15.

5 CBFS is an economically attractive oil source in the context of the invention, and is preferably a heavy hydrocarbon mix comprising predominantly C14 to C50, the sum of C14 – C50 preferably amounting to at least 50 wt%, more preferably at least 70 wt% of the feedstock. Some of the most important feedstocks used for producing carbon black include clarified slurry oil (CSO) obtained from fluid catalytic cracking of gas oils, ethylene cracker residue from naphtha steam cracking and
 10 coal tar oils. The presence of paraffins (<C15) substantially reduces their suitability, and a higher aromaticity is preferred. The concentration of aromatics determines the rate at which carbon nuclei are formed. The carbon black feedstock preferably has a high BMCI to be able to offer a high yield with minimum heat input hence reducing the cost of manufacturing. In a preferred embodiment, and in accordance with current CBFS specifications, the oil, including mixtures of oil,
 15 has a BMCI value of more than 120. While the skilled person has no difficulties understanding which are suitable CBFS, merely as a guide it is noted that – from a yield perspective - a BMCI value for CBFS is preferably more than 120, even more preferably more than 132. The amount of asphaltene in the oil is preferably lower than 10 wt%, preferably lower than 5.0 wt% of the CBFS weight. The CBFS preferably has low sulfur content, as sulfur adversely affects the product
 20 quality, leads to lower yield and corrodes the equipment.

It is preferred that the sulfur content of the oil according to ASTM D1619 is less than 8.0 wt%, preferably below 4.0 wt% more preferably less than 2.0 wt%.

25 The emulsion, preferably a CBFS-comprising emulsion, is a “single-phase emulsion” which is understood to mean that the oil phase and the water phase optically appear as one miscible mixture showing no physical separation of oil, water or surfactant to the naked eye. The single-phase emulsion can be a macro-emulsion or a micro-emulsion, and can be either kinetically or thermodynamically stable. The process by which an emulsion completely breaks (coalescence),
 30 i.e. the system separates into bulk oil and water phases, is generally considered to be controlled by four different droplet loss mechanisms, i.e., Brownian flocculation, creaming, sedimentation flocculation and disproportionation.

A ‘stable single-phase emulsion’ within the context of the invention is understood to mean that the
 35 emulsion shows no physical separation visible to the eye, preferably reflected in terms of the emulsion not showing any change in pH by more than 1.0 pH unit and/or the emulsion not showing any change in viscosity by more than 20%, over a period of time that exceeds the carbon structure network production time. The term ‘stable’ can mean ‘thermodynamically stable’ or ‘kinetically stable’ (by adding energy, i.e. through mixing). In practice, the single-phase emulsion
 40 is regarded stable if no de-mixing optically arises, i.e. a single-phase is retained, for a period of at

least 1 minute after preparation of the emulsion. It is thus preferred that the emulsion maintains its pH within 1.0 pH unit and/or its viscosity with less than 20 % variation over a period of time of at least 1 minute, preferably at least 5 minutes after preparation. While for handling purposes an extended stability is preferred, it is noted that the manufacturing process can still benefit from using emulsions stable over relatively short time spans of 1 minute, preferably 5 minutes: By adding energy (mixing) the stability of the emulsion can be extended, and short-term stability can be extended using in-line mixing. While macro-emulsions are not thermodynamically stable, and will always revert to their original, immiscible separate oil and water phases, the break down rate can be sufficiently slow to render it kinetically stable for the length of the manufacturing process.

Provided that a stable, single-phase emulsion is obtained, the amounts of water and oil are not regarded limiting, but it is noted that reduced amounts of water (and increased amounts of oil) improve yields. The water content is typically between 5 and 50 wt% of the emulsion, preferably 10 – 40 wt%, even more preferably up to 30 wt%, more preferably 10 - 20 wt% of the emulsion. While higher amounts of water can be considered, it will be at the cost of yield. Without wishing to be bound by any theory, the inventors believe that the water phase attributes to the shape and morphology of the networks thus obtained.

The choice of surfactant(s) is not regarded a limiting factor, provided that the combination of the oil, water and surfactant(s) results in a stable emulsion as defined here above. As further guidance to the skilled person, it is noted that the surfactant can be selected on the basis of the hydrophobicity or hydrophilicity of the system, i.e. the hydrophilic-lipophilic balance (HLB). The HLB of a surfactant is a measure of the degree to which it is hydrophilic or lipophilic, determined by calculating values for the different regions of the molecule, according to the Griffin or Davies method. The appropriate HLB value depends on the type of oil and the amount of oil and water in the emulsion, and can be readily determined by the skilled person on the basis of the requirements of retaining a stable, single phase emulsion as defined above. It is found that an emulsion comprising more than 50 wt% oil, preferably having less than 30 wt% water phase, would be stabilized best with a surfactant having an HLB value above 7, preferably above 8, more preferably above 9, most preferably above 10. On the other hand, an emulsion with at most 50 wt% oil would be stabilized best with a surfactant having an HLB value below 12, preferably below 11, more preferably below 10, most preferably below 9, particularly below 8. The surfactant is preferably selected to be compatible with the oil phase. In case the oil is a CBFS-comprising emulsion with a CBFS, a surfactant with high aromaticity is preferred, while an oil with low BMCI, such as characterized by $BMCI < 15$, would be stabilized best using aliphatic surfactants. The surfactant(s) can be cationic, anionic or non-ionic, or a mixture thereof. One or more non-ionic surfactants are preferred, in order to increase the yields since no residual ions will be left in the final product. In order to obtain a clean tail gas stream, the surfactant structure is preferably low in sulfur and nitrogen, preferably free from sulfur and nitrogen. Non-limiting examples of typical non-

ionic surfactants which can be used to obtain stable emulsions are commercially available series of tween, span, Hypermer, Pluronic, Emulan, Neodol, Triton X and Tergitol.

In one embodiment, the emulsion is preferably a micro-emulsion, comprising metal catalyst nanoparticles. In the context of the invention, a micro-emulsion is a dispersion made of water, oil (preferably CBFS), and surfactant(s) that is a single optically isotropic and thermodynamically stable liquid with dispersed domain diameter varying approximately from 1 to 500 nm, preferably 1 to 100 nm, usually 10 to 50 nm. In a micro-emulsion the domains of the dispersed phase are either globular (i.e. droplets) or interconnected (to give a bicontinuous micro-emulsion). In a preferred embodiment, the surfactant tails form a continuous network in the oil-phase of a water-in-oil (w/o) emulsion or bicontinuous emulsion. The water domains should contain a metal catalyst, preferably having an average particle size between 1 nm and 100 nm.

In a preferred embodiment, the single-phase emulsion, preferably a micro-emulsion, more preferably a w/o or bicontinuous micro-emulsion, preferably a bicontinuous micro-emulsion, further comprises metal catalyst nanoparticles having an average particle size between 1 and 100 nm. The skilled person will find ample guidance in the field of carbon nanotubes (CNTs) to produce and use these kinds of nanoparticles. These metal nanoparticles are found to improve network formation in terms of both rates and yields, and reproducibility. Methods for manufacturing suitable metal nanoparticles are found in Vinciguerra *et al.* "Growth mechanisms in chemical vapour deposited carbon nanotubes" *Nanotechnology* (2003) 14, 655; Perez-Cabero *et al.* "Growing mechanism of CNTs: a kinetic approach" *J. Catal.* (2004) 224, 197-205; Gavillet *et al.* "Microscopic mechanisms for the catalyst assisted growth of single-wall carbon nanotubes" *Carbon*. (2002) 40, 1649-1663 and Amelinckx *et al.* "A formation mechanism for catalytically grown helix-shaped graphite nanotubes" *Science* (1994) 265, 635-639, their contents about manufacturing metal nanoparticles herein incorporated by reference.

The metal catalyst nanoparticles are preferably used in a bicontinuous or w/o microemulsion, preferably a CBFS-comprising bicontinuous or w/o micro-emulsion. In one embodiment, a bicontinuous micro-emulsion is most preferred. Advantageously, the uniformity of the metal particles is controlled in said (bicontinuous) micro-emulsion by mixing a first (bicontinuous) micro-emulsion in which the aqueous phase contains a metal complex salt capable of being reduced to the ultimate metal particles, and a second (bicontinuous) micro-emulsion in which the aqueous phase contains a reductor capable of reducing said metal complex salt; upon mixing the metal complex is reduced, thus forming metal particles. The controlled (bicontinuous) emulsion environment stabilizes the particles against sintering or Ostwald ripening. Size, concentrations and durability of the catalyst particles are readily controlled. It is considered routine experimentation to tune the average metal particle size within the above range, for instance by amending the molar ratio of metal precursor vs. the reducing agent. An increase in the relative amount of reducing agent yields smaller particles. The metal particles thus obtained are

monodisperse, deviations from the average particle size are preferably within 10 %, more preferably within 5 %. Also, the present technology provides no restraint on the actual metal precursor, provided it can be reduced. Non-limiting examples of effective catalyst species are the noble metals (Pt, Pd, Au, Ag), iron-family elements (Fe, Co and Ni), Ru, and Cu. Suitable metal complexes are but are not limited to (i) platinum precursors such as H_2PtCl_6 ; $\text{H}_2\text{PtCl}_6 \cdot x\text{H}_2\text{O}$; K_2PtCl_4 ; $\text{K}_2\text{PtCl}_4 \cdot x\text{H}_2\text{O}$; $\text{Pt}(\text{NH}_3)_4(\text{NO}_3)_2$; $\text{Pt}(\text{C}_5\text{H}_7\text{O}_2)_2$, (ii) ruthenium precursors such as $\text{Ru}(\text{NO})(\text{NO}_3)_3$; $\text{Ru}(\text{dip})_3\text{Cl}_2$ [dip = 4,7-diphenyl-1,10-phenanthroline]; RuCl_3 , or (iii) palladium precursors such as $\text{Pd}(\text{NO}_3)_2$, or (iv) nickel precursors such as NiCl_2 or $\text{NiCl}_2 \cdot x\text{H}_2\text{O}$; $\text{Ni}(\text{NO}_3)_2$; $\text{Ni}(\text{NO}_3)_2 \cdot x\text{H}_2\text{O}$; $\text{Ni}(\text{CH}_3\text{COO})_2$; $\text{Ni}(\text{CH}_3\text{COO})_2 \cdot x\text{H}_2\text{O}$; $\text{Ni}(\text{AOT})_2$ [AOT = bis(2-ethylhexyl)sulphosuccinate]. Non-limiting suitable reducing agents are hydrogen gas, sodium boron hydride, sodium bisulphate, hydrazine or hydrazine hydrate, ethylene glycol, methanol and ethanol. Also suited are citric acid and dodecylamine. The type of metal precursor is not an essential part of the invention. The metal of the particles of the (bicontinuous) micro-emulsion are preferably selected from the group consisting of Pt, Pd, Au, Ag, Fe, Co, Ni, Ru and Cu, and mixtures thereof, in order to control morphology of the carbon structures networks ultimately formed. The metal nanoparticles end up embedded inside these structures where the metal particles are physically attached to the structures. While there is no minimum concentration of metal particles at which these networks are formed – in fact networks are formed using the modified carbon black manufacturing process according to the invention – it was found that the yields increase with the metal particle concentrations. In a preferred embodiment, the active metal concentration is at least 1 mM, preferably at least 5 mM, preferably at least 10 mM, more preferably at least 15 mM, more preferably at least 20 mM, particularly at least 25 mM, most preferably up to 3500 mM, preferably up to 3000 mM. In one embodiment, the metal nanoparticles comprise up to 250 mM. These are concentrations of the catalyst relative to the amount of the aqueous phase of the (bicontinuous) micro-emulsion.

Atomization of the emulsion, preferably a CBFS-comprising emulsion, is preferably realized by spraying, using a nozzle-system **4**, which allows the emulsion droplets to come in contact with the hot waste gas **a1** in the reaction zone **3b**, resulting in traditional carbonization, network formation and subsequent agglomeration, to produce crystalline carbon structure networks **e** according to the invention. The injection step preferably involves increased temperatures above 600 °C, preferably between 700 and 3000 °C, more preferably between 900 and 2500 °C, more preferably between 1100 and 2000 °C.

In a different but related aspect of the invention, the invention pertains to a process for the semi-batch production of the crystalline carbon structure networks according to the invention in a reactor **3** where a single-phase emulsion **c** according to the invention is injected from the top of the reactor **3**, preferably through spraying using an aerosol inlet **4**, to obtain an aerosol, and wherein said networks **e** are formed at a temperature of at least 600 °C, preferably 700 – 1200 °C and deposited at the bottom of the reactor furnace. The elevated temperature and reaction

conditions may be achieved using pyrolysis (e.g. heat source outside reactor, using N₂, depleted of oxygen) or by combustion (heat source inside reactor, using air or oxygen). In a further embodiment, the semi-batch process is conveniently operated with a carbon feed gas above its cracking temperature such as methane, ethane, propane, butane, ethylene, acetylene and propylene, carbon monoxide, oxygenated hydrocarbons such as methanol; aromatic hydrocarbons such as toluene, benzene and naphthalene, and mixtures of the above, for example carbon monoxide and methane. Reference is made to figure 1B. Typical residence times are extended compared to the preferred furnace black process, with residence times of the emulsion in the reactor typically in the order of 1 hours to 7 days, more preferably 8 hours to 3 days.

Related therewith, the invention also pertains to a process for the continuous production of the crystalline carbon structure networks in a reactor **3** where a single-phase emulsion **c** according to the invention is injected from the top of the reactor **3**, said reactor preferably being a thermal black reactor, preferably through spraying using an aerosol inlet **4**, to obtain an aerosol, and wherein said networks **e** are formed at an increased temperature of at least 600 °C, preferably 700 – 1200 °C and deposited at the bottom of the reactor, and wherein the increased temperature is obtained using combustion (heat source inside reactor, using air or oxygen), but wherein the emulsion is injected only under pyrolysis conditions. In a further embodiment, the continuous ‘pyrolysis’ process encompassing an initial combustion step is conveniently operated with a carbon feed gas above its cracking temperature such as methane, ethane, propane, butane, ethylene, acetylene and propylene, carbon monoxide, oxygenated hydrocarbons such as methanol; aromatic hydrocarbons such as toluene, benzene and naphthalene, and mixtures of the above, for example carbon monoxide and methane. Reference is made to figure 1B. The residence time for the emulsion in the reactor is preferably in the range of 1 to 600 seconds, more preferably 5 to 60 seconds.

According to the above semi-batch and continuous processes of the invention, crystalline carbon structure networks (i.e. networks of crystalline carbon structures) can be produced. In a related aspect, the invention thus pertains to crystalline carbon structure networks obtained by or obtainable by the process of the invention. The term “carbon structures” are understood to comprise crystalline sp²-based carbon allotropes, i.e. substances in which a carbon atom is bonded to neighbouring three carbon atoms in a hexagonal pattern, including graphene, fullerene, carbon nanofibers and carbon nanotubes. The method of the invention allows for the growth of crystalline carbon structure networks formed from carbon structures that are chemically interconnected through a multitude of junctions, including Y- and H-junctions. In the context of the invention, a ‘network’ is preferably understood to comprise at least 3, preferably at least 5, more preferably at least 10, more preferably at least 100, more preferably at least 500 chemically connected nodes.

The networks preferably have at least one, preferably at least two, more preferably at least three, most preferably all of the following properties:

- (i) Iodine Adsorption Number (IAN) of at least 250 mg/g, more preferably at least 300 mg/g, preferably 300 – 1000 mg/g, according to ASTM D1510;
- 5 (ii) Nitrogen Surface Area (N2SA) of at least 250 m²/g, more preferably at least 300 m²/g, preferably 300 – 1000 m²/g, according to ASTM D6556;
- (iii) Statistical Thickness Surface Area (STSA) of at least 120 m²/g, more preferably at least 150 m²/g, preferably 150 – 1000 m²/g, according to ASTM D6556;
- 10 (iv) Oil Absorption Number (OAN) of at least 150 cc/100g, preferably 150 – 500 cc/100 g according to ASTM D2414,

wherein:

IAN = Iodine Adsorption Number: the number of grams of iodine adsorbed per kilogram of carbon black under specified conditions as defined in ASTM D1510;

15 N2SA = nitrogen surface area: the total surface area of carbon black that is calculated from nitrogen adsorption data using the B.E.T. theory, according to ASTM D6556;

STSA = statistical thickness surface area: the external surface area of carbon black that is calculated from nitrogen adsorption data using the de Boer theory and a carbon black model, according to ASTM D6556; and

20 OAN = Oil Absorption Number: the number of cubic centimeters of dibutyl phthalate (DBP) or paraffin oil absorbed by 100 g of carbon black under specified conditions. The OAN value is proportional to the degree of aggregation of structure level of the carbon black, determined according to ASTM D2414.

For each of IAN, N2SA (or NSA), STSA and OAN - all typical parameters for characterizing carbon black materials - the networks exhibit superior properties compared to traditional carbon black. The networks of the invention are preferably characterized by at least one, preferably at least two, more preferably all of (i), (ii) and (iii) since these are typical ways of characterized the surface area properties of the materials. In one embodiment, the networks exhibit at least one of (i), (ii) and (iii), and further comply with (iv).

30 These structures forming the network may be described as nanofibers, which are solid (i.e. non-hollow), preferably having an average diameter or thickness of 1 – 400 nm, more preferably between 5 and 350 nm, more preferably up to 100 nm, in one embodiment 50 – 100 nm, compared to the average particle size of 8 – 500 nm for spherical carbon black particles. In one embodiment, the average fiber length (i.e. the average distance between two junctions) is

35 preferably in the range of 100 – 10,000 nm, more preferably 200 - 5000 nm, more preferably 500 – 5000 nm, as for instance can be determined using SEM. Alternatively, the nanofibers or structures may preferably be described in terms of an average aspect ratio of fiber length-to-thickness of at least 2, preferably at least 3, more preferably at least 4, most preferably at least 5; in sharp contrast with the amorphous (physically associated) aggregates formed from spherical

40 particles obtained through conventional carbon black manufacturing. The aggregates of carbon

structure networks according to the invention are typically of the order of 0.1- 100 microns, preferably 1 – 50 microns, which is observed with Laser Diffraction and Dynamic Light Scattering analysis.

- 5 The invention also pertains to a composite comprising carbon structure networks according to the invention, further comprising one or more polymers, for instance for adding mechanical strength, electrical conductivity or thermal conductivity to said polymer-based composite. The networks may be added in any amount adapted to the desired performance, e.g. 1 – 70 wt%, more preferably 10 – 50 wt%, even more preferably between 20 - 40 wt%, based on the total polymer weight in the composite. In one aspect, the composite shows a network concentration-dependent elasticity modulus (E-modulus, i.e. an increase with increasing concentration of networks) for instance as measured according to ISO 527.

EXAMPLES

15

Example 1A. Preparation of crystalline carbon structure network.

100 gallon of feedstock were prepared comprising of:

- a) Carbon Black slurry oil (CBO or CBFS oil)
- b) Water phase containing 3500 mM metal precursor salt (FeCl_3)
- 20 c) Water phase containing reducing agent (3650 mM citric acid)
- d) Surfactant (TritonX; HLB 13.4).

The exact composition of the emulsions (a+b+d) and (a+c+d) was detailed below:

Emulsion	CBO	Water/ FeCl_3	Water/CA	TritonX
a+b+d	70%	10%	0%	20%
a+c+d	70%	0%	10%	20%

25

Both emulsions (a+b+d) and (a+c+d) were added together and a single-phase emulsion was obtained that was stable for more than one hour, which was longer than the entire length of the experiment.

The networks thus obtained had the following characteristics:

- 30 IAN = 382.5 mg/g, according to ASTM D1510
- N2SA = 350 m²/g (ASTM D6556)
- STSA = 160.6 m²/g (ASTM D6556)
- OAN = 170 cc/100g (ASTM D2414).

Example 2. Carbon black vs network

The carbon networks according to example 1 were compared to conventional carbon black produced using (a). Standard grade carbon black typically has a nitrogen surface area (NSA or N2SA) varying up to 150 m²/g (N100-grade rubber carbon black).

5

The morphology of the carbon networks was assessed by Scanning Electron Microscopy (SEM). It was found that the carbon network building blocks were chemically covalently linked solid carbon (nano)fibers with average fibre diameters below 100 nm. On the other hand, the carbon black building blocks were nodules in which graphitic layers are organized in a spherical shape (8-
10 300 nm diameter). SEM pictures of carbon black and carbon networks building blocks are shown in figure 2A and 2B, respectively. It was found that the carbon networks were organized in aggregate size 1-100 µm, while carbon blacks aggregates ranged typically from 85-500 nm.

Example 3: Effect of metal nanoparticles

15 The metal catalyst concentration had an effect on the final yields of the reactions: Three 20 g bicontinuous micro-emulsions were made from isopropylpalmitate (35%wt), butanol (11.25%wt), Tween 80 (33.75%wt), water (20%wt). While the first batch was prepared without any metal nanoparticles, two batches involved 50 and 200 mM FeCl₃ metal nanoparticles (based on citric acid and FeCl₃ with ratio 10:1). Each of the emulsions were stable over the full length of the
20 experiments.

In each case, the emulsions were introduced in the middle of a quartz-tube of a thermal horizontal tube reactor. The reactor was heated up to 750°C (3 K/min) under 130 sccm of nitrogen flow and kept for 90 min at the same temperature. In the first 60 min the nitrogen gas flow was reduced to
25 100 sccm and ethylene gas was added at 100 sccm flow. During the last 30 minutes at 750°C the ethylene was purged out from nitrogen at 130 sccm for the last 30 min and the reactor was then cooled down. Both with and without the metal nanoparticles carbon structure networks were obtained. The test done in the presence of 50 and 200 mM FeCl₃ showed a yield increase of approx 40 and 60 wt% carbon structure networks, respectively, compared to the batch with no
30 metal nanoparticles.

A SEM picture of the networks obtained with a bicontinuous micro-emulsion based on isopropylpalmitate (35%wt), butanol (11.25%wt), Tween 80 (33.75%wt) and water (20%wt), with 100 mM Fe nanoparticles is shown in figure 3.

35

Example 4: Graph E-modulus in PA6

Carbon Network powder such as prepared according to the recipe of example 1 was compounded in different loadings (10, 20, 30, 40%wt) in Polyamide 6 (Akulon F223D), by means of a twin screw extruder (L/D= 38, D=25 mm) and compared to glass fiber (Chopvantage 3540)

compounded at 10, 20, 30%wt loadings under the same conditions. The E modulus was measured according to ISO 527, dried as molded tensile bars. The results are plotted in figure 4, and indicate a performance of carbon networks, which is comparable to that of glass fibers. Carbon black was found not to provide significant reinforcement in thermoplastic, at whatever concentration.

Example 5: Graph electrical conductivity PA6 and PET

Volume resistivity was measured on different compounds prepared with carbon network prepared using the recipe according to example 1, in different loadings in Polyamide 6 (Akulon F223D) and PET (Ramapet N1), by means of a twin-screw extruder (L/D= 38, D=25 mm). The results are plotted in figure 5. The percolation curves show good dosage control in the static dissipative range and that high conductive performances are achieved at high loadings. At the opposite, carbon black percolation threshold for conductive applications was found at lower dosages, i.e. < 20%wt, and dosage control in the static dissipative range was unsatisfactory. Moreover, carbon networks compounds did not slough up to 30%wt loading, whereas carbon black compounds are known to be sloughing also at low filling degree.

CLAIMS

1. A process for the production of crystalline carbon structure networks in a reactor **3** which contains a reaction zone **3b** and a termination zone **3c**, by injecting a water-in-oil or bicontinuous micro-emulsion **c** comprising metal catalyst nanoparticles, into the reaction zone **3b** which is at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, to produce crystalline carbon structure networks **e**, transferring these networks **e** to the termination zone **3c**, and quenching or stopping the formation of crystalline carbon structure networks in the termination zone by spraying in water **d**.
2. The process according to claim 1, said reactor being a furnace carbon black reactor **3** which contains, along the axis of the reactor **3**, a combustion zone **3a**, a reaction zone **3b** and a termination zone **3c**, by producing a stream of hot waste gas **a1** in the combustion zone by burning a fuel **a** in an oxygen-containing gas **b** and passing the waste gas **a1** from the combustion zone **3a** into the reaction zone **3b**, spraying a water-in-oil or bicontinuous micro-emulsion **c** comprising metal catalyst nanoparticles, in the reaction zone **3b** containing the hot waste gas, carbonizing said emulsion at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, and quenching or stopping the reaction in the termination zone **3c** by spraying in water **d**, to yield crystalline carbon structure networks **e**.
3. The process according to any one of the preceding claims, wherein the oil phase in the emulsion is aromatic and/or aliphatic, preferably comprising at least 50 wt% C14 or higher, based on the total weight of the oil phase.
4. The process according to any one of the preceding claims, said emulsion comprising at least 1 mM metal catalyst nanoparticles, preferably having an average particle size between 1 and 100 nm.
5. A crystalline carbon structure network obtainable by the process according to any one of the preceding claims, wherein said carbon structures are chemically interconnected through a multitude of junctions, including Y- and H-junctions.
6. The network according to claim 5, having at least one, preferably at least two, more preferably at least three, most preferably all of the following properties:
 - (i) Iodine Adsorption Number (IAN) of at least 250 mg/g according to ASTM D1510;
 - (ii) Nitrogen Surface Area (N2SA) of at least 250 m²/g according to ASTM D6556;

(iii) Statistical Thickness Surface Area (STSA) of at least 120 m²/g according to ASTM D6556;

(iv) Oil Absorption Number (OAN) of at least 150 cc/100 g according to ASTM D2414.

- 5 7. The network according to claim 5 or 6, wherein said structures have an average thickness of 1 – 400 nm, preferably between 5 and 350 nm, more preferably up to 100 nm, in one embodiment between 50 and 100 nm, and/or an average length in the range of 100 – 10000 nm, preferably 200 – 5000 nm, more preferably 500 – 5000 nm; and/or wherein the structures have an average aspect ratio of length to thickness of at least 2.
- 10 8. A composite comprising carbon structure networks according to any one of claims 5 - 7, further comprising one or more polymers, for instance for adding mechanical strength, electrical conductivity or thermal conductivity to said polymer-based composite, and wherein said networks are in any amount of 1 – 70 wt%, preferably 10 – 50 wt%, more preferably 15 between 20 - 40 wt%, based on the total polymer weight in the composite.
9. The composite according to claim 8, showing an E modulus increasing with network concentration as measured according to ISO 527.
- 20 10. Use of an emulsified carbon black feedstock in a carbon black manufacture process, preferably a furnace carbon black manufacture process, for producing crystalline carbon structure networks.
- 25 11. A process for the semi-batch production of the crystalline carbon structure networks in a reactor **3** where a single-phase emulsion **c** according to the invention is injected from the top of the reactor **3**, preferably through spraying using an aerosol inlet **4**, to obtain an aerosol, and wherein said networks **e** are formed at an increased temperature of at least 600 °C, preferably 700 – 1200 °C and deposited at the bottom of the reactor, and wherein the increased temperature is obtained using pyrolysis (e.g. heat source outside reactor, using N₂, 30 depleted of oxygen) or by combustion (heat source inside reactor, using air or oxygen).
- 35 12. A process for the continuous production of the crystalline carbon structure networks in a reactor **3** where a single-phase emulsion **c** according to the invention is injected from the top of the reactor **3**, said reactor preferably being a thermal black reactor, preferably through spraying using an aerosol inlet **4**, to obtain an aerosol, and wherein said networks **e** are formed at an increased temperature of at least 600 °C, preferably 700 – 1200 °C and deposited at the bottom of the reactor, and wherein the increased temperature is obtained using combustion (heat source inside reactor, using air or oxygen), but wherein the emulsion is injected only under pyrolysis conditions.

ABSTRACT

The invention pertains to a process for the production of crystalline carbon structure networks in a reactor **3** which contains a reaction zone **3b** and a termination zone **3c**, by injecting a single-phase emulsion **c**, preferably comprising metal catalyst nanoparticles, said emulsion preferably
5 being a carbon black feedstock (CBFS)-comprising emulsion, into the reaction zone **3b** which is at a temperature of above 600 °C, preferably above 700 °C, more preferably above 900 °C, even more preferably above 1000 °C, more preferably above 1100 °C, preferably up to 3000 °C, more preferably up to 2500 °C, most preferably up to 2000 °C, to produce crystalline carbon structure networks **e**, transferring these networks **e** to the termination zone **3c**, and quenching or stopping
10 the formation of crystalline carbon structure networks in the termination zone by spraying in water **d**.

<Fig. 1A>

Fig. 1A

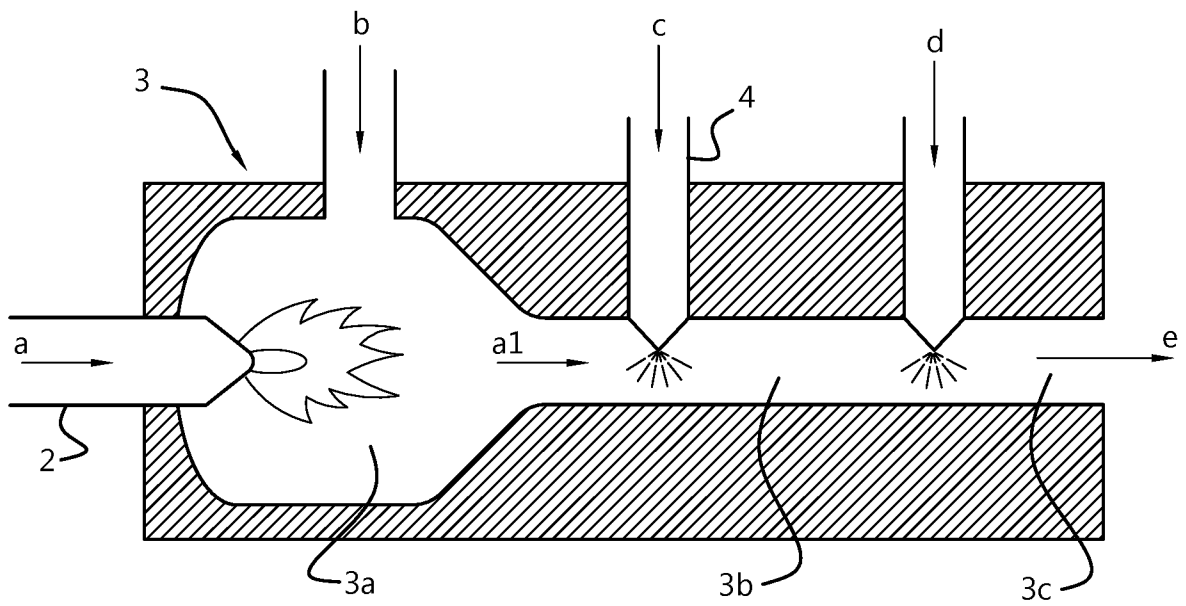


Fig. 1B

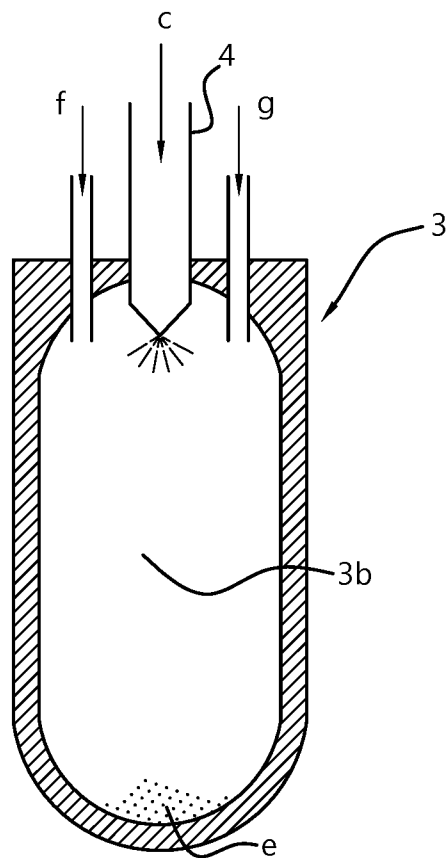


Fig. 2A

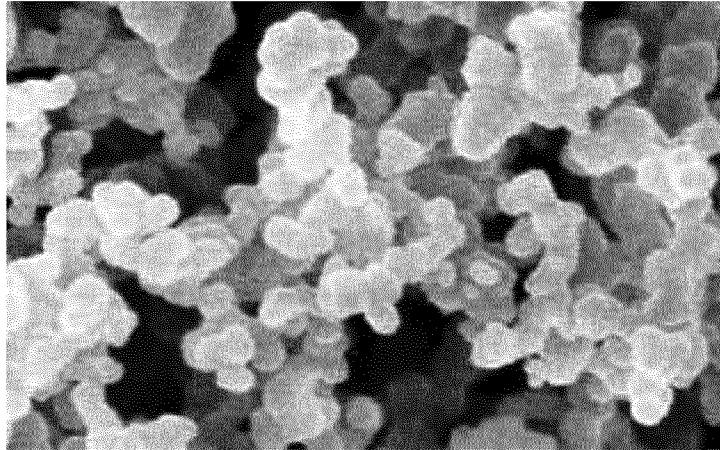


Fig. 2B

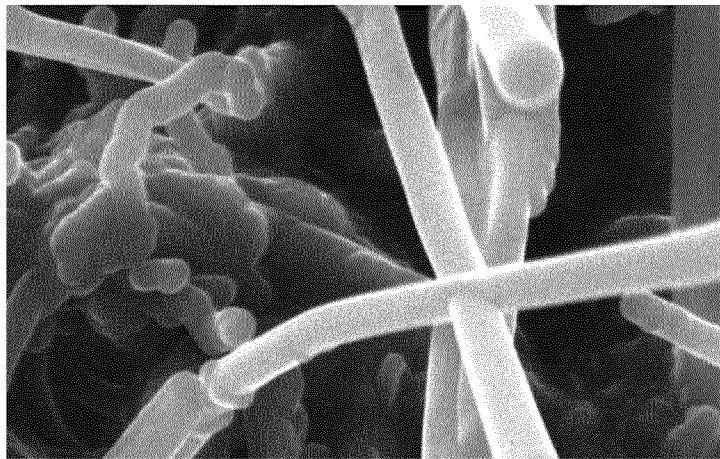


Fig. 3

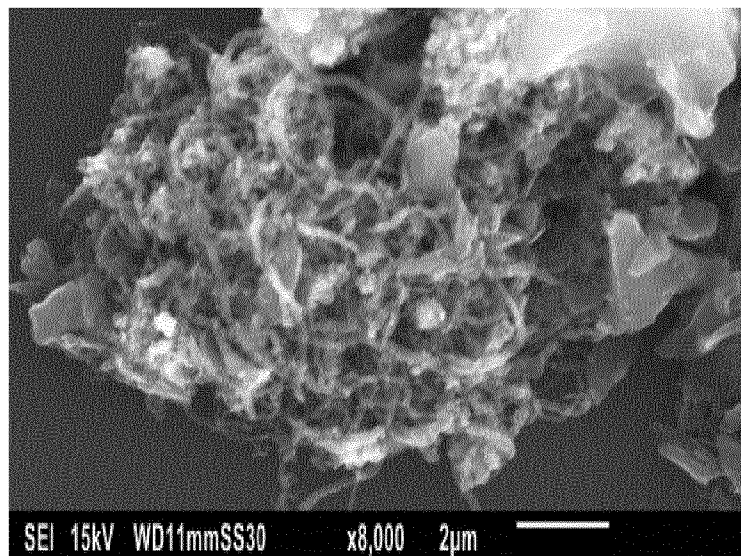


Fig. 4


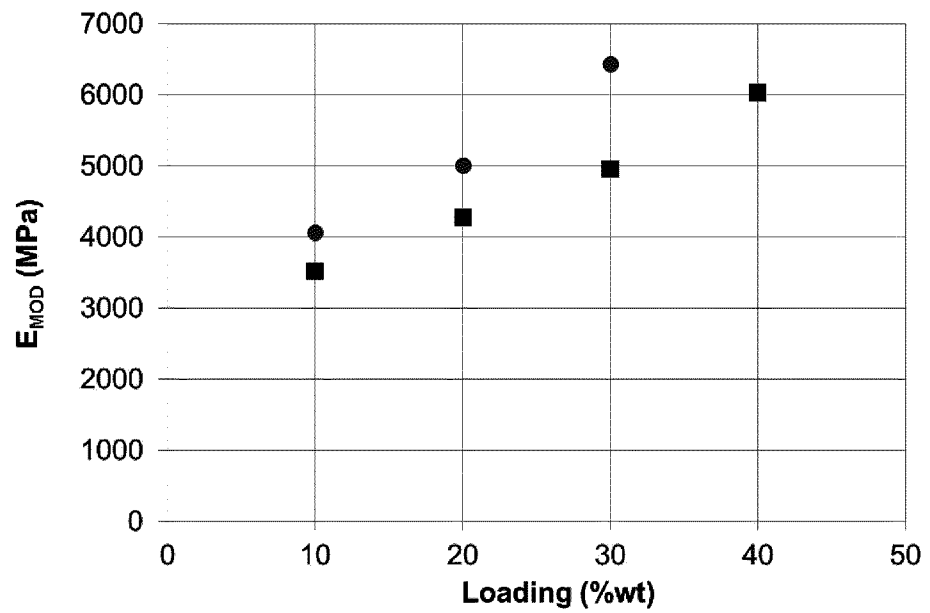


Fig. 5

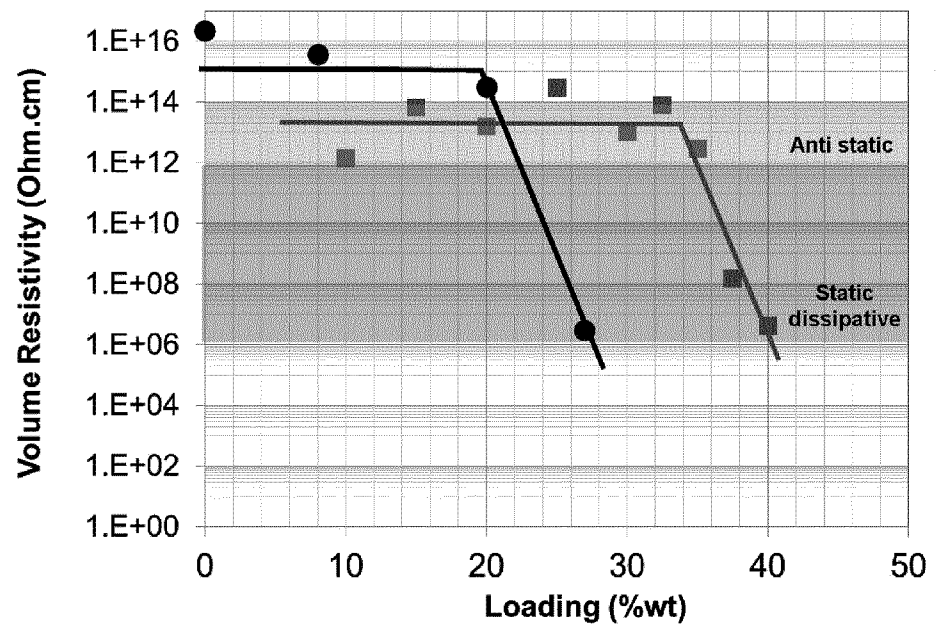

From the INTERNATIONAL BUREAU

PCTNOTIFICATION CONCERNING SUBMISSION,
OBTENTION OR TRANSMITTAL
OF PRIORITY DOCUMENT

(PCT Administrative Instructions, Section 411)

To:

NEDERLANDSCH OCTROOIBUREAU
P.O. Box 29720
2502 LS The Hague
PAYS-BAS

Date of mailing (day/month/year) 24 July 2017 (24.07.2017)	
Applicant's or agent's file reference P6061790PCT	IMPORTANT NOTIFICATION
International application No. PCT/EP2017/065994	International filing date (day/month/year) 28 June 2017 (28.06.2017)
International publication date (day/month/year) Not yet published	Priority date (day/month/year) 28 June 2016 (28.06.2016)
Applicant CARBONX B.V.	

The applicant is hereby notified of the date of receipt (or of obtaining by the International Bureau) of the priority document(s) relating to all earlier application(s) whose priority is claimed. Unless otherwise indicated by the letters "NR", in the right-hand column or by an asterisk appearing next to the date of receipt, **the priority document concerned was submitted to or transmitted to or obtained by the International Bureau in compliance with Rule 17.1(a), (b) or (b-bis)**. This Form replaces any previously issued notification concerning submission, transmittal or obtaining of priority documents.

<u>Priority date</u>	<u>Priority application No.</u>	<u>Country or regional Office or PCT receiving Office</u>	<u>Date of receipt of priority document</u>
28 June 2016 (28.06.2016)	16176599.5	EP	11 July 2017 (11.07.2017)
06 January 2017 (06.01.2017)	17150513.4	EP	11 July 2017 (11.07.2017)

The letters "NR" denote a priority document which, on the date of mailing of this Form, had not yet been received or obtained by the International Bureau in compliance with Rule 17.1(a), (b) or (b-bis). Where the applicant has failed to either submit, request to prepare and transmit, or to request the International Bureau to obtain the priority document within the applicable time limit under that Rule, the attention of the applicant is directed to Rule 17.1(c) which provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.

An asterisk "*" next to a date of receipt, denotes a priority document submitted or transmitted to or obtained by the International Bureau but not in compliance with Rule 17.1(a), (b) or (b-bis) (the priority document was received after the time limit prescribed in Rule 17.1(a); the request to prepare and transmit the priority document was submitted to the receiving Office after the applicable time limit under Rule 17.1(b) or the request to the International Bureau to obtain the priority document was made after the applicable time limit under Rule 17.1(b-bis)). Even though the priority document was not furnished in compliance with Rule 17.1(a), (b) or (b-bis), the International Bureau will nevertheless transmit a copy of the document to the designated Offices, for their consideration. In case such a copy is not accepted by the designated Office as the priority document, Rule 17.1(c) provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland	Authorized officer Nora Lindner e-mail pct.team5@wipo.int Telephone No. +41 22 338 74 05
Facsimile No. +41 22 338 89 75	

From the INTERNATIONAL BUREAU

PCTNOTIFICATION OF THE RECORDING
OF A CHANGE(PCT Rule 92bis.1 and
Administrative Instructions, Section 422)

To:

NEDERLANDSCH OCTROOIBUREAU
P.O. Box 29720
2502 LS The Hague
PAYS-BAS

Date of mailing (day/month/year) 21 November 2018 (21.11.2018)	IMPORTANT NOTIFICATION
Applicant's or agent's file reference P6061790PCT	
International application No. PCT/EP2017/065994	International filing date (day/month/year) 28 June 2017 (28.06.2017)

1. The following indications appeared on record concerning:		
☒ the applicant	☐ the inventor	☐ the agent
☐ the common representative		
Name and Address CARBONX B.V. Rembrandt Tower, 35th Floor Amstelplein 1 1096 HA Amsterdam Netherlands	State of Nationality NL	State of Residence NL
	Telephone No.	
	Facsimile No.	
	E-mail address	
2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:		
☒ the person	☐ the name	☐ the address
☐ the nationality		
☐ the residence		
Name and Address CARBONX IP 3 B.V. Rembrandt Tower, 35th Floor Amstelplein 1 1096 HA Amsterdam Netherlands	State of Nationality NL	State of Residence NL
	Telephone No.	
	Facsimile No.	
	E-mail address ☐ Notifications by e-mail authorized	
3. Further observations, if necessary: Assignment.		
4. A copy of this notification has been sent to:		
☒ the receiving Office	☐ the International Preliminary Examining Authority	
☒ the International Searching Authority	☒ the designated Offices concerned	
☐ the Authority(ies) specified for supplementary search	☐ the elected Offices concerned	
	☒ other: CARBONX B.V.	

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland	Authorized officer Ulhaq Faizan e-mail pct.team5@wipo.int Telephone No. +41 22 338 74 05
Facsimile No. +41 22 338 70 80	