



- (51) International Patent Classification:
E21B 7/06 (2006.01) *E21B 7/18* (2006.01)
E21B 7/08 (2006.01)
- (21) International Application Number: PCT/US2016/031778
- (22) International Filing Date: 11 May 2016 (11.05.2016)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 14/710,926 13 May 2015 (13.05.2015) US
- (71) Applicant: **BAKER HUGHES INCORPORATED**
[US/US]; P.O. Box 4740, Houston, TX 77210-4740 (US).
- (72) Inventors: **LIVESCU, Silviu**; N203-111 25th Ave SW, Calgary, Alberta T2S 3G4 (CA). **WATKINS, Thomas, J.**; 313 10120 Brookpark Blvd SW, Calgary, Alberta T2W 3G3 (CA).
- (74) Agent: **HUNTER, Shawn**; Law Office of Shawn Hunter, P.O. Box 270110, Houston, TX 77277-0110 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,

[Continued on next page]

(54) Title: REAL-TIME STEERABLE ACID TUNNELING SYSTEM

(57) Abstract: An acid tunneling system for forming lateral tunnels from a central wellbore. The acid tunneling system includes an acid tunneling tool having an acid injection nozzle which can be steered and oriented in response to downhole parameters that are detected and sent to surface in real time.

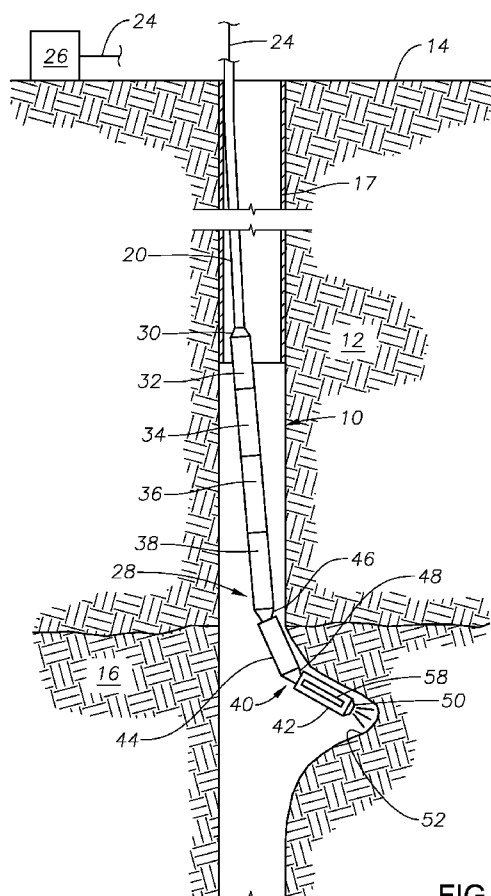


FIG. 4



SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

REAL-TIME STEERABLE ACID TUNNELING SYSTEM

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 [0001] The invention relates generally to systems and methods for creating steerable lateral subterranean tunnels and for monitoring formation of tunnels in real-time at surface.

2. Description of the Related Art

10 [0002] Sidetracking operations create lateral tunnels that extend outwardly from a central wellbore, which is typically substantially vertically-oriented, but might also be horizontally-oriented or inclined. A number of tools and techniques can be used to create lateral tunnels. Included among these tools and techniques are devices that
15 inject acid into the wellbore and surrounding formation in order to dissolve rock. Devices of this type are used, for example, in the StimTunnel™ targeted acid placement service which is available commercially from Baker Hughes Incorporated of Houston, Texas. These acid stimulation devices typically use a bottom hole assembly with a pivotable wand with a nozzle through which acid is dispensed under
20 high pressure. The acid helps dissolve portions of the formation around the nozzle. The wand is typically provided with one or more knuckle joints that help angle the nozzle in a desired direction. Features of this type of tool are discussed in U.S. Patent Publication No. 2008/0271925 ("Acid Tunneling Bottom Hole Assembly") by Misselbrook et al. [the '925 reference]. The '925 reference is herein incorporated by
25 reference.

SUMMARY OF THE INVENTION

[0003] The present invention relates to devices and techniques for forming lateral tunnels from a subterranean wellbore using acid injection. Devices and methods of

the present invention allow greater control of the direction and length of lateral tunnels being created than has been possible with conventional systems. Devices and methods of the present invention allow multiple lateral tunnels to be created radiating in different directions from a central, substantially vertical wellbore at a single depth or location along the wellbore. Devices and methods of the present invention allow for real-time monitoring, at surface, of details relating to the creation of lateral tunnels.

[0004] In accordance with particular embodiments, an acid tunneling system includes an acid-dispensing bottom hole assembly secured to a running arrangement for running into a wellbore. The bottom hole assembly includes a tunneling tool having a wand with a nozzle for injection of acid at desired locations to create lateral tunnels.

[0005] In preferred embodiments, the bottom hole assembly is provided with one or more downhole parameter sensors. The sensors are able to detect downhole parameters including pressure and temperature. In certain embodiments, the sensors are capable of detecting fluid flow parameters, such as density and viscosity. In a described embodiment, the sensors are retained within a sensor module that is incorporated into the bottom hole assembly.

[0006] In accordance with particular embodiments, a data/power cable is used to provide power to downhole components as well as a real-time data transmission system. Downhole parameters detected by the sensors is sent uphole by the cable to a controller. In accordance with preferred embodiments, the data/power cable is disposed within the central flowbore of the running string and may comprise a tube-wire type cable.

[0007] In a described embodiment, the acid tunneling system incorporates a casing collar locator ("CCL") which is useful for determining the position of the bottom hole assembly within a cased wellbore. When the acid tunneling system is run into a

wellbore having portions that are lined with casing having collared connection, the casing collar locator provides an indication of the bottom hole assembly's depth or location within the wellbore. Casing collar locator data is transmitted to the controller at surface using the data/power cable.

5 **[0008]** In particular embodiments, the acid tunneling system includes an inclinometer which can determine the angular departure from vertical of the bottom hole assembly at any given point within the wellbore. This data is transmitted to the controller at surface. Together with data from the casing collar locator, if used, the inclinometer can be used to locate the bottom hole assembly at a particular desired location in the
10 wellbore.

[0009] In accordance with particular embodiments, an indexing tool is incorporated into the bottom hole assembly and is useful to rotate the tunneling tool portion of the bottom hole assembly within the wellbore. Preferably, the indexing tool can rotate the tunneling tool up to 180 degrees in either radial direction, allowing the tunneling tool
15 to form lateral tunnels in any radial direction outwardly from the central wellbore.

[0010] In certain embodiments, a pulsating tool, such as a lower frequency EasyReach extended reach tool, is connected between the tunneling tool and upper portions of the bottom hole assembly. The pulsating tool creates pressure waves that are transmitted to the tunneling tool and, in response to each pulse, the wand and
20 nozzle of the tunneling tool are flexed radially outwardly to permit acid to be dispensed toward the surrounding formation.

[0011] In accordance with particular embodiments, the pulsating tool is designed to provide pressure waves having a pre-set pressure profile for bending the tunneling tool in a prescribed manner to form enlarged diameter lateral tunnels. The pulsating
25 tool is designed to provide pressure pulses or waves which will activate flexure or

bending of the tunneling tool in a periodic manner. In a particular embodiment, radial flexure of the tunneling tool occurs when the pulse is applied (pressure wave increasing) and the tool unflexes when the pulse is stopped (pressure wave decreasing). This flexing and unflexing will alternatively bend and straighten the tunneling tool so that wider tunnels are created. The inventors have determined that creating wider tunnels will advantageously reduce friction between the bottom hole assembly and the formation rock.

[0012] In operation, the acid tunneling system of the present invention can be operated to form lateral tunnels which extends outwardly from the central wellbore into which the acid tunneling system is run. In accordance with an exemplary method of operation, the acid tunneling system is run into a wellbore down to a formation into which it is desired to create lateral tunnels. The approximate location of the bottom hole assembly within the wellbore is determined using a data from a casing collar locator, inclinometer, sensors and/or by other means known in the art. Acid is flowed down through the flowbore of the running string, and the fluid pressure of the acid actuates the pulsating tool. The pulsating tool, in turn, actuates the tunneling tool to flex and unflex as acid is injected into the wellbore and creates lateral tunnels. The pulsating tool is also instrumental in creating lateral tunnels having larger diameters and which provide less frictional resistance with the tunneling tool, thereby facilitating the tunneling process.

[0013] The acid tunneling system of the present invention is steerable since it can be used to create tunnels in particular directions and at particular depths or locations in the wellbore. In certain embodiments, the acid tunneling system is steered by raising and lowering the running string within the wellbore based upon data provided by a casing collar locator or sensors. Further, the tunneling tool can be radially

oriented by the indexing tool to direct the nozzle of the tunneling tool in a particular radial direction.

[0014] In a further described embodiment, a steerable acid tunneling system is used in conjunction with a milling tool to form one or more lateral tunnels from a cased wellbore. In this embodiment, a milling tool is first run into the wellbore and cuts one or more windows in the wellbore casing at locations wherein it is desired to create lateral tunnels using acid tunneling. Thereafter, the acid tunneling system is run into the wellbore and the acid tunneling tool is steered to form one or more lateral tunnels through the one or more lateral windows.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] For a thorough understanding of the present invention, reference is made to the following detailed description of the preferred embodiments, taken in conjunction with the accompanying drawings, wherein like reference numerals designate like or similar elements throughout the several figures of the drawings and wherein:

[0016] Figure 1 is a side, cross-sectional view of an exemplary wellbore containing an acid tunneling system in accordance with the present invention.

[0017] Figure 2 is a side, cross-sectional view of a section of running string used with the acid tunneling system of Figure 1.

[0018] Figure 3 is a side, cross-sectional view of the wellbore and acid tunneling system of Figure 1, now with the acid tunneling tool having been flexed to engage the wellbore wall.

[0019] Figure 4 is a side, cross-sectional view of the wellbore and acid tunneling system of Figures 1 and 3, now with the acid tunneling tool creating a lateral tunnel in the wellbore wall.

[0020] Figure 5 is a side, cross-sectional view of the wellbore and acid tunneling system of Figures 1, 3 and 4, now with the acid tunneling tool having been rotated to create a second lateral tunnel.

[0021] Figure 6 is a side, cross-sectional view of the acid tunneling system forming an enlarged diameter lateral tunnel.

[0022] Figure 7 is a flow diagram depicting steps in an exemplary acid tunneling system steering operation.

[0023] Figure 8 is a side, cross-sectional view of an exemplary wellbore depicting a milling tool cutting a window in a cased wellbore.

[0024] Figure 9 is a side, cross-sectional view of the wellbore shown in Figure 8 now with an acid tunneling system disposed within the wellbore to create a lateral tunnel.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0025] Figure 1 illustrates an exemplary wellbore 10 that has been drilled through the earth 12 from the surface 14 down to a hydrocarbon-bearing formation 16 into which it is desired to create lateral tunnels. The wellbore 10 has a portion that is lined with metallic casing 17, of a type known in the art. An acid tunneling system, generally indicated at 18 is disposed within the wellbore 10 from the surface 14. The acid tunneling system 18 includes a running string 20, which is preferably coiled tubing of a type known in the art.

[0026] As Figure 2 illustrates, a central axial flowbore 22 is defined along the length of the running string 20. A cable 24 for transmission of electrical power and/or data extends along the length of the flowbore 22. According to preferred embodiments, the cable 24 is tube-wire. Tube-wire is a tube that contains an insulated cable that is used to provide electrical power and/or data to a bottom hole assembly or to transmit data

from the bottom hole assembly to the surface 14. Tube-wire is available commercially from manufacturers such as Canada Tech Corporation of Calgary, Canada. Telecoil is coiled tubing which incorporates tube-wire that can transmit power and data.

[0027] At surface 14, a controller 26 receives data from the cable 24. The controller 26 is preferably a programmable data processor having suitable amounts of memory and storage for processing data received from a bottom hole assembly as well as means for displaying such data. In currently preferred embodiments, the controller 26 comprises a computer. In preferred embodiments, the controller 26 is programmed with a suitable geosteering software which is capable of using data collected from downhole sensors and providing guidance to an operator in real time to permit on the fly changes or the position and orientation of the tunneling tool 40. Suitable software for use by the controller 26 includes Reservoir Navigation Services (RNS) software which is available commercially from Baker Hughes Incorporated of Houston, Texas.

[0028] The acid tunneling system 18 includes a bottom hole assembly 28 that is secured to the running string 20 by a coiled tubing connector 30. The bottom hole assembly 28 is designed for the injection of acid and preferably includes a sensor module 32 and a casing collar locator 34. In the described embodiment, the bottom hole assembly 28 also includes an indexing tool 36 and a pulsating tool 38. Additionally, the bottom hole assembly 28 includes an acid tunneling tool 40.

[0029] In many respects, the acid tunneling tool 40 is constructed and operates in the same manner as the acid tunneling bottom hole assembly 100 described in U.S. Patent Publication 2008/0271925 by Misselbrook et al. The acid tunneling tool 40 includes a wand 42 and intermediate sub 44 which are affixed to the pulsating tool 38 by articulating knuckle joint 46. A second articulating knuckle joint 48 interconnects the wand 42 and the intermediate sub 44 together. The wand 42 has a nozzle 50 at its

distal end. A suitable device for use as the acid tunneling tool 40 is the StimTunnel™ targeted acid placement tool which is available commercially from Baker Hughes Incorporated of Houston, Texas.

[0030] The indexing tool 36 is disposed axially between the hydraulic disconnect 34 and the pulsating tool 38. A suitable device for use as the indexing tool 36 is the coiled tubing Hi-Torque Indexing Tool which is available commercially from National Oilwell Varco. The indexing tool 36 is capable of rotating the pulsating tool 38 and acid tunneling tool 40 with respect to the running string 20 within the wellbore 10.

[0031] The bottom hole assembly 28 also includes a pulsating tool 38. A suitable device for use as the pulsating tool 38 is the EasyReach™ fluid hammer tool, which is available commercially from Baker Hughes Incorporated of Houston, Texas. A fluid pulsing tool of this type is described in greater detail in U.S. Patent Publication No. 2012/0312156 by Standen et al. entitled "Fluidic Impulse Generator." In operation, fluid, such as acid, is flowed down through the flowbore 22 of the running string, and through the pulsating tool 38 toward the acid tunneling tool 40. The pulsating tool 38 creates pressure pulses within the fluid flowing to the acid tunneling tool 40, and these pulses will cause the wand 42 and intermediate sub 44 to be flexed or bent upon the first and second knuckle joints 46, 48. In currently preferred embodiments, the tunneling tool 40 will flex (flexed position shown in Fig. 3) upon receipt of a pulse and unflex (unflexed position shown in Fig. 1). Flexing of the tunneling tool 40 allows acid to be injected at an angle toward the wellbore 10 wall, as illustrated by Figures 3-4. Lateral tunnel 52 is shown in Figure 4 being created by the injection of acid from nozzle 50.

[0032] Figure 6 illustrates the use of the pulsating tool 38 to help in creating an enlarged diameter lateral tunnel 52. In operation, the pulsating tool 38 generates a

series of fluid pulses transmitted toward the tunneling tool 40. As each pulse is transmitted, the wand 42 and intermediate sub 44 flex to the first position shown by the solid lines in Figure 6. When the pulse passes, the wand 42 and intermediate sub 44 unflex to the second position indicated by the broken lines in Figure 6. As a result, the surface area of the formation 16 over which acid is distributed is increased, thereby enlarging the lateral tunnel. In particular, the lateral tunnel 52 will have acid distributed onto an upper portion 54 and a lower portion 56. Periodic flexing and unflexing, together with injection of acid, will create a lateral tunnel 52 having an enlarged diameter or wider portions as compared to acid tunneling tools which do not incorporate a pulsating tool. In addition, the enlargement of the lateral tunnel will result in reduced friction between the tunneling tool 40 and the formation 16 which will aid the process of forming the lateral tunnel 52.

[0033] In certain embodiments, an inclinometer 58 is incorporated into the tunneling tool 40. The inclinometer 58 is capable of determining the angular inclination of the tunneling tool 40, or portions thereof, with respect to a vertical axis or relative to the inclination or angle of the wellbore 10. The inclinometer 58 is electrically connected to the data/power cable 24 so that inclinometer data is sent to the controller 26 at surface 14 in real time. In addition, the sensor module 32 and casing collar locator 34 are electrically connected to the data/power cable 24 so that data obtained by them is provided to the controller 26 in real time.

[0034] The sensor module 32 includes sensors that are capable of detecting at least one downhole parameter. Preferably, the sensor module 32 includes sensors that are capable of detecting a variety of downhole parameters. Exemplary downhole parameters that are sensed by the sensor module 32 include temperature, pressure, gamma, acoustics and pH (acidity/alkalinity). These parameters can be used by the

controller 26 or a user to identify the location and orientation of the bottom hole assembly 28 within the wellbore 10 in real time. For example, detected wellbore pressure or temperature can be correlated to a particular depth within the wellbore 10. In particular embodiments, real time bulk and azimuthal gamma measurements
5 provided to the controller 26 from the sensor module 32 are used by the controller 26 in a manner similar to geosteering drilling techniques for determining in real time if the lateral tunnel 52 being formed is being created in the desired direction from the wellbore 10. In certain embodiments, sensed acoustics data is provided to the controller 26 from the sensor module 32 are used by the controller 26 for the same
10 purpose. A pH sensor would be useful to provide information to the controller 26 which will help determine if acid is being spent effectively (i.e., reacting with formation rock) in forming lateral tunnel 52. A user can, in response, adjust acid volume, pumping rate, temperature and/or pressure.

[0035] The controller 26 will provide a user with the information needed to steer the
15 tunneling tool 40 in real time in response to information provided to the controller 26 by the sensor module 32, inclinometer 58 and casing collar locator 34 used with the bottom hole assembly 28. The casing collar locator 34 is capable of providing location data as a result of detection of axial spacing from a casing collar (i.e., connecting collars used with the cased portion 17 of the wellbore 10. In the acid tunneling system
20 18 of the present invention, data from the casing collar locator 34 is provided to the controller in real time via data/power cable 24.

[0036] In response to the information collected by the controller 26, a user can steer the bottom hole assembly 28 in order to create lateral tunnels at desired locations and in desired directions. With reference to Figure 5, it can be seen that the tunneling tool
25 40 has been rotated in the wellbore 10 from the creation of first lateral tunnel 52 so

that a second lateral tunnel 60 is being created by acid from the nozzle 50. The tunneling tool 40 has been rotated by the indexing tool 36 within the wellbore 10. In certain embodiments, the indexing tool 36 is capable of rotating the tunneling tool 40 up to 180 degrees in either radial direction within the wellbore 10, thereby providing the ability to orient the nozzle 50 of the tunneling tool 40 in any radial direction within the wellbore 10. Such real-time steering of the tunneling tool 40 can also be used to guide and orient the nozzle 50 of the tunneling tool 40 initially for the creation of lateral tunnel 52.

[0037] The invention provides systems and methods for steering a tunneling tool 40 in order to create lateral tunnels, such as tunnels 52, 60. In accordance with particular embodiments, data from downhole sensors and devices is transmitted to the surface in real time and, in response thereto, the tunneling tool 40 is moved axially within the wellbore 10 and/or angularly rotated within the wellbore 10 to steer and orient the nozzle 50 of that acid is injected in a desired direction for creation of one or more lateral tunnels. Figure 7 provides an exemplary flow diagram depicting steps in an exemplary operation to steer the tunneling tool 40 to create lateral tunnels. In step 70, the bottom hole assembly 28 is run into wellbore 10 on running string 20 to a first desired location within the wellbore 10. In step 72, acid is flowed to the bottom hole assembly 28 where the pulsating tool 38 is activated to flex and unflex the tunneling tool 40 as described above. Acid creates a first lateral tunnel at a first location within the wellbore 10.

[0038] In step 74, data from sensor module 32, inclinometer 58, and casing collar locator 34 is transmitted to controller 26. It is noted that step 74 occurs during each of the steps 70 and 72. In step 76, the tunneling tool 40 is steered to orient the nozzle 50 to create a second lateral tunnel at a second location. A user steers the tunneling

tool 40 in response to and based upon real-time downhole parameter data collected by the controller 26. In steering the tunneling tool 40, the bottom hole assembly 28 may be moved axially within the wellbore 10. Also, the indexing tool 36 can steer the tunneling tool 40 by rotating it within the wellbore 10. In step 78, the tunneling tool 40 creates a second lateral tunnel in a second location within the wellbore 10. In step 80, acid is flowed to the bottom hole assembly 28. The pulsating tool 38 flexes the tunneling tool 40 and directs the nozzle 50 radially outwardly so that a second lateral tunnel may be formed.

[0039] Figures 8-9 depict an embodiment wherein an acid tunneling system is used to create one or more lateral tunnels from within a wellbore 90 which is lined with metallic casing 92. Figure 8 illustrates a window mill 94 having been run into the wellbore 90 on running string 96. A whipstock 98 has been placed within the wellbore 90 deflects the mill 94 so that a window 100 is cut into the casing 92. The window 100 is cut at a location within the wellbore 90 wherein it is desired to create a lateral tunnel. Although only a single window 100 is shown being cut, it should be understood that more than one window may be cut, allowing lateral tunnels to be created at multiple locations from wellbore 90.

[0040] After the cutting of window 100 (or multiple windows, if applicable), the mill 94 and whipstock 98 are removed from the wellbore 90. Thereafter, an acid tunneling system 18 is disposed into the wellbore 90 (Figure 9). The tunneling tool 40 of the acid tunneling system 18 is then steered, using the techniques described previously, to direct the nozzle 50 of the tunneling tool 40 toward the window 100 and surrounding formation 16. Steering in this instance will preferably utilize at least data provided to the controller 26 by the casing collar locator 34 in order to assist in properly locating the tunneling tool 40 at the same depth or location in the wellbore 90 as the window

100. Data from the inclinometer 58 is useful for directing the nozzle 50 through the window 100. If there are multiple windows that have been cut in the casing, the tunneling tool 40 is steered to each of them using the techniques described previously. At each location, the acid tunneling tool is used to create a lateral tunnel through the
5 window, such as window 100.

[0041] Those of skill in the art will recognize that numerous modifications and changes may be made to the exemplary designs and embodiments described herein and that the invention is limited only by the claims that follow and any equivalents thereof.

CLAIMS

What is claimed is:

1. A steerable acid tunneling system for creating lateral tunnels (52, 60) in a subterranean formation (16) surrounding a wellbore (10), the steerable acid tunneling system being characterized by:

- an acid tunneling tool (40) having a wand (42) with a nozzle (50) for injecting acid into the formation and at least one articulable joint (46, 48) for angularly bending the wand (42) within the wellbore;
- one or more sensors for detection of at least one downhole parameter and transmission of a signal indicative of the at least one downhole parameter to surface; and
- wherein the acid tunneling tool is steered by angularly bending the wand in real time response to the at least one downhole parameter detected in order to inject acid in a particular direction.

2. The steerable acid tunneling system of claim 1 being further characterized by:

- an indexing tool (36) operably associated with the acid tunneling tool and operable to rotate the acid tunneling tool (40) within the wellbore; and
- wherein the acid tunneling tool is further steered by rotating the acid tunneling tool within the wellbore with the indexing tool.

3. The steerable acid tunneling system of claim 1 wherein the at least one downhole parameter is at least one of a group consisting of pressure, temperature, tool inclination, axial spacing from a casing collar, alkalinity/acidity, gamma, and acoustics.

1 4. The steerable acid tunneling system of claim 1 further characterized by:
2 an inclinometer (58) operably associated with acid tunneling tool (40); and
3 wherein the inclinometer provides a real time signal indicative of angular
4 inclination of the tunneling tool within the wellbore to surface.

1 5. The steerable acid tunneling system of claim 1 further comprising a controller
2 (26) to receive a signal indicative of the at least one downhole parameter.

1 6. The steerable acid tunneling system of claim 1 further comprising:
2 a running string (20) for running a bottom hole assembly including the acid
3 tunneling tool and one or more sensors into the wellbore, the running string having
4 an axial flowbore (22) for flowing of acid; and
5 a power/data cable (24) located within the flowbore for transmission of a
6 signal indicative of the at least one downhole parameter to surface.

1 7. A method of steering an acid tunneling system in real time within a wellbore
2 (10) to create a lateral tunnel (52, 60) from the wellbore, the method being
3 characterized by the steps of:

4 running an acid tunneling system (18) into a wellbore (10), the acid tunneling
5 system having an acid tunneling tool (40) with a wand (42) having a nozzle (50) for
6 injecting acid into a formation (16) radially surrounding the wellbore and at least one
7 articable joint (46, 48) for angularly bending the wand within the wellbore;

8 detecting at least one downhole parameter with one or more sensors and
9 transmitting a signal indicative of the at least one downhole parameter to surface in
10 real time;

steering the acid tunneling tool of the acid tunneling system to a desired location for forming a lateral tunnel (52, 60); and
flowing acid to the acid tunneling tool to inject the acid into a formation at the desired location to form the lateral tunnel.

8. The method of claim 7 wherein the step of steering the acid tunneling tool to a desired location further comprises steering the acid tunneling tool from a first location within the wellbore to a second location within the wellbore.

9. The method of claim 7 further characterized by the step of:
while flowing the acid to the acid tunneling tool, generating a plurality of fluid pulses within acid flowing to the acid tunneling tool, and
wherein the plurality of fluid pulses causes the wand to flex about the articulable joint between first and second positions so that the nozzle injects acid at the first and second positions, thereby enlarging the lateral tunnel formed.

10. The method of claim 7 wherein the step of steering the acid tunneling tool to a desired location is further characterized by rotating the acid tunneling tool within the wellbore.

11. The method of claim 7 wherein the step of steering the acid tunneling tool to a desired location is further characterized by moving the acid tunneling tool axially within the wellbore.

12. The method of claim 7 wherein:

2 the wellbore is lined with a metallic casing (17); and
3 prior to running the acid tunneling system into the wellbore, a window is cut
4 into the metallic casing, and thereafter, the acid tunneling tool is steered within the
5 wellbore to the desired location.

1/9

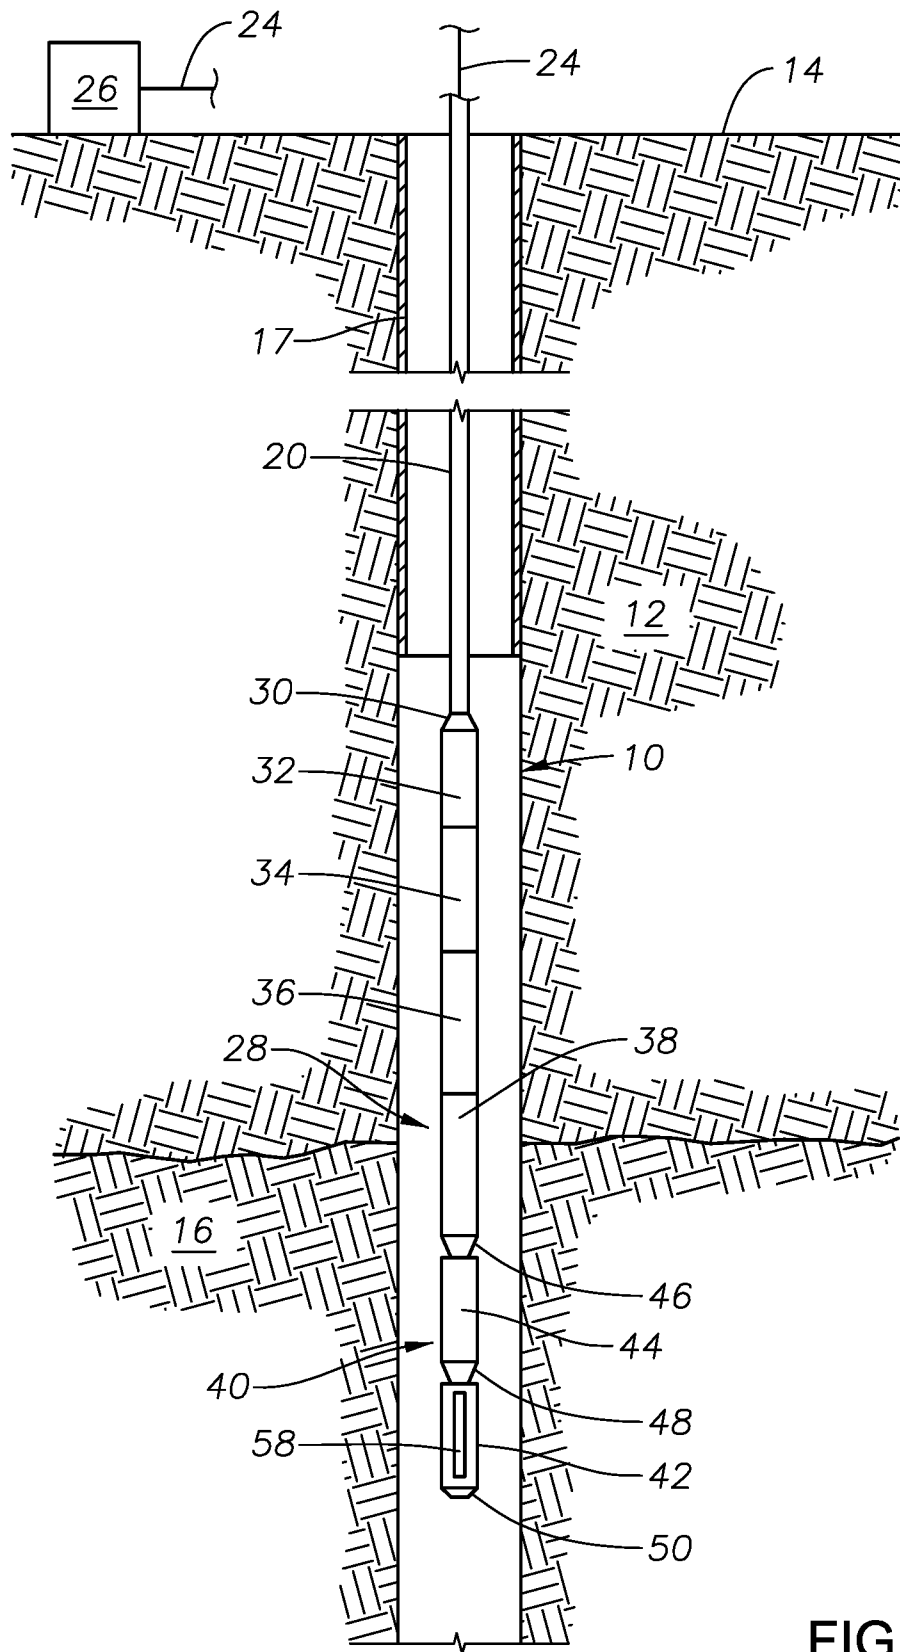


FIG. 1

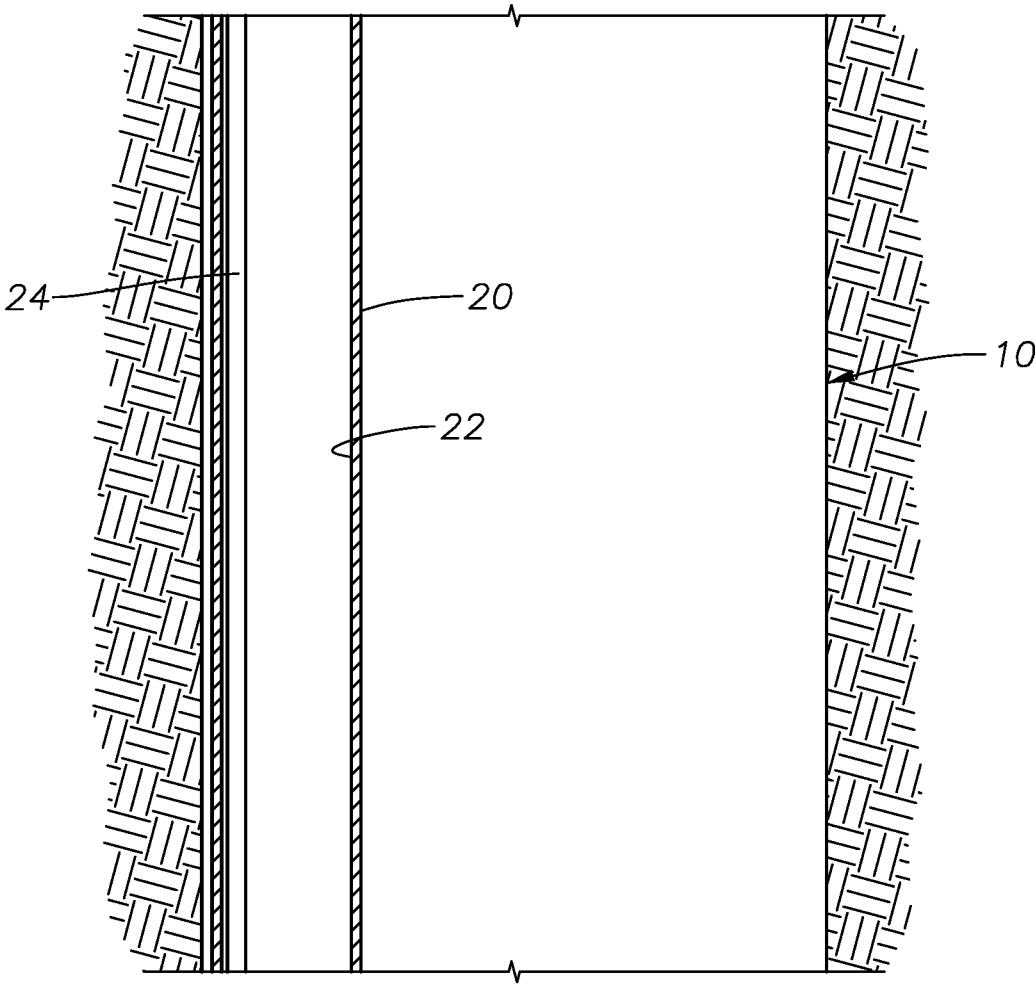


FIG. 2

3/9

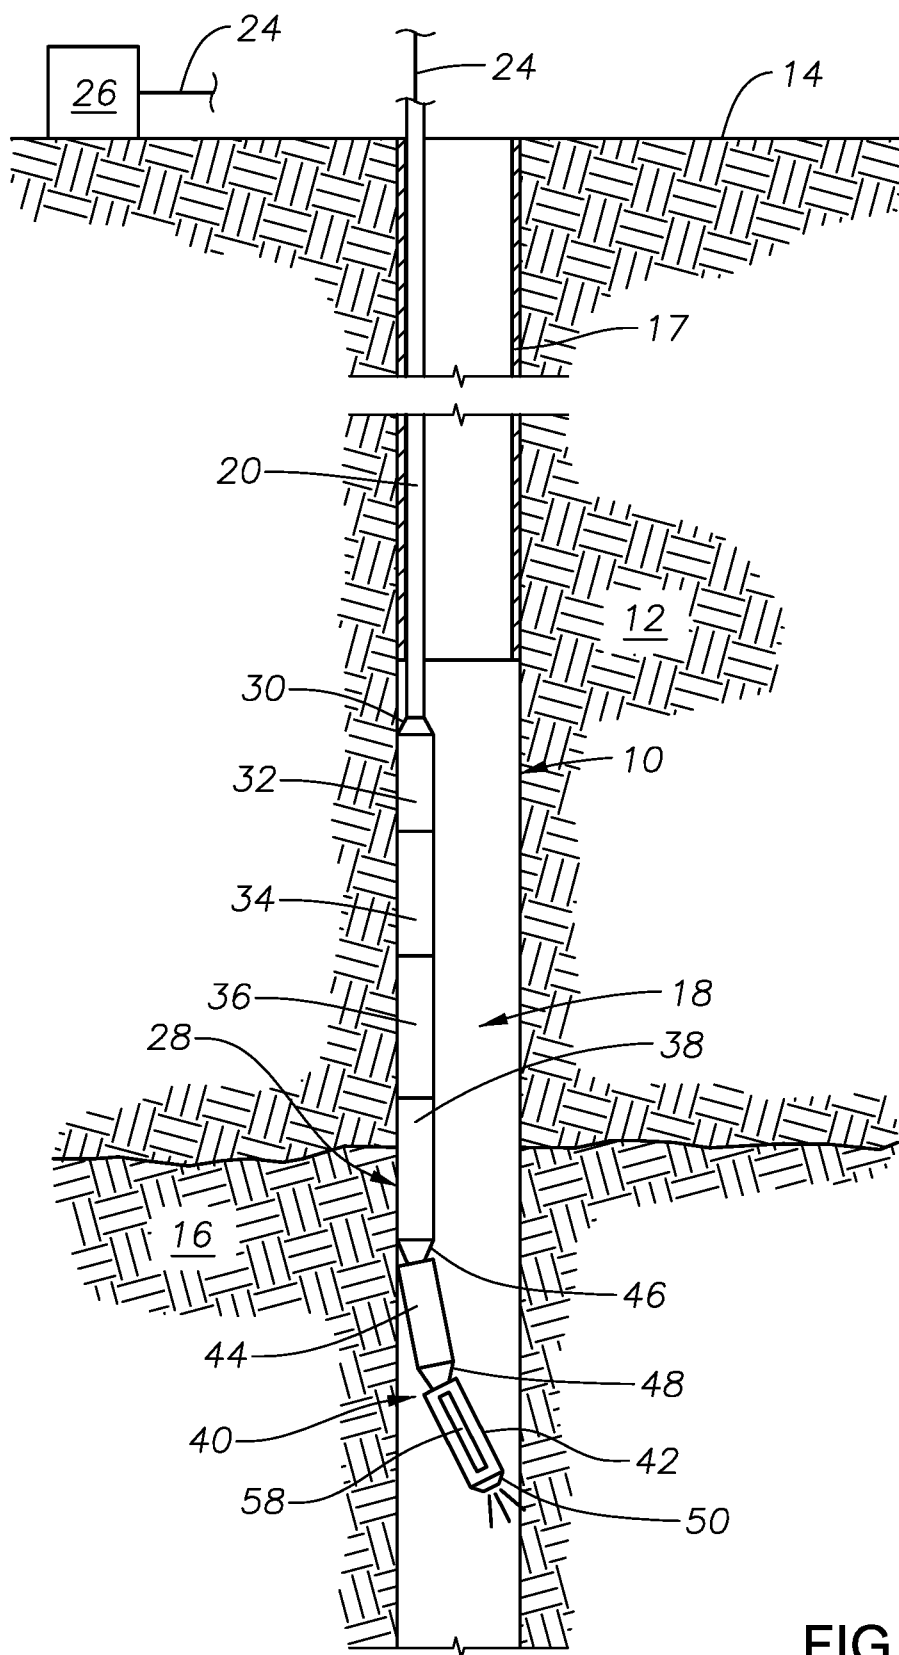


FIG. 3

4/9

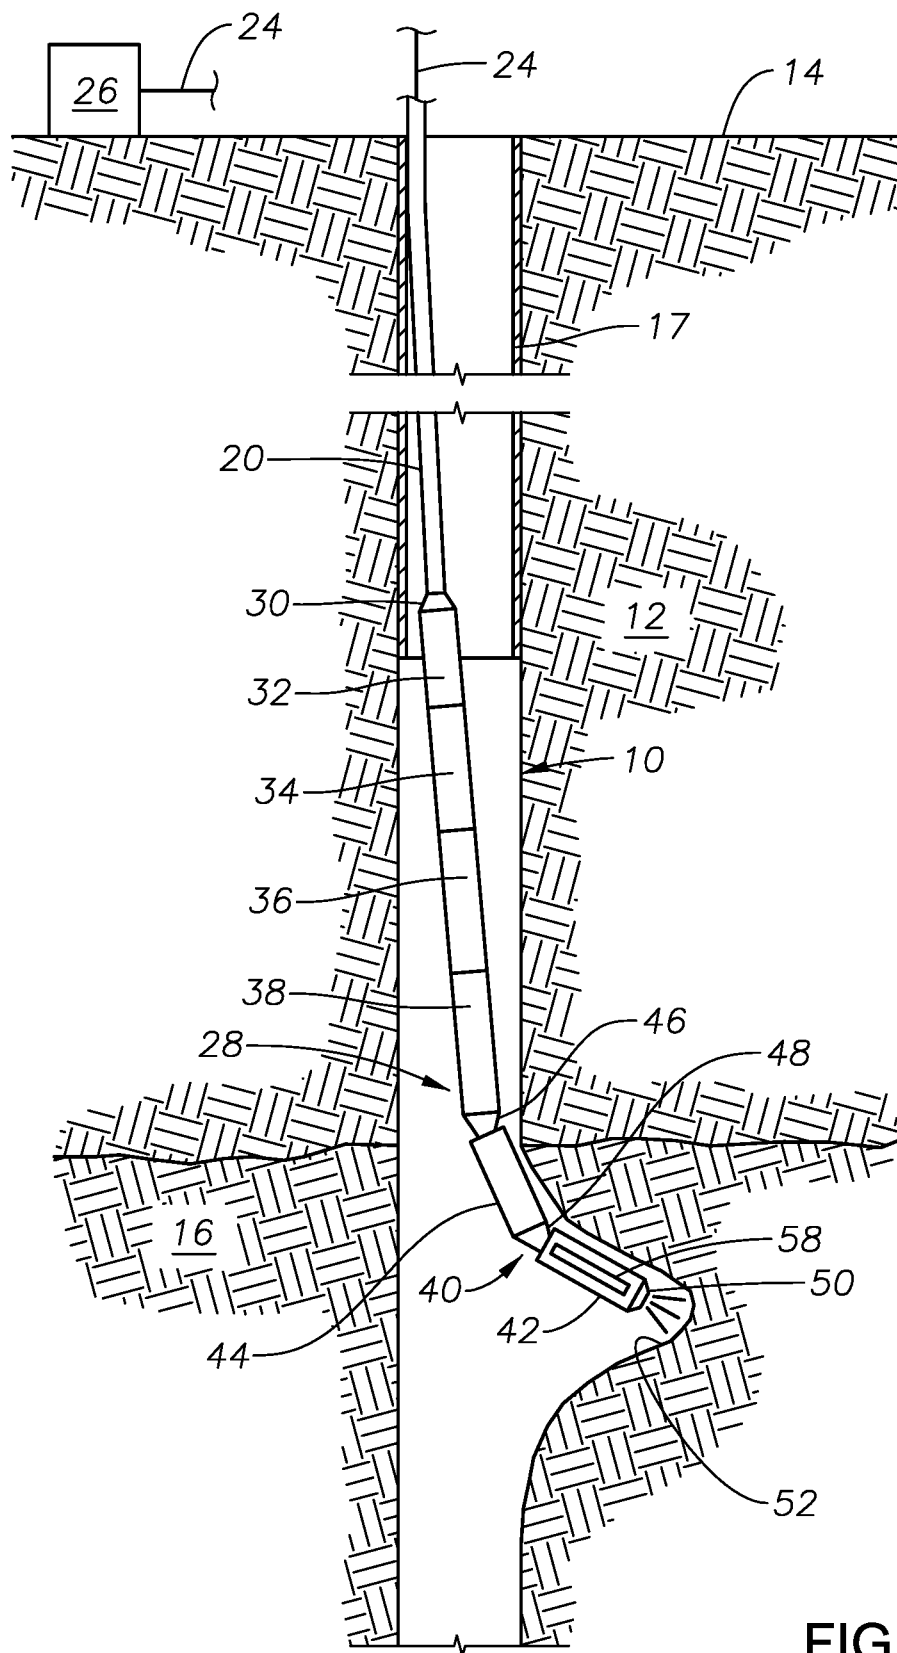


FIG. 4

5/9

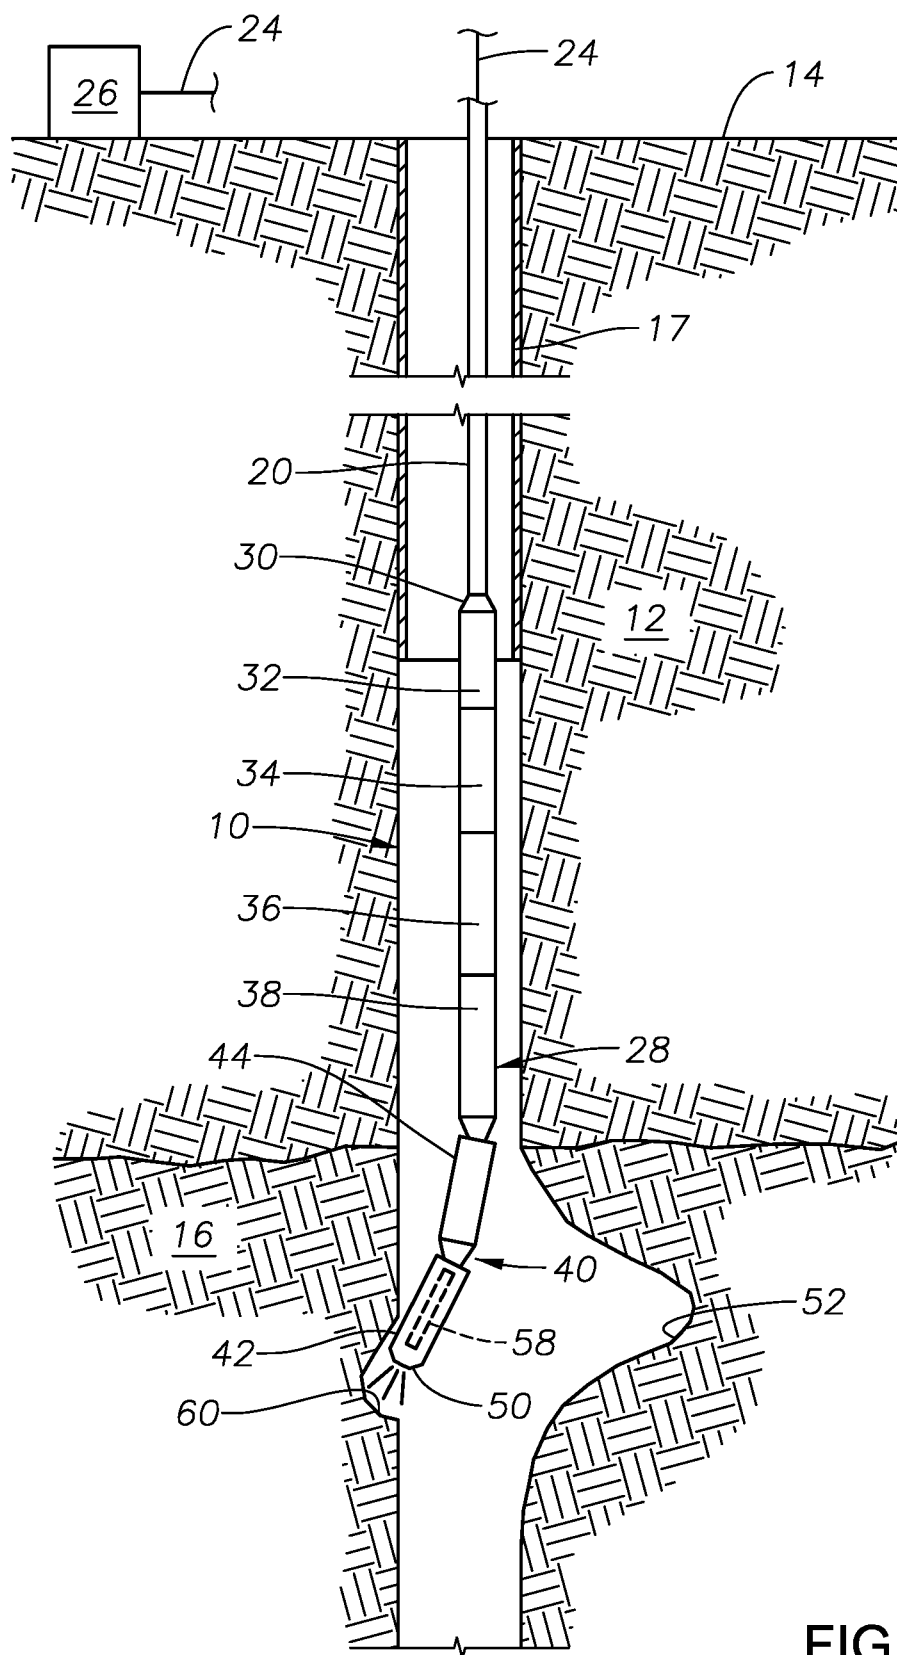


FIG. 5

6/9

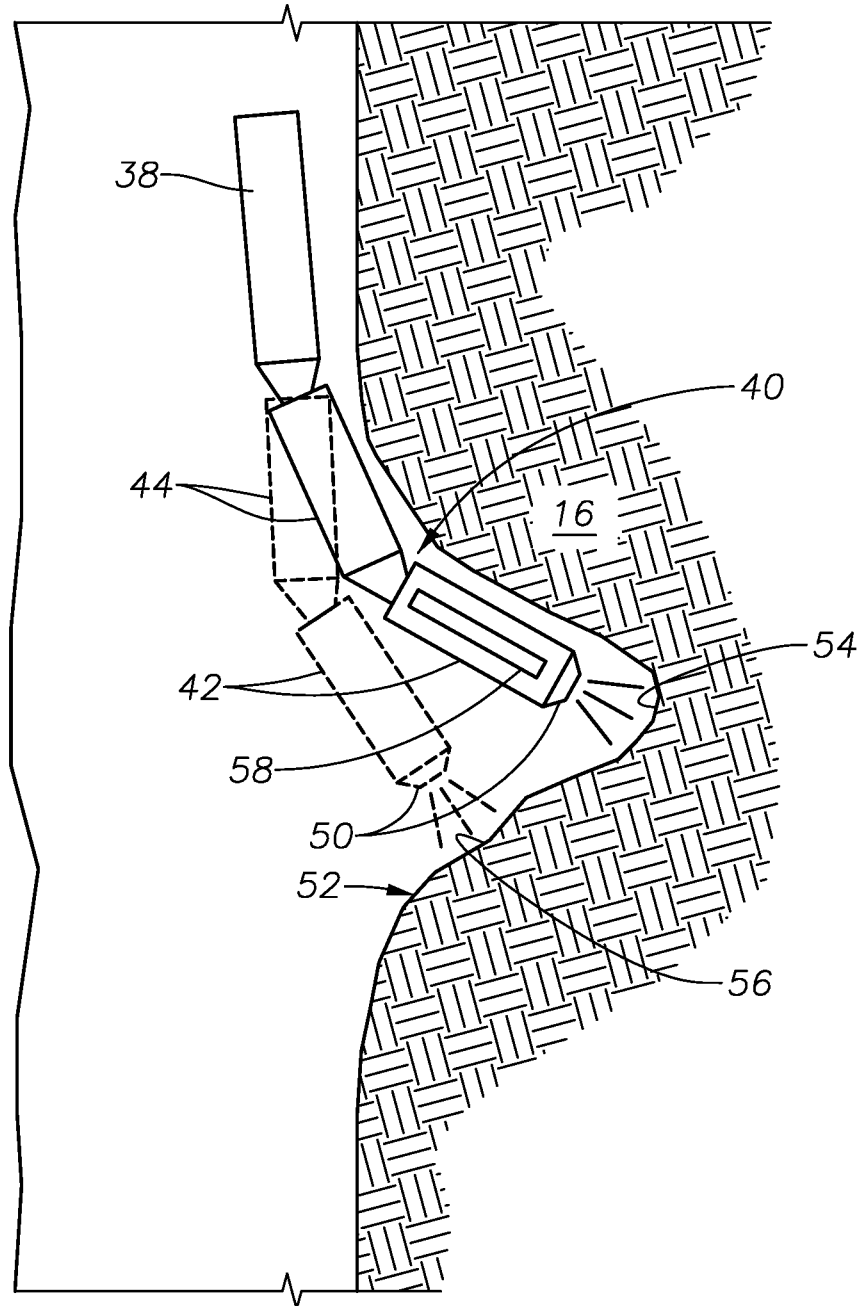


FIG. 6

7/9

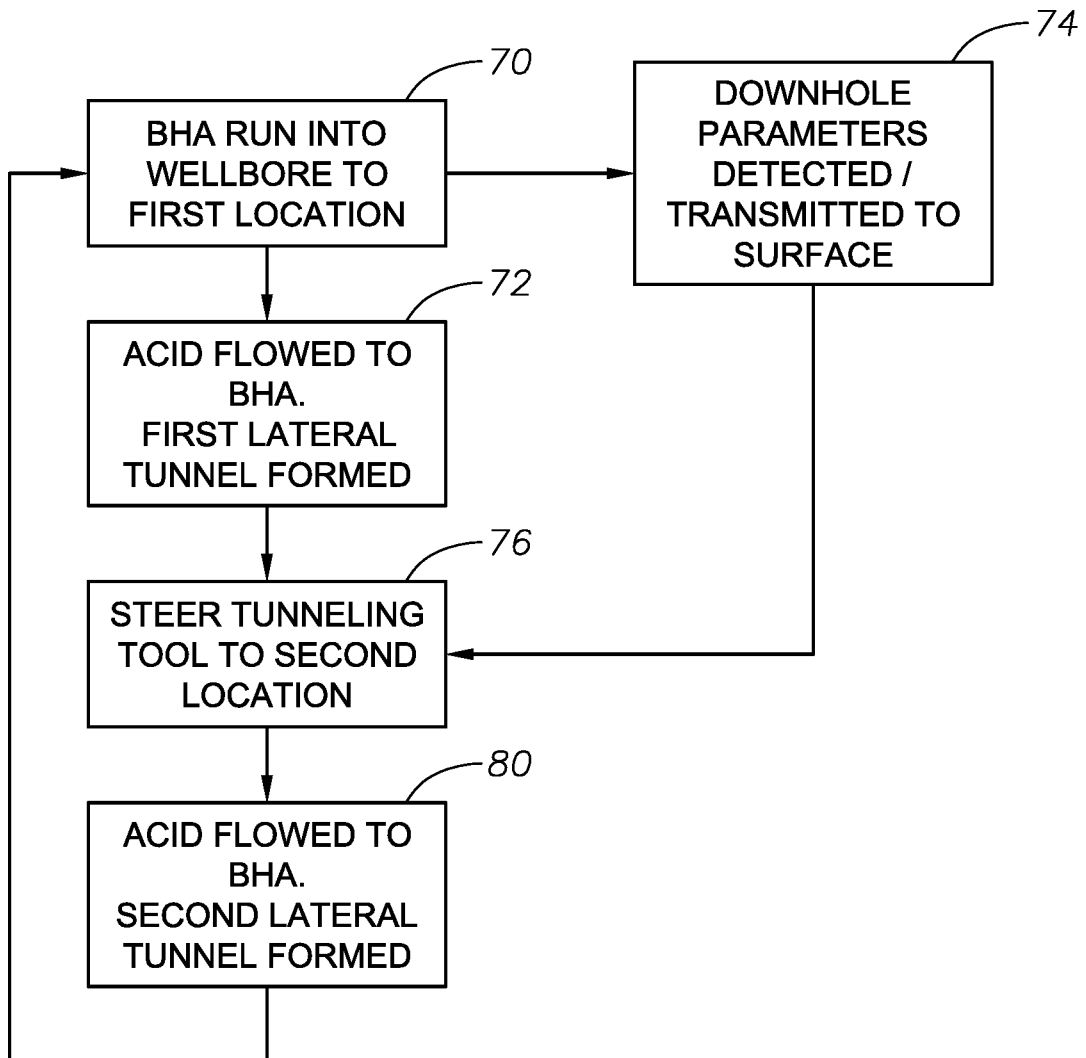


FIG. 7

8/9

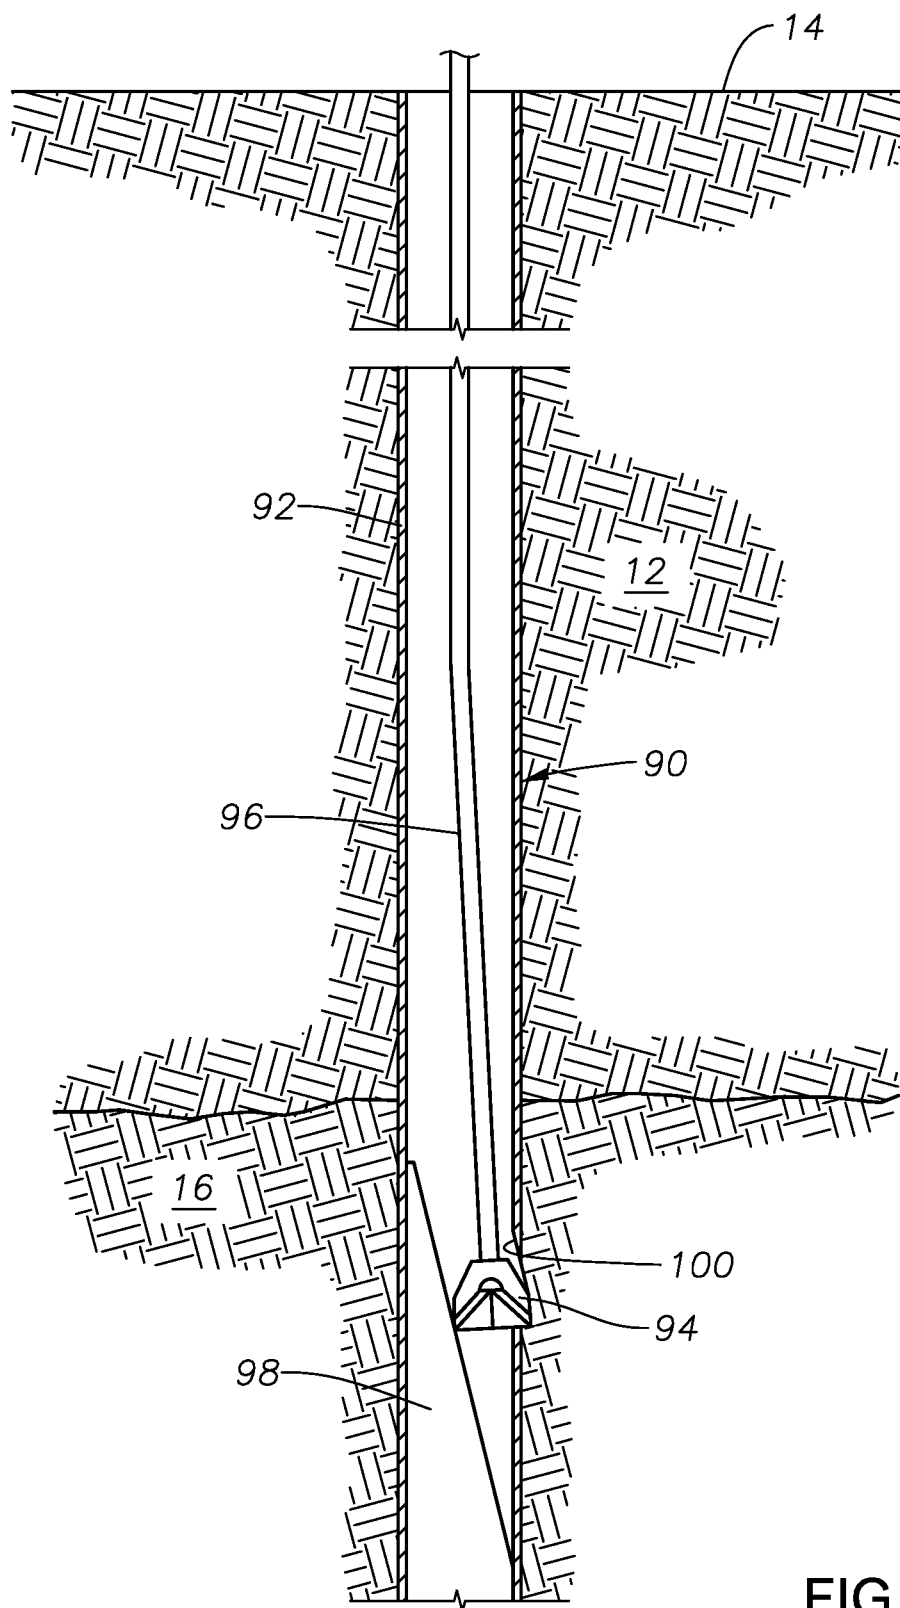


FIG. 8

9/9

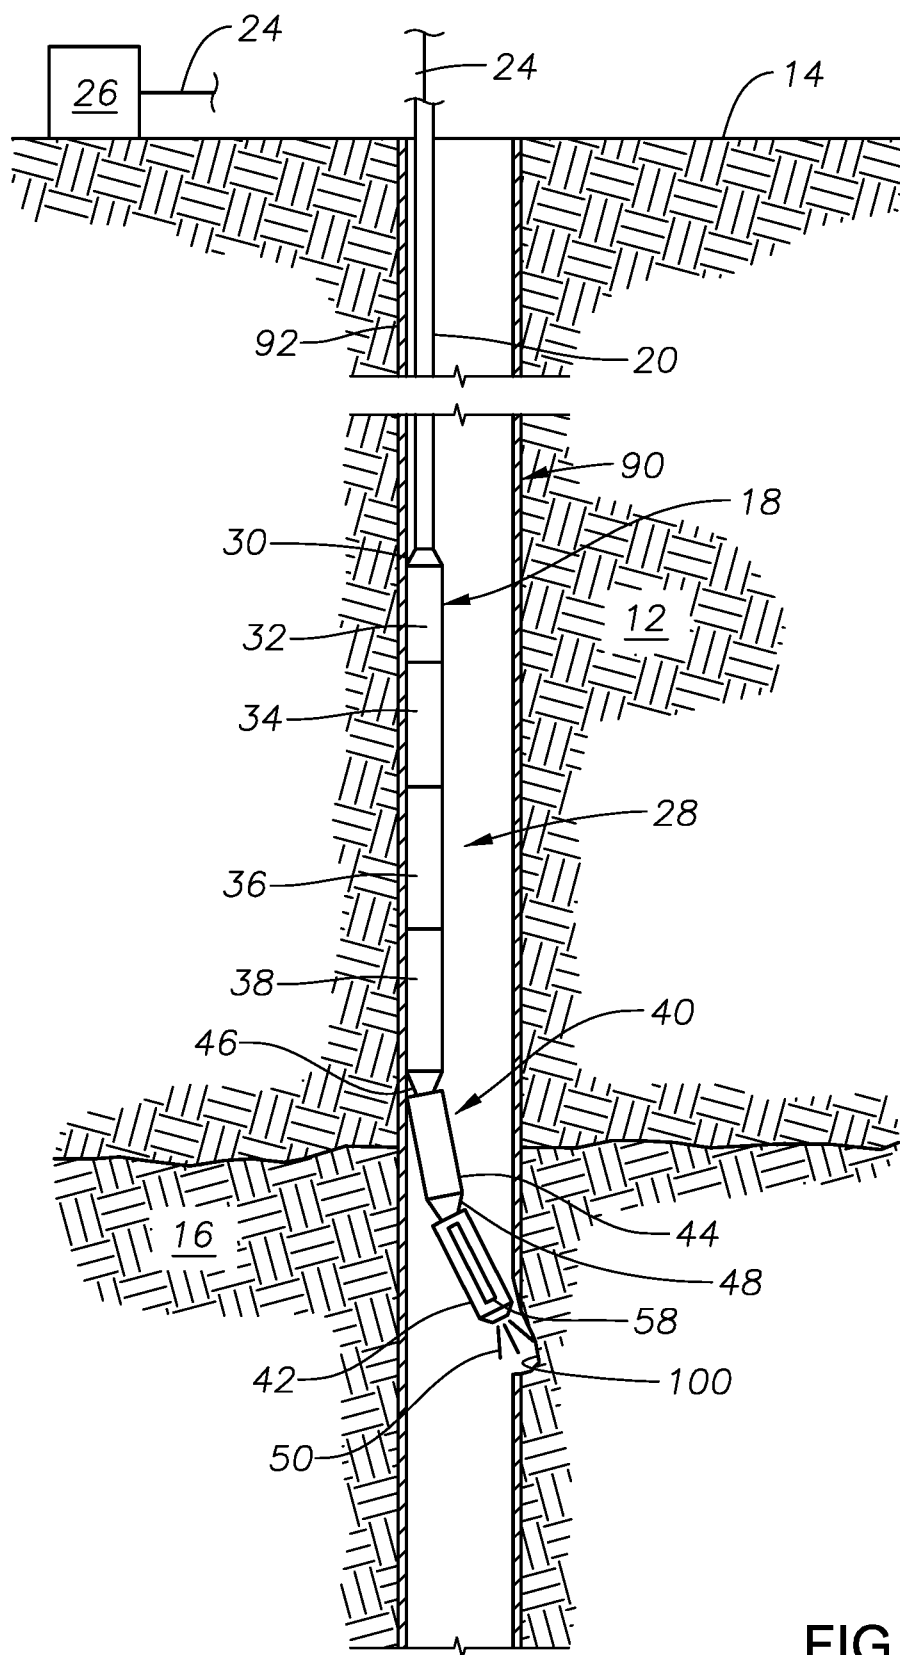


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2016/031778**A. CLASSIFICATION OF SUBJECT MATTER****E21B 7/06(2006.01)i, E21B 7/08(2006.01)i, E21B 7/18(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 7/06; E21B 10/00; E21B 7/08; G01V 3/38; E21B 43/26; E21B 29/00; E21B 7/18

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: acid tunneling tool, sensor, indexing tool, inclinometer, joint, and nozzle

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2008-0271925 A1 (MISSELBROOK et al.) 06 November 2008 See abstract, paragraphs [0036], [0041]-[0043], and figures 3-4.	1-12
Y	US 6272434 B1 (WISLER et al.) 07 August 2001 See abstract, column 9, line 32 - column 14, line 24, and figures 1A-2B.	1-12
Y	US 2012-0061079 A1 (BUCKMAN, SR. et al.) 15 March 2012 See abstract, paragraphs [0024], [0026], and figure 2B.	2, 10
Y	US 2012-0138301 A1 (ASSAL et al.) 07 June 2012 See abstract, paragraph [0031], and figure 5A.	12
A	US 2003-0234106 A1 (SURJAATMADJA, JIM B.) 25 December 2003 See abstract, paragraphs [0061]-[0063], and figure 11.	1-12



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 August 2016 (10.08.2016)

Date of mailing of the international search report

16 August 2016 (16.08.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

HAN, JOONG SUB

Telephone No. +82-42-481-3578



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/031778

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008-0271925 A1	06/11/2008	CA 2630223 A1 CA 2630223 C CA 2642704 A1 CA 2642704 C US 2009-0114449 A1 US 8205672 B2	03/11/2008 25/02/2014 28/04/2010 24/12/2013 07/05/2009 26/06/2012
US 6272434 B1	07/08/2001	CA 2165017 A1 CA 2165017 C EP 0718641 A2 EP 0718641 A3 EP 0718641 B1 US 5812068 A	13/06/1996 11/07/2006 26/06/1996 09/06/1999 13/08/2003 22/09/1998
US 2012-0061079 A1	15/03/2012	US 2010-0193192 A1 US 2012-0006548 A1 US 8196680 B2 US 8267198 B2 US 8267199 B2 WO 2010-090891 A1	05/08/2010 12/01/2012 12/06/2012 18/09/2012 18/09/2012 12/08/2010
US 2012-0138301 A1	07/06/2012	GB 201301911 D0 GB 2496789 A NO 20130249 A US 8678092 B2 WO 2012-018706 A1	20/03/2013 22/05/2013 14/02/2013 25/03/2014 09/02/2012
US 2003-0234106 A1	25/12/2003	AU 2002-300782 B2 AU 2002-300842 B2 CA 2405608 A1 CA 2405608 C CA 2405631 A1 CA 2405631 C CA 2466139 A1 CN 100482918 C CN 1327107 C CN 1408986 A CN 1425847 A EP 1298280 A1 EP 1298280 B1 EP 1298282 A2 EP 1298282 A3 EP 1298282 B1 EP 1489260 A1 NO 20041764 A US 2003-0062162 A1 US 2003-0062167 A1 US 2004-0089452 A1 US 6662874 B2	18/01/2007 14/02/2008 28/03/2003 10/03/2009 28/03/2003 02/08/2011 06/11/2004 29/04/2009 18/07/2007 09/04/2003 25/06/2003 02/04/2003 21/05/2008 02/04/2003 07/01/2004 28/04/2010 22/12/2004 08/11/2004 03/04/2003 03/04/2003 13/05/2004 16/12/2003

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/031778Patent document
cited in search reportPublication
datePatent family
member(s)Publication
date

US 6725933 B2

27/04/2004

US 6779607 B2

24/08/2004

US 6938690 B2

06/09/2005

PATENT COOPERATION TREATY

From the
INTERNATIONAL SEARCHING AUTHORITY

PCT

WRITTEN OPINION OF THE INTERNATIONAL SEARCHING AUTHORITY

(PCT Rule 43bis.1)

To:
HUNTER, SHAWN

LAW OFFICE OF SHAWN HUNTER P.O. BOX 270110
HOUSTON TX 77277-0110 USA

Date of mailing
(day/month/year) **16 August 2016 (16.08.2016)**

Applicant's or agent's file reference CT4-59521-WO	FOR FURTHER ACTION See paragraph 2 below
---	--

International application No. PCT/US2016/031778	International filing date (day/month/year) 11 May 2016 (11.05.2016)	Priority date(day/month/year) 13 May 2015 (13.05.2015)
---	---	---

International Patent Classification (IPC) or both national classification and IPC
E21B 7/06(2006.01)i, E21B 7/08(2006.01)i, E21B 7/18(2006.01)i

Applicant
BAKER HUGHES INCORPORATED

1. This opinion contains indications relating to the following items:

- | | | |
|-------------------------------------|--------------|---|
| ☒ | Box No. I | Basis of the opinion |
| ☐ | Box No. II | Priority |
| ☐ | Box No. III | Non-establishment of opinion with regard to novelty, inventive step and industrial applicability |
| ☐ | Box No. IV | Lack of unity of invention |
| ☒ | Box No. V | Reasoned statement under Rule 43bis.1(a)(i) with regard to novelty, inventive step and industrial applicability; citations and explanations supporting such statement |
| ☐ | Box No. VI | Certain documents cited |
| ☐ | Box No. VII | Certain defects in the international application |
| ☐ | Box No. VIII | Certain observations on the international application |

2. **FURTHER ACTION**

If a demand for international preliminary examination is made, this opinion will be considered to be a written opinion of the International Preliminary Examining Authority ("IPEA") except that this does not apply where the applicant chooses an Authority other than this one to be the IPEA and the chosen IPEA has notified the International Bureau under Rule 66.1bis(b) that written opinions of this International Searching Authority will not be so considered.

If this opinion is, as provided above, considered to be a written opinion of the IPEA, the applicant is invited to submit to the IPEA a written reply together, where appropriate, with amendments, before the expiration of 3 months from the date of mailing of Form PCT/ISA/220 or before the expiration of 22 months from the priority date, whichever expires later.
For further options, see Form PCT/ISA/220.

Name and mailing address of the ISA/KR International Application Division Korean Intellectual Property Office 189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea Facsimile No. +82-42-481-8578	Date of completion of this opinion 10 August 2016 (10.08.2016)	Authorized officer HAN, JOONG SUB Telephone No. +82-42-481-3578
---	---	---



**WRITTEN OPINION OF THE
INTERNATIONAL SEARCHING AUTHORITY**

International application No.

PCT/US2016/031778

Box No. 1 Basis of this opinion

1. With regard to the **language**, this opinion has been established on the basis of :

- ☒ the international application in the language in which it was filed
- ☐ a translation of the international application into _____ which is the language of a translation furnished for the purposes of international search (Rules 12.3(a) and 23.1(b))

2. ☐ This opinion has been established taking into account the **rectification of an obvious mistake** authorized by or notified to this Authority under Rule 91 (Rule 43bis.1(a))

3. ☐ With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, this opinion has been established on the basis of a sequence listing:

- a. ☐ forming part of the international application as filed:
- ☐ in the form of an Annex C/ST.25 text file.
- ☐ on paper or in the form of an image file.
- b. ☐ furnished together with the international application under PCT Rule 13ter.1(a) for the purposes of international search only in the form of an Annex C/ST.25 text file.
- c. ☐ furnished subsequent to the international filing date for the purposes of international search only:
- ☐ in the form of an Annex C/ST.25 text file (Rule 13ter.1(a)).
- ☐ on paper or in the form of an image file (Rule 13ter.1(b) and Administrative Instructions, Section 713).

4. ☐ In addition, in the case that more than one version or copy of a sequence listing has been filed or furnished, the required statements that the information in the subsequent or additional copies is identical to that forming part of the application as filed or does not go beyond the application as filed, as appropriate, were furnished.

5. Additional comments:

**WRITTEN OPINION OF THE
INTERNATIONAL SEARCHING AUTHORITY**

International application No.
PCT/US2016/031778

Box No. V Reasoned statement under Rule 43bis.1(a)(i) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Claims	1-12	YES
	Claims	NONE	NO
Inventive step (IS)	Claims	NONE	YES
	Claims	1-12	NO
Industrial applicability (IA)	Claims	1-12	YES
	Claims	NONE	NO

2. Citations and explanations :

Reference is made to the following documents:

D1: US 2008-0271925 A1 (MISSELBROOK et al.) 06 November 2008

D2: US 6272434 B1 (WISLER et al.) 07 August 2001

D3: US 2012-0061079 A1 (BUCKMAN, SR. et al.) 15 March 2012

D4: US 2012-0138301 A1 (ASSAL et al.) 07 June 2012

1. Novelty and Inventive Step

1.1 Independent Claim 1

D1, which is considered to be the closest prior art to the subject matter of claim 1, discloses a bottom hole assembly system for creating an acid tunnel in a subterranean formation surrounding a wellbore, the system comprising a bottom hole assembly (100) having a wand (160) with a nozzle (170) for injecting acid into the formation and knuckle joints (155,156) for curving the wand (160) within the wellbore (see paragraphs [0036], [0041]-[0043] and figures 3-4). Claim 1 differs from D1 in that one or more sensors are configured for: detection of at least one downhole parameter; and transmission of a signal indicative of the at least one downhole parameter to surface, wherein an acid tunneling tool is steered by angularly bending a wand in real time response to the at least one downhole parameter detected in order to inject acid in a particular direction. However, this feature would be easily conceived from: the bottom hole assembly (100) which is curved by curving the wand (160) to inject acid in D1 (see paragraph [0041] and figures 3-4); and sensors for detection of at least one downhole parameter and transmission of a signal indicative of the at least one downhole parameter to surface, wherein a drilling direction is adjusted in response to the at least one downhole parameter in D2 (see column 11, lines 29-42, column 14, lines 5-17). As D2 is directed

Continued on Supplemental Box

Supplemental Box

In case the space in any of the preceding boxes is not sufficient.

Continuation of : Box No. V

toward a similar subject matter, a person skilled in the art would, in seeking a solution to the problem being addressed, be motivated to combine the disclosures of each of documents to arrive at the claimed invention. Accordingly, claim 1 would have been obvious over D1 in view of D2. Therefore, claim 1 does not involve an inventive step under PCT Article 33(3).

1.2 Dependent Claims 2-6

1.2.1 Concerning Claim 2

The additional feature of claim 2, characterized in that an indexing tool is operably associated with the acid tunneling tool and operable to rotate the acid tunneling tool within the wellbore, wherein the acid tunneling tool is steered by rotating the acid tunneling tool within the wellbore with the indexing tool, is not disclosed in D1 or D2. However, this feature would be easily conceived from an indexing tool (50) associated with a tool body (24) and operable to rotate the tool body (24), wherein the tool body (24) is rotated to jet an abrasive slurry to form a hole within a wellbore in D3 (see paragraphs [0024], [0026] and figure 2B). As D3 is directed toward a similar subject matter, a person skilled in the art would, in seeking a solution to the problem being addressed, be motivated to combine the disclosures of each of documents to arrive at the claimed invention. Accordingly, claim 2 would have been obvious over D1 in view of D2 and D3. Therefore, claim 2 does not involve an inventive step under PCT Article 33(3).

1.2.2 Concerning Claim 3

The additional feature of claim 3 is identical to a downhole temperature in D2 (see column 11, lines 29-33). Accordingly, claim 3 would have been obvious over D1 in view of D2. Therefore, claim 3 does not involve an inventive step under PCT Article 33(3).

Continued on The Next Page

Supplemental Box

In case the space in any of the preceding boxes is not sufficient.

Continuation of : Previous Page

1.2.3 Concerning Claim 4

The additional feature of claim 4, characterized in that an inclinometer is operably associated with the acid tunneling tool, wherein the inclinometer provides a real time signal indicative of angular inclination of the tunneling tool within the wellbore to surface, would be easily conceived from an inclinometer (222) operably associated with a downhole assembly (20), wherein the inclinometer (222) provides a signal indicative of angular inclination of a module (216) of the downhole assembly (20) in D2 (see column 10, lines 36-43 and figures 1B-1C). Accordingly, claim 4 would have been obvious over D1 in view of D2. Therefore, claim 4 does not involve an inventive step under PCT Article 33(3).

1.2.4 Concerning Claim 5

The additional feature of claim 5 is identical to a surface processor (32) configured to receive a signal indicative of the at least one downhole parameter in D2 (see column 9, lines 32-60 and figure 1A). Accordingly, claim 5 would have been obvious over D1 in view of D2. Therefore, claim 5 does not involve an inventive step under PCT Article 33(3).

1.2.5 Concerning Claim 6

The additional feature of claim 6, concerning a running string for running a bottom hole assembly including the acid tunneling tool and one or more sensors into the wellbore, wherein the running string has an axial flowbore for flowing of acid; and a power/data cable located within the flowbore for transmission of a signal indicative of the at least one downhole parameter to surface, would be easily conceived from: a coiled tubing (5) for running the bottom hole assembly (100) into the wellbore, wherein the coiled tubing (5) has an axial flowbore for flowing of acid in D1 (see paragraphs [0036] and figure 3); and a drill string (16) having a downhole telemetry system for transmission of a signal indicative of the at least one downhole parameter to surface in D2 (see column 9, lines 32-60 and figure 1A). Accordingly, claim 6 would have been obvious over D1 in view of D2. Therefore, claim 6 does not involve an inventive step under PCT Article 33(3).

Continued on The Next Page

Supplemental Box

In case the space in any of the preceding boxes is not sufficient.

Continuation of : Previous Page

1.3 Independent Claim 7

D1, which is considered to be the closest prior art to the subject matter of claim 7, discloses a method of steering a bottom hole assembly system within a wellbore to create an acid tunnel from the wellbore, the method comprising the steps of: running a bottom hole assembly system into a wellbore, wherein the bottom hole assembly system has a bottom hole assembly (100) with a wand (160) having a nozzle (170) for injecting acid into a formation and knuckle joints (155,156) for curving the wand (160) within the wellbore; curving the bottom hole assembly (100) to form an acid tunnel (30); and flowing acid to the bottom hole assembly (100) to inject the acid into the formation to form the acid tunnel (30) (see paragraphs [0036], [0041]-[0043] and figures 3-4). Claim 7 differs from D1 in that it comprises the steps of: detecting at least one downhole parameter with one or more sensors; and transmitting a signal indicative of the at least one downhole parameter to surface in real time. However, this feature would be easily conceived from the steps of: detecting at least one downhole parameter with sensors; and transmitting a signal indicative of the at least one downhole parameter to surface in D2 (see column 11, lines 29-42, column 14, lines 5-17). As D2 is directed toward a similar subject matter, a person skilled in the art would, in seeking a solution to the problem being addressed, be motivated to combine the disclosures of each of documents to arrive at the claimed invention. Accordingly, claim 7 would have been obvious over D1 in view of D2. Therefore, claim 7 does not involve an inventive step under PCT Article 33(3).

1.4 Dependent Claims 8-12

1.4.1 Concerning Claim 8

The additional feature of claim 8, characterized in that steering the acid tunneling tool to a desired location comprises steering the acid tunneling tool from a first location within the wellbore to a second location within the wellbore, is merely a design variation of curving the bottom hole assembly (100) to form the acid tunnel (30) in D1 (see paragraphs [0036], [0042] and figure 4). Accordingly, claim 8 would have been obvious over D1 in view of D2. Therefore, claim 8 does not involve an inventive step under PCT Article 33(3).

Continued on The Next Page

Supplemental Box

In case the space in any of the preceding boxes is not sufficient.

Continuation of : Previous Page

1.4.2 Concerning Claim 9

The additional feature of claim 9, concerning the step of while flowing the acid to the acid tunneling tool, generating a plurality of fluid pulses within acid flowing to the acid tunneling tool, wherein the plurality of fluid pulses causes the wand to flex about the articulable joint between first and second positions so that the nozzle injects acid at the first and second positions, thereby enlarging the lateral tunnel formed, is merely a design variation of pumping the acid through the bottom hole assembly (100), wherein the pumping causes the wand (160) to curve the knuckle joints (155,156) so that the nozzle (170) injects acid to form the acid tunnel (30) in D1 (see paragraphs [0036], [0041]-[0042] and figure 4). Accordingly, claim 9 would have been obvious over D1 in view of D2. Therefore, claim 9 does not involve an inventive step under PCT Article 33(3).

1.4.3 Concerning Claim 10

The additional feature of claim 10, characterized in that steering the acid tunneling tool to a desired location is characterized by rotating the acid tunneling tool within the wellbore, is not disclosed in D1 or D2. However, this feature would be easily conceived from the step of rotating a tool body (24) within a wellbore to jet an abrasive slurry to form a hole within the wellbore in D3 (see paragraphs [0024], [0026] and figure 2B). As D3 is directed toward a similar subject matter, a person skilled in the art would, in seeking a solution to the problem being addressed, be motivated to combine the disclosures of each of documents to arrive at the claimed invention. Accordingly, claim 10 would have been obvious over D1 in view of D2 and D3. Therefore, claim 10 does not involve an inventive step under PCT Article 33(3).

1.4.4 Concerning Claim 11

The additional feature of claim 11 is identical to the step of lowering the bottom hole assembly (100) axially within the wellbore in D1 (see paragraph [0042]). Accordingly, claim 11 would have been obvious over D1 in view of D2. Therefore, claim 11 does not involve an inventive step under PCT Article 33(3).

Continued on The Next Page

Supplemental Box

In case the space in any of the preceding boxes is not sufficient.

Continuation of : Previous Page

1.4.5 Concerning Claim 12

The additional feature of claim 12, characterized in that: the wellbore is lined with a metallic casing; and prior to running the acid tunneling system into the wellbore, a window is cut into the metallic casing, and thereafter, the acid tunneling tool is steered within the wellbore to a desired location, is not disclosed in D1 or D2. However, this feature would be easily conceived from: a wellbore lined with a casing (185); and a window (187) which is cut into the casing (185), wherein an acid jetting tool (500) is steered within the wellbore in D4 (see paragraph [0031] and figure 5A). As D4 is directed toward a similar subject matter, a person skilled in the art would, in seeking a solution to the problem being addressed, be motivated to combine the disclosures of each of documents to arrive at the claimed invention. Accordingly, claim 12 would have been obvious over D1 in view of D2 and D4. Therefore, claim 12 does not involve an inventive step under PCT Article 33(3).

2. Industrial Applicability

Claims 1-12 are industrially applicable under PCT Article 33(4).

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference CT4-59521-WO	FOR FURTHER ACTION see Form PCT/ISA/220 as well as, where applicable, item 5 below.	
International application No. PCT/US2016/031778	International filing date (<i>day/month/year</i>) 11 May 2016 (11.05.2016)	(Earliest) Priority Date (<i>day/month/year</i>) 13 May 2015 (13.05.2015)
Applicant BAKER HUGHES INCORPORATED		

This International search report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This international search report consists of a total of 4 sheets.

☐ It is also accompanied by a copy of each prior art document cited in this report.

1. **Basis of the report**

a. With regard to the **language**, the international search was carried out on the basis of:

- ☒ the international application in the language in which it was filed
☐ a translation of the international application into _____, which is the language of a translation furnished for the purposes of international search (Rules 12.3(a) and 23.1(b))

b. ☐ This international search report has been established taking into account the **rectification of an obvious mistake** authorized by or notified to this Authority under Rule 91 (Rule 43.6bis(a)).

c. ☐ With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, see Box No. I.

2. ☐ **Certain claims were found unsearchable** (See Box No. II)

3. ☐ **Unity of invention is lacking** (See Box No. III)

4. With regard to the **title**,

- ☒ the text is approved as submitted by the applicant.
☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

- ☒ the text is approved as submitted by the applicant.
☐ the text has been established, according to Rule 38.2, by this Authority as it appears in Box No. IV. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. With regard to the drawings,

- a. the figure of the **drawings** to be published with the abstract is Figure No. 4
☒ as suggested by the applicant.
☐ as selected by this Authority, because the applicant failed to suggest a figure.
☐ as selected by this Authority, because this figure better characterizes the invention.
- b. ☐ none of the figures is to be published with the abstract.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2016/031778**A. CLASSIFICATION OF SUBJECT MATTER****E21B 7/06(2006.01)i, E21B 7/08(2006.01)i, E21B 7/18(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 7/06; E21B 10/00; E21B 7/08; G01V 3/38; E21B 43/26; E21B 29/00; E21B 7/18

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: acid tunneling tool, sensor, indexing tool, inclinometer, joint, and nozzle

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2008-0271925 A1 (MISSELBROOK et al.) 06 November 2008 See abstract, paragraphs [0036], [0041]-[0043], and figures 3-4.	1-12
Y	US 6272434 B1 (WISLER et al.) 07 August 2001 See abstract, column 9, line 32 - column 14, line 24, and figures 1A-2B.	1-12
Y	US 2012-0061079 A1 (BUCKMAN, SR. et al.) 15 March 2012 See abstract, paragraphs [0024], [0026], and figure 2B.	2, 10
Y	US 2012-0138301 A1 (ASSAL et al.) 07 June 2012 See abstract, paragraph [0031], and figure 5A.	12
A	US 2003-0234106 A1 (SURJAATMADJA, JIM B.) 25 December 2003 See abstract, paragraphs [0061]-[0063], and figure 11.	1-12



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 August 2016 (10.08.2016)

Date of mailing of the international search report

16 August 2016 (16.08.2016)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

HAN, JOONG SUB

Telephone No. +82-42-481-3578



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/031778

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008-0271925 A1	06/11/2008	CA 2630223 A1 CA 2630223 C CA 2642704 A1 CA 2642704 C US 2009-0114449 A1 US 8205672 B2	03/11/2008 25/02/2014 28/04/2010 24/12/2013 07/05/2009 26/06/2012
US 6272434 B1	07/08/2001	CA 2165017 A1 CA 2165017 C EP 0718641 A2 EP 0718641 A3 EP 0718641 B1 US 5812068 A	13/06/1996 11/07/2006 26/06/1996 09/06/1999 13/08/2003 22/09/1998
US 2012-0061079 A1	15/03/2012	US 2010-0193192 A1 US 2012-0006548 A1 US 8196680 B2 US 8267198 B2 US 8267199 B2 WO 2010-090891 A1	05/08/2010 12/01/2012 12/06/2012 18/09/2012 18/09/2012 12/08/2010
US 2012-0138301 A1	07/06/2012	GB 201301911 D0 GB 2496789 A NO 20130249 A US 8678092 B2 WO 2012-018706 A1	20/03/2013 22/05/2013 14/02/2013 25/03/2014 09/02/2012
US 2003-0234106 A1	25/12/2003	AU 2002-300782 B2 AU 2002-300842 B2 CA 2405608 A1 CA 2405608 C CA 2405631 A1 CA 2405631 C CA 2466139 A1 CN 100482918 C CN 1327107 C CN 1408986 A CN 1425847 A EP 1298280 A1 EP 1298280 B1 EP 1298282 A2 EP 1298282 A3 EP 1298282 B1 EP 1489260 A1 NO 20041764 A US 2003-0062162 A1 US 2003-0062167 A1 US 2004-0089452 A1 US 6662874 B2	18/01/2007 14/02/2008 28/03/2003 10/03/2009 28/03/2003 02/08/2011 06/11/2004 29/04/2009 18/07/2007 09/04/2003 25/06/2003 02/04/2003 21/05/2008 02/04/2003 07/01/2004 28/04/2010 22/12/2004 08/11/2004 03/04/2003 03/04/2003 13/05/2004 16/12/2003

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2016/031778Patent document
cited in search reportPublication
datePatent family
member(s)Publication
date

US 6725933 B2

27/04/2004

US 6779607 B2

24/08/2004

US 6938690 B2

06/09/2005