

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

March 17, 2017

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 15/091,173

FILING DATE: April 05, 2016

THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS CONVENTION, IS US15/091,173

**By Authority of the
Under Secretary of Commerce for Intellectual Property
and Director of the United States Patent and Trademark Office**



Sylvia Holley
SYLVIA HOLLEY
Certifying Officer

Electronic Acknowledgement Receipt

EFS ID:	25404659
Application Number:	15091173
International Application Number:	
Confirmation Number:	3697
Title of Invention:	TRANSITION CASTING FOR BOILER WITH STEAM COOLED UPPER FURNACE
First Named Inventor/Applicant Name:	Eric L WELLS
Customer Number:	41669
Filer:	Eric Marich/Amy Saus
Filer Authorized By:	Eric Marich
Attorney Docket Number:	Case 7707
Receipt Date:	05-APR-2016
Filing Date:	
Time Stamp:	16:14:55
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	Deposit Account
Payment was successfully received in RAM	\$ 1840
RAM confirmation Number	2769
Deposit Account	501813
Authorized User	SAUS, AMY

The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:
Charge any Additional Fees required under 37 CFR 1.16 (National application filing, search, and examination fees)

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Application Data Sheet	Case_7707_ADS_aia0014.pdf	1823095	no	9
			6140be407492947bdc5cb1d740a806e9219c79f		
Warnings:					
Information:					
2	Oath or Declaration filed	Case_7707_Declaration_EXECUTED.pdf	803466	no	2
			fb92bb4f5392cd3aaf5b1bf1fe47c38864c56c49		
Warnings:					
Information:					
3		Case_7707_Final.pdf	221470	yes	37
			160035e85a7d59bc7927e85a4f65a6c51429c099		
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Specification		1	29	
	Claims		30	36	
	Abstract		37	37	
Warnings:					
Information:					
4	Drawings-only black and white line drawings	Case_7707_Drawings.pdf	2407318	no	16
			5d0e6542edf50f6016455c5a23a83a532d2740c		
Warnings:					
Information:					
5	Fee Worksheet (SB06)	fee-info.pdf	36845	no	2
			a028c5b614254be39d030e56cdf94ed791ed620c		
Warnings:					
Information:					
Total Files Size (in bytes):			5292194		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

TRANSITION CASTING FOR BOILER WITH STEAM COOLED UPPER FURNACE**BACKGROUND**

[0001] The present disclosure relates to the boiler arts, with illustrative embodiments including sub-critical boilers, sub-critical natural circulation boilers, coal-fired boilers, sub-critical coal-fired boilers, sub-critical natural circulation coal-fired boilers, and to methods of manufacturing and operating the same. Transition castings are described, along with methods of making and using such, to permit small boilers to attain high superheated steam temperatures greater than about 1000°F, and up to 1100°F.

[0002] Small coal-fired boilers find application in diverse settings, such as where power requirements are relatively low (e.g. rural areas, underdeveloped regions), where coal is readily available, and so forth. Typical small coal-fired boilers for electric power generation employ a sub-critical natural circulation design. An example of such a boiler design is the Babcock & Wilcox Carolina-Type Radiant Boiler design. This design employs a furnace with membraned water-cooled furnace walls that feed one or more steam drums. Water passing through the furnace walls absorb heat energy, in effect cooling the tubes / pipes directly exposed to the combustion heat. The steam drum(s) feeds one or more primary superheaters located inside a convection pass, and one or more secondary pendant superheaters located inside the upper portion of the furnace. This superheated steam is used to run a high-pressure turbine. The steam exiting the high-pressure turbine is then sent through reheaters to increase the temperature again, so that the steam can then be used to run a low-pressure turbine.

[0003] Water-cooled pipes or tubes are designed to carry wet steam (i.e. a steam/water mixture, or equivalently, steam quality less than 100%). For a given operating pressure, the temperature of wet steam is thermodynamically limited to the boiling temperature of liquid water at the given operating pressure. In practice, water-cooled pipes are designed for an operating temperature of about 650°F-670°F, corresponding to an operating pressure of about 2200-2600 psig. In a sub-critical boiler, water-cooled pipes feed wet steam into the steam drum.

[0004] By contrast, steam-cooled pipes or tubes are designed to carry superheated steam having a steam quality of 100% (i.e., no liquid component). The temperature of

superheated steam is not thermodynamically limited for a given pressure, and in Carolina-Type designs the steam-cooled superheaters generally carry superheated steam at temperatures of about 1000°F-1050°F.

[0005] Because of the differences in temperature, water-cooled pipes can be made of lower cost carbon steel, whereas steam-cooled pipes are made of more costly steel compositions. A design such as the Carolina-Type Radiant Boiler advantageously leverages these factors by designing the entire furnace to be water-cooled, so that the membraned walls can use lower cost carbon steel pipes and connecting membranes. The higher alloy superheater components are located within the furnace and convection pass (i.e. inside the walls of the boiler), and are not membraned. In such designs, the membraned water-cooled walls are generally cooler than the flue gas to which the steam-cooled superheaters are exposed, due to more efficient heat transfer to the steam/water mixture carried by the water-cooled pipes.

[0006] In certain applications, it is desirable to obtain steam at high temperatures after superheating and after reheating, e.g. about 1050°F after both cycles. This can be difficult in small designs, and further designs and methods are needed to obtain such high temperatures.

BRIEF DESCRIPTION

[0007] The present disclosure thus relates to small high pressure sub-critical boilers that can have natural circulation and achieve high superheater temperatures of about 1050°F. Generally, the lower furnace of such boilers uses water-cooled tubes/pipes, and the upper furnace uses steam-cooled tubes/pipes. The upper furnace and the lower furnace are joined to each other through a transition section that is formed of transition castings as described herein.

[0008] Disclosed herein in various embodiments are transition castings, comprising: a first steam tube having a steam tube diameter and a steam passageway extending between a front end pointing in a forward direction and a vertical end pointing in a first vertical direction; a first water tube having a water tube diameter and a water passageway extending between a front end pointing in the forward direction and a vertical end pointing in a second vertical direction opposite the first vertical direction; a

first pass-through tube having a pass-through tube diameter and a fluid conduit extending between a first vertical end pointing in the first vertical direction and a second vertical end pointing in the second vertical direction; and a membrane joining the first steam tube, the first water tube, and the first pass-through tube to form a pressure seal therebetween; wherein a center of the vertical end of the first steam tube and a center of the first vertical end of the first pass-through tube are aligned in a first plane, and a center of the vertical end of the first water tube is offset from the first plane.

[0009] Also disclosed herein in various embodiments are transition castings, comprising: a first steam tube having a steam tube diameter and a steam passageway extending between a front end pointing in a forward direction and a vertical end pointing in a first vertical direction; a first water tube having a water tube diameter and a water passageway extending between a front end pointing in the forward direction and a vertical end pointing in a second vertical direction opposite the first vertical direction; a first pass-through tube having a pass-through tube diameter and a fluid conduit extending between a first vertical end pointing in the first vertical direction and a second vertical end pointing in the second vertical direction; and a membrane joining the first steam tube, the first water tube, and the first pass-through tube to form a pressure seal therebetween; wherein a center of the vertical end of the first steam tube and a center of the first vertical end of the first pass-through tube define a first line; wherein a center of the vertical end of the first water tube and a center of the second vertical end of the first pass-through tube define a second line; and wherein the first line and the second line form an acute angle.

[0010] In various embodiments, the first water tube and the first steam tube are both adjacent to a common side of the first pass-through tube.

[0011] Sometimes, the front end of the first steam tube is both laterally and vertically offset from the front end of the first water tube. Alternatively, the front end and the vertical end of the first steam tube are vertically offset from each other. The front end and the vertical end of the first water tube may be vertically aligned with each other.

[0012] The transition casting may further comprise a heat transfer fin extending from the membrane and abutting the first water tube.

[0013] The water tube diameter can be greater than the steam tube diameter. In some embodiments, the pass-through tube diameter is the same as the steam tube diameter. In other embodiments, the pass-through tube diameter is the same as the water tube diameter.

[0014] In some particular embodiments, the transition casting further comprises a second pass-through tube having the pass-through tube diameter and a fluid conduit extending between a first vertical end pointing in the first vertical direction and a second vertical end pointing in the second vertical direction; wherein the first steam tube and the first water tube are located vertically relative to each other and are located between the first pass-through tube and the second pass-through tube.

[0015] The first vertical ends of the first pass-through tube and the second pass-through tube may be offset in the same lateral direction relative to the second vertical ends of the first pass-through tube and the second pass-through tube.

[0016] Two lines joining (i) the second vertical end of the first pass-through tube with the vertical end of the first water tube, and (ii) the vertical end of the first water tube with the second vertical end of the second pass-through tube, may form an obtuse angle.

[0017] In other embodiments, the centers of the first vertical ends of the first pass-through tube and the second pass-through tube are closer to each other than the centers of the second vertical ends of the first pass-through tube and the second pass-through tube.

[0018] In some transition castings, two lines joining (i) the first vertical end of the first pass-through tube with the vertical end of the first steam tube, and (ii) the vertical end of the first steam tube with the first vertical end of the second pass-through tube, form an obtuse angle.

[0019] In some embodiments, the center of the vertical end of the first water tube is offset from the first plane by a distance of about a radius of the first steam tube.

[0020] The transition casting can be made of stainless steel.

[0021] Also disclosed are boilers, comprising: an upper furnace having steam-cooled membrane walls comprising steam wall tubes; a lower furnace having water-cooled membrane walls comprising water wall tubes; a transition section disposed between the upper furnace and the lower furnace, wherein the transition section comprises an upper

transition casting and a lower transition casting that are joined by alternating straight water tubes and straight steam tubes. The upper transition casting comprises an upper steam tube having a steam tube diameter and a steam passageway extending between a front end pointing in a forward direction and an upper end pointing in an upper vertical direction; an upper water tube having a water tube diameter and a water passageway extending between a front end pointing in the forward direction and a lower end pointing in a lower vertical direction; a steam pass-through tube having the steam tube diameter and a fluid conduit extending between an upper end pointing in the upper vertical direction and a lower end pointing in the lower vertical direction; and a membrane joining the upper steam tube, the upper water tube, and the steam pass-through tube to form a pressure seal therebetween; wherein a center of the upper end of the upper steam tube and a center of the upper end of the steam pass-through tube are aligned in a first plane, and a center of the lower end of the upper water tube is offset from the first plane. The lower transition casting comprises a lower steam tube having the steam tube diameter and a steam passageway extending between a front end pointing in the forward direction and an upper end pointing in the upper vertical direction; a lower water tube having the water tube diameter and a water passageway extending between a front end pointing in the forward direction and a lower end pointing in the lower vertical direction; a water pass-through tube having the water tube diameter and a fluid conduit extending between an upper end pointing in the upper vertical direction and a lower end pointing in the lower vertical direction; and a membrane joining the lower steam tube, the lower water tube, and the water pass-through tube to form a pressure seal therebetween; wherein a center of the lower end of the lower steam tube and a center of the lower end of the steam pass-through tube are aligned in a second plane, and a center of the upper end of the lower steam tube is offset from the second plane.

[0022] Either transition casting may further comprise a heat transfer fin extending from the membrane wall and abutting the upper water tube.

[0023] In various embodiments, the upper steam tube and the lower steam tube are each fluidly connected to a steam inlet header located below the lower transition casting; and the upper water tube and the lower water tube are each fluidly connected to a water outlet header located above the upper transition casting.

[0024] The lower furnace may be top-supported through the transition section. The centers of the straight water tubes may be located in a different plane from the centers of the straight steam tubes. The water tube diameter may be greater than the steam tube diameter. The upper transition casting and the lower transition casting may be made of stainless steel.

[0025] These and other non-limiting aspects and/or objects of the disclosure are more particularly described below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026] The following is a brief description of the drawings, which are presented for the purposes of illustrating embodiments disclosed herein and not for the purposes of limiting the same.

[0027] **FIG. 1** diagrammatically shows a side-sectional view of an illustrative boiler. Insets A, B, and C illustrate portions of piping.

[0028] **FIG. 2** is a top cross-sectional view of the boiler of **FIG. 1** through the upper furnace along line A-A of **FIG. 3**.

[0029] **FIG. 3** diagrammatically shows a more detailed side-sectional view of a portion of the boiler of **FIG. 1** including an illustrative layout of superheaters.

[0030] **FIG. 4** diagrammatically shows a cooling circuit of the boiler of **FIG. 1** and **FIG. 2**.

[0031] **FIG. 5** is a magnified perspective view of the boiler showing the transition section.

[0032] **FIG. 6** is a perspective view of the transition section.

[0033] **FIGS. 7-10** are different views of an upper transition casting. **FIG. 7** is a perspective view. **FIG. 8** is a front view. **FIG. 9** is a top view, and **FIG. 10** is a bottom view.

[0034] **FIG. 11** is a magnified front view of the heat transfer fin in circle B-B in **FIG. 8**.

[0035] **FIG. 12** is a cross-section through line C-C in **FIG. 11**.

[0036] **FIGS. 13-16** are different views of a lower transition casting. **FIG. 13** is a perspective view. **FIG. 14** is a front view. **FIG. 15** is a top view, and **FIG. 16** is a bottom view.

DETAILED DESCRIPTION

[0037] A more complete understanding of the processes and apparatuses disclosed herein can be obtained by reference to the accompanying drawings. These figures are merely schematic representations based on convenience and the ease of demonstrating the existing art and/or the present development, and are, therefore, not intended to indicate relative size and dimensions of the assemblies or components thereof.

[0038] Although specific terms are used in the following description for the sake of clarity, these terms are intended to refer only to the particular structure of the embodiments selected for illustration in the drawings, and are not intended to define or limit the scope of the disclosure. In the drawings and the following description below, it is to be understood that like numeric designations refer to components of like function.

[0039] The modifier "about" used in connection with a quantity is inclusive of the stated value and has the meaning dictated by the context (for example, it includes at least the degree of error associated with the measurement of the particular quantity). When used with a specific value, it should also be considered as disclosing that value. For example, the term "about 2" also discloses the value "2" and the range "from about 2 to about 4" also discloses the range "from 2 to 4."

[0040] It should be noted that many of the terms used herein are relative terms. For example, the terms "inlet" and "outlet" are relative to a direction of flow, and should not be construed as requiring a particular orientation or location of the structure. The terms "upstream" and "downstream" are relative to the direction in which a fluid flows through various components, i.e. the fluid flows through an upstream component prior to flowing through the downstream component. It should be noted that in a loop, a first component can be described as being both upstream of and downstream of a second component. Similarly, the terms "upper" and "lower" are relative to each other in location, i.e. an upper component is located at a higher elevation than a lower component.

[0041] The terms "horizontal" and "vertical" are used to indicate direction relative to an absolute reference, i.e. ground level. However, these terms should not be construed to require structures to be absolutely parallel or absolutely perpendicular to each other.

For example, a first vertical structure and a second vertical structure are not necessarily parallel to each other.

[0042] The terms "top" and "bottom" or the terms "roof" and "floor" are used to refer to locations/surfaces where the top/roof is always higher than the bottom/floor relative to an absolute reference, i.e. the surface of the earth. The terms "upwards" and "downwards" are also relative to an absolute reference; an upwards flow is always against the gravity of the earth.

[0043] The term "plane" is used herein to refer generally to a common level, and should be construed as referring to a volume, not as a flat surface.

[0044] A fluid at a temperature that is above its saturation temperature at a given pressure is considered to be "superheated." The temperature of a superheated fluid can be lowered (i.e. transfer energy) without changing the phase of the fluid. As used herein, the term "wet steam" refers to a saturated steam/water mixture (i.e., steam with less than 100% quality where quality is percent steam content by mass). The terms "wet steam" and "water" may be used interchangeably to describe any steam/water mixture that contains from 0% to about 80% steam (i.e. 20% to 100% water). As used herein, the term "dry steam" refers to steam having a quality equal to or about 100% (i.e., no liquid water is present).

[0045] The terms "pipes" and "tubes" are used interchangeably herein to refer to a hollow cylindrical shape, as is commonly understood.

[0046] The term "natural circulation", as used herein, refers to the circulation of water through the boiler due to differences in density as the water is heated. Water circulation can occur without the need for a mechanical pump.

[0047] To the extent that explanations of certain terminology or principles of the boiler and/or steam generator arts may be necessary to understand the present disclosure, the reader is referred to *Steam/its generation and use*, 42nd Edition, edited by G.L. Tomei, Copyright 2015, The Babcock & Wilcox Company, ISBN 978-0-9634570-2-8, the text of which is hereby incorporated by reference as though fully set forth herein.

[0048] In a small boiler using only water-cooled furnace walls, it is difficult or impossible to achieve superheater and reheater outlet temperatures both at 1050°F for

150-300 MW net power generation, because it is not possible to provide sufficient superheater / reheater surface area for heat transfer to the dry steam to obtain such high temperatures.

[0049] One possible alternative is to employ a drumless once-through boiler design, such as one of the Babcock & Wilcox Universal Pressure boiler designs. However, these designs employ once-through steam generation. In a once-through design, the transition point from wet steam to superheated steam depends on operating conditions, rather than being defined using a steam separator (e.g. a steam drum). As a result, more expensive piping is typically used for all piping/tubing in such once-through designs for safety. This results in increased capital costs.

[0050] In the sub-critical boiler designs of the present disclosure, the furnace is divided into two sections: a lower furnace using water-cooled membrane walls that feeds into the steam separator, and an upper furnace using steam-cooled membrane walls that is fed (directly or indirectly) by the dry steam outlet of the steam separator. This approach advantageously enables lower cost carbon steel to be used for the lower furnace walls, with more expensive piping being used only in the upper steam-cooled furnace (including the convection path walls in some embodiments). Cost is lowered by retaining the steam separator. A higher steam output temperature is attainable because the use of a steam-cooled upper furnace and convection pass walls provides additional surface area for heat transfer from combustion / flue gases to the dry steam within the steam-cooled walls, resulting in superheated steam of desired temperatures. Again, such high superheated steam temperatures cannot be obtained with conventional water-cooled walls in the upper furnace.

[0051] In some embodiments, further improvement is attained in such a design by reducing the cross-section of the upper steam-cooled furnace compared with the lower water-cooled furnace. This increases flue gas flow velocity in the upper steam-cooled furnace compared with the lower water-cooled furnace, which provides more efficient heat transfer in the high temperature gas path, and also reduces the amount of materials and manufacturing cost.

[0052] In Carolina-Type Radiant Boiler designs, the convection pass is spaced apart from the furnace by a horizontal convection pass whose horizontal length creates a

spacing between the furnace and the convection pass. As a result, in the Carolina-Type Radiant Boiler design, the furnace includes a rear wall and the convection pass includes a front wall. In a folded design, these two walls are combined into one wall. In the present disclosure, a common membraned steam-cooled wall is used to separate the upper furnace up-pass and the adjacent convection pass. This eliminates the open pass between the furnace and the convection pass, providing improved compactness for the boiler and reduces the amount of materials and manufacturing cost.

[0053] These benefits set forth above are attained by replacing the conventional water-cooled furnace with a two-part design in which the upper furnace is steam-cooled. However, such a modification has certain potential disadvantages. Overall material cost is increased due to the higher-cost alloys used in the upper furnace, but this can be mitigated by approaches disclosed herein (e.g., reduced upper furnace cross-section, employing a common steam-cooled wall between the furnace and the convection pass). Another potential disadvantage is structural complications for the preferred top-supported arrangement. This potentially arises because the lower furnace pipes are preferably carbon steel to reduce cost, while the upper furnace pipes are higher cost alloys for compatibility with steam cooling. Such a difficulty is also encountered in some once-through super-critical furnaces that employ carbon steel pipes in a lower furnace section to reduce cost. An example of such a design is the Babcock & Wilcox Spiral Wound Universal Pressure (SWUP) Boiler. In the SWUP once-through super-critical boiler design, the lower water-cooled furnace portion is top-supported via dedicated lower furnace support components that connect with the upper boiler support via an array of vertical tie rods and/or connections to the upper furnace water-cooled pipes. The resulting assembly is complicated as the lower furnace must be secured by installing its support components, followed by performing the pipe welding.

[0054] Such an approach employing dedicated lower furnace support components can also be employed in sub-critical boiler designs with an upper steam-cooled furnace and lower water-cooled furnace, as disclosed herein. However, in some embodiments disclosed herein, such dedicated support castings and concomitant complex pipe welding operations are eliminated, and in their place a transition section with integral transition piping is employed. The transition section contains both water pipes and

steam pipes, and provides a location where these pipes can be run to headers. In the transition section, at least some transition pipes are designed to be vertically oriented pipes, and lower furnace support is achieved by tensile support via welds to these vertically oriented transition pipes. The transition section can be made of a high alloy steel material that is compatible with steam-cooling – it is therefore overdesigned for the water-cooled transition pipes, but the ability to maintain top support for the lower furnace outweighs the additional cost entailed by overdesigning these relatively short water-cooled transition pipes. The transition section also acts as a pressure seal between the furnace and the atmosphere.

[0055] Some illustrative embodiments of such sub-critical boilers are diagrammatically shown and described below. These are merely illustrative examples, and a given embodiment may include one, two, more, or all disclosed novel features described herein.

[0056] FIG. 1 and FIG. 2 show different views of an illustrative sub-critical natural circulation boiler of the present disclosure. FIG. 1 is a side-sectional view of the entire boiler. FIG. 2 is a top (plan) view that passes through the upper furnace of the boiler.

[0057] With reference to FIG. 1, a sub-critical boiler 10 is diagrammatically shown. The boiler 10 includes a lower furnace 12 which is water-cooled, an upper furnace 14 which is steam-cooled, and a transitional section 16 which in preferred embodiments is formed from a single-piece transition casting. The illustrative boiler 10 is a folded boiler design that further includes a convection pass 18 which is connected to the upper furnace 14 to form what might be considered a horizontal pass 20. The walls of the lower furnace 12, the transitional section 16, the upper furnace 14, and the convection pass 18 collectively define the boiler.

[0058] Combustion / flue gas 22 are diagrammatically indicated by arrows, and these gases flow through the boiler and heat the water / steam in the various walls of the boiler. More specifically, combustion air is blown into the lower furnace 12 through an air inlet 24, where it is mixed with a combustible fuel such as coal, oil, or natural gas. In some preferred embodiments, the fuel is coal, which is pulverized by a pulverizer (not shown). A plurality of burners 26 combusts the fuel/air mixture, resulting in flue gas. The flue gas rises by natural convection through the up-pass formed by the lower

furnace 12, the transition section 16, and the upper furnace 14, then flows horizontally through the convection pass, which includes the convection pass 18 and finally exits through a flue gas outlet 28 for further downstream processing. Preferably, a hopper 33 is provided to capture ash or other contaminants in the exiting flue gas.

[0059] The sub-critical boiler 10 is top-supported to the building structure via suitable upper anchor points 30. These are diagrammatically indicated in **FIG. 1**. The pipes of the upper furnace 14 and the convection pass 18 are vertically oriented and are directly supported from the anchor points 30. The pipes of the lower furnace 12 are also vertically oriented and are directly supported via welds to the transition section 16.

[0060] It is desirable to capture the heat energy present in the combustion / flue gas 22 for tasks such as driving an electrical power generation turbine (for example). To do so, the sub-critical boiler 10 includes cooling surfaces comprising pipes or tubes through which wet steam flows (these pipes or tubes are referred to herein as water-cooled) or through which superheated steam flows (these pipes or tubes are referred to herein as steam-cooled). More particularly, with reference to Inset A of **FIG. 1**, the lower furnace 12 includes water-cooled tubes 32 with membrane 34 disposed between and welded to the tubes 32, so that the tubes 32 and membrane 34 collectively form a membrane wall 36, with the tubes 32 carrying flow of wet steam through the membrane wall 36. The membrane wall 36 forms the barrier that contains the flue gas 22, i.e. the membrane 34 is welded or otherwise connected to the tubes 32 to provide a seal against leakage of the flue gas 22. The water-cooled membrane wall 36 of the lower furnace 12 does not see highly elevated water temperatures; for example, if the sub-critical boiler 10 is designed for a maximum steam pressure of 2800 psig, then the saturated steam carried by the water-cooled tubes 32 is at about 685°F (corresponding to the boiling point of water at 2800 psig), though of course the combustion gas is at a much higher temperature.

[0061] The upper furnace 14 and convection pass 18 are analogously made of a steam-cooled membrane wall 46 comprising steam-cooled tubes 42 with membrane 44 disposed between and welded or otherwise connected to the tubes 42 (see Inset B of **FIG. 1**), with the tubes 42 and membrane 44 collectively forming the membrane wall 46. The tubes 42 carry a flow of superheated steam through the membrane wall 46. The

steam-cooled membrane wall **46** carries steam at substantially higher steam temperature than the water-cooled membrane wall **36**. For example, the steam in the steam-cooled membrane walls **46** may be at a temperature of over 1000°F, e.g. up to 1100°F in some contemplated embodiments. It should be noted that the roof **35** of the furnace and the convection pass is also made of steam-cooled membrane wall. It should also be noted that the diameter of the tubes and the spacing between the tubes of the steam-cooled membrane walls may differ between the upper furnace and the convection pass.

[0062] The tubes **32** of the water-cooled membrane wall generally have a greater diameter than the tubes **42** of the steam-cooled membrane wall. In particular, embodiments, the inner diameter of the water-cooled tubes is at least 0.5 inches greater than the inner diameter of the steam-cooled tubes. The tubes of the water-cooled membrane wall have an inner diameter of about 1.5 inches to about 2.0 inches, while the tubes of the steam-cooled membrane wall have an inner diameter of about 1.0 inches to about 2.5 inches. The tubes of the water-cooled membrane wall have an outer diameter of about 2.0 inches to about 2.5 inches, while the tubes of the steam-cooled membrane wall have an outer diameter of about 1.3 inches to about 2.3 inches. The tubes themselves may have a thickness of about 0.2 inches to about 0.5 inches.

[0063] In a typical steam flow circuit for the sub-critical boiler **10**, water is inputted to the lower ends of the water-cooled tubes **32** via a lower inlet header **50**. As the water travels upwards through these water-cooled tubes **32**, the water cools the tubes exposed to high-temperature flue gas in the lower furnace **12** and absorbs energy from the flue gas to become a steam-water mixture (i.e. wet steam) at subcritical pressure.

[0064] The wet steam exits the upper ends of the water-cooled tubes **32** and flows via a wet steam outlet header **52** into an inlet **53** of a steam separator **54**. The wet steam outlet header **52** is preferably welded to water-cooled transition pipes within the transition section **16**. Preferably, the wet steam outlet header **52** facilitates venting of the tubes **32** as appropriate during start up, shut down, or maintenance, etc. Any type of steam separator may be used, e.g. employing cyclonic separation or so forth. In particular embodiments, a vertical steam separator is used, such as that described in U.S. Patent No. 6,336,429. A dry steam outlet **56** of the steam separator **54** at an upper

end of the steam separator outputs substantially dry steam (i.e., steam with 100% quality). A drain or water outlet **58** near the lower end of the steam separator **54** collects water extracted from the wet steam for recycle back to the lower inlet header **50** feeding the lower furnace **12**.

[0065] The steam output from the dry steam outlet **56** flows to the convection pass **18** and then to the upper furnace **14**. To provide additional surface for heat transfer, one or more primary superheaters **60**, re-heaters **62**, and/or secondary superheaters **64** may be provided in the interior volume of the boiler, within the upper furnace **14** and the convection pass **18**. As illustrated here, one or more superheaters **60** disposed in the convection pass **18**; one or more re-heaters (or re-heating superheaters) **62** are disposed in the convection pass **18** and/or in the upper furnace **14**; and one or more secondary superheaters **64** are disposed in the upper furnace **14**. Again, the steam-cooled furnace walls **46** of the upper furnace **14** act as superheater surfaces as well. A more detailed illustrative steam circuit is described in later drawings. It is to be understood that the illustrative steam circuit is merely an example, and other steam circuit configurations are contemplated, e.g. various superheater components may be omitted, and/or located elsewhere, etc.

[0066] Unlike the membrane walls **46** of the steam-cooled upper furnace **14** and the convection pass **18**, the superheaters **60**, **62**, **64** located within the boiler are formed from loose pipes/ tubes **72** without membranes joining the tubes together (see Inset C of **FIG. 1**). These superheaters **60**, **62**, **64** are disposed in the interior of the flue boiler, and desirably permit flue gas to pass through them, increasing the surface area through which heat transfer from the flue gas to the steam within the pipes can occur. The superheater pipes **72** are preferably made of an alloy steel material. In some embodiments, the superheater pipes **72** and the steam-cooled membrane wall **46** are made of the same alloy steel material, although this is not required.

[0067] As seen in **FIG. 1**, the superheaters **60**, **62**, **64** are surrounded by the steam-cooled membrane walls **46**. Said another way, the superheaters **60**, **62**, **64** are contained within the upper furnace **14** and/or in the convection pass **18** as shown in the illustrative boiler **10** of **FIG. 1**. The steam within the steam-cooled membrane walls **46** may be at the same or higher temperature than in the superheaters **60**, **62**, **64**. Due to

the additional surface area available for heat transfer from the flue gas to the superheated steam within the various superheating surfaces **46**, **60**, **62**, **64**, the boiler **10** can achieve higher superheated steam temperatures than would be achievable with a conventional water-cooled sub-critical boiler whose furnace walls are entirely cooled by wet steam flowing through water-cooled pipes. However, the sub-critical boiler **10** retains the general layout of a sub-critical boiler, including employing the steam separator **54** disposed (in a steam flow sense) between the wet steam sub-circuit and the superheated steam sub-circuit, thus retaining advantages such as the operational flexibility of a sub-critical boiler design.

[0068] The illustrative sub-critical boiler **10** employs certain features that enhance compactness and efficiency. One feature is a reduced cross-sectional area for the combustion / flue gas flow **22** through the upper furnace **14** compared with the lower furnace **12**. The referenced cross-sectional area is the horizontal cross-section in the illustrative design in which the flue gas **22** flows vertically upward. In the illustrative boiler **10**, the reduction in cross-sectional area of the upper furnace **14** relative to the lower furnace **12** is obtained via a "arch" surface **76**, which is slanted as the upper furnace continues upward from the transition section **16**, to reduce turbulence at the transition to higher flow velocity. This has at least two benefits. First, the reduced cross-sectional area of the upper furnace **14** reduces the amount of material (e.g. total surface area of membrane wall **46**) which reduces capital cost. Second, the higher velocity of the flue gas flow **22** due to the reduced cross-sectional area increases the efficiency of heat transfer to the steam-cooled pipes **42**, **72**. The transition section **16** is located below the arch **76**. The arch **76** is part of the upper furnace, and is also a steam-cooled membrane wall.

[0069] FIG. 2 is a cross-sectional plan (top) view of the boiler **10** through the upper furnace **14**, and provides another view of the various components. The front wall **110** of the upper furnace is shown in solid line, as is the front wall **112** of the lower furnace. The area between these two walls is the arch **76**. The upper furnace includes a first side wall **114** and a second side wall **116** opposite the first side wall, both of which are made of steam-cooled membrane walls **42**. The fourth side of the upper furnace is defined by a common steam-cooled membrane wall **80**. The convection pass is defined

by a first side wall **124**, a second side wall **126** opposite the first side wall, and a rear wall **128**. A baffle wall **130** divides the convection pass into a front convection pass **17** and a rear convection pass **19**. A primary superheater **60** is seen in the rear convection pass **19**, while a reheater **62** is seen in the front convection pass **17** and a secondary superheater **64** is seen within the upper furnace **14**.

[0070] Another feature that enhances the compactness and efficiency of this boiler design is the use of a common steam-cooled membrane wall **80**. The common steam-cooled membrane wall **80** is both a "rear" wall of the upper furnace **14** and a "front" wall of the convection pass **18**. The upper furnace **14** and the convection pass **18** thus share the common steam-cooled membrane wall **80**, which comprises a single layer of pipes sealed by a single layer of membrane disposed between and connected to the single layer of pipes. The use of the common steam-cooled membrane wall **80** has numerous advantages. The usual open pass between the furnace and the convection pass is eliminated, providing a more compact design and reducing capital costs due to lower surface area. The common steam-cooled membrane wall **80** is advantageously heated both by flue gas flowing upward through the upper furnace **14** and by flue gas flowing downward through the convection pass **18**.

[0071] One issue with employing the common steam-cooled membrane wall **80** is the large temperature variation between the flue gas temperature in the upper furnace **14**, on the one hand, and the flue gas temperature in the convection pass **18** on the other hand. This differential between the two flue gas temperatures will be felt by the common steam-cooled membrane wall **80**. Using transient modeling and finite element analysis to determine the resulting stress in the walls of the boiler, it was found that maximum thermal differential stress occurs during start-up, and more particularly occurs in a small area about the bottom of the common steam-cooled membrane wall **80** adjacent walls **114**, **124** on one side and walls **116**, **126** on the other. Intuitively, this can be understood since this bottommost part of the common steam-cooled membrane wall **80** is where there is the greatest temperature differential between the upward flue gas flow in the upper furnace **14** and the downward flue gas flow in the convection pass **18**. This stress can cause boiler bowing/tearing, and is accommodated by providing seals at the junction of the bottom of the common steam-cooled membrane wall **80**, the furnace

side walls **114**, **116**, and the convection pass side walls **124**, **126**, as analysis showed that the overstressed area does not extend significantly up the common steam-cooled membrane wall **80**. These seals are illustrated in **FIG. 2** with reference numeral **132**.

[0072] It should be noted that the various improvements disclosed herein can be used to advantage individually or in various combinations, and/or in various types of boilers. For example, the disclosed common steam-cooled membrane wall **80** can also be used to advantage in a once-through boiler design having a convection pass, or in other types of boilers having two neighboring steam-cooled membrane walls.

[0073] With reference now to **FIGS. 2-4**, an illustrative steam-cooled circuit is described that may be used in the boiler **10** of **FIG. 1**. **FIG. 3** shows a side-sectional view of the upper furnace **14**, the convection pass **18**, and the horizontal pass **20** connecting them. Also shown are more detailed renderings of the primary superheaters **60**, reheaters **62**, and secondary superheaters **64**. In **FIG. 3** and **FIG. 4**, the primary superheaters **60** are labeled using the prefix "PSH"; the reheaters (i.e. re-heating superheaters) are labeled using the prefix "RSH"; and the secondary superheaters are labeled using the prefix "SSH". Additionally, economizers are shown, indicated by the prefix "ECON". Inlet headers are indicated by the suffix "IN" while outlet headers are indicated by the suffix "OUT".

[0074] As shown in **FIG. 3**, there are four primary superheaters disposed in the rear convection pass **19**. Three of these employ horizontal tubes, and from lowest to highest elevation are indicated as PSH1, PSH2, and PSH3. The fourth primary superheater PSH4 is at the highest elevation and employs vertical pipes. Flow through the primary superheaters is in sequential order by number, upward through the convection pass, and the superheated steam exits at the PSH OUT header at the roof of the boiler.

[0075] Four reheaters RSH1, RSH2, RSH3, and RSH4 are also employed. Three of these (RSH1, RSH2, and RSH3) are disposed in the front convection pass **17**, while the fourth reheater RSH4 is disposed near the top of the upper furnace **14**. Cross-over piping labeled RSH XOVER conveys steam from RSH3 in the convection pass **18** to RSH4 in the upper furnace **14**. Steam flow is from a lower inlet header RSH IN, through the reheaters in sequential order, to an outlet header RSH OUT shown to the left of the upper furnace **14** in **FIG. 3**.

[0076] Four secondary superheaters SSH1, SSH2, SSH3, and SSH4 are disposed in the upper furnace **14** below the fourth re-heater RSH4. Superheated steam flows from the PSH OUT header to the SSH IN header shown to the left of the upper furnace **14**, then upwards successively through SSH1, SSH2, SSH3, and SSH4 and to the SSH OUT header again shown to the left of the upper furnace **14** above the SSH IN header.

[0077] The steam-cooled circuit further includes superheater stringers denoted SH STRINGER in **FIG. 3**, which are fed from SH STRINGER IN headers at the top of the upper furnace and subsequently flow to the SH STRINGER OUT outlet header. These stringers support the secondary superheaters. Similarly, reheater stringers are visible which support the reheaters in the front convection pass.

[0078] Referring now to **FIG. 4**, a more detailed illustration of the components that form the steam-cooled circuit and their interconnections is shown. The steam-cooled circuit starts at the dry steam outlet **56** of the steam separator **54**. Going downstream from the steam separator, dry steam running downstream first flows from the dry steam outlet **56** across the roof **90** of the boiler **10**. Dry steam also flows down the rear wall **128** of the convection pass **18**. The dry steam that flowed down the rear wall **128** then flows up the convection pass side walls **124**, **126** and the reheater stringer supports **91**, and then back down the upper baffle wall. The dry steam from the roof **90** of the boiler flows up the lower baffle wall.

[0079] The two dry superheated steam streams from the upper baffle wall and the lower baffle wall are then combined and flow into the primary superheaters **60** (i.e. PSH1, PSH2, PSH3, PSH4 in **FIG. 3**). Please note the superheated steam travels through all four primary superheaters; the steam is not divided so that only a portion flows through each primary superheater. The superheated steam travels upwards to the PSH OUT header (see **FIG. 3**). The superheated steam then travels downwards through the superheater stringers (labeled SH STRINGER) in the upper furnace. From there, the superheated steam travels upwards through the upper furnace front wall **110** and the common steam-cooled membrane wall **80** (acting as the upper furnace rear wall). The superheated steam then travels upwards through the upper furnace side walls **114**, **116**. Next, the superheated steam travels upwards through the secondary superheaters **64**. Again, the superheated steam passes through all four secondary

superheaters (SSH1, SSH2, SSH3, and SSH4). After passing through the secondary superheaters, the superheated steam has a pressure of 2000 psig or greater, and in some cases 2500 psig or greater, such as about 2600 psig. The superheated steam also has a temperature of 1000°F or greater, such as about 1050°F. The superheated steam is then sent to a high-pressure turbine **92** where the heat energy is used for electrical power generation. The superheated steam loses both temperature and pressure within the high-pressure turbine **92**. The output from the high-pressure turbine is then sent back to the boiler **10** and sent through the reheaters **62**. After passing through the reheaters, the steam has a pressure of 500 psig or greater, such as about 600 psig, and also has a temperature of 1000°F or greater, such as about 1050°F. This superheated steam can then be used to run a low-pressure turbine.

[0080] Referring back to **FIG. 4**, water is returned from the low-pressure turbine. This water passes through a condenser (COND), a boiler feed pump (BFP), and a feedwater heater (FWH) before being sent to the economizer (ECON) to absorb residual heat energy from the flue gas exiting the convection pass. From there, the heated water from the economizer is sent to the steam separator **54**. In the water-cooled circuit, water is sent from the steam separator to lower furnace inlet header **50**, which feeds the water-cooled membrane walls of the lower furnace **12**. Wet steam is collected from lower furnace outlet header **52** and sent to the steam separator **54** for separation into water and dry steam.

[0081] The steam-cooled circuit of **FIG. 3** and **FIG. 4** is merely an illustrative example, and in other embodiments the number and locations of superheaters may be different, as well as the arrangement of the various steam-cooled membrane wall and superheater components in the steam-cooled circuit. The illustrative furnace of **FIG. 1** with the illustrative steam-cooled steam circuit of **FIG. 3** and **FIG. 4** has been modeled using 3D solid modeling software, and was determined from analysis thereof to provide improved performance including a 1050°F/2600 psig superheater temperature/pressure and a 1050°F/600 psig reheater temperature/pressure, for a boiler designed to provide 150 MW to 300 MW of net power.

[0082] Referring back now to **FIG. 1**, the transition section **16** connects the lower furnace **12** to the upper furnace **14**. As previously mentioned, this allows the lower

furnace to be top-supported through the transition section and the upper furnace. It should be noted that the transition section is relatively short. The transition section is only about 4 feet in total height.

[0083] FIG. 5 is a magnified perspective view of the boiler showing the transition section 16. The transition section is made up of upper transition castings 200 and lower transition castings 300. As will be explained in greater detail further herein, each transition casting 200, 300 includes bent steam tubes and bent water tubes. Dry/superheated steam flows through the bent steam tubes, and water or a water/steam mixture flows through the bent water tubes. As can be seen, this arrangement permits steam cooled tubes to drain and water cooled tubes to be vented during start up.

[0084] The tubes of the upper transition castings 200 and lower transition castings 300 are fluidly joined to each other through straight steam tubes 1010 and straight water tubes 1020 which are joined together via membrane 1040 to create a pressure seal. A steam inlet header 1200 is present outside the pressure boundary (i.e. on the exterior of the furnace), and is located below the lower transition casting 300. A water outlet header 1100 is also located outside of the pressure boundary, and is located above the upper transition casting 200. Steam-cooled tube 1012 connects the upper transition casting 200 to the steam inlet header 1200. Steam-cooled tube 1014 connects the lower transition casting 300 to the steam inlet header 1200. Water-cooled tube 1022 connects the upper transition casting 200 to the water outlet header 1100. Water-cooled tube 1024 connects the lower transition casting 300 to the water outlet header 1100.

[0085] FIG. 6 is a perspective view of the transition section 16 only. The upper transition casting 200 and the lower transition casting 300 are more easily visible here. As more easily seen here, the straight steam tubes 1010 and the straight water tubes 1020 are joined together by membrane 1040. Going laterally, the straight steam tubes 1010 alternate regularly with the straight water tubes 1020 (i.e. steam tube, water tube, steam tube, water tube, etc.). However, the straight steam tubes 1010 and the straight water tubes 1020 are also arranged in different planes, with the membrane being angled to join the tubes together.

[0086] FIGS. 7-10 are different views of the upper transition casting 200. FIG. 7 is a perspective view. FIG. 8 is a front view. FIG. 9 is a top view, and FIG. 10 is a bottom view. The various components of the upper transition casting will now be described below. These figures include arrows indicating a first vertical direction 201, a second vertical direction 203 opposite the first vertical direction, a first lateral direction 208 which is perpendicular to the first vertical direction 201, and a second lateral direction 209 which is opposite the first lateral direction.

[0087] Referring now to FIGS. 7-10, the upper transition casting 200 is broadly defined by a first steam tube 210, a first water tube 220, a first pass-through tube 230, and membrane 240 that joins these three tubes 210, 220, 230 together to form a pressure seal. The first steam tube 210 has a steam passageway extending between a front end 212 pointing in the forward direction (i.e. outwardly from the furnace) and a vertical end 214 pointing in a first vertical direction 201, which in this case is also an upper vertical direction 205. The first water tube 220 has a water passageway extending between a front end 222 that also points in the forward direction and a vertical end 224 pointing in a second vertical direction 203. The second vertical direction 203 is opposite that of the first vertical direction 201, and in this case is also a lower vertical direction 207. The first pass-through tube 230 has a fluid conduit extending between a first vertical end 232 that points in the first vertical direction 201 and a second vertical end 234 that points in the second vertical direction 203. It is noted that the first steam tube 210 and the first water tube 220 do not cross over (i.e. extend past) each other at the middle of the transition casting. Put another way, the front end 212 of the first steam tube is closer to the vertical end 214 of the first steam tube than the front end 222 of the first water tube is. Also, the front end 222 of the first water tube is closer to the vertical end 224 of the first water tube than the front end 212 of the first steam tube is.

[0088] The upper transition casting 200 may also have additional steam tubes, water tubes, and pass-through tubes. Here, the upper transition casting also has a second steam tube 260, a second pass-through tube 270, and a second water tube 290. The second steam tube 260 also has a steam passageway extending between a front end 262 pointing in the forward direction and a vertical end 264 pointing in the first vertical

direction **201**. The second water tube **290** also has a water passageway extending between a front end **292** that also points in the forward direction and a vertical end **294** pointing in a second vertical direction **203**. The second pass-through tube **270** has a fluid conduit extending between a first vertical end **272** that points in the first vertical direction **201** and a second vertical end **274** that points in the second vertical direction **203**. Membrane **242** joins the first steam tube **210**, first water tube **220**, and the second pass-through tube **270** together to form a pressure seal. Membrane **244** joins the second steam tube **260**, second water tube **290**, and the second pass-through tube **270** together to form a pressure seal.

[0089] As seen particularly in **FIG. 8**, the first steam tube **210** and the first water tube **220** are located vertically relative to each other (i.e. one above the other). The first steam tube **210** and the first water tube **220** are both adjacent to a common side of the first pass-through tube **230** (i.e. the first lateral side). The first steam tube **210** and the first water tube **220** are also located between the first pass-through tube **230** and the second pass-through tube **270**.

[0090] The front end **212** of the first steam tube **210** is laterally offset from the front end **222** of the first water tube **220**, i.e. the center of the first steam tube is off to one side of the center of the first water tube. The front end **212** of the first steam tube **210** is also vertically offset from the front end **222** of the first water tube **220**, i.e. they are at different heights. Relative to itself, the front end **212** of the first steam tube **210** is laterally offset from the vertical end **214** of the first steam tube **210**, i.e. to one side. In contrast, the front end **222** and the vertical end **224** of the first water tube **220** are vertically aligned with each other.

[0091] As seen in **FIG. 8**, the first steam tube **210** has a steam tube diameter **D1**. The first water tube **220** has a water tube diameter **D2**. The first pass-through tube **230** has a pass-through tube diameter **D3**. Depending on whether the pass-through tube transports water or steam, the pass-through tube diameter **D3** may be equal to either **D1** or **D2**. Here, the diameter **D3** is equal to **D1**. Generally, the water tube diameter **D2** will be greater than the steam tube diameter **D1**. As previously discussed above, in particular, embodiments, the inner diameter of the water tubes is at least 0.5 inches greater than the inner diameter of the steam tubes. The water tubes have an inner

diameter of about 1.5 inches to about 2.0 inches, while the steam tubes have an inner diameter of about 1.0 inches to about 2.5 inches. The water tubes have an outer diameter of about 2.0 inches to about 2.5 inches, while the steam tubes have an outer diameter of about 1.3 inches to about 2.3 inches. The tubes themselves may have a thickness of about 0.2 inches to about 0.5 inches.

[0092] In FIG. 8, it is particularly noted that the first vertical ends 232, 272 of the pass-through tubes 230, 270 are offset in the same lateral direction (i.e. in second lateral direction 209) relative to the second vertical ends 234, 274. Also illustrated in FIG. 7 and FIG. 8 is a heat transfer fin 250, which will be discussed in more detail further herein.

[0093] Referring now to FIG. 9, which is a top view, the first steam tube 210, first water tube 220, first pass-through tube 230, second steam tube 260, and second water tube 290 of the upper transition casting 200 are marked. The front ends of these tubes 212, 222, 262, 292 are also marked, and it is noted that the front ends all terminate at generally the same distance from the membrane 240. The membrane 240 is vertically aligned and can be considered a rear side of the casting. Heat transfer fin 250 is also visible, and will be discussed in greater detail further herein.

[0094] The first steam tube vertical end 214, the first pass-through tube first vertical end 232, and the second steam tube vertical end 264 are all marked. Also marked is the second pass-through tube first vertical end 272. The centers of these vertical ends are marked as 232c, 214c, 272c, and 264c, going laterally. As seen here, these vertical ends all have the same diameter, and the centers of these vertical ends are all aligned in a first plane P1, which is a vertical plane that also marks a rear side of the casting. Put another way, the centers of any two of these vertical ends define a first line L1. It is also noted that the centers are evenly spaced apart from each other.

[0095] Referring now to FIG. 10, which is a bottom view, the first steam tube 210, first water tube 220, first pass-through tube 230, second steam tube 260, and second water tube 290 of the upper transition casting 200 are marked. The front ends of these tubes 212, 222, 262, 292 are also marked.

[0096] The first water tube vertical end 224, the first pass-through tube second vertical end 234, and the second water tube vertical end 294 are all marked. Also

marked is the second pass-through tube second vertical end **274**. The centers of these vertical ends are marked as **234c**, **224c**, **274c**, and **294c**, going laterally. As illustrated here, for the lower end of the upper transition casting, and in contrast to that of **FIG. 9**, the centers of the vertical ends are not all aligned in a single common plane. Rather, they alternate between two different planes. The centers of the pass-through tubes **234c**, **274c** are aligned in a plane **P1** which is substantially coincident with the first plane **P1** of **FIG. 9**. The centers of the water tubes **224c**, **294c** are aligned in a second different plane **P2** that is offset from the first plane **P1**. The center **224c** of the vertical end of the first water tube **220** is offset from the plane **P1** by a distance that is about equal to the radius of the first steam tube **210**. Put another way, the center **224c** of the vertical end of the first water tube **220** and the center **234c** of the second vertical end of the first pass-through tube **230** define a second line **L2**. The first line **L1** (see **FIG. 9**) and the second line **L2** form an acute angle. In embodiments, the acute angle formed by **L1** and **L2** has a value of about 15° to about 25°.

[0097] Referring still to **FIG. 10**, membrane **240** is visible joining first pass-through tube **230** to first water tube **220**. Membrane **242** is visible joining first water tube **220** to the second vertical end **274** of the second pass-through tube. Membrane **244** is visible joining the second vertical end **274** of the second pass-through tube to the second water tube **290**. Membrane **240** can be considered a line (**L2**) joining the first pass-through tube second vertical end **234** with the first water tube vertical end **224**. Membrane **242** can be considered a line (**L3**) joining the first steam tube vertical end **224** with the second pass-through tube second vertical end **274**. The lines **L2** and **L3** form an obtuse angle at their common point (first water tube vertical end **224**). In embodiments, the obtuse angle formed by **L2** and **L3** has a value of about 130° to about 150°.

[0098] **FIG. 11** is a magnified front view of circle A-A in **FIG. 8**. Present in this view is membrane wall **280**, second water tube **290**, and heat transfer fin **250**. However, it is noted that the following discussion of the heat transfer fin applies generally to any membrane wall, and water tube. Also visible in **FIG. 11** is line C-C, which indicates the cross-section shown in **FIG. 12**.

[0099] Referring now to **FIG. 12**, the heat transfer fin **250** is intended to aid in heat transfer from the membrane **280** to the water tube **290**, thus keeping the temperature of the membrane lower than without the fin. The heat transfer fin extends from the membrane **280**. A first edge **252** of the fin abuts the membrane **280**, and a second edge **254** of the fin abuts the water tube **290**. The first edge is generally short compared to the second edge. The fin is also coped, as represented by reference numeral **251** (dotted lines indicating material removed from the fin and not present), which can help in providing additional welding space near the steam tube of the casting (not visible).

[0100] **FIGS. 13-16** are different views of the lower transition casting **300**. **FIG. 13** is a perspective view. **FIG. 14** is a front view. **FIG. 15** is a top view, and **FIG. 16** is a bottom view. The various components of the lower transition casting will now be described below. Again, these figures include arrows indicating a first vertical direction **201**, a second vertical direction **203** opposite the first vertical direction, a first lateral direction **208** which is perpendicular to the first vertical direction **201**, and a second lateral direction **209** which is opposite the first lateral direction. It is noted that a heat transfer fin **250** is not depicted on the lower transition casting, but that such may be present if desired.

[0101] Referring now to **FIG. 13** and **FIG. 14**, the upper transition casting **300** is broadly defined by a first steam tube **310**, a first water tube **320**, a first pass-through tube **330**, and membrane **340** that joins these three tubes **310**, **320**, **330** together to form a pressure seal. The first steam tube **310** has a steam passageway extending between a front end **312** pointing in the forward direction (i.e. outwardly from the furnace) and a vertical end **314** pointing in first vertical direction **201** / upper vertical direction **205**. The first water tube **320** has a water passageway extending between a front end **322** that also points in the forward direction and a vertical end **324** pointing in the second vertical direction **203** / lower vertical direction **207**. The first pass-through tube **330** has a fluid conduit extending between a first vertical end **332** that points in the first vertical direction **201** and a second vertical end **334** that points in the second vertical direction **203**. It is noted that the first steam tube **310** and the first water tube **320** do not cross over (i.e. extend past) each other at the middle of the transition

casting. Put another way, the front end **312** of the first steam tube is closer to the vertical end **314** of the first steam tube than the front end **322** of the first water tube is. Also, the front end **322** of the first water tube is closer to the vertical end **324** of the first water tube than the front end **312** of the first steam tube is.

[0102] The lower transition casting **300** may also have additional steam tubes, water tubes, and pass-through tubes. Here, the lower transition casting also has a second steam tube **360** and a second pass-through tube **370**. The second steam tube **360** also has a steam passageway extending between a front end **362** pointing in the forward direction and a vertical end **364** pointing in the first vertical direction **201**. The second pass-through tube **370** has a fluid conduit extending between a first vertical end **372** that points in the first vertical direction **201** and a second vertical end **374** that points in the second vertical direction **203**. Membrane **342** joins the first steam tube **310**, first water tube **320**, and the second pass-through tube **370** together to form a pressure seal.

[0103] As seen particularly in **FIG. 14**, the first steam tube **310** and the first water tube **320** are located vertically relative to each other (i.e. one above the other). The first steam tube **310** and the first water tube **320** are both adjacent to a common side of the first pass-through tube **330** (i.e. the first lateral side). The first steam tube **310** and the first water tube **320** are also located between the first pass-through tube **330** and the second pass-through tube **370**.

[0104] The front end **312** of the first steam tube **310** is laterally offset from the front end **322** of the first water tube **320**, i.e. the center of the first steam tube is off to one side of the center of the first water tube. The front end **312** of the first steam tube **310** is also vertically offset from the front end **322** of the first water tube **320**, i.e. they are at different heights. Relative to itself, the front end **322** of the first water tube **320** is laterally offset from the vertical end **324** of the first water tube **320**, i.e. to one side. In contrast, the front end **312** and the vertical end **314** of the first steam tube **310** are vertically aligned with each other.

[0105] As seen in **FIG. 14**, the first steam tube **310** has a steam tube diameter **D1**. The first water tube **320** has a water tube diameter **D2**. The first pass-through tube **330**

has a pass-through tube diameter **D3**. Here because the pass-through tube transports water, the pass-through tube diameter **D3** is equal to **D2**.

[0106] In **FIG. 14**, it is particularly noted that the first vertical ends **332, 372** of the pass-through tubes **330, 370** are offset in different lateral directions relative to their second vertical ends **334, 374**. Put another way, the centers of the first vertical ends **332, 372** of the first pass-through tube and the second pass-through tube are closer to each other than the centers of the second vertical ends of the first pass-through tube and the second pass-through tube **334, 374**.

[0107] **FIG. 15** and **FIG. 16** are a top view and a bottom view, respectively, of the lower transition casting. It is noted that the top view of the lower transition casting corresponds to the bottom view of the upper transition casting (**FIG. 10**). Thus, we will discuss the bottom view of the lower transition casting first.

[0108] Referring now to **FIG. 16**, which is a bottom view for the lower transition casting **300**, the first steam tube **310**, first water tube **320**, and second steam tube **360** of the lower transition casting **300** are marked. The front ends of these tubes **312, 322, 362** are also marked, and it is noted that the front ends all terminate at generally the same distance from the membrane **340**. The membrane **340** is vertically aligned and can be considered a rear side of the casting.

[0109] The first water tube vertical end **324**, the first pass-through tube second vertical end **334**, and the second pass-through tube second vertical end **374** are all marked. The centers of these vertical ends are marked as **334c, 324c, and 374c**, going laterally. As seen here, these vertical ends all have the same diameter, and the centers of these vertical ends are all aligned in a third plane **P3**, which is a vertical plane that also marks a rear side of the casting. Put another way, the centers of any two of these vertical ends define a fourth line **L4**.

[0110] Referring now to **FIG. 15**, which is the top view of the lower transition casting, the first steam tube **310**, first water tube **320**, and second steam tube **360** of the lower transition casting **300** are marked. The front ends of these tubes **312, 322, 362** are also marked.

[0111] The second steam tube vertical end **364**, the first pass-through tube first vertical end **332**, the first steam tube vertical end **314**, and the second pass-through

tube first vertical end **372** are all marked. The centers of these vertical ends are marked as **364c**, **332c**, **314c**, and **372c**, going laterally. As illustrated here, for the upper end of the lower transition casting, and in contrast to that of **FIG. 16**, the centers of the vertical ends are not all aligned in a single common plane. Rather, they alternate between two different planes. The centers of the pass-through tubes **332c**, **372c** are aligned in a plane **P3** which is substantially coincident with the third plane **P3** of **FIG. 16**. The centers of the steam tubes **364c**, **314c** are aligned in a fourth different plane **P4** that is offset from the third plane **P3**. The center **314c** of the vertical end of the first steam tube **310** is offset from the plane **P3** by a distance that is about equal to the radius of the first steam tube **310**. Put another way, the center **314c** of the vertical end of the first steam tube **310** and the center **332c** of the first vertical end of the first pass-through tube **330** define a fifth line **L5**. The fourth line **L4** (see **FIG. 16**) and the fifth line **L5** form an acute angle. In embodiments, the acute angle formed by **L4** and **L5** has a value of about 15° to about 25° .

[0112] Referring still to **FIG. 15**, membrane **340** is visible joining first pass-through tube **330** to first steam tube **310**. Membrane **342** is visible joining first steam tube **310** to the first vertical end **372** of the second pass-through tube. Membrane **340** can be considered a line (**L5**) joining the first pass-through tube first vertical end **332** with the first steam tube vertical end **314**. Membrane **342** can be considered a line (**L6**) joining the first steam tube vertical end **314** with the second pass-through tube first vertical end **374**. The lines **L5** and **L6** form an obtuse angle at their common point (first steam tube vertical end **314**). In embodiments, the obtuse angle formed by **L5** and **L6** has a value of about 130° to about 150° .

[0113] The transition castings **200**, **300** can be made by casting, which is a process in which a liquid metal is poured into a mold and solidified as one piece. This also allows the bends in the various tubes to be made at a much smaller radius compared to normal bent tubes. The smaller radius permits a narrower membrane area, which produces lower membrane metal temperatures and therefore longer service life.

[0114] The transition castings are preferably made with materials which can accommodate the high temperatures needed to handle the superheated steam. For example, SA217C12a, SA217WC9 or SA217WC7 or SA217WC6 steel could be used.

The castings are welded to the wall tubes of the upper furnace and the lower furnace, and their use permits access for welding the various tubes and headers together.

[0115] The present disclosure has been described with reference to exemplary embodiments. Obviously, modifications and alterations will occur to others upon reading and understanding the preceding detailed description. It is intended that the present disclosure be construed as including all such modifications and alterations insofar as they come within the scope of the appended claims or the equivalents thereof.

CLAIMS:

We claim:

1. A transition casting, comprising:

a first steam tube having a steam tube diameter and a steam passageway extending between a front end pointing in a forward direction and a vertical end pointing in a first vertical direction;

a first water tube having a water tube diameter and a water passageway extending between a front end pointing in the forward direction and a vertical end pointing in a second vertical direction opposite the first vertical direction;

a first pass-through tube having a pass-through tube diameter and a fluid conduit extending between a first vertical end pointing in the first vertical direction and a second vertical end pointing in the second vertical direction; and

a membrane joining the first steam tube, the first water tube, and the first pass-through tube to form a pressure seal therebetween;

wherein a center of the vertical end of the first steam tube and a center of the first vertical end of the first pass-through tube are aligned in a first plane, and a center of the vertical end of the first water tube is offset from the first plane.

TRADUCCIÓN SIMPLE AL ESPAÑOL REALIZADA POR MELISSA AGUDELO
MAGALHÃES DEL SIGUIENTE DOCUMENTO, ESCRITO ORIGINALMENTE EN INGLÉS.

ESTADOS UNIDOS DE AMÉRICA
A TODOS LOS QUE LA PRESENTE VIEREN, SABED:

DEPARTAMENTO DE COMERCIO DE ESTADOS UNIDOS
Oficina de Marcas y Patentes de Estados Unidos

21 de marzo de 2017

POR MEDIO DE LA PRESENTE SE CERTIFICA QUE EL DOCUMENTO QUE
FIGURA EN ANEXO ES UNA COPIA FIEL TOMADA DE LOS ARCHIVOS DE ESTA
OFICINA, CORRESPONDIENTE A UN DOCUMENTO RADICADO EL 28 DE ABRIL
DE 2016.

Con autorización del
Subsecretario de Comercio para la Propiedad Intelectual y
Director de la Oficina de Marcas y Patentes de Estados
Unidos

(Firmado)
JOHN A. BURSON
Oficial de Registro

SELLO: OFICINA DE MARCAS Y PATENTES DE ESTADOS UNIDOS.
DEPARTAMENTO DE COMERCIO

PORTADA DE CESIÓN DE PATENTE	
Versión electrónica v1.1 Versión hoja de estilo v1.2	
EPASID: PAT3850458	
TIPO DE COMUNICACIÓN:	NUEVA CESIÓN
NATURALEZA DE LA TRANSMISIÓN:	CESIÓN
DATOS DEL CEDENTE	
Nombre	Fecha de ejecución
ERIC L WELLS	05/04/2016
ROGER A DETZEL	05/04/2016
ALBERT J BENNETT	05/04/2016
STEVEN D THAYER	05/04/2016
DATOS DEL CESIONARIO	
Nombre	The Babcock & Wilcox Company
Dirección:	20 South Van Buren Avenue
Ciudad:	Barberton
Estado/País:	OHIO
Código postal:	44203
NÚMERO TOTAL DE PROPIEDADES: 1	
Tipo de Propiedad	Número
Número de Solicitud:	15091173
INFORMACIÓN DE CORRESPONDENCIA	
Número de fax:	(330)860-6609
<i>La correspondencia se enviará primero al correo electrónico; si no funciona, se enviará por fax, si lo hay, y por Correo de los EE.UU. cuando el intento por fax no sea exitoso</i>	
Teléfono:	3308606710
E-mail:	amsaus@babcock.com
Nombre de corresponsal:	AMY SAUS
Línea de dirección 1:	20 SOUTH VAN BUREN AVENUE
Línea de dirección 2:	BVCB2K
Línea de dirección 4:	BARBERTON, OHIO 44203
NÚMERO DE EXPEDIENTE DE ABOGADO:	CASO 7707

NOMBRE DEL REMITENTE:	AMY M SAUS
FIRMA:	/AMSAUS/
FECHA DE FIRMA:	28/04/2016
Anexos totales: 3 source=Case_7707_Assignment_EXECUTED#page1.tif source=Case_7707_Assignment_EXECUTED#page2.tif source=Case_7707_Assignment _EXECUTED#page3.tif	

CESIÓN A FAVOR DE BABCOCK & WILCOX COMPANY

CASO 7707

POR MEDIO DE LA PRESENTE CESIÓN, realizada el día 5 de abril de 2016, por parte de Eric L. Wells, domiciliado en 9185 Hunters Chase Street NW, Massillon, Ohio 44646; y por Roger A. Detzel, domiciliado en 1785 Fairway Drive, Uniontown, Ohio 44685; y por Albert J. Bennet, domiciliado en 12539 Hollow Ridge Drive, Doylestown, Ohio 44230; y por Steven D. Thayer, domiciliado en 7195 Lowmiller Road, Minerva, Ohio 44657; todos ellos ciudadanos de Estados Unidos de América;

DECLARA: Que

CONSIDERANDO QUE somos los coinventores de cierta nueva y útil mejoría e invención en

FUNDICIÓN DE TRANSICIÓN PARA CALDERA CON HORNO SUPERIOR REFRIGERADO POR VAPOR

para la cual hemos preparado y presentado una Solicitud de Título de Patente Estadounidense el 5 de abril de 2016, y

CONSIDERANDO QUE BABCOCK & WILCOX COMPANY., una Compañía constituida bajo las leyes del estado de Delaware, EE.UU., cuyas oficinas principales se encuentran ubicadas en 20 S. Van Buren Ave., Barberton, Ohio 44203, EE.UU., desea adquirir la totalidad de los derechos, títulos e intereses en y para dicha mejoría e invención, y todo y cualquier Título de Patente que sea concedida para la misma;

AHORA BIEN, a quien pueda interesar, sépase que por y en consideración de la suma de Un Dólar (\$1,00), a nosotros pagada en efectivo y en mano, y demás contraprestaciones a título oneroso, cuyo recibo se reconoce por la presente, nosotros, Eric L. Wells, Roger A. Detzel, Albert J. Bennet, y Steven D. Thayer, hemos vendido, cedido, transferido y traspasado, y por medio de la presente vendemos, cedemos, transferimos y traspasamos a THE BABCOCK & WILCOX COMPANY, sus sucesores y cesionarios, la totalidad de los derechos, títulos e intereses en y para la mejoría, invención y solicitud de patente antes mencionadas, y en y para todas las Patentes de Estados Unidos que puedan ser concedidas para las mismas a partir de este momento, y en y para toda y cualquier extensión, división o reemisión de dichas Patentes, las mismas que tendrá y de las que gozará THE BABCOCK & WILCOX COMPANY para su propio uso y beneficio, y para el uso y beneficio de sus sucesores y cesionarios, por todo el tiempo por el cual sea concedida dicha

Patente, tan plena y completamente como lo hubiéramos tenido y gozado nosotros si no hubiesen ocurrido la presente venta y cesión;

Y, por la consideración antes mencionada, convenimos y acordamos con THE BABCOCK & WILCOX COMPANY, sus sucesores y cesionarios, que, en el momento de ejecución y entrega de la presente, somos los copropietarios legítimos de la totalidad de los derechos, títulos e intereses en y para la mejoría, invención, solicitud y patente antes mencionadas, y que las mismas se encuentran libres de gravamen, y que tenemos derecho y autoridad legal para vender y transferir a las mismas de la manera especificada en la presente;

Y, por la consideración antes mencionada, convenimos y acordamos con THE BABCOCK & WILCOX COMPANY, sus sucesores y cesionarios, que, siempre que su abogado o el abogado de sus sucesores y cesionarios considere que una modificación o división o cualquier otro procedimiento relacionado con dicha solicitud, incluyendo procedimientos de interferencia, es legítimo y deseable, o que una reemisión o extensión de dicha Patente es legítima y deseable, firmaremos todos los documentos y dibujos, prestaremos todos los juramentos correspondientes, y realizaremos todas las acciones necesarias o requeridas para la obtención de patentes válidas para dicha mejoría e invención, o para la reemisión o extensión de las mismas, sin cargos a THE BABCOCK & WILCOX COMPANY, o a sus sucesores y cesionarios, pero a costas de los mismos.

Por medio de la presente solicitamos al Honorable Comisionado de Marcas y Patentes de Estados Unidos que emita las Patentes conforme al presente instrumento.

Y, por la anterior consideración, hemos vendido, cedido, transferido y traspasado, y por medio de la presente vendemos, cedemos, transferimos y traspasamos a THE BABCOCK & WILCOX COMPANY, sus sucesores y cesionarios o personas designadas, la totalidad de los derechos, títulos e intereses en y para todas las Patentes u otras formas de protección que puedan ser otorgadas en países fuera de los Estados Unidos, u otras formas de protección que puedan ser otorgadas y en y para todas y cualquiera de las solicitudes de Patentes o demás formas de protección que puedan ser presentadas para dicha mejoría e invención en países fuera de los Estados Unidos, incluyendo todos los derechos a reivindicar prioridad, y en y para la invención descrita en dichas solicitudes; y por medio de la presente autorizamos y habilitamos a THE BABCOCK & WILCOX COMPANY, sus sucesores y cesionarios o personas designadas para que soliciten las Patentes o demás formas de protección sobre dicha mejoría e invención, en su nombre o en nombre de sus sucesores, cesionarios o personas designadas, en todos y cualquiera de los países en donde desee presentar dichas solicitudes y donde dichas solicitudes puedan ser presentadas por cualquier persona

diferente a los inventores; y por medio de la presente convenimos y aceptamos firmar todos los documentos y dibujos, prestar todos los juramentos correspondientes, y realizar todas las acciones necesarias o requeridas para la obtención de patentes válidas u otras formas de protección para dicha mejoría e invención en países fuera de los Estados Unidos, y para verter o confirmar el derecho y título de las mismas sobre THE BABCOCK & WILCOX COMPANY, sus sucesores y cesionarios o personas designadas, sin cargo a THE BABCOCK & WILCOX COMPANY, sus sucesores y cesionarios o personas designadas pero a sus expensas.

EN FE DE LO ANTERIOR, estampamos nuestra firma y sello en el día y año escritos arriba.

(Firma ilegible)

Eric L. Wells

(Firma ilegible)

Roger A. Detzel

(Firma ilegible)

Albert J. Bennet

(Firma ilegible)

Steven D. Thayer

TESTIGOS:

(Firma ilegible)

(Firma ilegible)

ESTADO DE OH)

) ss.

CONDADO DE SUMMIT)

En este día 5 de abril de 2016 comparecieron personalmente ante mí Eric L. Wells, Roger A. Detzel, Albert J. Bennet, y Steven D. Thayer, a quienes conozco como las personas descritas en y quienes ejecutaron el anterior instrumento, y quienes reconocieron haber ejecutado el mismo para los fines establecidos en el mismo.

SELLO SELLO NOTARIAL DEL ESTADO DE OHIO

(Firma ilegible)

MICHAEL J. SEYMOUR

NOTARIO PÚBLICO – OHIO

MI COMISIÓN NO TIENE FECHA DE

VENCIMIENTO
BAJO LA SECCIÓN 147.03 R.C.

MAM\MAM\ID-497041\WPCL2527

Señor Director

DIRECCION DE NUEVAS CREACIONES

Superintendencia de Industria y Comercio

E. S. D.

Referencia: Expediente No. NC2017/0003187

Asunto: Solicitud de patente para: ***“FUNDICIÓN DE TRANSICIÓN PARA CALDERA CON HORNO SUPERIOR ENFRIADO CON VAPOR”***

Solicitante: THE BABCOCK & WILCOX COMPANY

Fecha de solicitud: 31 de marzo de 2017

RESPUESTA A EXAMEN PRELIMINAR

Yo, ANDRÉS RINCÓN USCÁTEGUI, identificado como aparece al pie de mi firma, en mi condición de apoderado de la sociedad solicitante de la patente de la referencia, doy respuesta al Oficio No. 5619.

I. EN CUANTO AL ANÁLISIS DE PRIORIDAD

Presento, junto con la respuesta a este oficio, copia certificada del documento de la prioridad invocada.

II. EN CUANTO AL DOCUMENTO DE CESIÓN

Presento, junto con la respuesta a este oficio, copia del documento de cesión por parte de los inventores a favor de los solicitantes.

III. EN CUANTO AL RESUMEN

Mi representado se reserva el derecho de modificar el resumen dado que cumple con todos los requisitos exigidos por el literal e) del artículo 26 y el artículo 31 de la Decisión 486.

IV. EN CUANTO AL TÍTULO

Mi representado se reserva el derecho de modificar el título.

V. EN CUANTO A LA DESCRIPCIÓN

Mi representado se reserva el derecho de modificar la descripción.

VI. EN CUANTO A LAS OBJECIONES DE SUPUESTA FALTA DE CLARIDAD

1. El Examinador señala que las reivindicaciones de la 1 a la 10 no son claras, en resumen, por las siguientes razones:

– El preámbulo de las reivindicaciones independientes 1 y 2 “Una fundición de transición” es general.

– Los términos “un primer tubo de vapor” (reiv. 1 a 3), “un diámetro” (reiv. 1, 2), “un pasaje de vapor” (reiv. 1, 2), “un extremo frontal” (reiv. 1, 2, 4 a 6), “una dirección hacia adelante” (reiv. 1, 2), “un extremo vertical” (reiv. 1, 2, 6), “una primera dirección vertical” (reiv. 1, 2), “un primer tubo de agua” (reiv. 1 a 3), “un pasaje de agua” (reiv. 1, 2), “una segunda dirección vertical” (reiv. 1, 2), “un primer tubo pasante” (reiv. 1 a 3), “un conducto de fluido” (reiv. 1, 2), “un primer extremo vertical” (reiv. 1, 2), “un segundo extremo vertical” (reiv. 1, 2, 5), “una membrana” (reiv. 1, 2), “un primer plano” (reiv. 1), “un centro del extremo vertical” (reiv. 1, 2), “un centro del primer extremo vertical” (reiv. 2), “un centro del segundo extremo vertical” (reiv. 2), “un lado común” (reiv. 3), “está desplazado tanto lateral como verticalmente del extremo frontal del primer tubo de agua” (reiv. 4), “están desplazados verticalmente uno del otro” (reiv. 5), “una aleta de transferencia de calor” (reiv. 7), “se extiende desde la membrana y que linda con el primer tubo de agua” (reiv. 7), “el diámetro de tubo pasante es el mismo que el diámetro de tubo de vapor” (reiv. 9), “el diámetro de tubo pasante es el mismo que el diámetro de tubo de agua” (reiv. 10), son imprecisos.

– Los términos “que une” (reiv. 1, 2), “pasante para formar un sello a presión entre estos” (reiv. 1, 2), “define una primera línea” (reiv. 2) corresponden a características funcionales.

– Los términos “adyacentes” (reiv. 3), “mayor que” son imprecisos.

– Incluir entre paréntesis () los números de referencia de cada uno de los elementos que hacen parte de la invención de acuerdo con la numeración empleada en los dibujos.

2. Mi representado se reserva el derecho de modificar “Una fundición de transición” para cuando se realice el examen de patentabilidad, en aras de no limitar indebidamente la invención. En este sentido, es importante resaltar que el término “Una fundición de transición” no es general sino que es muy conocido por personas versadas en la materia y, adicionalmente, se debe interpretar en conjunto con la Descripción.

3. Mi representado se reserva el derecho de modificar los términos “un primer tubo de vapor” (reiv. 1 a 3), “un diámetro” (reiv. 1, 2), “un pasaje de vapor” (reiv. 1, 2), “un extremo frontal” (reiv. 1, 2, 4 a 6), “una dirección hacia adelante” (reiv. 1, 2), “un extremo vertical” (reiv. 1, 2, 6), “una

primera dirección vertical” (reiv. 1, 2), “un primer tubo de agua” (reiv. 1 a 3), “un pasaje de agua” (reiv. 1, 2), “una segunda dirección vertical” (reiv. 1, 2), “un primer tubo pasante” (reiv. 1 a 3), “un conducto de fluido” (reiv. 1, 2), “un primer extremo vertical” (reiv. 1, 2), “un segundo extremo vertical” (reiv. 1, 2, 5), “una membrana” (reiv. 1, 2), “un primer plano” (reiv. 1), “un centro del extremo vertical” (reiv. 1, 2), “un centro del primer extremo vertical” (reiv. 2), “un centro del segundo extremo vertical” (reiv. 2), “un lado común” (reiv. 3), “está desplazado tanto lateral como verticalmente del extremo frontal del primer tubo de agua” (reiv. 4), “están desplazados verticalmente uno del otro” (reiv. 5), “una aleta de transferencia de calor” (reiv. 7), “se extiende desde la membrana y que linda con el primer tubo de agua” (reiv. 7), “el diámetro de tubo pasante es el mismo que el diámetro de tubo de vapor” (reiv. 9), “el diámetro de tubo pasante es el mismo que el diámetro de tubo de agua” (reiv. 10) dado que no son imprecisos sino ampliamente conocidos por personas versadas en la materia.

4. Difiero respetuosamente de la opinión del Examinador en lo referente al uso de las expresiones “que une” (reiv. 1, 2), “pasante para formar un sello a presión entre estos” (reiv. 1, 2), “define una primera línea” (reiv. 2) dado que la Guía de Examen de Patentes permite el uso de características funcionales cuando buscan ilustrar o definir las características técnicas de la invención. Dicha frase busca brindar mayor información sobre el alcance de las características técnicas.

5. Difiero respetuosamente de la opinión del Examinador en lo referente a que los “adyacentes” (reiv. 3), “mayor que” son imprecisos dado que los citados términos fijan un mínimo necesario para que la invención sea realizada exitosamente.

6. Mi representado se reserva el derecho de incluir entre paréntesis () los números de referencia de cada uno de los elementos que hacen parte de la invención de acuerdo con la numeración empleada en los dibujos.

Por todo lo anterior, considero que el Capítulo Reivindicatorio Modificado adjunto cumple con todos los requisitos de claridad y concisión, ajustándose así a los lineamientos del Artículo 30 de la Decisión 486, ya que cualquier persona medianamente versada en la materia está en completa capacidad de reproducir la invención sin ambigüedad alguna.

IV. EN CUANTO AL PAGO DE TASA ADICIONAL POR EL NÚMERO DE REIVINDICACIONES

Mi representado se reserva el derecho de realizar el pago por reivindicaciones adicionales.

V. PETICIÓN

Teniendo en cuenta que la presente solicitud cumple con los requisitos de los Artículos 26 y 27 de la Decisión 486 de 2000 y considerando que se ha dado respuesta a cada una de las observaciones de la Dirección de Nuevas Creaciones con respecto a otros aspectos que tienen que ver con la patentabilidad de la invención, solicito a su Despacho continuar con el trámite administrativo correspondiente.

VI. ANEXOS

- Copia certificada del documento de prioridad
- Cesión de inventores


Señor Director,

ANDRÉS RINCÓN USCÁTEGUI

C.C. 79.780.910 de Bogotá

T.P. 114.908

A 7627159

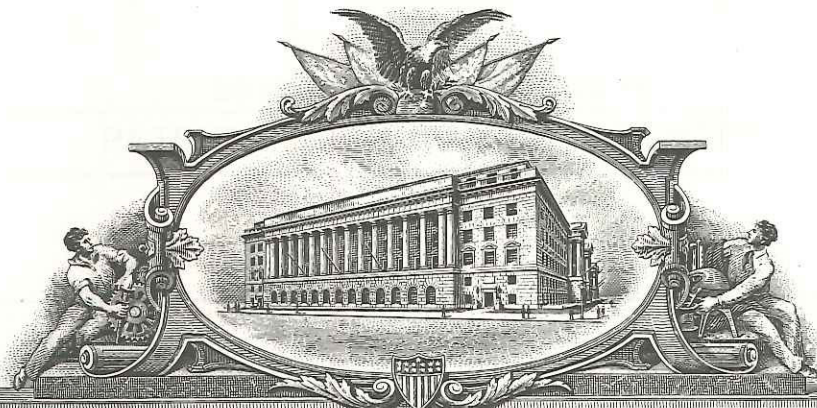

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office

March 21, 2017

THIS IS TO CERTIFY THAT ANNEXED IS A TRUE COPY FROM THE
RECORDS OF THIS OFFICE OF A DOCUMENT RECORDED ON
APRIL 28, 2016.

By Authority of the
Under Secretary of Commerce for Intellectual Property
and Director of the United States Patent and Trademark Office




JOHN A BURSON
Certifying Officer

PATENT ASSIGNMENT COVER SHEET

Electronic Version v1.1
 Stylesheet Version v1.2

EPAS ID: PAT3850458

SUBMISSION TYPE:	NEW ASSIGNMENT
NATURE OF CONVEYANCE:	ASSIGNMENT
CONVEYING PARTY DATA	
Name	Execution Date
ERIC L WELLS	04/05/2016
ROGER A DETZEL	04/05/2016
ALBERT J BENNETT	04/05/2016
STEVEN D THAYER	04/05/2016
RECEIVING PARTY DATA	
Name:	The Babcock & Wilcox Company
Street Address:	20 South Van Buren Avenue
City:	Barberton
State/Country:	OHIO
Postal Code:	44203
PROPERTY NUMBERS Total: 1	
Property Type	Number
Application Number:	15091173
CORRESPONDENCE DATA	
Fax Number:	(330)860-6609
<i>Correspondence will be sent to the e-mail address first; if that is unsuccessful, it will be sent using a fax number, if provided; if that is unsuccessful, it will be sent via US Mail.</i>	
Phone:	3308606710
Email:	amsaus@babcock.com
Correspondent Name:	AMY SAUS
Address Line 1:	20 SOUTH VAN BUREN AVENUE
Address Line 2:	BVCB2K
Address Line 4:	BARBERTON, OHIO 44203
ATTORNEY DOCKET NUMBER:	CASE 7707
NAME OF SUBMITTER:	AMY M SAUS
SIGNATURE:	/AMSAUS/
DATE SIGNED:	04/28/2016
Total Attachments: 3	
source=Case_7707_Assignment_EXECUTED#page1.tif	
source=Case_7707_Assignment_EXECUTED#page2.tif	

source=Case_7707_Assignment_EXECUTED#page3.tif

PATENT
REEL: 038406 FRAME: 0924

ASSIGNMENT TO THE BABCOCK & WILCOX COMPANY

CASE 7707

THIS ASSIGNMENT made the 5th day of April, 2016, by Eric L. Wells residing at 9185 Hunters Chase Street NW, Massillon, Ohio 44646; and by Roger A. Detzel, residing at 1785 Fairway Drive, Uniontown, Ohio 44685; and by Albert J. Bennett, residing at 12539 Hollow Ridge Drive, Doylestown, Ohio 44230; and by Steven D. Thayer, residing at 7195 Lowmiller Road, Minerva, Ohio 44657; all citizens of the United States of America;

WITNESSETH: That

WHEREAS, we are the joint inventors of a certain new and useful improvement and invention in

**TRANSITION CASTING FOR BOILER WITH
STEAM COOLED UPPER FURNACE**

for which we have prepared and executed an application for Letters Patent of the United States on the 5th day of April, 2016, and

WHEREAS, THE BABCOCK & WILCOX COMPANY, a Corporation organized under the laws of the state of Delaware, U.S.A., and having its principal office at 20 S. Van Buren Ave., Barberton, Ohio, U.S.A., is desirous of acquiring the entire right, title, and interest in and to said improvement and invention, and any and all Letters Patent which shall be granted therefor;

NOW, THEREFORE, To All Whom It May Concern, be it known that for and in consideration of the sum of One Dollar (\$1.00) to us in hand paid, and other good and valuable considerations, the receipt of which is hereby acknowledged, we, Eric L. Wells, Roger A. Detzel, Albert J. Bennett and Steven D. Thayer, have sold, assigned, transferred and set over, and by these presents do sell, assign, transfer and set over, unto said THE BABCOCK & WILCOX COMPANY, its successors and assigns, the entire right, title, and interest in and to the above-mentioned improvement, invention, and application for Letters Patent therefor, and in and to any and all Letters Patent of the United States which may hereinafter be granted therefor, and in and to any and all extensions, divisions, or reissues of said Letters Patent, the same to be held and enjoyed by said THE BABCOCK & WILCOX COMPANY, for its own use and behoof, and the use and behoof of its successors and assigns, to the full end of the term for which said Letters Patent may be granted, as fully and entirely as the same would have been held and enjoyed by us had this assignment and sale not been made;

ASSIGNMENT TO THE BABCOCK & WILCOX COMPANY

CASE 7707

AND, for the consideration aforesaid, we hereby covenant and agree with said THE BABCOCK & WILCOX COMPANY, its successors and assigns, that at the time of the execution and delivery of these presents, we are the joint and lawful owners of the entire right, title, and interest in and to the above-mentioned improvement, invention, and application for Letters Patent above mentioned, and that the same are unencumbered, and that we have good right and lawful authority to sell and convey the same in the manner herein set forth;

AND, for the consideration aforesaid, we hereby covenant and agree with said THE BABCOCK & WILCOX COMPANY, its successors and assigns, that we will, whenever its counsel or the counsel of its successors or assigns, learned in the law, shall advise that an amendment or division or any other proceeding in connection with said application, including interference proceedings, is lawful and desirable or that a reissue or extension of said Letters Patent is lawful and desirable, sign all papers and drawings, take all rightful oaths, and do all acts necessary or required to be done for the procurement of valid Letters Patent for said improvement and invention, or for the reissue or extension of same, without charge to said THE BABCOCK & WILCOX COMPANY, or its successors or assigns, but at its or their expense.

We hereby request the Honorable Commissioner of Patents and Trademarks of the United States to issue the Letters Patent in accordance with this instrument.

AND, for the consideration aforesaid, we have sold, assigned, transferred and set over, and by these presents do sell, assign, transfer and set over, unto said THE BABCOCK & WILCOX COMPANY, its successors, assigns, or nominees, the entire right, title, and interest in and to any and all Letters Patent or other form of protection which may be granted in countries foreign to the United States, and in and to any and all applications for Letters Patent or other form of protection which may be filed for said improvement and invention in countries foreign to the United States, including all rights to claim priority, and in and to the invention described in said applications; and we hereby authorize and empower said THE BABCOCK & WILCOX COMPANY, its successors, assigns, or nominees, to apply for Letters Patent, or other form of protection, on said improvement and invention, in its own name or in the name of its successors, assigns, or nominees, in any and all countries where it may desire to file

ASSIGNMENT TO THE BABCOCK & WILCOX COMPANY

CASE 7707

such applications and where such applications may be filed by another other than the inventors; and we hereby covenant and agree to sign all papers and drawings, take all rightful oaths, and do all acts necessary or required to be done for the procurement of valid Letters Patent, or other form of protection, for said improvement and invention in countries foreign to the United States, and for further investing or confirming the right and title thereto in said THE BABCOCK & WILCOX COMPANY, its successors, assigns, or nominees, without charge to said THE BABCOCK & WILCOX COMPANY, its successors, assigns, or nominees, but at its or their expense.

IN WITNESS WHEREOF, we have hereunto set our hands and seal on the day and year first above written.

Eric L. Wells
Eric L. Wells

Roger A. Detzel
Roger A. Detzel

Albert J. Bennett
Albert J. Bennett

Steven D. Thayer
Steven D. Thayer

WITNESSES: [Signature]

[Signature]

STATE OF OH)
COUNTY OF Summit) ss.

On this, the 5th day of April, 2016, before me personally appeared Eric L. Wells, Roger A. Detzel, Albert J. Bennett and Steven D. Thayer, me known and known to me to be the persons described in and who executed the foregoing instrument; and they acknowledged to me that they executed the same for the purpose therein stated.

SEAL



MICHAEL J. SEYMOUR
NOTARY PUBLIC - OHIO
MY COMMISSION HAS NO EXPIRATION DATE
UNDER SECTION 147.08 R.C.