



(51) International Patent Classification:

B60B 27/02 (2006.01) *B60B 35/18* (2006.01)
B60G 9/00 (2006.01)

(21) International Application Number:

PCT/US2018/028379

(22) International Filing Date:

19 April 2018 (19.04.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/487,767 20 April 2017 (20.04.2017) US

(71) Applicant: **WATSON & CHALIN MANUFACTURING, INC.** [US/US]; 725 East University Drive, McKinney, TX 75069 (US).

(72) Inventors: **ROSENE, Nathan**; 725 East University Drive, McKinney, TX 75069 (US). **SKARZENSKI, Chris**; 725 East University Drive, McKinney, TX 75069 (US). **O'BANNON, Walter**; 725 East University Drive, McKinney, TX 75069 (US).

(74) Agent: **SMITH, Marlin, R.**; SMITH IP SERVICES, P.C., P.O. Box 997, Rockwall, TX 75087 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) Title: VEHICLE SUSPENSION WITH COMMON HUB AND/OR KNUCKLE ASSEMBLY

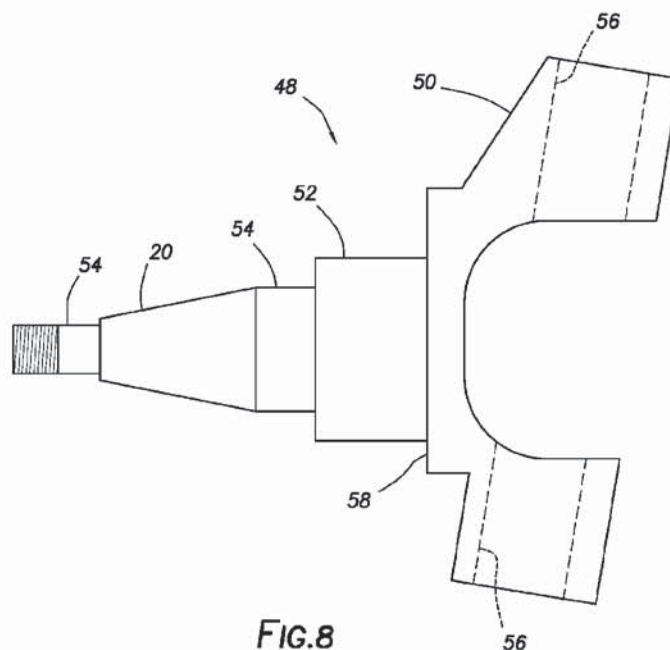


FIG. 8

(57) Abstract: A vehicle suspension can include an adapter mounting face, a spindle rigidly mounted relative to the adapter mounting face, a wheel mounting hub including a hub body rotatably mounted on the spindle by bearings, and an adapter that spaces a brake component away from the adapter mounting face. Another vehicle suspension can include a spindle, bearings, and a wheel mounting hub rotatably mounted on the spindle by the bearings, the wheel mounting hub can include a hub body and a wheel mounting flange, the hub body and the wheel mounting flange being separate components of the wheel mounting hub. A system for adapting a vehicle suspension to different suspension capacities can include multiple wheel mounting hubs including a same hub body internal configuration configured to be rotatably mounted on the spindle by the bearings, but the wheel mounting hubs including respective different wheel mounting flanges.



SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*