



(51) International Patent Classification:

H04W 16/28 (2009.01) H04W 36/00 (2009.01)
H04B 7/06 (2006.01)

(21) International Application Number:

PCT/SE2018/050456

(22) International Filing Date:

03 May 2018 (03.05.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/501,144 04 May 2017 (04.05.2017) US

(71) Applicant: TELEFONAKTIEBOLAGET LM
ERICSSON (PUBL) [SE/SE]; 164 83 Stockholm (SE).

(72) Inventors: DA SILVA, Icaro L. J.; Bergshamra Alle
175, SE-170 77 SOLNA (SE). EULER, Sebastian; Vinter-
gatsvägen 50, SE-743 35 Storvreta (SE).

(74) Agent: AYOUB, Nabil; Ericsson AB, Patent Unit Kista
RAN 2, 164 80 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: WIRELESS DEVICE, RADIO NETWORK NODE, AND METHODS PERFORMED THEREIN FOR HANDLING COMMUNICATION IN A WIRELESS COMMUNICATION NETWORK

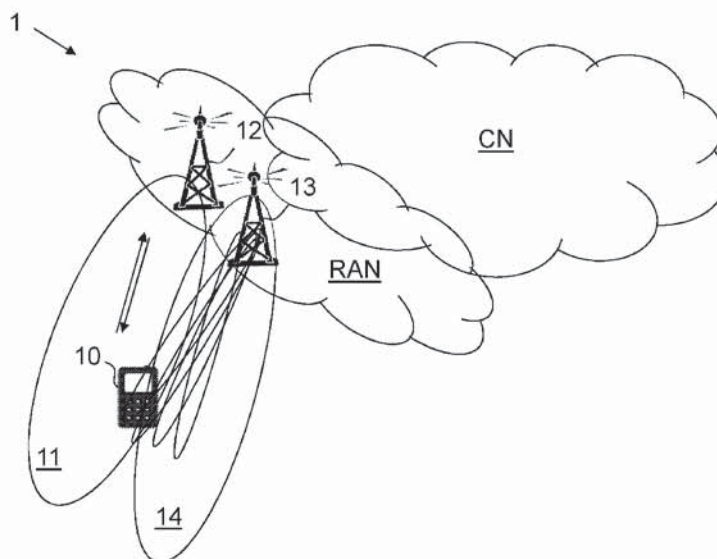


Fig. 9

(57) Abstract: Embodiments herein relate e.g. to a method performed a wireless device (10) for handling communication of the wireless device (10) in a wireless communication network (1). A radio network node (12) serves the wireless device (10). The wireless device obtains a first indication indicating a first number of beams for performing cell quality derivation on and a second indication indicating a second number of beams for performing measurement reporting on. The wireless device performs a cell quality derivation taking the first indication into account; and performs measurement reporting of a second number of beams taking the second indication into account.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed
contained color or greyscale and is available for download
from PATENTSCOPE*