



(51) International Patent Classification:

H04W 48/02 (2009.01) *G06F 21/00* (2013.01)
H04W 48/14 (2009.01) *H04L 29/06* (2006.01)
H04W 12/08 (2009.01)

(21) International Application Number:

PCT/FI2018/050570

(22) International Filing Date:

02 August 2018 (02.08.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/544,519 11 August 2017 (11.08.2017) US

(71) Applicant: **NOKIA TECHNOLOGIES OY** [FI/FI];
Karaportti 3, 02610 Espoo (FI).

(72) Inventors: **WON, Sung Hwan**; No. A-501, 50 Neungdong-ro, Gwangjin-gu, Seoul, 05070 (KR). **TOMALA, Malgorzata**; Objazdowa 76/11, 54-513 Wroclaw (PL). **COVELL, Betsy**; 1960 Lucent LN, Naperville, Illinois 60563-1594 (US).

(74) Agent: **NOKIA TECHNOLOGIES OY** et al.; Ari Aarnio, IPR Department, Karakaari 7, 02610 Espoo (FI).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) Title: NETWORK SLICE-SPECIFIC ACCESS BARRING FOR WIRELESS NETWORKS

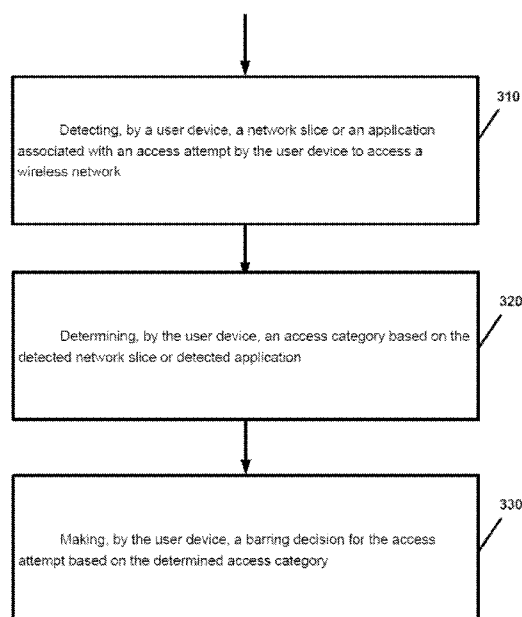


FIG. 3

(57) Abstract: A technique includes detecting, by a user device, a network slice associated with an access attempt by the user device to access a wireless network, and making, by the user device, a barring decision for the access attempt based on the network slice associated with the access attempt. Another example technique may include receiving, by a base station from one or more core network entities within a wireless network, network slice-specific load information that indicates a load for each of one or more network slices, determining, by the base station based on the received network slice-specific load information, a barring configuration that indicates a set of barring parameters for one or more access categories, and sending, by the base station to a user device, the barring configuration to reduce a load on the wireless network.

SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

NETWORK SLICE-SPECIFIC ACCESS BARRING FOR WIRELESS NETWORKS

TECHNICAL FIELD

5 This description relates to communications.

BACKGROUND

10 A communication system may be a facility that enables communication between two or more nodes or devices, such as fixed or mobile communication devices. Signals can be carried on wired or wireless carriers.

15 An example of a cellular communication system is an architecture that is being standardized by the 3rd Generation Partnership Project (3GPP). A recent development in this field is often referred to as the long-term evolution (LTE) of the Universal Mobile Telecommunications System (UMTS) radio-access technology. E-UTRA (evolved UMTS Terrestrial Radio Access) is the air interface of 3GPP's LTE upgrade path for mobile networks. In LTE, base stations or access points (APs), which are referred to as enhanced Node AP (eNBs), provide wireless access within a coverage area or cell. In LTE, mobile devices, or mobile stations are referred to as user equipments (UE). LTE has included a number of improvements or developments.

25 A global bandwidth shortage facing wireless carriers has motivated the consideration of the underutilized millimeter wave (mmWave) frequency spectrum for future broadband cellular communication networks, for example. mmWave (or extremely high frequency) may, for example, include the frequency range between 30 and 300 gigahertz (GHz). Radio waves in this band may, for example, have wavelengths from ten to one millimeters, giving it the name millimeter band or millimeter wave. The amount of wireless data will likely significantly increase in the coming years. Various techniques have been used in attempt to address this challenge including obtaining more spectrum, having smaller cell sizes, and using improved technologies enabling more bits/s/Hz. One element that may be used to obtain more spectrum is to move to higher frequencies, e.g., above 6 GHz. For fifth generation wireless systems (5G), an access architecture for deployment of cellular radio equipment employing mmWave radio spectrum has been proposed. Other example spectrums may also be used, such as cmWave radio spectrum (e.g., 3-30 GHz).

35

In addition, 5G wireless networks may support network slicing, wherein a single physical network may be sliced into multiple virtual networks. Each network slice may include a set of logical network functions that may support the requirements of a particular use case.

5 SUMMARY

According to an example implementation, a method includes: detecting, by a user device, a network slice associated with an access attempt by the user device to access a wireless network; and, making, by the user device, a barring decision for the access attempt based on the network slice associated with the access attempt.

According to an example implementation, an apparatus includes at least one processor and at least one memory including computer instructions that, when executed by the at least one processor, cause the apparatus to: detect, by a user device, a network slice associated with an access attempt by the user device to access a wireless network; and, make, by the user device, a barring decision for the access attempt based on the network slice associated with the access attempt.

According to an example implementation, a computer program product includes a computer-readable storage medium and storing executable code that, when executed by at least one data processing apparatus, is configured to cause the at least one data processing apparatus to perform a method including: detecting, by a user device, a network slice associated with an access attempt by the user device to access a wireless network; and, making, by the user device, a barring decision for the access attempt based on the network slice associated with the access attempt.

According to an example implementation, a method includes: receiving, by a base station from one or more core network entities within a wireless network, network slice-specific load information that indicates a load for each of one or more network slices; determining, by the base station based on the received network slice-specific load information, a barring configuration that indicates a set of barring parameters for one or more access categories; and sending, by the base station to a user device, the barring configuration to reduce a load on the wireless network.

According to an example implementation, an apparatus includes at least one processor and at

least one memory including computer instructions that, when executed by the at least one processor, cause the apparatus to: receive, by a base station from one or more core network entities within a wireless network, network slice-specific load information that indicates a load for each of one or more network slices; determine, by the base station based on the received
5 network slice-specific load information, a barring configuration that indicates a set of barring parameters for one or more access categories; and send, by the base station to a user device, the barring configuration to reduce a load on the wireless network.

According to an example implementation, a computer program product includes a computer-
10 readable storage medium and storing executable code that, when executed by at least one data processing apparatus, is configured to cause the at least one data processing apparatus to perform a method including: receiving, by a base station from one or more core network entities within a wireless network, network slice-specific load information that indicates a load
15 for each of one or more network slices; determining, by the base station based on the received network slice-specific load information, a barring configuration that indicates a set of barring parameters for one or more access categories; and sending, by the base station to a user device, the barring configuration to reduce a load on the wireless network.

According to an example implementation, a method includes: determining, by a core network
20 entity, network slice-specific load information that indicates a load for each of one or more network slices; and sending, by the core network entity to a base station, the network-slice specific load information.

According to an example implementation, an apparatus includes at least one processor and at
25 least one memory including computer instructions that, when executed by the at least one processor, cause the apparatus to: determine, by a core network entity, network slice-specific load information that indicates a load for each of one or more network slices; and send, by the core network entity to a base station, the network-slice specific load information.

According to an example implementation, a computer program product includes a computer-
30 readable storage medium and storing executable code that, when executed by at least one data processing apparatus, is configured to cause the at least one data processing apparatus to perform a method including: determining, by a core network entity, network slice-specific load information that indicates a load for each of one or more network slices; and sending, by the
35 core network entity to a base station, the network-slice specific load information.

The details of one or more examples of implementations are set forth in the accompanying drawings and the description below. Other features will be apparent from the description and drawings, and from the claims.

5 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a wireless network according to an example implementation.

FIG. 2 is a diagram illustrating a network-specific access barring technique according to an example implementation.

10 FIG. 3 is a flow chart illustrating operation of a user device according to an example implementation.

FIG. 4 is a flow chart illustrating operation of a base station according to an example implementation.

15 FIG. 5 is a flow chart illustrating operation of a core network entity according to an example implementation.

FIG. 6 is a diagram illustrating a network according to an example implementation.

FIG. 7 is a diagram illustrating an overall procedure for access barring for the access attempts caused by an upper layer according to an example implementation.

20 FIG. 8 is a diagram illustrating an overall procedure for access barring for access attempts triggered by the RRC layer according to an example implementation.

FIG. 9 is a diagram illustrating a procedure for a RAN node to set barring configuration to be broadcasted according to an example implementation.

FIG. 10 diagram illustrating a network-specific access barring technique according to another example implementation.

25 FIG. 11 is a block diagram of a node or wireless station (e.g., base station/access point, relay node, or mobile station/user device) according to an example implementation.

DETAILED DESCRIPTION

30 FIG. 1 is a block diagram of a wireless network 130 according to an example implementation. In the wireless network 130 of FIG. 1, user devices 131, 132, 133 and 135, which may also be referred to as mobile stations (MSs) or user equipment (UEs), may be connected (and in communication) with a base station (BS) 134, which may also be referred to as an access point (AP), an enhanced Node B (eNB), a gNB (which may be a 5G base station) or a network node.

35 At least part of the functionalities of an access point (AP), base station (BS) or (e)Node B

(eNB) may be also be carried out by any node, server or host which may be operably coupled to a transceiver, such as a remote radio head. BS (or AP) 134 provides wireless coverage within a cell 136, including to user devices 131, 132, 133 and 135. Although only four user devices are shown as being connected or attached to BS 134, any number of user devices may be provided. BS 134 is also connected to a core network 150 via an interface 151. This is merely one simple example of a wireless network, and others may be used.

A user device (user terminal, user equipment (UE)) may refer to a portable computing device that includes wireless mobile communication devices operating with or without a subscriber identification module (SIM), including, but not limited to, the following types of devices: a mobile station (MS), a mobile phone, a cell phone, a smartphone, a personal digital assistant (PDA), a handset, a device using a wireless modem (alarm or measurement device, etc.), a laptop and/or touch screen computer, a tablet, a phablet, a game console, a notebook, and a multimedia device, as examples. It should be appreciated that a user device may also be a nearly exclusive uplink only device, of which an example is a camera or video camera loading images or video clips to a network.

In LTE (as an example), core network 150 may be referred to as Evolved Packet Core (EPC), which may include a mobility management entity (MME) which may handle or assist with mobility/handover of user devices between BSs, one or more gateways that may forward data and control signals between the BSs and packet data networks or the Internet, and other control functions or blocks.

The various example implementations may be applied to a wide variety of wireless technologies, wireless networks, such as LTE, LTE-A, 5G (New Radio, or NR), cmWave, and/or mmWave band networks, or any other wireless network or use case. LTE, 5G, cmWave and mmWave band networks are provided only as illustrative examples, and the various example implementations may be applied to any wireless technology/wireless network. The various example implementations may also be applied to a variety of different applications, services or use cases, such as, for example, ultra-reliability low latency communications (URLLC), Internet of Things (IoT), enhanced mobile broadband, massive machine type communications (MMTC), vehicle-to-vehicle (V2V), vehicle-to-device, etc. Each of these use cases, or types of UEs, may have its own set of requirements.

In addition, 5G wireless networks may support network slicing, wherein a single physical

network may be sliced into multiple virtual networks. Each network slice may include, for example, a set of logical network functions that may support the requirements of a particular use case. Network Slicing may allow differentiated treatment depending on requirements of different UEs or groups of UEs. With slicing (network slicing), an operator can create networks for optimized solutions based on different service requirements, QoS (quality of service), functionality, performance, etc. By way of illustrative example, a network slice may include, for example, a portion of one or more network resources at one or more network entities, such as a portion of, e.g., one or more of computational resources, memory resources, hardware resources, software or functional resources, and/or other network resources at a BS and/or at one or more core network entities, for example, that may support a group of UEs or support a particular use case.

According to an example implementation, a UE and/or group of UEs, e.g., with similar QoS requirements or running the same or similar application, providing a common feature or functionality, for a particular use case, or other common aspect, may support a network slice or may be allocated or assigned to a network slice, e.g., where a network slice identifier (or slice identifier) may identify the network slice. However, different UEs (e.g., different type of UEs) and/or each different group of UEs, which may be assigned to different network slices, may have different service requirements. According to an example implementation, different UEs and/or each of multiple groups of UEs may be assigned to a different network slice.

Furthermore, a UE may have a number of different applications and/or data flows (e.g., protocol data unit sessions) that may generate and/or receive traffic or data. Therefore, a UE may be allocated to multiple network slices, e.g., based on different types of traffic that may be transmitted to or from the UE, different applications running on a UE, or different use cases that the UE may support. Therefore, a UE may be allocated to or allowed to use a plurality of network slices.

According to an example implementation, a slice may be identified by a slice identifier, which may include one or more of the following: a slice/service type (SST); a slice/service type (SST) and slice differentiator (SD); and a single Network Slice Selection Assistance Information (S-NSSAI). For example a SST may indicate a service type, such as a specific 5G wireless service type, such as ultra-reliability low latency communications (URLLC), Internet of Things (IoT), enhanced mobile broadband (eMBB), massive machine type communications (MMTC), etc. Thus, for example, a network slice may be allocated to or associated with a

specific service type. A slice differentiator (SD) may further allow a differentiation between different slices of the same type (e.g., to allow differentiation between two URLLC network slices that may be assigned to different groups of URLLC UEs, for example). Also, according to an example implementation, a S-NSSAI may be another type of slice identifier. According to an example implementation, a S-NSSAI = SST+SD (e.g., S-NSSAI may include or may be a combination of or concatenation of a SST and a SD for a slice), for example.

As noted, each of the different wireless service types (e.g., URLLC, IoT, eMBB, mMTC) may have different requirements in terms of, e.g., latency, QoS, minimum data rates, etc. As a result, in some cases, different wireless services/service types (e.g., URLLC, IoT, eMBB, mMTC) may be prioritized for service differently by a wireless network. Because each network slice may be associated with or allocated to a specific wireless service type (e.g., URLLC, IoT, eMBB, mMTC), this means that, at least in some cases, a wireless network may prioritize some network slices over other network slices.

According to an example implementation, in order to acquire a radio connection, a user device (UE) may typically make an access attempt towards the RAN (radio access network, which includes a BS). In the case where a BS and/or core network are overloaded (e.g., too many UEs that are using and/or attempting to use network resources of the network and/or a threshold (e.g., 90%+) percentage of network resources are being used and/or have been allocated), the access attempt by the UE may be barred or prevented by the UE. If the access attempt by the UE is not barred, then the UE may send, for example, a RRC (radio resource control) connection request to a BS or radio access network entity, for example, in order to register and/or establish a connection (e.g., RRC connection) to the network.

Therefore, according to an example implementation, a network may impose access restrictions to UEs that are in an Idle mode (e.g., RRC_Idle mode), e.g., to prevent UEs from registering and/or establishing a RRC connection to the network. For example, a wireless network may broadcast (e.g., via system information) a barring configuration to one or more UEs. The barring configuration may, for example, indicate whether access barring is being performed for one or more access classes or access categories. For example, each UE may be assigned an access class. Also, each access attempt may be assigned an access category. The network (e.g., BS) may broadcast a barring configuration to one or more UEs that may include information indicating that access attempts associated with one or more access categories and/or access classes, for example, may be barred, and if so, provide a set of barring parameters

for these one or more of the classes and/or access categories, for example.

According to an example implementation, a set of barring parameters may include, for example, a barring rate (or barring factor) and a barring time (or barring timer value). If access
5 barring is performed (e.g., for an access class or access category), then the UE may generate a random number. If the number is, e.g., less than the barring rate (also known as the barring factor), then the access attempt is not barred, and the UE may access the network by sending the RRC connection request. If, for example, the random number generated by the UE is greater than or equal to the barring rate (or barring factor), then the access attempt is barred (at
10 least temporarily), and the UE is not allowed to send the RRC connection request at that time, and the UE may later again re-attempt the network access after the barring timer has expired (e.g., barring timer may be initialized and begin counting down upon or around when the UE random number is determined to be greater than or equal to the barring rate, for example). Thus, after the barring time, the UE may again attempt to access the network, by generating
15 another (a second) random number, and determining whether this second random number is less than the barring rate or barring factor. Of course, the network may be able to adjust a network load by adjusting one or more of the barring parameters. For example, the network may adjust, e.g., increase or decrease, the number or percentage of UEs successfully accessing the network by increasing the barring rate/barring factor or decreasing the barring rate/barring
20 factor, for example. Also, network load may be adjusted by varying or adjusting the barring time (e.g., an increased barring time may reduce network load).

However, access barring typically does not account for different loads and/or priorities that may be applied to or associated with different network slices (e.g., associated with different
25 service types). Different network slices (or slice types) may have different loads. For example, a first network slice associated with or allocated to URLLC UEs may have a 90% load, a second network slice associated with IoT UEs may have a 60% load. According to an example implementation, it may be desirable to allow the network to decrease the overall load on the network by decreasing load for the two network slices differently (e.g., based on different sets
30 of barring parameters). Thus, for example, the network may set a barring rate for IoT UEs (of the second network slice) at a barring rate (or barring factor) of 20% (e.g., to bar or prevent, on average, 80% of the access attempts from IoT UEs), and set a barring rate for the URLLC UEs (of the first network slice) to 70% (e.g., to bar or prevent, on average, only 30% of the URLLC access attempts), e.g., in order to prioritize URLLC access attempts over IoT access attempts,
35 while decreasing network load, for example.

Therefore, according to an example implementation, network-slice specific access barring may be performed. For example, a UE may make a barring decision for an access attempt based on a network slice associated with the access attempt.

5 FIG. 2 is a diagram illustrating a network-specific access barring technique according to an example implementation. At UE 132, BS 134 and a core network entity 150 are in communication, as shown. At 210, the UE 132 detects a network slice associated with an access attempt by the UE. As noted, the UE may be assigned to or associated with one or more network slices, e.g., a different network slice for each of multiple 5G service types. The UE 132
10 may detect for which slice(s), e.g., for which application(s) or service type(s), is generating the access attempt for the UE, for example.

At 212, the core network entity 150 may send to UE 132 one or more access category filters that indicate an access category associated with one or more network slices. For example, the access
15 category filters may indicate: access category X for network slice #1 (URLLC); and access category Y for network slice #2 (IoT). These are merely a couple of illustrative example access category filters, which may allow the UE 132 to determine an access category for an access attempt based on the slice associated with the access attempt. As noted below, different access categories may be treated differently for access barring, e.g., in order to prioritize access
20 attempts for certain slices over access attempts for other slices, for example. For example, access category X (for URLLC) may be prioritized (e.g., a reduced amount of barring for access category X) over access category Y (e.g., a higher amount of barring of access attempts for access category Y).

25 At 214, the UE 132 may determine an access category for the access attempt based on the slice for the access attempt and the access category filters.

At 216, the core network entity 150 may determine a slice-specific network load(s) for each of one or more network slices. Load may be measured or determine as, e.g., number of UEs,
30 amount of traffic, percentage or amount of resources for the network slice that are used or allocated, etc. Thus, the core network entity 150 may separately determine a load for each of one or more network slices.

At 218, the core network entity 150 may send to the BS 134 the slice-specific load information
35 for one or more network slices.

At 220, the BS 134 may determine, based on the slice-specific load information, a barring configuration, e.g., which may indicate for one or more access categories: whether the access category is subject to barring, and providing a set of barring parameters for the access category (e.g., a barring rate or barring factor, and a barring time, as described above). Also, a barring configuration may include a compensation factor to adjust (e.g., reduce) a barring of access attempts from Inactive UEs.

According to an example implementation, a UE may be Connected (and active); Idle (not connected), or Connected (connected to the core network entity) but Inactive (Inactive Mode). In an example of Inactive mode, the core network determines that the UE is connected, and thus does not page the Inactive UE, but rather, just sends any downlink data to the BS for delivery to the Inactive UE. The BS may then page the Inactive UE to cause the UE to establish a connection (if not barred from access) and receive the downlink data for the Inactive UE. According to an example implementation, a compensation factor may be used to adjust a barring rate for Inactive UEs. For example, the compensation factor may be provided and used by the UE in making a barring decision that may provide fewer barred access attempts for Inactive mode UEs, as compared to Idle mode UEs (e.g., a lower rate of barring of access attempts for Inactive mode UEs, as compared to a higher rate of barring of access attempts from Idle mode UEs, for example).

At 222, the barring configuration may be sent from the BS 134 to the UE 132.

At 224, the UE 132 may make a barring decision for the UE access attempt based on the network slice associated with the access attempt. For example, the UE 132 may make a barring decision based on the access category for the UE access category (which is based on the slice for the access attempt) and the barring configuration (e.g., which may indicate whether access barring is being performed for such access category, and/or provide a set of barring parameters (e.g., a barring rate or barring factor, and a barring time, and possibly a compensation factor for Inactive mode UEs to adjust barring decision making if the UE is an Inactive mode) for the access category that may provide parameters for the UE to make the access barring decision for the UE access attempt.

For example, UE 132 may generate a random number and compare it to the received barring rate or barring factor. If the random number is less than (or alternatively, greater than) the barring rate or barring factor, then the access attempt is not barred. If, on the other hand, the

random number generated by the UE is greater than or equal to (or alternatively, less than or equal to) the barring rate or barring factor, then the UE access attempt is (at least temporarily) barred or prevented from occurring.

5 At 226, if the UE access attempt is not barred, then the UE may perform the access attempt (to access the network), e.g., by sending a RRC connection request message to the BS 134. If the access attempt is barred, then the UE may wait an amount of time based on the barring time (a backoff time), and then may generate a second random number, and compare it to the barring rate or barring factor again, to determine if the second access attempt is also barred. This
10 process may continue, e.g., with the UE 132 repeatedly receiving an indication of a UE access attempt associated with a particular network slice, and then determining (e.g., based on the slice associated with the access attempt, and/or based on the slice-specific barring configuration and/or slice-specific access category filters) if the access attempt is barred or not.

15 Example 1: FIG. 3 is a flow chart illustrating operation of a user device according to an example implementation. Operation 310 includes detecting, by a user device, a network slice or an application associated with an access attempt by the user device to access a wireless network. Operation 320 includes determining, by the user device, an access category based on the detected network slice or detected application. Operation 330 includes making, by the user
20 device, a barring decision for the access attempt based on the network slice associated with the access attempt.

Example 2: According to an example implementation of example 1, wherein the making a barring decision comprises: making, by the user device based on the network slice associated
25 with the access attempt, a decision that the access attempt is not barred; and the method further comprising performing, by the user device based on the decision, the detected access attempt to the wireless network.

Example 3: According to an example implementation of any of examples 1-2, wherein the
30 performing the detected access attempt comprises: sending, by the user device, a radio resource control (RRC) connection request message to request a connection to the wireless network.

Example 4: According to an example implementation of any of examples 1-3, and further
35 comprising: receiving, by the user device, one or more access category filters that indicate an

access category associated with one or more network slices or applications; determining, by the user device, an access category for the access attempt based on the network slice or application that is associated with the access attempt and the one or more access category filters; receiving, by the user device, a barring configuration that indicates a set of barring parameters for one or more of the access categories; and wherein the making a barring decision comprises making, by the user device, a barring decision for the access attempt based on the barring configuration and the access category for the access attempt.

Example 5: According to an example implementation of any of examples 1-4, wherein the network slice associated with the access attempt comprises one or more of the following: a slice/service type (SST); a slice/service type (SST) and slice differentiator (SD); a single Network Slice Selection Assistance Information (S-NSSAI).

Example 6: According to an example implementation of any of examples 1-5, wherein the barring configuration that indicates a set of barring parameters for one or more of the access categories comprises a barring configuration that indicates a set of barring parameters for one or more of the access categories and one or more applications.

Example 7: The method of any of claims 1-6 wherein the application associated with the access attempt is identified by one or more of the following: operating system identity; and operating system application identity.

Example 8: According to an example implementation of any of examples 1-7, wherein the barring configuration indicates a set of barring parameters, including at least a barring rate and a barring timer, for one or more of the access categories.

Example 9: According to an example implementation of any of examples 1-8, and further comprising: receiving a compensation parameter for a user device in Inactive mode; determining, by the user device, that the user device is in Inactive mode; and wherein the making a barring decision comprises: applying, by the user device, the compensation parameter to the making a barring decision for the user device to adjust a barring rate of the access attempt of the user device that is in Inactive mode.

Example 10: According to an example implementation of any of examples 1-9, wherein the barring configuration is based on a network slice-specific load information that indicates a

network load for each of one or more network slices.

Example 11: According to an example implementation of any of examples 1-10, wherein the barring configuration that indicates a set of barring parameters for one or more of the access categories provides or indicates a different prioritization of one or more access attempts based on access categories of the access attempts.

Example 12: FIG. 4 is a flow chart illustrating operation of a base station according to an example implementation. Operation 410 includes receiving, by a base station from one or more core network entities within a wireless network, network slice-specific load information that indicates a load for each of one or more network slices. Operation 420 includes determining, by the base station based on the received network slice-specific load information, a barring configuration that indicates a set of barring parameters for one or more access categories. Operation 430 includes sending, by the base station to a user device, the barring configuration to reduce a load on the wireless network.

Example 13: According to an example implementation of example 12, wherein the sending comprises sending, by the base station to a user device, the barring configuration, to allow the user device to make a barring decision for an access attempt based on a network slice associated with the access attempt by the user device.

Example 14: According to an example implementation of any of examples 12-13, and further comprising: forwarding, by the base station to the user device, one or more access category filters that indicate an access category associated with one or more network slices.

Example 15: According to an example implementation of any of examples 12-14, wherein the barring configuration indicates a set of barring parameters, including at least a barring rate and a barring timer, for one or more of the access categories.

Example 16: According to an example implementation of any of examples 12-15, wherein the one or more network slices are identified by or associated with one or more of the following: a slice/service type (SST); a slice/service type (SST) and slice differentiator (SD); and a single Network Slice Selection Assistance Information (S-NSSAI).

Example 17: FIG. 5 is a flow chart illustrating operation of a core network entity according to

an example implementation. Operation 510 includes determining, by a core network entity, network slice-specific load information that indicates a load for each of one or more network slices. Operation 520 includes sending, by the core network entity to a base station, the network-slice specific load information.

5

Example 18: According to an example implementation of example 17, wherein the core network entity comprises a first core network entity, and wherein the network slice-specific load information is determined by the first core network entity from one or more of the following: network slice-specific load information determined or gathered by the first core network entity; and network slice-specific load information received from a second core network entity.

10

Example 19: According to an example implementation of any of examples 17-18, and further comprising: sending, by the core network entity to a user device via a base station, one or more access category filters that indicate an access category associated with one or more network slices.

15

Example 20: According to an example implementation of any of examples 17-19, wherein the one or more network slices are identified by or associated with one or more of the following: a slice/service type (SST); a slice/service type (SST) and slice differentiator (SD); and a single Network Slice Selection Assistance Information (S-NSSAI).

20

Example 21: An apparatus comprising means for performing a method of any of examples 1-20.

25

Example 22: An apparatus comprising at least one processor and at least one memory including computer instructions that, when executed by the at least one processor, cause the apparatus to perform a method of any of examples 1-20.

Example 23: An apparatus comprising a computer program product including a non-transitory computer-readable storage medium and storing executable code that, when executed by at least one data processing apparatus, is configured to cause the at least one data processing apparatus to perform a method of any of examples 1-20.

30

Further example implementations and/or example details will now be provided.

35

FIG. 6 is a diagram illustrating a network according to an example implementation. The figure above shows a part of 5GS architecture in reference point representation. The UE is served by a RAN node (BS) in RAN and by an AMF and an SMF in the core network. Once the UE is registered to the network, the UE can communicate with a DN via a PDU session: a data path is established through RAN and UPF towards a DN. A UE's registration, mobility, and sessions are managed by core network control plane network functions: AMF and SMF. In addition, a UE's subscription is stored in the UDM and the UE's policy (e.g. mobility restriction) is controlled by the PCF.

When the UE would like to be served by the network, the UE needs to acquire radio connection and register to the core network. In order to acquire radio connection, the UE makes an access attempt towards the RAN (but first the UE must confirm that the access attempt is not barred. In case the RAN and/or core network are overloaded, the access attempt may be barred by the UE. In an example implementation, the UE may bar an access attempt according to the characteristics of the access attempt and barring configuration broadcasted by the RAN node, and possibly other information. However, a traditional access barring does not take into account slices, slice-related information, or slice-specific load information.

Therefore, according to an example implementation, network-slice specific access barring may be performed. For example, a UE may make a barring decision for an access attempt based on a network slice associated with the access attempt.

According to an example implementation, a load report may be sent from the core network (e.g., AMF and/or SMF) to RAN/BS; barring configuration for RRC-inactive (and connected) UEs as opposed to connected and active UEs, and idle; connected mode UEs are not barred usually; idle mode UEs should be barred most, and inactive connected UEs should be barred less than Idle mode UEs, because CN believes these UEs are connected. So these inactive UEs receive some additional access barring configuration parameters (e.g., the compensation parameter). A barring configuration may be determined by BS based on load information, and sent to UE.

A 5GMM entity of UE may collect one or more of the following information from other entities in the UE:

start and stop of MMTel video, MMTel voice, SMSoIP services from the IMS entity;
request of SMSoNAS delivery from the SMS entity; and

indication whether the 5GSM request is related to emergency PDU session from the 5GSM entity. Then, the 5GMM of UE entity decides the access category of an access attempts by making use of information available to itself in addition to the above information and sends the access category to the RRC layer of UE.

5

The RRC layer makes a barring decision for the access attempt taking into account the following factors:

barring configuration is access category specific, which is slice-specific (this barring configuration takes into account the slice specific load information; and, barring configuration transmission may be triggered by updated load information). access category from the 5GMM entity;

10

access class(es) of the UE; and/or

whether the access attempt is triggering change from RRC-INACTIVE to RRC-CONNECTED and, if yes, whether the access attempt is triggered by RAN-level paging.

15

UE decides whether access attempt is barred or not barred based on information coming from BS – if barred, then UE goes into idle mode, and if not barred, then UE transitions from RRC Inactive to RRC Connected; in RRC, there are three different states – connected, inactive and idle (at RRC level).

20

The slice (e.g., SST) may be taken into account for the access category decision: 5GMM entity collects information from other entities, and the 5GMM entity may collect which slice (e.g., SST) the 5GSM access request is related to from the 5GSM entity. Additionally, SST of an already established PDU session can be available in the 5GMM entity. Thus, the 5GMM may use the SST(s) of the PDU session(s) associated with the access attempt as well. In short, the 5GMM entity may obtain SST(s) related to the access attempt from the 5GSM entity and/or from itself.

25

In addition, mobile or wireless operator-specific access categories can be determined: The network provides the UE (5GMM entity) with access category filter(s). The filter is associated with an operator-specific access category and has an associated precedence in relation to standard access categories.

30

Barring configuration determination/population by BS:

35

The NGAP (BS) may determine or populate barring configuration according to the slice-

specific load information received from the core network. The core network may indicate the slice-specific load in the core network to the RAN node. The load can be indicated per PLMN, per SST, per SD, and/or per S-NSSAI.

5 FIG. 7 is a diagram illustrating an overall procedure for access barring for the access attempts caused by an upper layer according to an example implementation. FIG. 8 is a diagram illustrating an overall procedure for access barring for access attempts triggered by the RRC layer according to an example implementation. The RRC layer of the UE in RRC-INACTIVE mode can trigger an access attempt. The RRC layer may or may not receive an access category
10 for the access attempt. In an example implementation, the NAS layer provides an access category for a NAS message irrespective of the RRC states. FIG. 9 is a diagram illustrating a procedure for a RAN node to set barring configuration to be broadcasted according to an example implementation. The load information of the AMF and/or SMF per network slice can be delivered to the RAN node.

15

FIG. 10 diagram illustrating a network-specific access barring technique according to another example implementation. The operations of 1 – 7 are described below, by way of illustrative example.

20 1a. The IMS client at UE may provide at least one of the following indications to the 5GMM entity at UE either directly from the IMS client to the 5GMM entity or via the 5GSM entity:

- MO-MMTEL-voice-started;
- MO-MMTEL-voice-ended;
- MO-MMTEL-video-started;
- 25 - MO-MMTEL-video-ended;
- MO-SMSoIP-attempt-started; and
- MO-SMSoIP-attempt-ended.

30 From the above indications, the 5GMM entity can be aware of the start and end of mobile originated MMTel voice service, MMTel video service, and SMSoIP service.

1b. The SMS entity of UE may request the 5GMM entity to deliver an MO SMS message.

1c. The 5GSM entity of UE may request 5GSM message delivery to the 5GMM entity at UE. Together with the 5GSM message, the 5GSM entity may also provide PDU session
35 information, e.g. PDU session ID, S-NSSAI, DNN.

The 5GMM entity may store the information provided by the 5GSM entity in addition to 5GSM message, e.g. PDU session ID, S-NSSAI, DNN.

If no 5G NAS signalling connection is established for a PDU session and user data of the PDU session needs to be delivered to the network, the 5GMM entity may be requested to establish a 5G NAS signalling connection by the QoS flow controlling entity. In this case, the 5GMM entity may also receive PDU session ID of the PDU session.

2. The network may provide operator-specific access category filter(s) to the 5GMM entity of the UE via e.g., a NAS message, OMA DM. In case the operator-specific access category filter(s) is delivered via a NAS message, i.e. the AMF provides the filter(s) to the UE via a 5GMM message, the filter(s) may be coming from the PCF. The NAS message may correspond to the N1: CONFIGURATION UPDATE COMMAND message.

Each of the access category filters is associated with an operator-specific access category and/or precedence value and may include at least one of the following criteria:

- SST; per slice, and for one or more service types;
- SD;
- application ID;
- OS ID;
- OS application ID; and
- DNN.

For example, within a slice type (or SST), there could be different Access categories for different service types (Slice ID may be, for example, a combination of SST plus SD, with SD being optional). For each combination of SST+SD (or for each network slice, where the slice can be allocated to a service type of UEs), there can be an Access Category. An access category filter may indicate an access category for each of a plurality of slices (or for each slice ID or SST). This information informs the UE how the access attempt should be assigned to an access category; this access category may be used by the UE to perform access barring analysis: For example, a filter (sent to the UE) for operator-specific access category X can indicate that SST = eMBB and SD = Amazon, which means that an access attempt subject to a eMBB network slice dedicated for Amazon services will be classified as access category X. As another example, a filter for operator-specific access category Y can indicate that DNN (data network name, which could be tied to slice, but not the same; Internet or IMS/IP

multimedia subsystem) = enterprise network, which means that an access attempt subject to internal enterprise traffic should be categorized as access category Y. Subject to operator's policy, the access attempts categorized as access categories X and Y can be prioritized by setting small values of barring rates for these access categories in the broadcasted barring configuration.

The operator-specific access category filter(s) can have a higher or lower priority than standardized access category decision rules.

As can be seen from the above examples, in order to give special treatment to access attempts related to proprietary traffic for the roaming UEs and even for the UEs in the home network (if the network wants to change the previous configuration), the network shall be able to configure the UE with operator-specific access categories.

3. Taking into account information obtained from step 1 and the following information available in the 5GMM entity:

- whether the access attempt is an answer to a mobile terminated message;
- SST(s) of the PDU session(s) associated with the access attempt (SST of an already established PDU session can be available in the 5GMM entity);
- UE's registered PLMN and the UE's HPLMN/EHPLMN(s)/most preferred VPLMN(s)
- Any operator provided access category filters

the UE decides a standard access category. The examples of standard access categories are:

- MO resulting from MT: the access attempt is an answer to a mobile terminated message
- MO MMTel voice: the access attempt is caused by an MO MMTel voice call
- MO MMTel voice: the access attempt is caused by an MO MMTel video call
- MO SMSoIP: the access attempt is caused by an MO SMSoIP
- MO SMSoNAS: the access attempt is caused by an MO SMSoNAS
- MO emergency: the access attempt is relevant to the emergency call
- MO delay tolerant service in EHPLMN: the access attempt is relevant to the delay tolerant service or UE registered to the UE's EHPLMN
- MO delay tolerant service in most preferred VPLMN: the access attempt is relevant to the delay tolerant service or UE registered to the UE's most preferred VPLMN
- MO delay tolerant service in other PLMN: the access attempt is relevant to the delay tolerant service or UE registered to other PLMN
- MO eMBB: the access attempt is relevant to eMBB

- MO URLLC: the access attempt is relevant to URLLC
- MO signalling: the access attempt is not for user plane radio resource request and is not relevant to other access category
- MO data: the access attempt is for user plane radio resource request and is not relevant to other access category
- VoLTE fallback: the access attempt is for initiating fallback from 5GS to voice over LTE in early 5GC network deployments

There are cases where an access attempt is associated with multiple SSTs. In order to deal with these cases priority order can be decided, e.g. URLLC > eMBB > massive IoT, that is, again for example, an access attempt associated with URLLC and massive IoT are treated the same as access attempt associated with: URLLC and eMBB; or URLLC alone.

In addition, if available, the UE may decide that the access attempt is subject to an operator-specific category taking into account the filter received in step 2. In addition to what the 5GMM entity considers as input factors for the access category decision for the standard access category, the 5GMM entity additionally takes into account the parameters that are not considered as input for standard access category decision, e.g. SD(s) related to the access attempt.

4. The 5GMM entity of UE forwards the access category together with the NAS message to the RRC layer of UE.

5. The AMF (example core network entity) may indicate the load (overall network load and slice-specific loads) in the core network to the RAN node/BS. The load can be indicated per PLMN, per SST, per SD, and/or per S-NSSAI. Such information can be provided by the SMF to the RAN node. The load information can be expressed in a percentage scale per PLMN, per SST, per SD, and/or per S-NSSAI.

A) More specifically, the AMF may directly provide its load information per PLMN, per SST, per SD, and/or per S-NSSAI to the RAN node. Since the UEs served by the RAN node can be served by multiple AMFs, the RAN node may need to collect load information from all AMFs that serve the UEs served by the RAN node, in order to figure out the overall load in the core network (AMFs).

B) On the other hand, the SMF may provide the load information per PLMN, per SST, per SD, and/or per S-NSSAI to the AMF, and the AMF may forward the load information to the RAN node. Since the UEs served by the RAN node can be served by multiple SMFs, the RAN node may need to collect load information from all SMFs that serve the UEs served by the RAN node, in order to figure out the overall load in the core network (SMFs). In the message from the AMF to the RAN node, the AMF may include the AMF load information per PLMN, per SST, per SD, and/or per S-NSSAI in addition to the SMF load information to be forwarded.

C) Or the AMF can gather load information per PLMN, per SST, per SD, and/or per S-NSSAI from SMFs and provide the gathered load information to the RAN node. The gathered load information may be set so that the load of the AMF itself is also reflected in addition to the load of SMFs.

In B) and C), an SMF can indicate that resources assigned for a network slice with SST = massive IoT as overloaded (e.g. 98% load). In B) the AMF forwards the load information (the SMF's massive IoT slice resources are 98% loaded), and in C) the AMF gathers load information of massive IoT slice of SMF(s) and decides the load of massive IoT slice also taking into account the AMF's load for the massive IoT slice (in this case, how the AMF calculates the overall load for the massive IoT slice can be left to implementation).

6. The RAN node populates (determines) per-slice barring configuration (e.g., which may provide higher barring for some slices, and lower barring rates for other slices – prioritization of some traffic over others, e.g., may opt to have a lower barring rate for URLLC than for eMBB) to be broadcasted to the UE. From step 5, the RAN node may be aware of the load status of the core network per PLMN, per SST, per SD and/or per S-NSSAI. Thus, the RAN node can populate or determine the barring configuration so that load for a particular PLMN/network slice can be reduced, e.g. the barring parameters for access categories related to specific network slices (e.g. eMBB, URLLC, massive IoT, IMS) can be set so that access attempt associated with such access categories are reduced. Note that the massive IoT slice is mapped to delay tolerant service-series access categories.

The barring configuration may indicate one or more of the following, by way of illustrative example:

- whether a particular access class(es) should be barred with a certain barring rate and barring timer;

- whether a particular access category(ies) should be barred with a certain barring rate and barring timer;
- whether barring should be applied for each of the access classes in range 11-15;
- whether the RAN-level paging should be barred with a certain barring rate and barring timer;
- compensation parameter(s) (e.g. for reducing barring rate) for RRC-INACTIVE UEs; and/or
- compensation parameter(s) (e.g. for reducing barring rate) for high priority IMS PDU sessions.

Note that the barring rate and barring timer for the IMS services (MMTel voice, MMTel video, SMSoIP) and the compensation parameter(s) for high priority IMS PDU sessions may be delivered to the IMS client in the UE by the RRC layer in the UE and the IMS client can use the information for barring check for IMS services.

For example, a UE may select a random number between 0 and 1, and determines a barring factor, and compares it to barring rate (if less than barring rate, the access attempt is not barred).

Exemplary implementation of the barring configuration broadcasted in System Information can be represented as follows:

SystemInformationBlockTypeX information element

```

-- ASN1START

SystemInformationBlockTypeX ::= SEQUENCE {
5   accessBarringConfiguration      SEQUENCE {
        plmn-IdentityIndex-r15      INTEGER (1..maxPLMN-r15)    OPTIONAL    -- Need OP
        abc-Info-r15                SEQUENCE {
            abcForSpecialAC          BIT STRING (SIZE(5))    OPTIONAL    -- Need OP
            abcForAC                 BIT STRING (SIZE(10))    OPTIONAL    -- Need OP
10        barringPerAccessCategoryList-r15    BarringPerAccessCategoryList-r15 OPTIONAL    --
Need OP
        }
        abcConfig-r15              SEQUENCE {
            abcFactor-r15            ENUMERATED {
15                p00, p05, p10, p15, p20, p25, p30, p40,
                p50, p60, p70, p75, p80, p85, p90, p95},
            abcTime-r15              ENUMERATED {s4, s8, s16, s32, s64, s128, s256, s512}
        }
        OPTIONAL    -- Need OP
    }
}

BarringPerAccessCategory-r15 ::= SEQUENCE {
20   accessCategory-r15             INTEGER (1..maxAccessCategory-r15),
}

-- ASN1STOP

```

Where abc-Info-r15 pertains to collective configuration of three Access Barring Configuration types:

- for special access classes (e.g., AC11-15) by means of abcForSpecialAC;
- for regular LTE access classes by means of abcForAC;
- for Access Categories by means of barringPerAccessCategoryList parameter, where the range of Access Categories is determined by maxAccessCategory-r15.

Some example advantages of various example implementations may include, or example, that air interface and UE's RRC layer becomes adaptable, extendable and to high degree transparent in terms of provision or barring of particular access attempts. While NW (network) has the means to control various services and terminal access attempts in the same unified manner. Assuming the Access Category List is defined in RRC layer in extendable manner, the technique allows adding potentially new services without the need to change service accessibility framework.

7. The RRC layer of UE bars access attempts according to the broadcasted barring configuration, and the information on the access attempt, e.g., at least one of the following, for example:

- access category from the 5GMM entity;
- access class(es) of the UE; and/or (do not cover use of access classes)
- whether the access attempt is triggering change from RRC-INACTIVE to RRC-CONNECTED and, if yes, whether the access attempt is triggered by RAN-level paging.

For example, if the 5GMM entity of a UE in the RRC-INACTIVE mode requested the RRC layer to transport a NAS message with access category = MO SMSoNAS and the barring configuration indicates that the barring rate for access category = MO SMSoNAS is 40% and the compensation parameter for RRC-INACTIVE UEs is 0.3, the access attempt for the MO SMSoNAS should be barred with a probability $0.4 * 0.3 = 0.12$ (12% of such access attempt will be barred).

In an example implementation, the RRC layer of UE may obtain access class(es) of the UE from the USIM, but if this is not available, the upper layer can provide the RRC layer of UE with the access class(es) of the UE.

If the access attempt for a UE in the RRC-INACTIVE mode is barred, the RRC layer should indicate the upper layer of the barring result with a specific cause. The cause should indicate that the UE is barred due to barring configuration of the RAN node so that this case can be distinguished from the radio link failure. In this case, both in the RRC layer and in the NAS layer, the UE turns into the idle mode. The NAS layer shall operate as if the UE is barred in the idle mode.

List of example abbreviations:

	3GPP:	third generation partnership project
	4G:	fourth generation of mobile telecommunication technology
	5G:	fifth generation of mobile telecommunication technology
5	5GMM:	5GS mobility management
	5GS:	5G system
	5GSM:	5GS session management
	ACB:	access class barring
	AMF:	access and mobility management function
10	CSFB:	circuit switched fallback
	DM:	device management
	DN:	data network
	DNN:	data network name
	EHPLMN:	equivalent HPLMN
15	eMBB:	enhanced mobile broadband
	eNB:	evolved Node B
	EPS:	evolved packet system
	gNB:	next generation Node B (uncertain)
	HPLMN	home PLMN
20	IMS:	IP multimedia subsystem
	IoT:	internet of things
	IP:	internet protocol
	MME:	mobility management entity
	MMTel:	IMS multimedia telephony service
25	NAS:	non-access stratum
	NGAP:	next generation application protocol
	NSSAI:	network slice selection assistance information
	OAM:	operations, administration, and management
	OMA:	open mobile alliance
30	OS:	operating system
	PCF:	policy control function
	PDU:	protocol data unit
	PLMN	public land mobile network
	RAN:	radio access network
35	RRC:	radio resource control

	S-NSSAI:	single NSSAI
	SD:	slice differentiator
	SMS:	short message service
	SMSoNAS:	SMS over NAS
5	SMSoIP:	SMS over IP
	SSAC:	service specific access control
	SST:	slice/service type
	UDM:	user data management
	UE:	user equipment
10	UPF:	user plane function
	URLLC:	ultra-reliable and low latency communication
	VPLMN:	visited PLMN

FIG. 11 is a block diagram of a wireless station (e.g., AP, BS, eNB, UE or user device) 1100 according to an example implementation. The wireless station 1100 may include, for example, one or two RF (radio frequency) or wireless transceivers 1102A, 1102B, where each wireless transceiver includes a transmitter to transmit signals and a receiver to receive signals. The wireless station also includes a processor or control unit/entity (controller) 1104 to execute instructions or software and control transmission and receptions of signals, and a memory 1106 to store data and/or instructions.

Processor 1104 may also make decisions or determinations, generate frames, packets or messages for transmission, decode received frames or messages for further processing, and other tasks or functions described herein. Processor 1104, which may be a baseband processor, for example, may generate messages, packets, frames or other signals for transmission via wireless transceiver 1102 (1102A or 1102B). Processor 1104 may control transmission of signals or messages over a wireless network, and may control the reception of signals or messages, etc., via a wireless network (e.g., after being down-converted by wireless transceiver 1102, for example). Processor 1104 may be programmable and capable of executing software or other instructions stored in memory or on other computer media to perform the various tasks and functions described above, such as one or more of the tasks or methods described above. Processor 1104 may be (or may include), for example, hardware, programmable logic, a programmable processor that executes software or firmware, and/or any combination of these. Using other terminology, processor 1104 and transceiver 1102 together may be considered as a wireless transmitter/receiver system, for example.

In addition, referring to FIG. 11, a controller (or processor) 1108 may execute software and instructions, and may provide overall control for the station 1100, and may provide control for other systems not shown in FIG. 11, such as controlling input/output devices (e.g., display, keypad), and/or may execute software for one or more applications that may be provided on wireless station 1100, such as, for example, an email program, audio/video applications, a word processor, a Voice over IP application, or other application or software.

In addition, a storage medium may be provided that includes stored instructions, which when executed by a controller or processor may result in the processor 1104, or other controller or processor, performing one or more of the functions or tasks described above.

According to another example implementation, RF or wireless transceiver(s) 1102A/1102B may receive signals or data and/or transmit or send signals or data. Processor 1104 (and possibly transceivers 1102A/1102B) may control the RF or wireless transceiver 1102A or 1102B to receive, send, broadcast or transmit signals or data.

The embodiments are not, however, restricted to the system that is given as an example, but a person skilled in the art may apply the solution to other communication systems. Another example of a suitable communications system is the 5G concept. It is assumed that network architecture in 5G will be quite similar to that of the LTE-advanced. 5G is likely to use multiple input – multiple output (MIMO) antennas, many more base stations or nodes than the LTE (a so-called small cell concept), including macro sites operating in co-operation with smaller stations and perhaps also employing a variety of radio technologies for better coverage and enhanced data rates.

It should be appreciated that future networks will most probably utilise network functions virtualization (NFV) which is a network architecture concept that proposes virtualizing network node functions into “building blocks” or entities that may be operationally connected or linked together to provide services. A virtualized network function (VNF) may comprise one or more virtual machines running computer program codes using standard or general type servers instead of customized hardware. Cloud computing or data storage may also be utilized. In radio communications this may mean node operations may be carried out, at least partly, in a server, host or node operationally coupled to a remote radio head. It is also possible that node operations will be distributed among a plurality of servers, nodes or hosts. It should also be understood that the distribution of labour between core network operations and base station

operations may differ from that of the LTE or even be non-existent.

Implementations of the various techniques described herein may be implemented in digital electronic circuitry, or in computer hardware, firmware, software, or in combinations of them.

5 Implementations may be implemented as a computer program product, i.e., a computer program tangibly embodied in an information carrier, e.g., in a machine-readable storage device or in a propagated signal, for execution by, or to control the operation of, a data processing apparatus, e.g., a programmable processor, a computer, or multiple computers. Implementations may also be provided on a computer readable medium or computer readable
10 storage medium, which may be a non-transitory medium. Implementations of the various techniques may also include implementations provided via transitory signals or media, and/or programs and/or software implementations that are downloadable via the Internet or other network(s), either wired networks and/or wireless networks. In addition, implementations may be provided via machine type communications (MTC), and also via an Internet of Things
15 (IOT).

The computer program may be in source code form, object code form, or in some intermediate form, and it may be stored in some sort of carrier, distribution medium, or computer readable medium, which may be any entity or device capable of carrying the program. Such carriers
20 include a record medium, computer memory, read-only memory, photoelectrical and/or electrical carrier signal, telecommunications signal, and software distribution package, for example. Depending on the processing power needed, the computer program may be executed in a single electronic digital computer or it may be distributed amongst a number of computers.

25 Furthermore, implementations of the various techniques described herein may use a cyber-physical system (CPS) (a system of collaborating computational elements controlling physical entities). CPS may enable the implementation and exploitation of massive amounts of interconnected ICT devices (sensors, actuators, processors microcontrollers,...) embedded in physical objects at different locations. Mobile cyber physical systems, in which the physical
30 system in question has inherent mobility, are a subcategory of cyber-physical systems. Examples of mobile physical systems include mobile robotics and electronics transported by humans or animals. The rise in popularity of smartphones has increased interest in the area of mobile cyber-physical systems. Therefore, various implementations of techniques described herein may be provided via one or more of these technologies.

A computer program, such as the computer program(s) described above, can be written in any form of programming language, including compiled or interpreted languages, and can be deployed in any form, including as a stand-alone program or as a module, component, subroutine, or other unit or part of it suitable for use in a computing environment. A computer
5 program can be deployed to be executed on one computer or on multiple computers at one site or distributed across multiple sites and interconnected by a communication network.

Method steps may be performed by one or more programmable processors executing a computer program or computer program portions to perform functions by operating on input
10 data and generating output. Method steps also may be performed by, and an apparatus may be implemented as, special purpose logic circuitry, e.g., an FPGA (field programmable gate array) or an ASIC (application-specific integrated circuit).

Processors suitable for the execution of a computer program include, by way of example, both
15 general and special purpose microprocessors, and any one or more processors of any kind of digital computer, chip or chipset. Generally, a processor will receive instructions and data from a read-only memory or a random access memory or both. Elements of a computer may include at least one processor for executing instructions and one or more memory devices for storing instructions and data. Generally, a computer also may include, or be operatively coupled to
20 receive data from or transfer data to, or both, one or more mass storage devices for storing data, e.g., magnetic, magneto-optical disks, or optical disks. Information carriers suitable for embodying computer program instructions and data include all forms of non-volatile memory, including by way of example semiconductor memory devices, e.g., EPROM, EEPROM, and flash memory devices; magnetic disks, e.g., internal hard disks or removable disks;
25 magneto-optical disks; and CD-ROM and DVD-ROM disks. The processor and the memory may be supplemented by, or incorporated in, special purpose logic circuitry.

To provide for interaction with a user, implementations may be implemented on a computer having a display device, e.g., a cathode ray tube (CRT) or liquid crystal display (LCD) monitor,
30 for displaying information to the user and a user interface, such as a keyboard and a pointing device, e.g., a mouse or a trackball, by which the user can provide input to the computer. Other kinds of devices can be used to provide for interaction with a user as well; for example, feedback provided to the user can be any form of sensory feedback, e.g., visual feedback, auditory feedback, or tactile feedback; and input from the user can be received in any form,
35 including acoustic, speech, or tactile input.

Implementations may be implemented in a computing system that includes a back-end component, e.g., as a data server, or that includes a middleware component, e.g., an application server, or that includes a front-end component, e.g., a client computer having a graphical user interface or a Web browser through which a user can interact with an implementation, or any
5 combination of such back-end, middleware, or front-end components. Components may be interconnected by any form or medium of digital data communication, e.g., a communication network. Examples of communication networks include a local area network (LAN) and a wide area network (WAN), e.g., the Internet.

10 While certain features of the described implementations have been illustrated as described herein, many modifications, substitutions, changes and equivalents will now occur to those skilled in the art. It is, therefore, to be understood that the appended claims are intended to cover all such modifications and changes as fall within the true spirit of the various embodiments.

CLAIMS:

1. A method comprising:

detecting, by a user device, a network slice or an application associated with an access attempt by the user device to access a wireless network;

determining, by the user device, an access category based on the detected network slice or detected application; and

making, by the user device, a barring decision for the access attempt based on the determined access category.

2. A method of claim 1 wherein the making a barring decision comprises:

making, by the user device based on the determined access category, a decision that the access attempt is not barred; and

the method further comprising performing, by the user device based on the decision, the detected access attempt to the wireless network.

3. The method of claim 2 wherein the performing the detected access attempt comprises:

sending, by the user device, a radio resource control (RRC) connection request message to request a connection to the wireless network.

4. The method of any of claims 1-3 and further comprising:

receiving, by the user device, one or more access category definitions that indicate a respective access category associated with one or more applications; and

wherein determining the access category based on the detected application includes:

determining, by the user device, the access category for the access attempt based on the application that is associated with the access attempt and the one or more access category definitions.

5. The method of any of claims 1-3 and further comprising:
receiving, by the user device, one or more access category definitions that indicate a
respective access category associated with one or more network slices; and
wherein determining the access category based on the detected network slice includes:
5 determining, by the user device, the access category for the access attempt based
on the network slice that is associated with the access attempt and the one or more access
category definitions.

6. The method of any of claims 1-5, further comprising:
10 receiving, by the user device, a barring configuration that indicates a set of barring
parameters for one or more of the access categories; and
wherein the making the barring decision for the access attempt includes making, by the
user device, a barring decision for the access attempt based on the barring configuration and the
access category for the access attempt.

7. The method of any of claims 1-6 wherein the network slice associated with the
access attempt is identified by one or more of the following:
a slice/service type (SST); and
a slice/service type (SST) and slice differentiator (SD).

8. The method of any of claims 1-7 wherein the application associated with the
access attempt is identified by one or more of the following:
operating system identity; and
operating system application identity.

9. The method of any of claims 1-8 wherein the set of barring parameters includes at
least a barring rate and a barring timer.

10. The method of any of claims 1-9, and further comprising:
30 receiving a compensation parameter for a user device in Inactive mode;
determining, by the user device, that the user device is in Inactive mode; and
wherein the making a barring decision comprises:
applying, by the user device, the compensation parameter to the making a barring
decision for the user device to adjust a barring rate of the access attempt of the user
35 device that is in Inactive mode.

11. The method of any of claims 4-10 wherein the barring configuration is based on a network slice-specific load information that indicates a network load for each of one or more network slices.

5 12. The method of any of claims 1-11 wherein the barring configuration that indicates a set of barring parameters for one or more of the access categories provides a different prioritization of one or more access attempts based on access categories of the access attempts.

10 13. A method comprising:
receiving, by a base station from one or more core network entities within a wireless network, network slice-specific load information that indicates a load for each of one or more network slices;
determining, by the base station based on the received network slice-specific load information, a barring configuration that indicates a set of barring parameters for one or more
15 access categories; and
sending, by the base station to a user device, the barring configuration to reduce a load on the wireless network.

20 14. The method of claim 13, wherein the barring configuration that indicates a set of barring parameters for one or more access categories indicates whether an access attempt with which a network slice is associated is triggered by radio access network (RAN)-level paging.

25 15. The method of claim 14 wherein the sending comprises sending, by the base station to a user device, the barring configuration, to allow the user device to make a barring decision for an access attempt based on a network slice associated with the access attempt by the user device.

30 16. The method of any of claims 13-15 wherein the set of barring parameters includes at least a barring rate and a barring timer.

35 17. The method of any of claims 13-16 wherein the one or more network slices are identified by one or more of the following:
a slice/service type (SST); and
a slice/service type (SST) and slice differentiator (SD).

18. A method comprising:

determining, by a core network entity, network slice-specific load information that indicates a load for each of one or more network slices; and

5 sending, by the core network entity to a base station, the network-slice specific load information.

19. The method of claim 18 where the core network entity comprises a first core network entity, and wherein the network slice-specific load information is determined by the first core network entity from one or more of the following:

10 network slice-specific load information determined or gathered by the first core network entity; and

network slice-specific load information received from a second core network entity.

20. The method of any of claims 18-19 and further comprising:

15 sending, by the core network entity to a user device, one or more access category definitions that indicate an access category associated with one or more network slices.

21. The method of any of claims 18-20 wherein the one or more network slices are identified by or associated with one or more of the following:

20 a slice/service type (SST); and


a slice/service type (SST) and slice differentiator (SD).


22. An apparatus comprising means for performing a method of any of claims 1-21.

25 23. An apparatus comprising at least one processor and at least one memory including computer instructions that, when executed by the at least one processor, cause the apparatus to perform a method of any of claims 1-21.


30 24. An apparatus comprising a computer program product including a non-transitory computer-readable storage medium and storing executable code that, when executed by at least one data processing apparatus, is configured to cause the at least one data processing apparatus to perform a method of any of claims 1-21.

Example Wireless Network 130

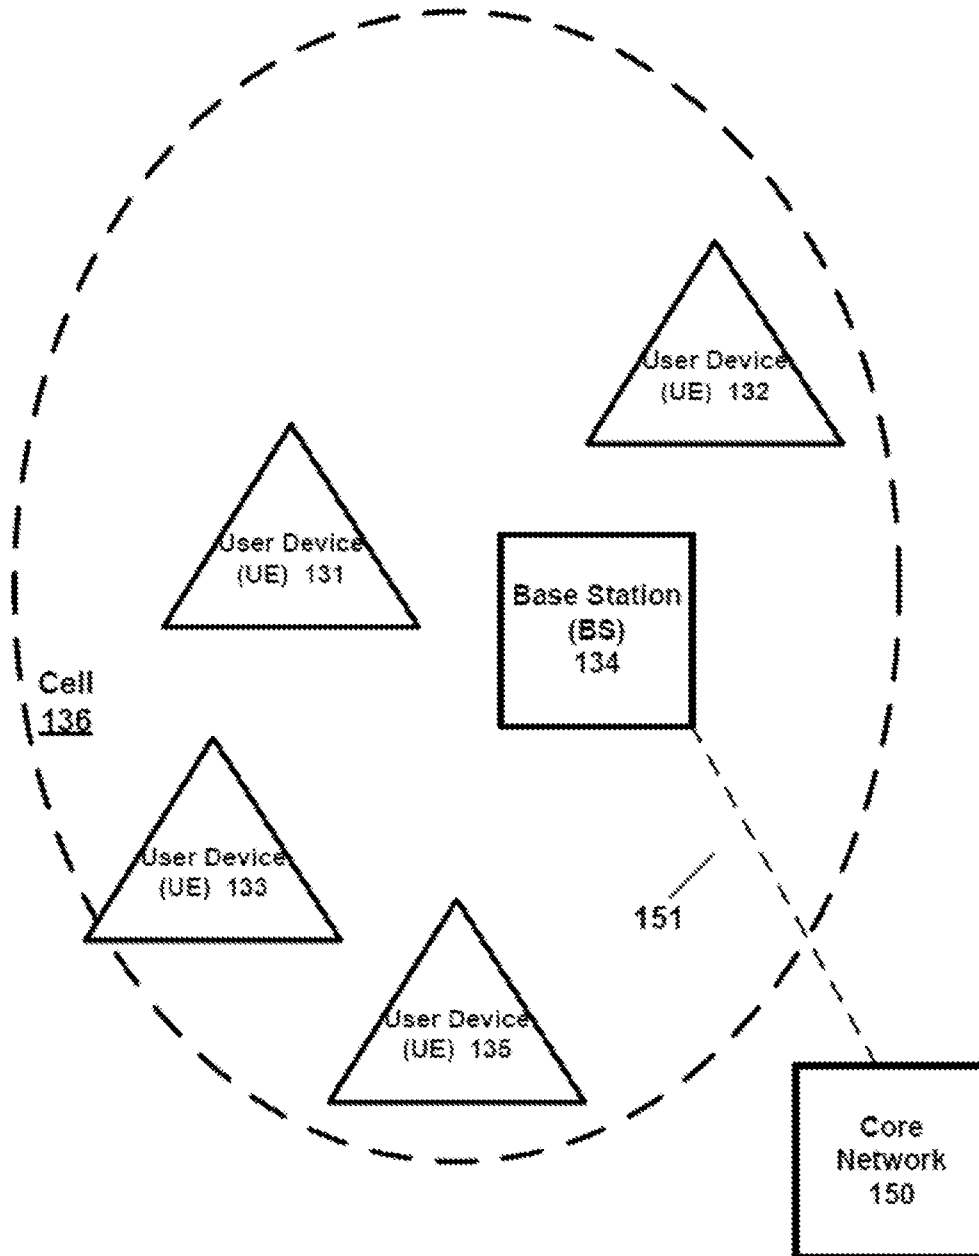
**FIG. 1**

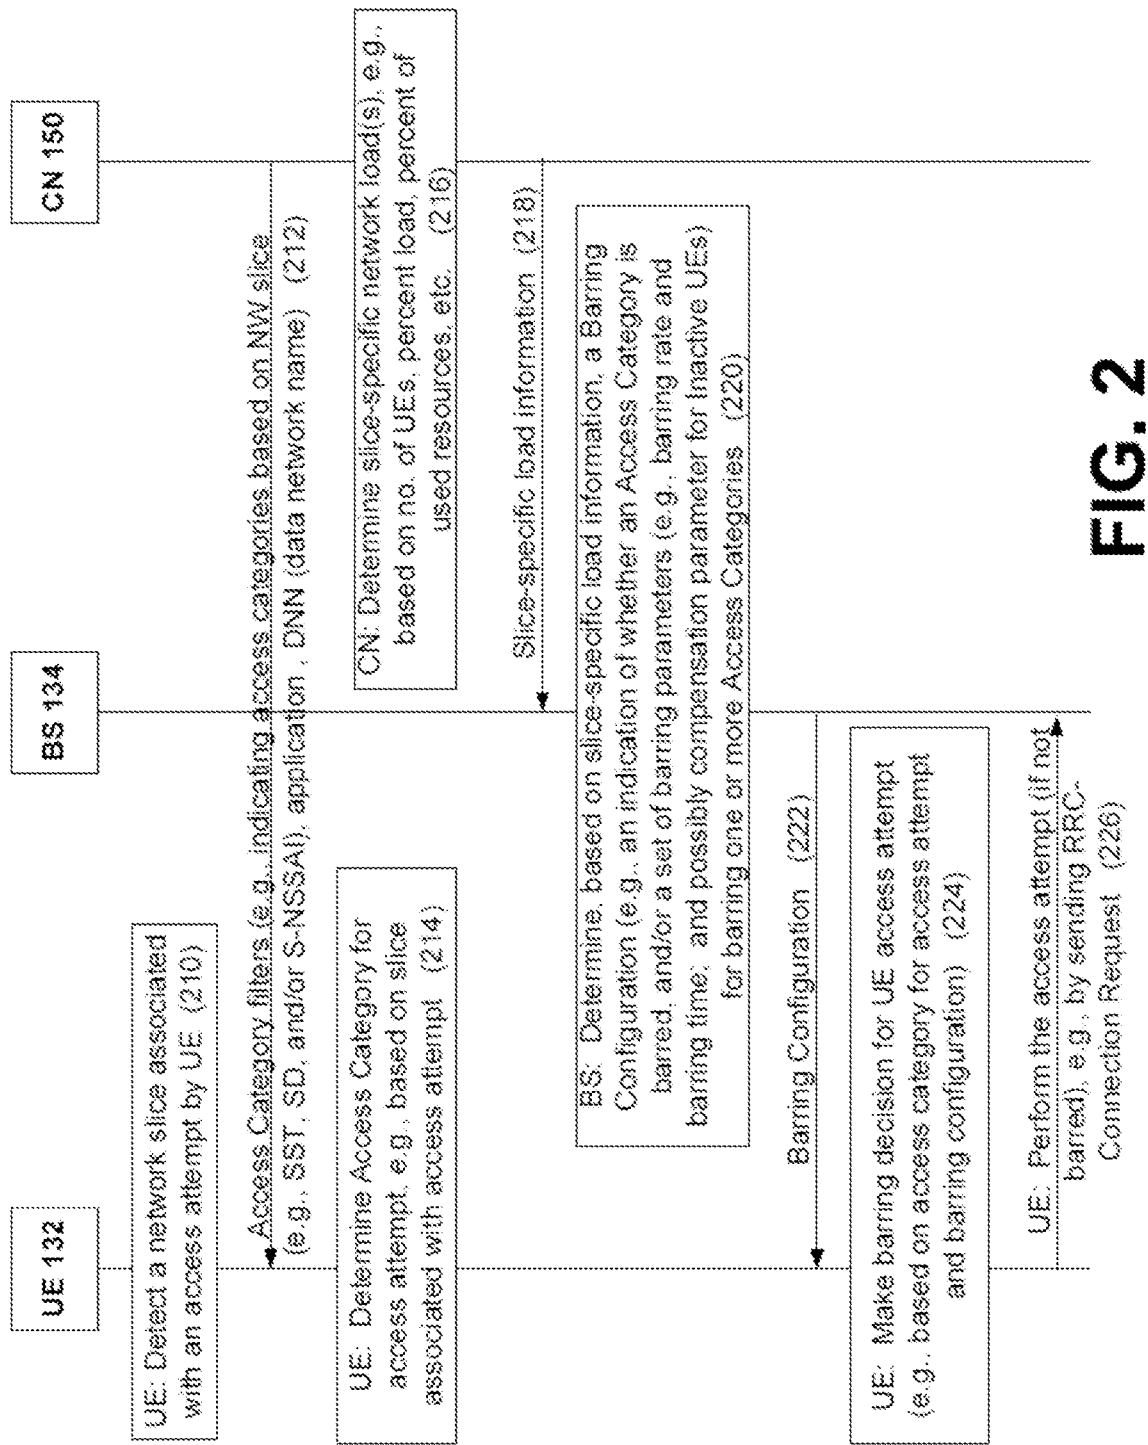


3/11

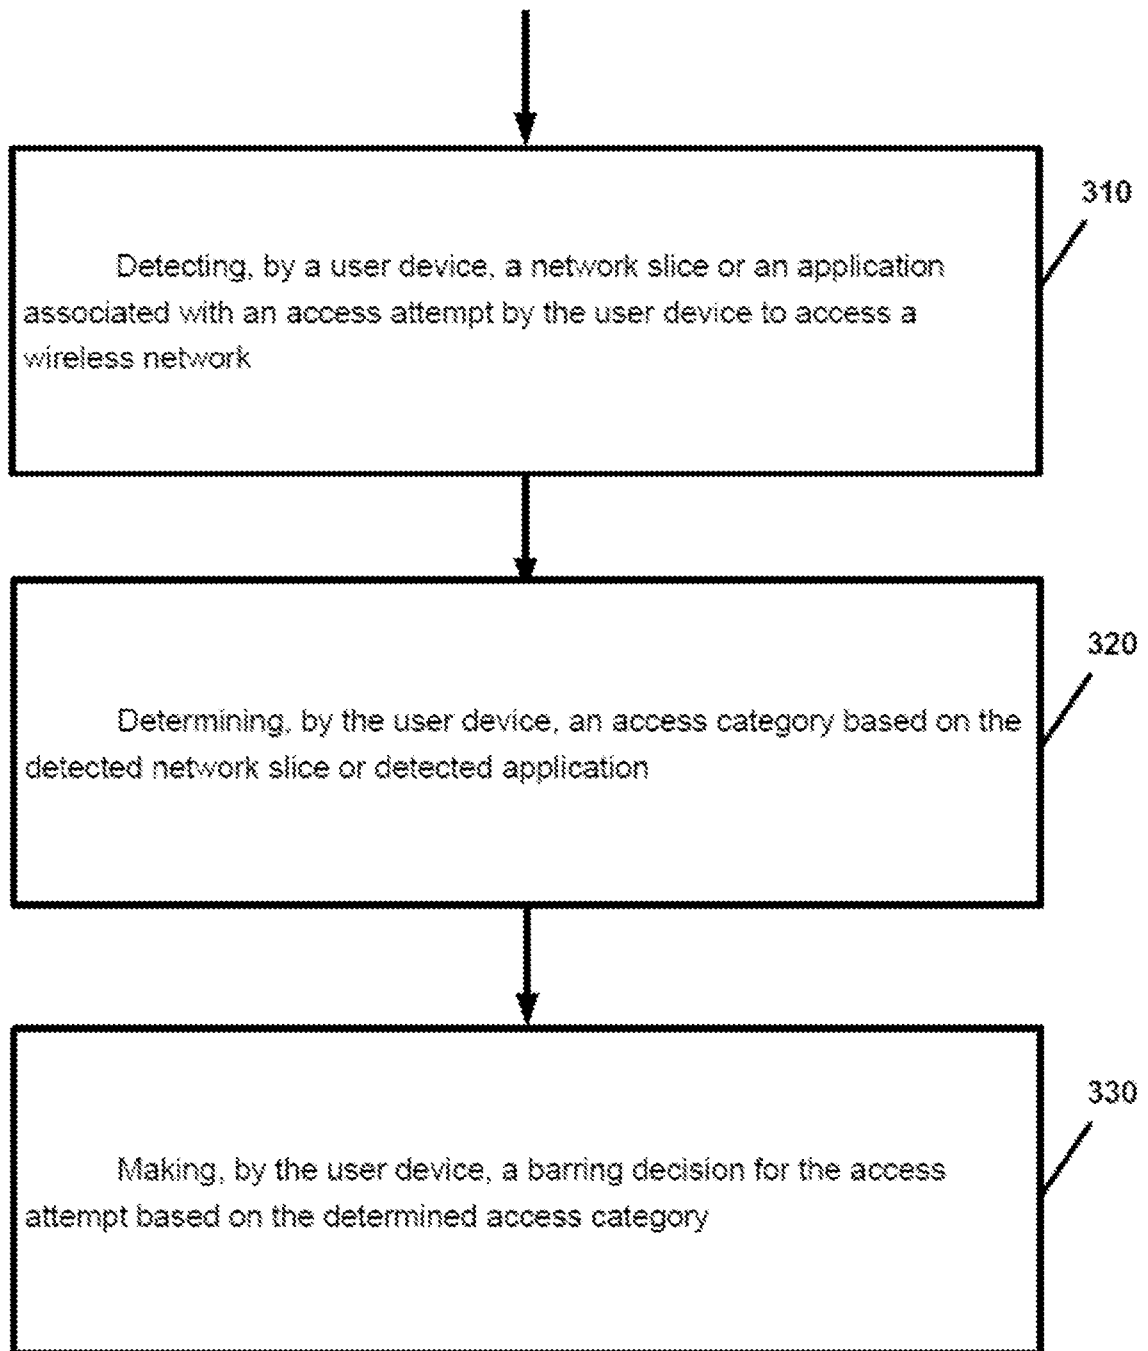**FIG. 3**

4/11

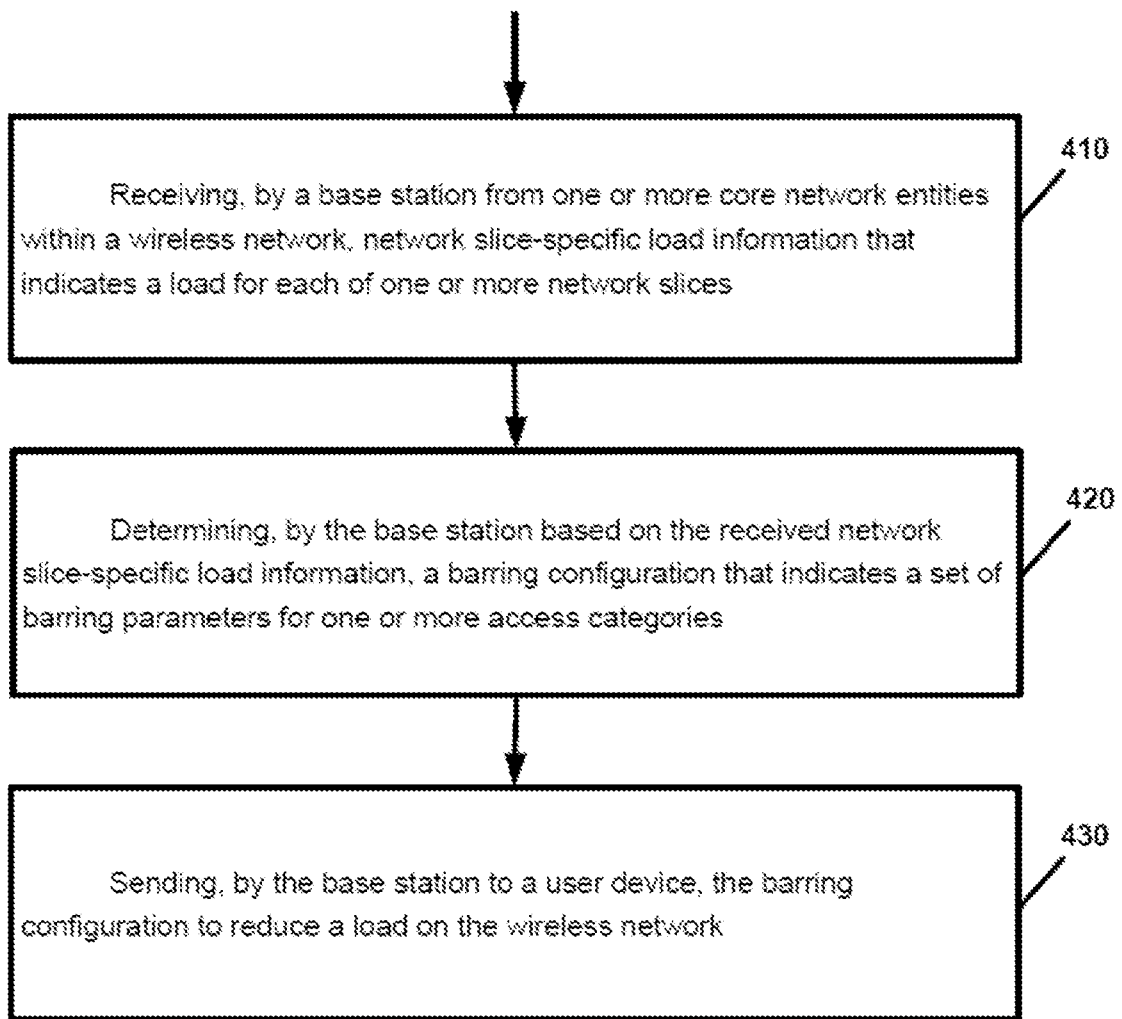**FIG. 4**

5/11

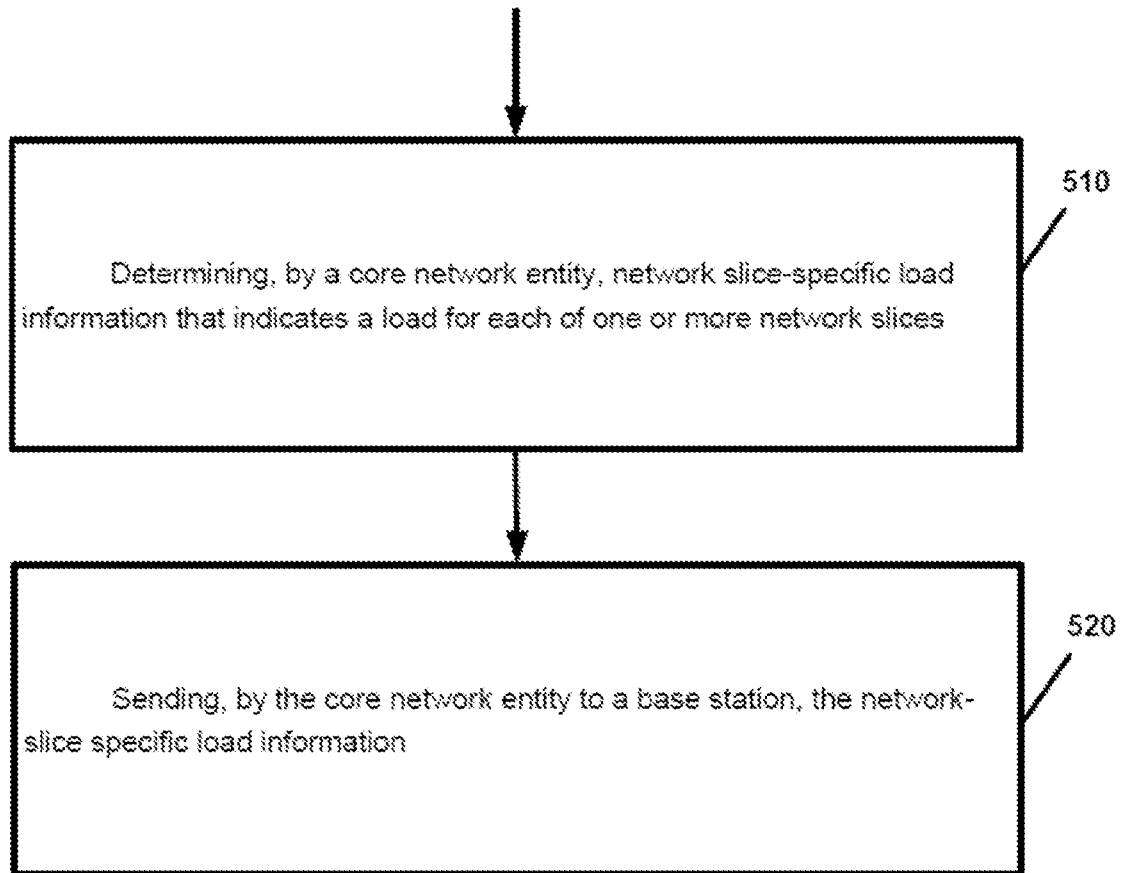**FIG. 5**

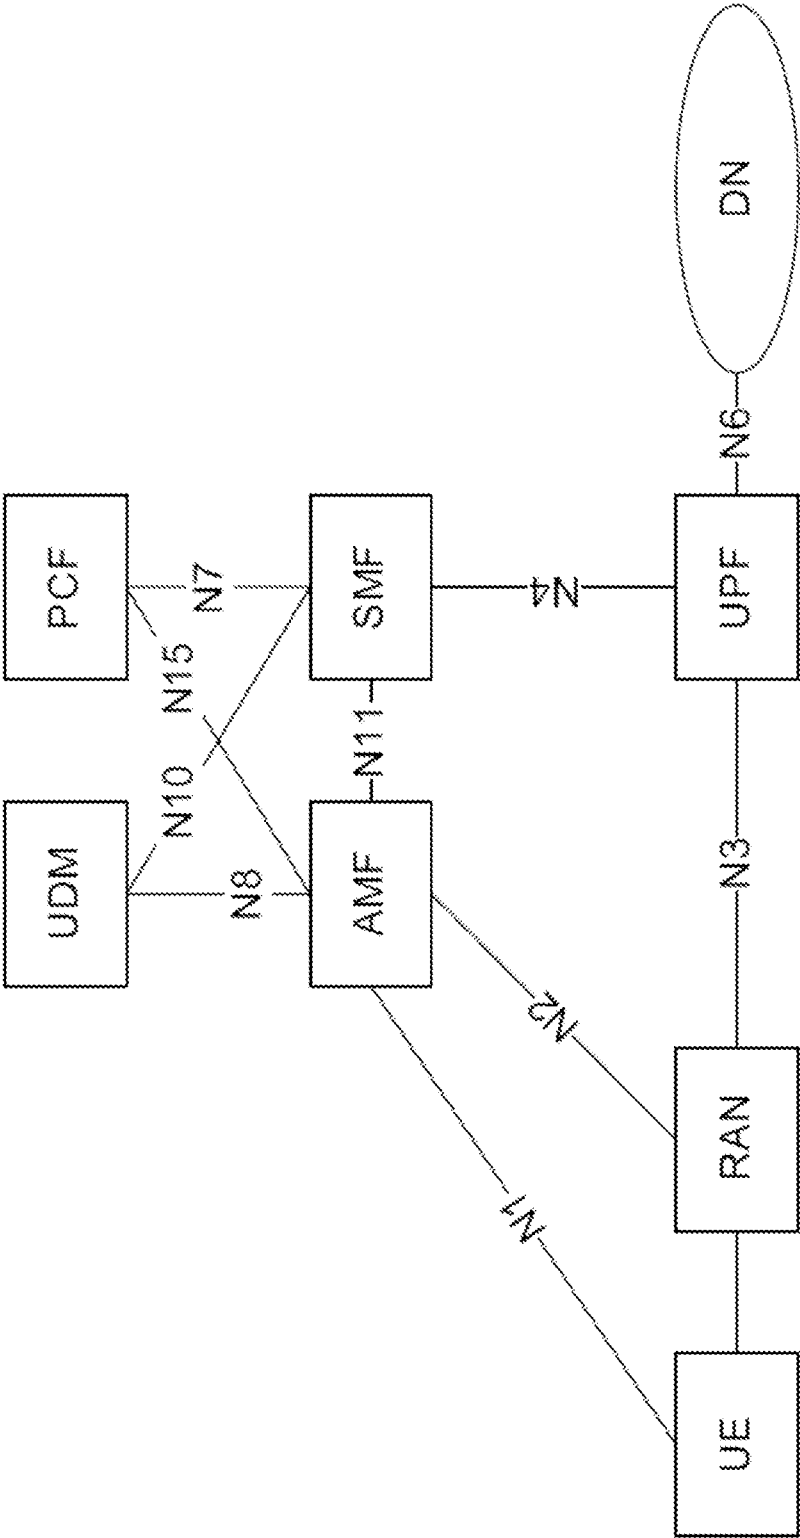
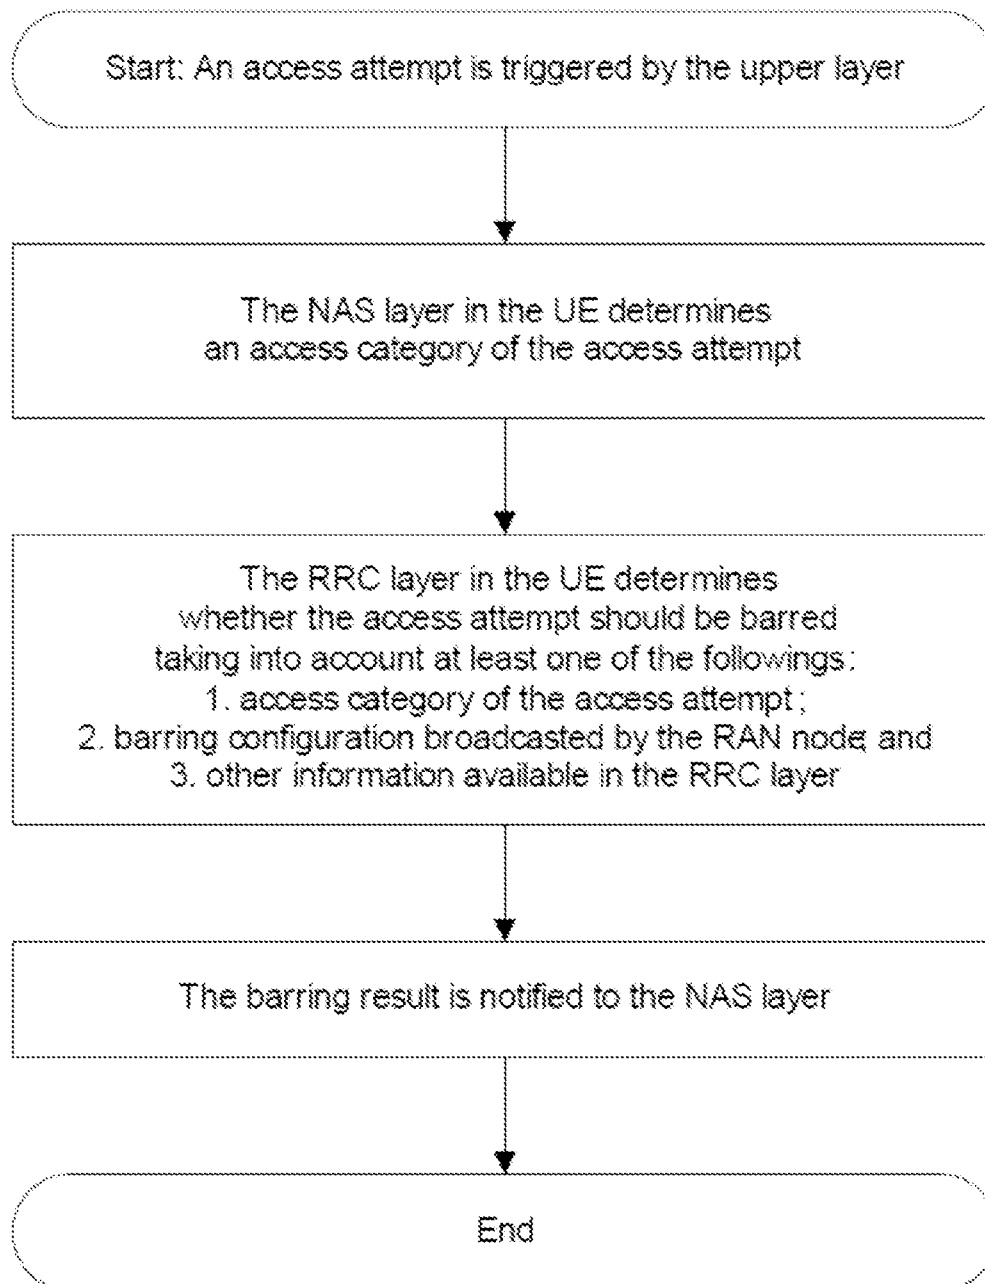
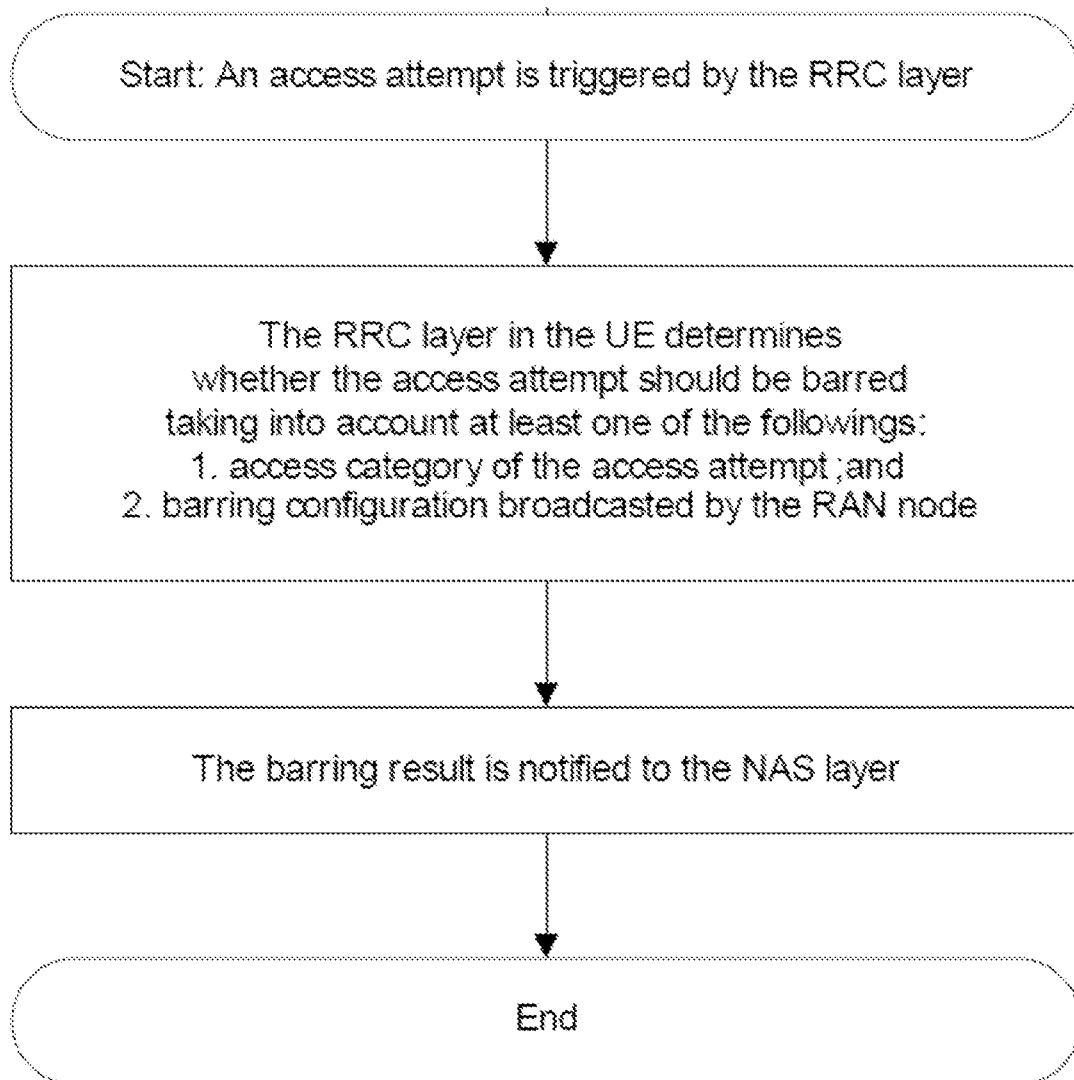


FIG. 6

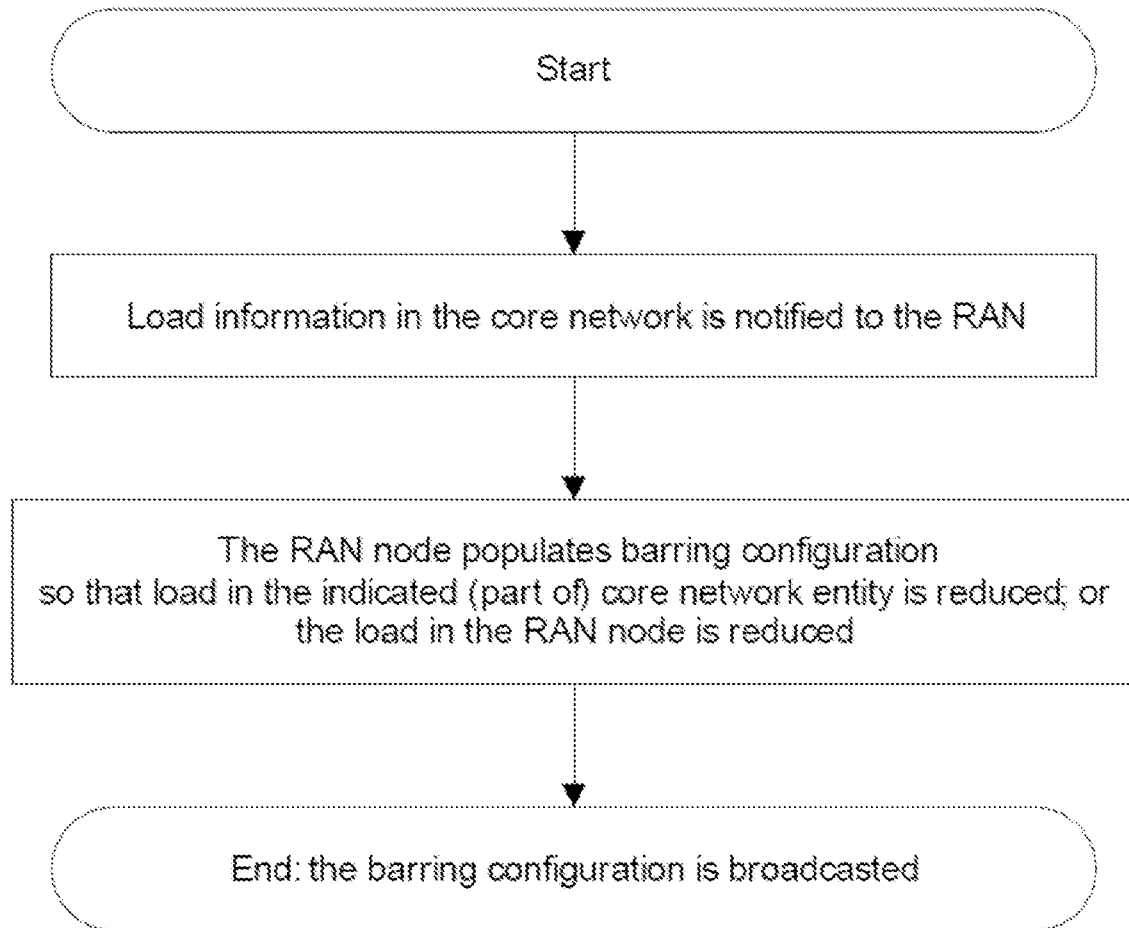
7/11

**FIG. 7**

8/11

**FIG. 8**

9/11

**FIG. 9**

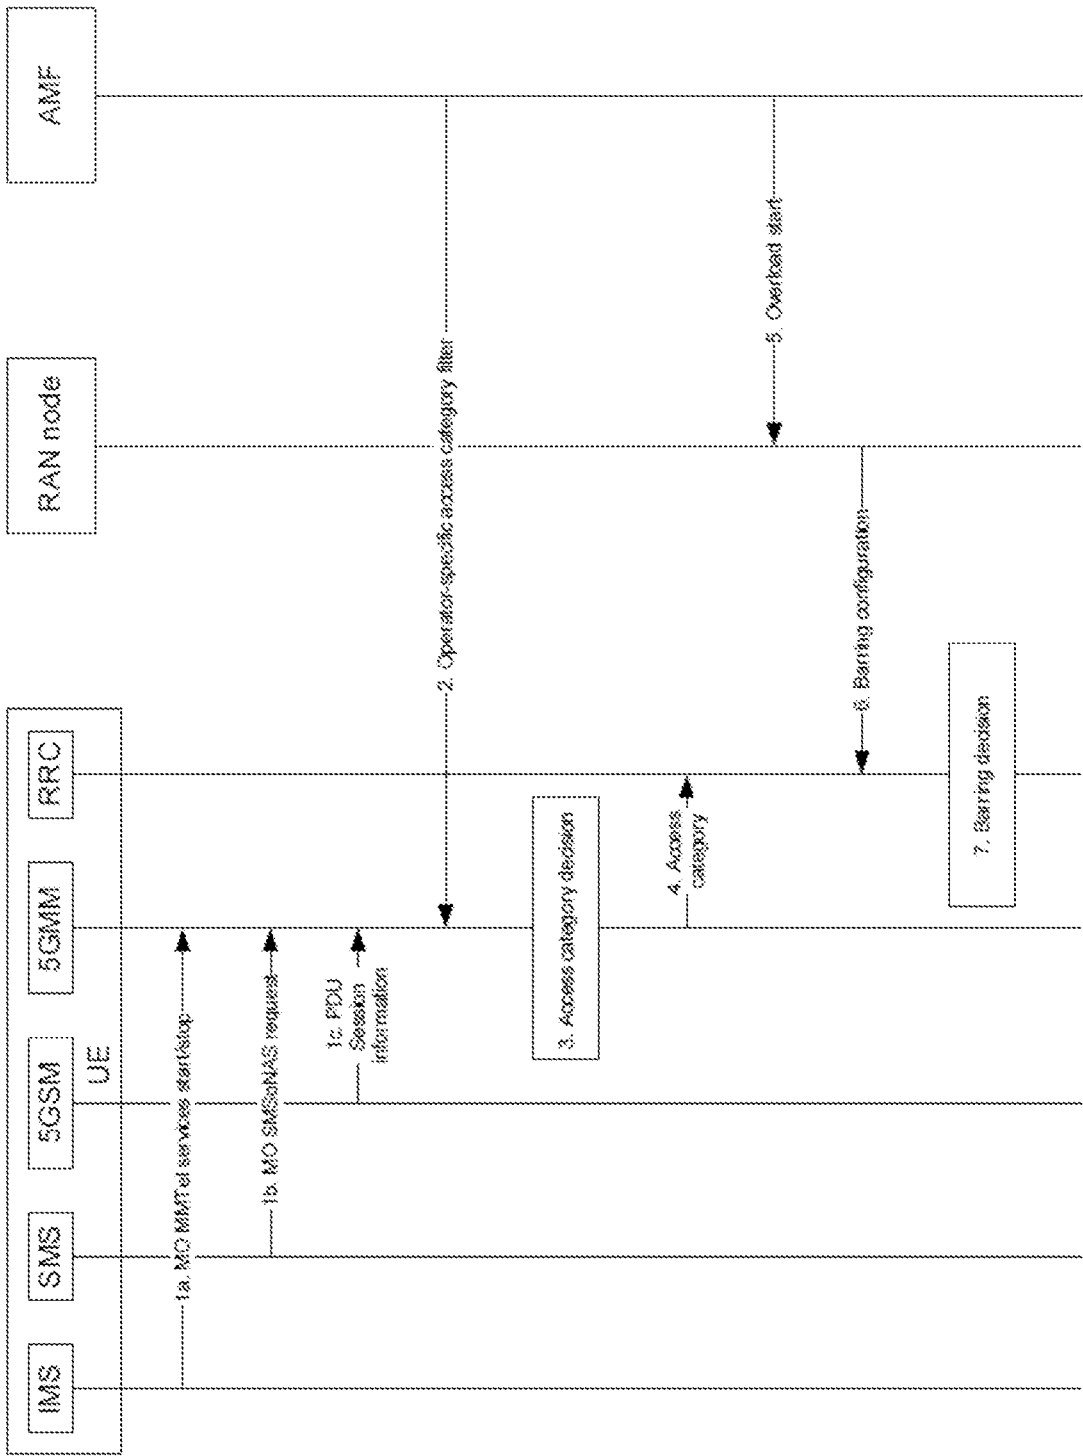
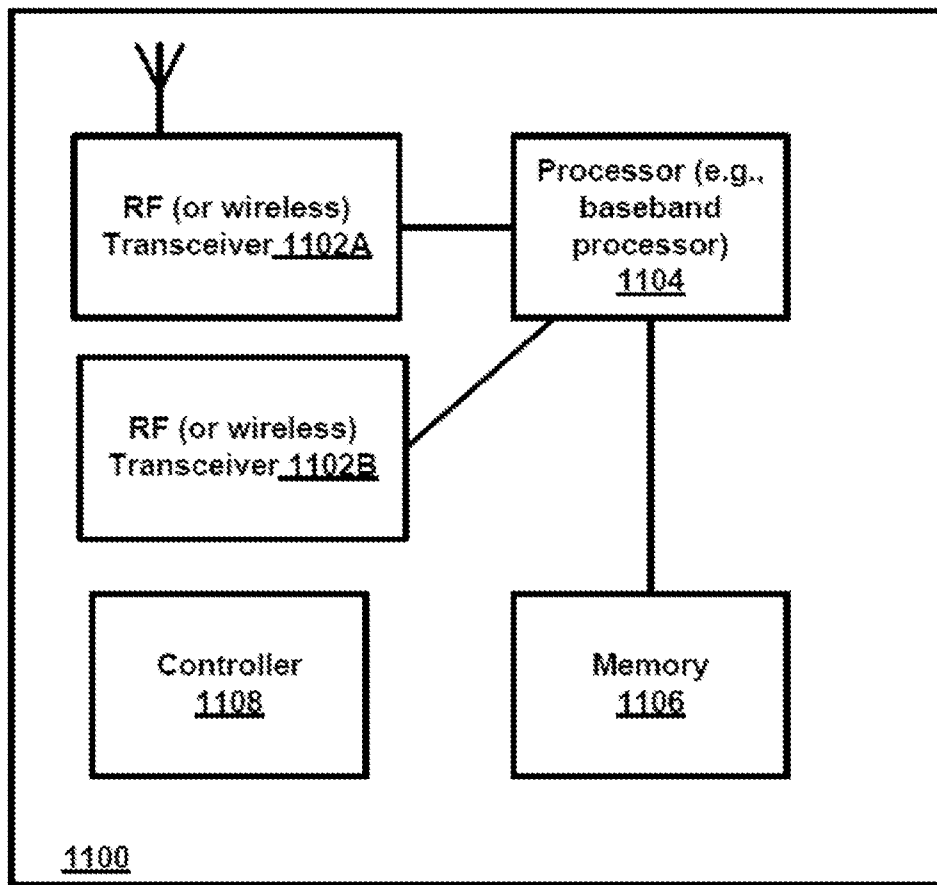


FIG. 10

**FIG. 11**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2018/050570

A. CLASSIFICATION OF SUBJECT MATTER

See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: G06F, H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

FI, SE, NO, DK

Electronic data base consulted during the international search (name of data base, and, where practicable, search terms used)

EPODOC, EPO-Internal full-text databases, Full-text translation databases from Asian languages, WPIAP, XP3GPP, XPAIP, XPESP, XPETSI, XPI3E, XPIEE, XPIETF, XPIOP, XPIPCOM, XPJPEG, XPMISC, XPOAC, XPRD, XPTK, COMPDX, INSPEC, NPL, Internet, ESPACENET.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2017119844 A1 (ERICSSON TELEFON AB L M (PUBL) [SE]) 13 July 2017 (13.07.2017) Abstract, paragraphs [004], [009]-[0016], [0018], [0036], [0045]-[0049], [0055]-[0081], [0084]-[0089], [00101]-[00110], figures 5, 7-9, 13, 16	1-24
A	HUAWEI; HISILICON Update of Solution #1 for Key issue #1. 3GPP (3rd Generation Partnership Project) SA WG2 Meeting #114,, [online], 2016-04-05, [retrieved on 2018-10-12]. Retrieved from <http://www.3gpp.org/ftp/tsg_sa/WG2_Arch/TSGS2_114_Sophia_Antipolis/Docs/S2-161503.zip>, The whole document.	1-24
A	US 2017141973 A1 (VRZIC SOPHIE [CA]) 18 May 2017 (18.05.2017) The whole document.	1-24

☒ Further documents are listed in the continuation of Box C.
☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 16 October 2018 (16.10.2018)	Date of mailing of the international search report 17 October 2018 (17.10.2018)
Name and mailing address of the ISA/FI Finnish Patent and Registration Office FI-00091 PRH, FINLAND Facsimile No. +358 29 509 5328	Authorized officer Harald Kaaja Telephone No. +358 29 509 5000

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2018/050570

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2016006948 A1 (LG ELECTRONICS INC [KR]) 14 January 2016 (14.01.2016) The whole document.	1-24
A	US 2017041854 A1 (KIM JAEHYUN [KR] et al.) 09 February 2017 (09.02.2017) The whole document.	1-24
A	WO 2013112410 A1 (INTEL CORP [US]) 01 August 2013 (01.08.2013) The whole document.	1-24

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2018/050570

CLASSIFICATION OF SUBJECT MATTER

IPC

H04W 48/02 (2009.01)

H04W 48/14 (2009.01)

H04W 12/08 (2009.01)

G06F 21/00 (2013.01)

H04L 29/06 (2006.01)

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
WO 2017119844 A1	13/07/2017	CN 108476406 A	31/08/2018
.....			
US 2017141973 A1	18/05/2017	CN 108293004 A	17/07/2018
		EP 3332509 A1	13/06/2018
		US 2017142591 A1	18/05/2017
		WO 2017080517 A1	18/05/2017
		WO 2017080518 A1	18/05/2017
.....			
WO 2016006948 A1	14/01/2016	CN 106471848 A	01/03/2017
		EP 3167659 A1	17/05/2017
		US 2018109992 A1	19/04/2018
.....			
US 2017041854 A1	09/02/2017	US 9860824 B2	02/01/2018
		CN 106068660 A	02/11/2016
		CN 107079332 A	18/08/2017
		EP 3096560 A1	23/11/2016
		EP 3220687 A1	20/09/2017
		JP 2017508392 A	23/03/2017
		JP 6333994 B2	30/05/2018
		KR 20160128342 A	07/11/2016
		KR 101823815 B1	31/01/2018
		US 2017295536 A1	12/10/2017
		US 2018132164 A1	10/05/2018
		WO 2016076603 A1	19/05/2016
		WO 2016076606 A1	19/05/2016
.....			
WO 2013112410 A1	01/08/2013	AU 2011374261 A1	06/02/2014
		AU 2012333172 A1	22/05/2014
		AU 2012333172 B2	22/10/2015
		AU 2012333237 A1	22/05/2014
		AU 2012333237 B2	10/12/2015
		AU 2012333239 A1	22/05/2014
		AU 2013211872 A1	17/07/2014
		AU 2013211872 B2	27/04/2017
		AU 2013211927 A1	17/07/2014
		AU 2013212088 A1	14/08/2014
		AU 2013212088 B2	02/07/2015
		AU 2013212110 A1	21/08/2014
		AU 2013212110 B2	19/11/2015
		AU 2013246041 A1	02/10/2014
		AU 2013251441 A1	02/10/2014

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		AU 2013251441 B2	24/12/2015
		AU 2013267841 A1	30/10/2014
		AU 2013267841 B2	05/11/2015
		AU 2013286893 A1	18/12/2014
		AU 2013286893 B2	28/01/2016
		AU 2013287185 A1	11/12/2014
		AU 2013287185 B2	17/09/2015
		AU 2013296189 A1	05/02/2015
		AU 2013296189 B2	16/06/2016
		AU 2013296976 A1	05/02/2015
		AU 2013296976 B2	05/05/2016
		AU 2013296977 A1	05/02/2015
		AU 2013296977 B2	26/05/2016
		AU 2013296991 A1	05/02/2015
		AU 2013296991 B2	21/04/2016
		AU 2013297032 A1	12/02/2015
		AU 2013297032 B2	15/09/2016
		AU 2013297042 A1	18/06/2015
		AU 2013297042 B2	03/12/2015
		AU 2013323321 A1	05/02/2015
		AU 2013323321 B2	10/11/2016
		AU 2013323624 A1	05/02/2015
		AU 2013323624 B2	12/05/2016
		AU 2013323978 A1	05/02/2015
		AU 2013323978 B2	21/04/2016
		AU 2013334019 A1	12/02/2015
		AU 2013334019 B2	12/11/2015
		AU 2014355101 A1	05/05/2016
		AU 2014355109 A1	21/04/2016
		AU 2014355109 B2	14/12/2017
		AU 2015203907 A1	09/06/2016
		AU 2015203907 B2	10/05/2018
		AU 2015249093 A1	12/11/2015
		AU 2015249093 B2	08/09/2016
		AU 2015261598 A1	17/12/2015
		AU 2015261598 B2	30/03/2017
		AU 2016200154 A1	04/02/2016
		AU 2016200154 B2	07/09/2017
		AU 2016200252 A1	04/02/2016
		AU 2016200252 B2	06/04/2017
		AU 2016200331 A1	11/02/2016
		AU 2016200331 B2	19/01/2017
		AU 2016200389 A1	11/02/2016
		AU 2016200389 B2	30/11/2017
		AU 2016200390 A1	11/02/2016
		AU 2016200390 B2	23/03/2017
		AU 2016201020 A1	03/03/2016

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		AU 2016203175 A1	09/06/2016
		AU 2016203175 B2	19/10/2017
		AU 2016203284 A1	09/06/2016
		AU 2016203284 B2	13/07/2017
		AU 2016203409 A1	16/06/2016
		AU 2016203409 B2	08/02/2018
		AU 2016204096 A1	07/07/2016
		AU 2016204096 B2	15/06/2017
		AU 2016204197 A1	14/07/2016
		AU 2016204197 B2	12/10/2017
		AU 2016213733 A1	25/08/2016
		AU 2016259432 A1	08/12/2016
		AU 2016259432 B2	26/04/2018
		AU 2017200813 A1	02/03/2017
		AU 2017200813 B2	17/05/2018
		AU 2017202995 A1	25/05/2017
		AU 2017203569 A1	15/06/2017
		AU 2017203569 B2	05/07/2018
		AU 2017203829 A1	22/06/2017
		AU 2017203829 B2	06/09/2018
		AU 2017203841 A1	22/06/2017
		AU 2017210634 A1	24/08/2017
		AU 2017219013 A1	07/09/2017
		AU 2017261510 A1	07/12/2017
		BR 112014002424 A2	21/02/2017
		BR 112014002572 A2	21/02/2017
		BR 112014002573 A2	21/02/2017
		BR 112014010597 A2	02/05/2017
		BR 112014010606 A2	25/04/2017
		BR 112014010624 A2	13/06/2017
		BR 112014010740 A2	25/04/2017
		BR 112014010783 A2	13/06/2017
		BR 112014010784 A2	19/06/2018
		BR 112014010785 A2	13/06/2017
		BR 112014010786 A2	13/06/2017
		BR 112014027216 A2	27/06/2017
		BR 112014030149 A2	27/06/2017
		BR 112014030152 A2	27/06/2017
		BR 112014030155 A2	21/11/2017
		BR 112014030156 A2	27/06/2017
		BR 112014031854 A2	27/06/2017
		BR 112014032454 A2	28/11/2017
		BR 112015000117 A2	27/06/2017
		BR 112015000118 A2	22/05/2018
		BR 112015000355 A2	27/06/2017
		BR 112015000462 A2	27/06/2017
		BR 112015002361 A2	04/07/2017

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		BR 112015004006 A2	04/07/2017
		BR 112015004036 A2	04/07/2017
		BR 112015004107 A2	04/07/2017
		BR 112015004583 A2	24/07/2018
		BR 112015004584 A2	04/07/2017
		BR 112015004586 A2	04/07/2017
		BR 112015006455 A2	08/08/2017
		BR 112015006675 A2	04/07/2017
		BR 112015007330 A2	12/12/2017
		BR 112015014223 A2	11/07/2017
		BR 112015017404 A2	11/07/2017
		BR 112015024631 A2	19/12/2017
		BR 112016006844 A2	01/08/2017
		BR 112017011034 A2	09/01/2018
		CA 2843594 A1	07/02/2013
		CA 2843594 C	22/05/2018
		CA 2850124 A1	10/05/2013
		CA 2850124 C	23/08/2016
		CA 2853238 A1	10/05/2013
		CA 2853239 A1	10/05/2013
		CA 2853239 C	15/08/2017
		CA 2861484 A1	01/08/2013
		CA 2861484 C	09/01/2018
		CA 2862374 A1	01/08/2013
		CA 2863424 A1	01/08/2013
		CA 2863618 A1	01/08/2013
		CA 2868038 A1	17/10/2013
		CA 2868038 C	28/03/2017
		CA 2868114 A1	31/10/2013
		CA 2868114 C	15/05/2018
		CA 2871105 A1	05/12/2013
		CA 2871105 C	02/01/2018
		CA 2874463 A1	09/01/2014
		CA 2874475 A1	09/01/2014
		CA 2874902 A1	09/01/2014
		CA 2878195 A1	06/02/2014
		CA 2878215 A1	06/02/2014
		CA 2878215 C	29/08/2017
		CA 2878327 A1	06/02/2014
		CA 2878327 C	15/05/2018
		CA 2878329 A1	06/02/2014
		CA 2878329 C	19/06/2018
		CA 2878379 A1	06/02/2014
		CA 2879201 A1	03/04/2014
		CA 2879201 C	19/12/2017
		CA 2879206 A1	03/04/2014
		CA 2879206 C	22/08/2017

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		CA 2880588 A1	01/05/2014
		CA 2880885 A1	06/02/2014
		CA 2882353 A1	03/04/2014
		CA 2882353 C	01/05/2018
		CA 2926378 A1	06/02/2014
		CA 2931649 A1	09/07/2015
		CA 2931664 A1	09/07/2015
		CA 2932387 A1	10/05/2013
		CA 2957198 A1	17/10/2013
		CA 2986418 A1	01/08/2013
		CN 103368940 A	23/10/2013
		CN 103368940 B	12/04/2017
		CN 103369467 A	23/10/2013
		CN 103369467 B	22/06/2016
		CN 103379599 A	30/10/2013
		CN 103379599 B	28/12/2016
		CN 103428659 A	04/12/2013
		CN 103517327 A	15/01/2014
		CN 103517327 B	11/08/2017
		CN 103532680 A	22/01/2014
		CN 103532680 B	15/09/2017
		CN 103546477 A	29/01/2014
		CN 103546477 B	20/06/2017
		CN 103581861 A	12/02/2014
		CN 103581861 B	26/01/2018
		CN 103581880 A	12/02/2014
		CN 103581965 A	12/02/2014
		CN 103581965 B	20/06/2017
		CN 103582003 A	12/02/2014
		CN 103582003 B	30/03/2018
		CN 103582006 A	12/02/2014
		CN 103582006 B	12/04/2017
		CN 103582057 A	12/02/2014
		CN 103582057 B	11/05/2018
		CN 103582066 A	12/02/2014
		CN 103596065 A	19/02/2014
		CN 103596065 B	01/03/2017
		CN 103731912 A	16/04/2014
		CN 103731912 B	06/02/2018
		CN 103748833 A	23/04/2014
		CN 103748833 B	03/10/2017
		CN 103763694 A	30/04/2014
		CN 103763694 B	29/08/2017
		CN 103782589 A	07/05/2014
		CN 103797771 A	14/05/2014
		CN 103797771 B	01/03/2017
		CN 103843415 A	04/06/2014

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		CN 103858457 A	11/06/2014
		CN 103907301 A	02/07/2014
		CN 103907301 B	12/09/2017
		CN 103907367 A	02/07/2014
		CN 103907389 A	02/07/2014
		CN 103907389 B	21/09/2018
		CN 103907394 A	02/07/2014
		CN 103947135 A	23/07/2014
		CN 103947135 B	25/08/2017
		CN 103947145 A	23/07/2014
		CN 103947145 B	11/07/2017
		CN 103959672 A	30/07/2014
		CN 103959683 A	30/07/2014
		CN 103959683 B	22/05/2018
		CN 103959691 A	30/07/2014
		CN 103959691 B	20/03/2018
		CN 103959694 A	30/07/2014
		CN 103959694 B	10/11/2017
		CN 103959695 A	30/07/2014
		CN 103959695 B	20/03/2018
		CN 103959699 A	30/07/2014
		CN 103959699 B	19/01/2018
		CN 103959837 A	30/07/2014
		CN 103959850 A	30/07/2014
		CN 103959850 B	08/05/2018
		CN 103975629 A	06/08/2014
		CN 104012011 A	27/08/2014
		CN 104025492 A	03/09/2014
		CN 104025629 A	03/09/2014
		CN 104025629 B	02/02/2018
		CN 104025657 A	03/09/2014
		CN 104025657 B	19/06/2018
		CN 104054386 A	17/09/2014
		CN 104067536 A	24/09/2014
		CN 104067536 B	04/07/2017
		CN 104067537 A	24/09/2014
		CN 104067549 A	24/09/2014
		CN 104067549 B	26/12/2017
		CN 104067593 A	24/09/2014
		CN 104067593 B	22/02/2017
		CN 104067643 A	24/09/2014
		CN 104067667 A	24/09/2014
		CN 104067673 A	24/09/2014
		CN 104067674 A	24/09/2014
		CN 104067674 B	13/03/2018
		CN 104067675 A	24/09/2014
		CN 104067684 A	24/09/2014

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		CN 104067688 A	24/09/2014
		CN 104067688 B	10/08/2018
		CN 104081681 A	01/10/2014
		CN 104081684 A	01/10/2014
		CN 104081684 B	14/11/2017
		CN 104081696 A	01/10/2014
		CN 104081696 B	18/07/2017
		CN 104081798 A	01/10/2014
		CN 104081798 B	06/02/2018
		CN 104137441 A	05/11/2014
		CN 104137441 B	20/06/2017
		CN 104137611 A	05/11/2014
		CN 104137611 B	24/04/2018
		CN 104145489 A	12/11/2014
		CN 104145489 B	17/08/2018
		CN 104145524 A	12/11/2014
		CN 104145524 B	30/03/2018
		CN 104160771 A	19/11/2014
		CN 104170271 A	26/11/2014
		CN 104170271 B	29/09/2017
		CN 104170521 A	26/11/2014
		CN 104205667 A	10/12/2014
		CN 104205667 B	10/07/2018
		CN 104205734 A	10/12/2014
		CN 104205977 A	10/12/2014
		CN 104205977 B	12/06/2018
		CN 104221307 A	17/12/2014
		CN 104221307 B	19/01/2018
		CN 104221410 A	17/12/2014
		CN 104254067 A	31/12/2014
		CN 104254067 B	09/02/2018
		CN 104272615 A	07/01/2015
		CN 104272615 B	15/09/2017
		CN 104272689 A	07/01/2015
		CN 104272790 A	07/01/2015
		CN 104272791 A	07/01/2015
		CN 104272811 A	07/01/2015
		CN 104303439 A	21/01/2015
		CN 104303439 B	13/10/2017
		CN 104303446 A	21/01/2015
		CN 104303446 B	06/02/2018
		CN 104335508 A	04/02/2015
		CN 104335508 B	12/09/2017
		CN 104335518 A	04/02/2015
		CN 104335639 A	04/02/2015
		CN 104335643 A	04/02/2015
		CN 104350689 A	11/02/2015

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		CN 104350689 B	21/09/2018
		CN 104365037 A	18/02/2015
		CN 104396170 A	04/03/2015
		CN 104396174 A	04/03/2015
		CN 104396174 B	11/09/2018
		CN 104412253 A	11/03/2015
		CN 104412253 B	28/08/2018
		CN 104412521 A	11/03/2015
		CN 104412521 B	21/09/2018
		CN 104412524 A	11/03/2015
		CN 104412524 B	24/04/2018
		CN 104412554 A	11/03/2015
		CN 104412554 B	21/09/2018
		CN 104412646 A	11/03/2015
		CN 104412646 B	04/09/2018
		CN 104412660 A	11/03/2015
		CN 104412666 A	11/03/2015
		CN 104412698 A	11/03/2015
		CN 104429008 A	18/03/2015
		CN 104429014 A	18/03/2015
		CN 104429014 B	17/08/2018
		CN 104429015 A	18/03/2015
		CN 104429015 B	12/06/2018
		CN 104429141 A	18/03/2015
		CN 104429147 A	18/03/2015
		CN 104429150 A	18/03/2015
		CN 104471601 A	25/03/2015
		CN 104471601 B	24/04/2018
		CN 104471876 A	25/03/2015
		CN 104471876 B	10/08/2018
		CN 104472007 A	25/03/2015
		CN 104488344 A	01/04/2015
		CN 104508989 A	08/04/2015
		CN 104508989 B	30/01/2018
		CN 104509008 A	08/04/2015
		CN 104509008 B	14/11/2017
		CN 104541543 A	22/04/2015
		CN 104584464 A	29/04/2015
		CN 104584464 B	23/02/2018
		CN 104584475 A	29/04/2015
		CN 104584475 B	13/02/2018
		CN 104584482 A	29/04/2015
		CN 104584482 B	23/02/2018
		CN 104584620 A	29/04/2015
		CN 104584620 B	11/05/2018
		CN 104584623 A	29/04/2015
		CN 104584672 A	29/04/2015

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		CN 104604165 A	06/05/2015
		CN 104604165 B	13/04/2018
		CN 104604167 A	06/05/2015
		CN 104604167 B	27/10/2017
		CN 104604175 A	06/05/2015
		CN 104604175 B	06/02/2018
		CN 104604263 A	06/05/2015
		CN 104604263 B	18/09/2018
		CN 104604282 A	06/05/2015
		CN 104604284 A	06/05/2015
		CN 104604284 B	10/08/2018
		CN 104604286 A	06/05/2015
		CN 104604299 A	06/05/2015
		CN 104604301 A	06/05/2015
		CN 104604314 A	06/05/2015
		CN 104620640 A	13/05/2015
		CN 104662814 A	27/05/2015
		CN 104662814 B	24/04/2018
		CN 104662951 A	27/05/2015
		CN 104662997 A	27/05/2015
		CN 104662997 B	30/03/2018
		CN 104685816 A	03/06/2015
		CN 104685816 B	12/01/2018
		CN 104685894 A	03/06/2015
		CN 104704767 A	10/06/2015
		CN 104704767 B	29/05/2018
		CN 104704844 A	10/06/2015
		CN 104737485 A	24/06/2015
		CN 104737485 B	29/05/2018
		CN 104737511 A	24/06/2015
		CN 104737511 B	24/11/2017
		CN 104737562 A	24/06/2015
		CN 104737619 A	24/06/2015
		CN 104756418 A	01/07/2015
		CN 104756418 B	20/10/2017
		CN 104756431 A	01/07/2015
		CN 104756431 B	23/03/2018
		CN 104756581 A	01/07/2015
		CN 104769865 A	08/07/2015
		CN 104769865 B	24/04/2018
		CN 104769869 A	08/07/2015
		CN 104769869 B	11/05/2018
		CN 104769870 A	08/07/2015
		CN 104769870 B	13/02/2018
		CN 104770045 A	08/07/2015
		CN 104770048 A	08/07/2015
		CN 104770048 B	07/09/2018

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		CN 104782062 A	15/07/2015
		CN 104782062 B	26/12/2017
		CN 104782157 A	15/07/2015
		CN 104782157 B	17/07/2018
		CN 104782166 A	15/07/2015
		CN 104782167 A	15/07/2015
		CN 104813602 A	29/07/2015
		CN 104813602 B	07/08/2018
		CN 104813693 A	29/07/2015
		CN 104813737 A	29/07/2015
		CN 104823394 A	05/08/2015
		CN 104823394 B	10/08/2018
		CN 104838697 A	12/08/2015
		CN 104854773 A	19/08/2015
		CN 104854773 B	11/05/2018
		CN 104854835 A	19/08/2015
		CN 104854835 B	06/07/2018
		CN 104854894 A	19/08/2015
		CN 104854916 A	19/08/2015
		CN 104871444 A	26/08/2015
		CN 104871444 B	27/10/2017
		CN 104871447 A	26/08/2015
		CN 104871447 B	23/02/2018
		CN 104871546 A	26/08/2015
		CN 104871546 B	07/08/2018
		CN 104871587 A	26/08/2015
		CN 104871587 B	08/06/2018
		CN 104885389 A	02/09/2015
		CN 104885389 B	11/05/2018
		CN 104885390 A	02/09/2015
		CN 104885390 B	23/03/2018
		CN 104885504 A	02/09/2015
		CN 104885514 A	02/09/2015
		CN 104904137 A	09/09/2015
		CN 104904256 A	09/09/2015
		CN 104904303 A	09/09/2015
		CN 104919766 A	16/09/2015
		CN 104919766 B	23/03/2018
		CN 104919876 A	16/09/2015
		CN 104937859 A	23/09/2015
		CN 104937859 B	24/04/2018
		CN 104937961 A	23/09/2015
		CN 104937977 A	23/09/2015
		CN 104937994 A	23/09/2015
		CN 104937995 A	23/09/2015
		CN 104938003 A	23/09/2015
		CN 104956631 A	30/09/2015

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		CN 104956631 B	15/06/2018
		CN 104956703 A	30/09/2015
		CN 104956703 B	25/09/2018
		CN 104956710 A	30/09/2015
		CN 104956721 A	30/09/2015
		CN 104956766 A	30/09/2015
		CN 104969503 A	07/10/2015
		CN 104969503 B	30/01/2018
		CN 104982063 A	14/10/2015
		CN 104982074 A	14/10/2015
		CN 104982074 B	02/10/2018
		CN 104995852 A	21/10/2015
		CN 104995855 A	21/10/2015
		CN 104995961 A	21/10/2015
		CN 104995961 B	02/10/2018
		CN 104995963 A	21/10/2015
		CN 105009477 A	28/10/2015
		CN 105009477 B	17/04/2018
		CN 105009478 A	28/10/2015
		CN 105009478 B	25/05/2018
		CN 105009481 A	28/10/2015
		CN 105009481 B	23/02/2018
		CN 105009482 A	28/10/2015
		CN 105009482 B	29/05/2018
		CN 105009488 A	28/10/2015
		CN 105009488 B	16/01/2018
		CN 105009511 A	28/10/2015
		CN 105009662 A	28/10/2015
		CN 105009664 A	28/10/2015
		CN 105009684 A	28/10/2015
		CN 105027461 A	04/11/2015
		CN 105027464 A	04/11/2015
		CN 105027468 A	04/11/2015
		CN 105027468 B	22/06/2018
		CN 105027469 A	04/11/2015
		CN 105027499 A	04/11/2015
		CN 105027523 A	04/11/2015
		CN 105027597 A	04/11/2015
		CN 105027629 A	04/11/2015
		CN 105027655 A	04/11/2015
		CN 105027664 A	04/11/2015
		CN 105027666 A	04/11/2015
		CN 105052046 A	11/11/2015
		CN 105052052 A	11/11/2015
		CN 105052109 A	11/11/2015
		CN 105052114 A	11/11/2015
		CN 105052202 A	11/11/2015

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		CN 105052227 A	11/11/2015
		CN 105075214 A	18/11/2015
		CN 105075214 B	27/03/2018
		CN 105075303 A	18/11/2015
		CN 105075304 A	18/11/2015
		CN 105075316 A	18/11/2015
		CN 105075334 A	18/11/2015
		CN 105075370 A	18/11/2015
		CN 105075388 A	18/11/2015
		CN 105103473 A	25/11/2015
		CN 105103473 B	20/04/2018
		CN 105103519 A	25/11/2015
		CN 105103590 A	25/11/2015
		CN 105103591 A	25/11/2015
		CN 105103606 A	25/11/2015
		CN 105103609 A	25/11/2015
		CN 105103621 A	25/11/2015
		CN 105103622 A	25/11/2015
		CN 105103626 A	25/11/2015
		CN 105103634 A	25/11/2015
		CN 105103648 A	25/11/2015
		CN 105122672 A	02/12/2015
		CN 105122673 A	02/12/2015
		CN 105122673 B	10/08/2018
		CN 105122868 A	02/12/2015
		CN 105144600 A	09/12/2015
		CN 105144647 A	09/12/2015
		CN 105144768 A	09/12/2015
		CN 105144774 A	09/12/2015
		CN 105144789 A	09/12/2015
		CN 105165042 A	16/12/2015
		CN 105165053 A	16/12/2015
		CN 105191200 A	23/12/2015
		CN 105191370 A	23/12/2015
		CN 105191442 A	23/12/2015
		CN 105229934 A	06/01/2016
		CN 105229937 A	06/01/2016
		CN 105229942 A	06/01/2016
		CN 105230053 A	06/01/2016
		CN 105247804 A	13/01/2016
		CN 105247924 A	13/01/2016
		CN 105264788 A	20/01/2016
		CN 105265016 A	20/01/2016
		CN 105284059 A	27/01/2016
		CN 105284166 A	27/01/2016
		CN 105324952 A	10/02/2016
		CN 105325029 A	10/02/2016

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		CN 105337644 A	17/02/2016
		CN 105340190 A	17/02/2016
		CN 105340203 A	17/02/2016
		CN 105340203 B	30/03/2018
		CN 105340221 A	17/02/2016
		CN 105340327 A	17/02/2016
		CN 105340332 A	17/02/2016
		CN 105340339 A	17/02/2016
		CN 105359059 A	24/02/2016
		CN 105359059 B	10/08/2018
		CN 105359424 A	24/02/2016
		CN 105359429 A	24/02/2016
		CN 105359440 A	24/02/2016
		CN 105359440 B	15/06/2018
		CN 105359476 A	24/02/2016
		CN 105359477 A	24/02/2016
		CN 105359492 A	24/02/2016
		CN 105359561 A	24/02/2016
		CN 105359606 A	24/02/2016
		CN 105359615 A	24/02/2016
		CN 105379147 A	02/03/2016
		CN 105379148 A	02/03/2016
		CN 105379316 A	02/03/2016
		CN 105379366 A	02/03/2016
		CN 105379410 A	02/03/2016
		CN 105393470 A	09/03/2016
		CN 105393574 A	09/03/2016
		CN 105393632 A	09/03/2016
		CN 105393638 A	09/03/2016
		CN 105432027 A	23/03/2016
		CN 105453456 A	30/03/2016
		CN 105453477 A	30/03/2016
		CN 105453635 A	30/03/2016
		CN 105474595 A	06/04/2016
		CN 105474672 A	06/04/2016
		CN 105474683 A	06/04/2016
		CN 105474688 A	06/04/2016
		CN 105474719 A	06/04/2016
		CN 105493067 A	13/04/2016
		CN 105493418 A	13/04/2016
		CN 105493536 A	13/04/2016
		CN 105493552 A	13/04/2016
		CN 105493554 A	13/04/2016
		CN 105493555 A	13/04/2016
		CN 105493616 A	13/04/2016
		CN 105519182 A	20/04/2016
		CN 105519228 A	20/04/2016

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		CN 105532025 A	27/04/2016
		CN 105556994 A	04/05/2016
		CN 105557015 A	04/05/2016
		CN 105557032 A	04/05/2016
		CN 105557051 A	04/05/2016
		CN 105557052 A	04/05/2016
		CN 105557064 A	04/05/2016
		CN 105580287 A	11/05/2016
		CN 105580328 A	11/05/2016
		CN 105580403 A	11/05/2016
		CN 105580414 A	11/05/2016
		CN 105580417 A	11/05/2016
		CN 105580440 A	11/05/2016
		CN 105580464 A	11/05/2016
		CN 105580477 A	11/05/2016
		CN 105594140 A	18/05/2016
		CN 105594246 A	18/05/2016
		CN 105594266 A	18/05/2016
		CN 105612712 A	25/05/2016
		CN 105612769 A	25/05/2016
		CN 105612786 A	25/05/2016
		CN 105635949 A	01/06/2016
		CN 105637917 A	01/06/2016
		CN 105637972 A	01/06/2016
		CN 105659544 A	08/06/2016
		CN 105659658 A	08/06/2016
		CN 105659659 A	08/06/2016
		CN 105659660 A	08/06/2016
		CN 105659692 A	08/06/2016
		CN 105684374 A	15/06/2016
		CN 105684396 A	15/06/2016
		CN 105684499 A	15/06/2016
		CN 105684529 A	15/06/2016
		CN 105794160 A	20/07/2016
		CN 105794167 A	20/07/2016
		CN 105794204 A	20/07/2016
		CN 105794259 A	20/07/2016
		CN 105794262 A	20/07/2016
		CN 105794270 A	20/07/2016
		CN 105794283 A	20/07/2016
		CN 105794308 A	20/07/2016
		CN 105794310 A	20/07/2016
		CN 105794311 A	20/07/2016
		CN 105848088 A	10/08/2016
		CN 105850180 A	10/08/2016
		CN 105871429 A	17/08/2016
		CN 105915882 A	31/08/2016

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		CN 105978677 A	28/09/2016
		CN 105981311 A	28/09/2016
		CN 105981448 A	28/09/2016
		CN 105993189 A	05/10/2016
		CN 106028464 A	12/10/2016
		CN 106028471 A	12/10/2016
		CN 106060769 A	26/10/2016
		CN 106060912 A	26/10/2016
		CN 106162533 A	23/11/2016
		CN 106231615 A	14/12/2016
		CN 106231628 A	14/12/2016
		CN 106233687 A	14/12/2016
		CN 106375783 A	01/02/2017
		CN 106411490 A	15/02/2017
		CN 106465263 A	22/02/2017
		CN 106535338 A	22/03/2017
		CN 106850129 A	13/06/2017
		CN 106851793 A	13/06/2017
		CN 106899382 A	27/06/2017
		CN 106899971 A	27/06/2017
		CN 106912109 A	30/06/2017
		CN 107070519 A	18/08/2017
		CN 107071691 A	18/08/2017
		CN 107071724 A	18/08/2017
		CN 107071908 A	18/08/2017
		CN 107079289 A	18/08/2017
		CN 107105387 A	29/08/2017
		CN 107105400 A	29/08/2017
		CN 107197421 A	22/09/2017
		CN 107257252 A	17/10/2017
		CN 107257274 A	17/10/2017
		CN 107257539 A	17/10/2017
		CN 107302390 A	27/10/2017
		CN 107317663 A	03/11/2017
		CN 107493159 A	19/12/2017
		CN 107517096 A	26/12/2017
		CN 107592182 A	16/01/2018
		CN 107645748 A	30/01/2018
		CN 107682099 A	09/02/2018
		CN 107733571 A	23/02/2018
		CN 107889176 A	06/04/2018
		CN 108055062 A	18/05/2018
		CN 108112064 A	01/06/2018
		CN 108155977 A	12/06/2018
		CN 108322914 A	24/07/2018
		CN 108337027 A	27/07/2018
		CN 108365941 A	03/08/2018

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2018/050570

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
		CN 108462937 A	28/08/2018
		CN 108471322 A	31/08/2018
		CN 108494454 A	04/09/2018
		CN 108495334 A	04/09/2018
		CN 108566267 A	21/09/2018
		CN 108599906 A	28/09/2018
		CN 108600789 A	28/09/2018
		CN 108601085 A	28/09/2018
		DE 112011105497 T5	18/06/2014
		DE 202013012469 U1	12/01/2017
		DE 202013012662 U1	03/04/2018
		EP 2740236 A1	11/06/2014
		EP 2740254 A1	11/06/2014
		EP 2740254 B1	18/04/2018
		EP 2740265 A1	11/06/2014
		EP 2740297 A1	11/06/2014
		EP 2740300 A2	11/06/2014
		EP 2774277 A1	10/09/2014