



(51) International Patent Classification:

H04B 7/06 (2006.01) H04L 5/00 (2006.01)
H01Q 21/24 (2006.01)

(21) International Application Number:

PCT/SE2017/050993

(22) International Filing Date:

10 October 2017 (10.10.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)** [SE/SE]; .., SE-164 83 Stockholm (SE).

(72) Inventors: **NILSSON, Andreas**; Seminariegatan 16, SE-413 13 Göteborg (SE). **ATHLEY, Fredrik**; Banvallen 65A, SE-429 30 Kullavik (SE). **PETERSSON, Sven**; Rotevägen 1, SE-433 69 Sävedalen (SE).

(74) Agent: **ERICSSON**; Patent Development Torshamnsgatan 21-23, SE-164 83 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: BEAM MANAGEMENT OF A RADIO TRANSCEIVER DEVICE

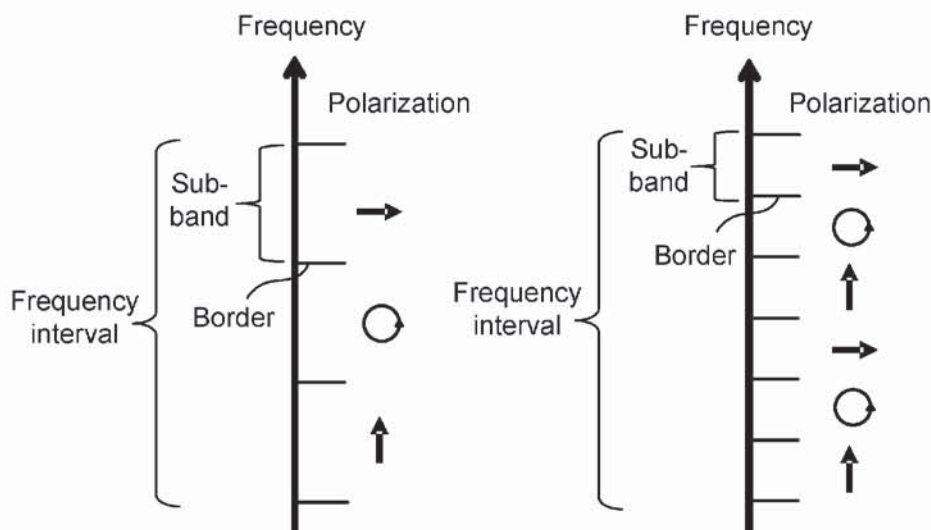


Fig. 6

(57) Abstract: There is provided mechanisms for performing beam management. A method is performed by a radio transceiver device. The method comprises transmitting a reference signal in a transmission beam as part of the beam management. The reference signal in the transmission beam occupies time/frequency resources that extend over a frequency interval. The transmission beam has a frequency-dependent polarization over the frequency interval.



Published:

— with international search report (Art. 21(3))