

DOCUMENT MADE AVAILABLE UNDER THE PATENT COOPERATION TREATY (PCT)

International application number:	PCT/EP2018/077373
International filing date:	09 October 2018 (09.10.2018)
Document type:	Certified copy of priority document
Document details:	Country/Office: US
	Number: 62/569,918
	Filing date: 09 October 2017 (09.10.2017)
Date of receipt at the International Bureau:	22 October 2018 (22.10.2018)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a),(b) or (b-bis)

CERTIFICATE OF AVAILABILITY OF A CERTIFIED PATENT DOCUMENT IN A DIGITAL LIBRARY

The International Bureau certifies that a copy of the patent application indicated below has been available to the WIPO Digital Access Service since the date of availability indicated, and that the patent application has been available to the indicated Office(s) as of the date specified following the relevant Office code:

Document details: Country/Office: US

Filing date: 09 Oct 2017 (09.10.2017)


Application number: 62569918

Date of availability of document: 19 Oct 2017 (19.10.2017)

The following Offices can retrieve this document by using the access code:

JP, US, SE, NZ, KR, EA, IN, BR, GB, AU, ES, NL, IB, EE, CN, MA,
FI, DK

Date of issue of this certificate: 22 Oct 2018 (22.10.2018)

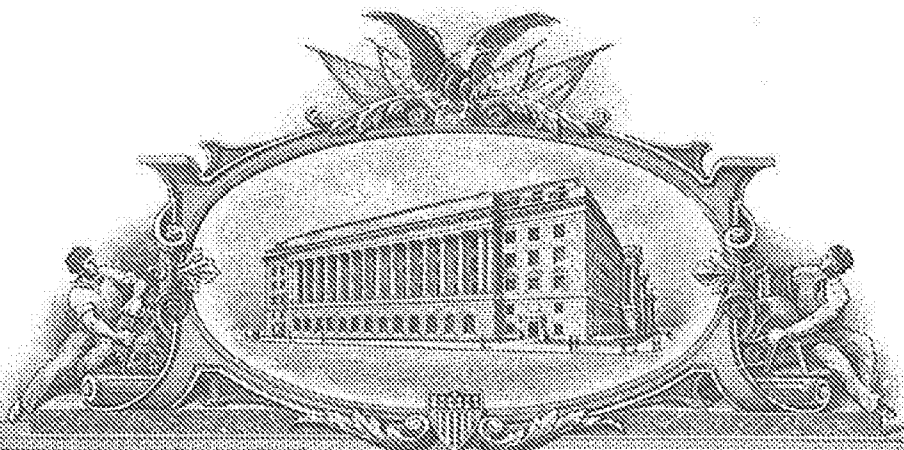

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

October 22, 2018

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 62/569,918
FILING DATE: *October 09, 2017*

THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS CONVENTION, IS *US62/569,918*



Certified by

Anders Iversen

Under Secretary of Commerce
for Intellectual Property
and Director of the United States
Patent and Trademark Office

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	02316.7384USP1/3533
		Application Number	
Title of Invention	FIBER OPTIC TELECOMMUNICATIONS TRAY WITH ENHANCED ACCESSIBILITY		
The application data sheet is part of the provisional or nonprovisional application for which it is being submitted. The following form contains the bibliographic data arranged in a format specified by the United States Patent and Trademark Office as outlined in 37 CFR 1.76. This document may be completed electronically and submitted to the Office in electronic format using the Electronic Filing System (EFS) or the document may be printed and included in a paper filed application.			

Secrecy Order 37 CFR 5.2:

☐	Portions or all of the application associated with this Application Data Sheet may fall under a Secrecy Order pursuant to 37 CFR 5.2 (Paper filers only. Applications that fall under Secrecy Order may not be filed electronically.)
--------------------------	---

Inventor Information:

Inventor	1				Remove
Legal Name					
Prefix	Given Name	Middle Name	Family Name	Suffix	
	Dirk		Kempeneers		
Residence Information (Select One) US Residency • Non US Residency Active US Military Service					
City	Aarschot		Country of Residence ⁱ	BE	

Mailing Address of Inventor:

Address 1	Betekomsesteenweg 26				
Address 2					
City	Aarschot	State/Province			
Postal Code	B-3200	Country ⁱ	BE		

Inventor	2				Remove
Legal Name					
Prefix	Given Name	Middle Name	Family Name	Suffix	
	Eric		SCHURMANS		
Residence Information (Select One) US Residency • Non US Residency Active US Military Service					
City	Geetbets		Country of Residence ⁱ	BE	

Mailing Address of Inventor:

Address 1	Hogenstraat 53				
Address 2					
City	Geetbets	State/Province			
Postal Code	3450	Country ⁱ	BE		

All Inventors Must Be Listed - Additional Inventor Information blocks may be generated within this form by selecting the Add button.

Add

Correspondence Information:

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	02316.7384USP1/3533	
		Application Number		
Title of Invention	FIBER OPTIC TELECOMMUNICATIONS TRAY WITH ENHANCED ACCESSIBILITY			

Enter either Customer Number or complete the Correspondence Information section below.
For further information see 37 CFR 1.33(a).

☐ **An Address is being provided for the correspondence information of this application.**

Customer Number	142510		
Email Address		Add Email	Remove Email

Application Information:

Title of the Invention	FIBER OPTIC TELECOMMUNICATIONS TRAY WITH ENHANCED ACCESSIBILITY		
Attorney Docket Number	02316.7384USP1/3533	Small Entity Status Claimed	☐
Application Type	Provisional		
Subject Matter	Utility		
Total Number of Drawing Sheets (if any)	13	Suggested Figure for Publication (if any)	

Filing By Reference:

Only complete this section when filing an application by reference under 35 U.S.C. 111(c) and 37 CFR 1.57(a). Do not complete this section if application papers including a specification and any drawings are being filed. Any domestic benefit or foreign priority information must be provided in the appropriate section(s) below (i.e., "Domestic Benefit/National Stage Information" and "Foreign Priority Information").

For the purposes of a filing date under 37 CFR 1.53(b), the description and any drawings of the present application are replaced by this reference to the previously filed application, subject to conditions and requirements of 37 CFR 1.57(a).

Application number of the previously filed application	Filing date (YYYY-MM-DD)	Intellectual Property Authority or Country

Publication Information:

☐ **Request Early Publication (Fee required at time of Request 37 CFR 1.219)**

☐ **Request Not to Publish.** I hereby request that the attached application not be published under 35 U.S.C. 122(b) and certify that the invention disclosed in the attached application **has not and will not be** the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.

Representative Information:

Representative information should be provided for all practitioners having a power of attorney in the application. Providing this information in the Application Data Sheet does not constitute a power of attorney in the application (see 37 CFR 1.32). Either enter Customer Number or complete the Representative Name section below. If both sections are completed the customer Number will be used for the Representative Information during processing.

Please Select One:	☒ Customer Number	US Patent Practitioner	☐ Limited Recognition (37 CFR 11.9)
Customer Number	142510		

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	02316.7384USP1/3533
		Application Number	
Title of Invention	FIBER OPTIC TELECOMMUNICATIONS TRAY WITH ENHANCED ACCESSIBILITY		

Domestic Benefit/National Stage Information:

This section allows for the applicant to either claim benefit under 35 U.S.C. 119(e), 120, 121, 365(c), or 386(c) or indicate National Stage entry from a PCT application. Providing benefit claim information in the Application Data Sheet constitutes the specific reference required by 35 U.S.C. 119(e) or 120, and 37 CFR 1.78.

When referring to the current application, please leave the "Application Number" field blank.

Prior Application Status		Remove
Application Number	Continuity Type	Prior Application Number
Additional Domestic Benefit/National Stage Data may be generated within this form by selecting the Add button.		Add

Foreign Priority Information:

This section allows for the applicant to claim priority to a foreign application. Providing this information in the application data sheet constitutes the claim for priority as required by 35 U.S.C. 119(b) and 37 CFR 1.55. When priority is claimed to a foreign application that is eligible for retrieval under the priority document exchange program (PDX)ⁱ the information will be used by the Office to automatically attempt retrieval pursuant to 37 CFR 1.55(i)(1) and (2). Under the PDX program, applicant bears the ultimate responsibility for ensuring that a copy of the foreign application is received by the Office from the participating foreign intellectual property office, or a certified copy of the foreign priority application is filed, within the time period specified in 37 CFR 1.55(g)(1).

Application Number	Country ⁱ	Filing Date (YYYY-MM-DD)	Remove
			Access Code ⁱ (if applicable)
Additional Foreign Priority Data may be generated within this form by selecting the Add button.			Add

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications

- ☐ This application (1) claims priority to or the benefit of an application filed before March 16, 2013 and (2) also contains, or contained at any time, a claim to a claimed invention that has an effective filing date on or after March 16, 2013.
- NOTE: By providing this statement under 37 CFR 1.55 or 1.78, this application, with a filing date on or after March 16, 2013, will be examined under the first inventor to file provisions of the AIA.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	02316.7384USP1/3533
		Application Number	
Title of Invention	FIBER OPTIC TELECOMMUNICATIONS TRAY WITH ENHANCED ACCESSIBILITY		

Authorization or Opt-Out of Authorization to Permit Access:

When this Application Data Sheet is properly signed and filed with the application, applicant has provided written authority to permit a participating foreign intellectual property (IP) office access to the instant application-as-filed (see paragraph A in subsection 1 below) and the European Patent Office (EPO) access to any search results from the instant application (see paragraph B in subsection 1 below).

Should applicant choose not to provide an authorization identified in subsection 1 below, applicant **must opt-out** of the authorization by checking the corresponding box A or B or both in subsection 2 below.

NOTE: This section of the Application Data Sheet is **ONLY** reviewed and processed with the **INITIAL** filing of an application. After the initial filing of an application, an Application Data Sheet cannot be used to provide or rescind authorization for access by a foreign IP office(s). Instead, Form PTO/SB/39 or PTO/SB/69 must be used as appropriate.

1. Authorization to Permit Access by a Foreign Intellectual Property Office(s)

A. Priority Document Exchange (PDX) - Unless box A in subsection 2 (opt-out of authorization) is checked, the undersigned hereby **grants the USPTO authority** to provide the European Patent Office (EPO), the Japan Patent Office (JPO), the Korean Intellectual Property Office (KIPO), the State Intellectual Property Office of the People's Republic of China (SIPO), the World Intellectual Property Organization (WIPO), and any other foreign intellectual property office participating with the USPTO in a bilateral or multilateral priority document exchange agreement in which a foreign application claiming priority to the instant patent application is filed, access to: (1) the instant patent application-as-filed and its related bibliographic data, (2) any foreign or domestic application to which priority or benefit is claimed by the instant application and its related bibliographic data, and (3) the date of filing of this Authorization. See 37 CFR 1.14(h)(1).

B. Search Results from U.S. Application to EPO - Unless box B in subsection 2 (opt-out of authorization) is checked, the undersigned hereby **grants the USPTO authority** to provide the EPO access to the bibliographic data and search results from the instant patent application when a European patent application claiming priority to the instant patent application is filed. See 37 CFR 1.14(h)(2).

The applicant is reminded that the EPO's Rule 141(1) EPC (European Patent Convention) requires applicants to submit a copy of search results from the instant application without delay in a European patent application that claims priority to the instant application.

2. Opt-Out of Authorizations to Permit Access by a Foreign Intellectual Property Office(s)

☐ A. Applicant **DOES NOT** authorize the USPTO to permit a participating foreign IP office access to the instant application-as-filed. If this box is checked, the USPTO will not be providing a participating foreign IP office with any documents and information identified in subsection 1A above.

☐ B. Applicant **DOES NOT** authorize the USPTO to transmit to the EPO any search results from the instant patent application. If this box is checked, the USPTO will not be providing the EPO with search results from the instant application.

NOTE: Once the application has published or is otherwise publicly available, the USPTO may provide access to the application in accordance with 37 CFR 1.14.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	02316.7384USP1/3533
		Application Number	
Title of Invention	FIBER OPTIC TELECOMMUNICATIONS TRAY WITH ENHANCED ACCESSIBILITY		

Applicant Information:

Providing assignment information in this section does not substitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.

Applicant	1	Remove
------------------	---	------------------------

If the applicant is the inventor (or the remaining joint inventor or inventors under 37 CFR 1.45), this section should not be completed. The information to be provided in this section is the name and address of the legal representative who is the applicant under 37 CFR 1.43; or the name and address of the assignee, person to whom the inventor is under an obligation to assign the invention, or person who otherwise shows sufficient proprietary interest in the matter who is the applicant under 37 CFR 1.46. If the applicant is an applicant under 37 CFR 1.46 (assignee, person to whom the inventor is obligated to assign, or person who otherwise shows sufficient proprietary interest) together with one or more joint inventors, then the joint inventor or inventors who are also the applicant should be identified in this section.

[Clear](#)

Assignee	Legal Representative under 35 U.S.C. 117	Joint Inventor
----------	--	----------------

☒ Person to whom the inventor is obligated to assign.
 ☐ Person who shows sufficient proprietary interest

If applicant is the legal representative, indicate the authority to file the patent application, the inventor is:

Name of the Deceased or Legally Incapacitated Inventor:

If the Applicant is an Organization check here. ☒

Organization Name	CommScope Connectivity Belgium BVBA		
-------------------	-------------------------------------	--	--

Mailing Address Information For Applicant:

Address 1	Diestsesteenweg 692		
Address 2			
City	Kessel-Lo	State/Province	
Country	BE	Postal Code	B-3010
Phone Number		Fax Number	
Email Address			

Additional Applicant Data may be generated within this form by selecting the Add button. [Add](#)

Assignee Information including Non-Applicant Assignee Information:

Providing assignment information in this section does not substitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76	Attorney Docket Number	02316.7384USP1/3533
	Application Number	
Title of Invention	FIBER OPTIC TELECOMMUNICATIONS TRAY WITH ENHANCED ACCESSIBILITY	

Assignee	1
-----------------	---

Complete this section if assignee information, including non-applicant assignee information, is desired to be included on the patent application publication. An assignee-applicant identified in the "Applicant Information" section will appear on the patent application publication as an applicant. For an assignee-applicant, complete this section only if identification as an assignee is also desired on the patent application publication.

Remove

If the Assignee or Non-Applicant Assignee is an Organization check here. ☐

Prefix	Given Name	Middle Name	Family Name	Suffix

Mailing Address Information For Assignee including Non-Applicant Assignee:

Address 1				
Address 2				
City		State/Province		
Country i		Postal Code		
Phone Number		Fax Number		
Email Address				

Additional Assignee or Non-Applicant Assignee Data may be generated within this form by selecting the Add button.

Add

Signature:

Remove

NOTE: This Application Data Sheet must be signed in accordance with 37 CFR 1.33(b). However, if this Application Data Sheet is submitted with the **INITIAL** filing of the application and either box A or B is not checked in subsection 2 of the "Authorization or Opt-Out of Authorization to Permit Access" section, then this form must also be signed in accordance with 37 CFR 1.14(c).

This Application Data Sheet **must** be signed by a patent practitioner if one or more of the applicants is a **juristic entity** (e.g., corporation or association). If the applicant is two or more joint inventors, this form must be signed by a patent practitioner, **all** joint inventors who are the applicant, or one or more joint inventor-applicants who have been given power of attorney (e.g., see USPTO Form PTO/AIA/81) on behalf of **all** joint inventor-applicants.

See 37 CFR 1.4(d) for the manner of making signatures and certifications.

Signature	/Sangki Park/		Date (YYYY-MM-DD)	2017-10-09
First Name	Sangki	Last Name	Park	Registration Number
				L1121

Additional Signature may be generated within this form by selecting the Add button.

Add

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	02316.7384USP1/3533
		Application Number	
Title of Invention	FIBER OPTIC TELECOMMUNICATIONS TRAY WITH ENHANCED ACCESSIBILITY		

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether the Freedom of Information Act requires disclosure of these records.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspections or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

FIBER OPTIC TELECOMMUNICATIONS TRAY WITH ENHANCED ACCESSIBILITY

BACKGROUND

[0001] Optical fiber distribution systems may include equipment such as fiber management trays that are mounted in telecommunications closures or at other locations. Fiber management trays are commonly used to manage, store and protect optical fibers and optical splices. Fiber management trays include fiber routing paths for allowing excess length of optical fiber to be stored in looped configurations without violating minimum bend radius requirements for the optical fiber. Fiber management trays typically include fiber guide structures that define the fiber routing paths and splice storage locations. Fiber optic components such as fiber optic fusion splice holders, passive optical splitters and wavelength division multiplexers are often mounted to fiber management trays. Improvements in fiber management trays are needed for optical fiber accessibility and handling.

SUMMARY

[0002] In general terms, the present disclosure relates to a telecommunications management device. In one possible configuration and by non-limiting example, the telecommunication management device includes a fiber management tray for managing optical fibers. Various aspects are described in this disclosure, which include, but are not limited to, the following aspects.

[0003] One aspect is a fiber optic telecommunications tray. The tray includes a base plate, a cable containment wall, and a connectorized fiber connection device. The cable containment wall extends from the base plate and defines a cable management space on the base plate. The connectorized fiber connection device is arranged in the cable management space and includes one or more adapter holder arrangements. In certain examples, two adapter holder arrangements are provided to the tray. Each adapter holder arrangement includes an adapter access aperture and a pair of adapter holding blocks. The adapter access aperture is defined through the base plate and configured to allow a fiber optic adapter to at least partially pass therethrough. The pair of adapter holding blocks extends from the base plate and is arranged oppositely with the adapter access aperture therebetween. The pair of adapter holding blocks is configured to movably hold

the fiber optic adapter therebetween by an interference fit and selectively allow the fiber optic adapter in a storage position or in an access position. In the storage position, the fiber optic adapter is held by the pair of adapter holding blocks above the adapter access aperture and arranged to be parallel with the base plate. In the access position, the fiber optic adapter is held by the pair of adapter holding blocks and arranged to pass through the adapter access aperture at an angle relative to the base plate.

[0004] In certain examples, the pair of adapter holding blocks includes contact lips configured to press against an adapter body of the fiber optic adapter when the fiber optic adapter is held between the pair of adapter holding blocks.

[0005] In certain examples, the connectorized fiber connection device further includes a pair of latching devices extending from the base plate and arranged oppositely with the adapter access aperture therebetween. The pair of latching devices is configured to movably latch the fiber optic adapter therebetween.

[0006] In certain examples, the pair of latching devices includes latching hooks extending over the fiber optic adapter when the fiber optic adapter is latched between the pair of latching devices.

[0007] In certain examples, the pair of adapter holding blocks are arranged adjacent the pair of latching devices, respectively.

[0008] In certain examples, the connectorized fiber connection device further includes a balance bar at least partially crossing the adapter access aperture and configured to provide a pivot point around which the fiber optic adapter is rotated and arranged at the angle relative to the base plate.

[0009] In certain examples, the cable containment wall includes a main outer wall, a first entrance outer wall, and a second entrance outer wall. The main outer wall is arranged at a distal side of the fiber optic telecommunications tray. The first entrance outer wall is arranged at a first cable entrance side of the fiber optic telecommunications tray and connected to the main outer wall. The second entrance outer wall is arranged at a second cable entrance side of the fiber optic telecommunications tray and connected to the main outer wall. The second cable entrance side is opposite to the first cable entrance side. The first entrance outer wall has a height lower than a height of the main outer wall, and the second entrance outer wall has a height lower than the height of the main outer wall.

[0010] In certain examples, the cable containment wall further includes a first entrance inner wall and a second entrance inner wall. The first entrance inner wall is arranged to be parallel with the first entrance outer wall and defines a first cable guide channel between the first entrance inner wall and the first entrance outer wall. The second entrance inner wall is arranged to be parallel with the second entrance outer wall and defines a second cable guide channel between the second entrance inner wall and the second entrance outer wall. The first entrance inner wall has a height lower than the height of the main outer wall, and the second entrance inner wall has a height lower than the height of the main outer wall.

[0011] In certain examples, the cable containment wall further includes a lower outer wall arranged at a proximate side of the fiber optic telecommunications tray. The proximate side is opposite to the distal side.

[0012] In certain examples, a tray mounting interface is arranged at the proximate side of the fiber optic telecommunications tray and configured to mount the fiber optic telecommunications tray to a structure.

[0013] In certain examples, the connectorized fiber connection device is arranged adjacent the proximate side of the fiber optic telecommunications tray.

[0014] In certain examples, the fiber optic adapter includes an adapter body having a first port and a second port opposite to the first port. The first port is configured to receive a first connectorized fiber, and the second port is configured to receive a second connectorized fiber.

[0015] Another aspect is a method for managing fibers. The method includes providing the fiber optic telecommunications tray described herein; inserting a fiber optic adapter to the connectorized fiber connection device; rotating the fiber optic adapter to the access position; inserting connectorized fibers to the fiber optic adapter; and rotating the fiber optic adapter to the storage position.

[0016] In certain example, the method further includes pivotally mounting the fiber optic telecommunications tray to a structure.

[0017] In certain example, the method further includes stacking a plurality of the fiber optic telecommunications tray described herein.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 is a perspective view of a fiber optic telecommunications tray assembly in accordance with an exemplary embodiment of the present disclosure.

[0019] FIG. 2 is a top view of the fiber optic telecommunications tray assembly of FIG. 1.

[0020] FIG. 3A is a side view of the fiber optic telecommunications tray assembly of FIG. 1.

[0021] FIG. 3B is an opposite side view of the fiber optic telecommunications tray assembly of FIG. 1.

[0022] FIG. 4 is a cross sectional side view of the fiber optic telecommunications tray assembly of FIG. 1.

[0023] FIG. 5 is a perspective view of a fiber optic telecommunications tray of FIG. 1.

[0024] FIG. 6 is another perspective view of the fiber optic telecommunications tray of FIG. 5.

[0025] FIG. 7 is a top view of the fiber optic telecommunications tray of FIG. 5.

[0026] FIG. 8 is a bottom view of the fiber optic telecommunications tray of FIG. 5.

[0027] FIG. 9A is a side view of the fiber optic telecommunications tray of FIG. 5.

[0028] FIG. 9B is an opposite side view of the fiber optic telecommunications tray of FIG. 5.

[0029] FIG. 10 is an expanded perspective view of an example connectorized fiber connection device in the fiber optic telecommunications tray.

[0030] FIG. 11 is another expanded perspective view of the connectorized fiber connection device of FIG. 10.

[0031] FIG. 12 is a top perspective view of the fiber optic telecommunications tray assembly that illustrates example positions of a fiber optic adapter in the connectorized fiber connection device.

[0032] FIG. 13 is a bottom perspective view of the fiber optic telecommunications tray assembly that illustrates example positions of the fiber optic adapter in the connectorized fiber connection device.

DETAILED DESCRIPTION

[0033] Various embodiments will be described in detail with reference to the drawings, wherein like reference numerals represent like parts and assemblies throughout the several views.

[0034] Referring to FIGS. 1-4, a fiber optic telecommunications tray assembly is described in accordance with an exemplary embodiment of the present disclosure. The fiber optic telecommunications tray assembly 100 includes a fiber optic telecommunications tray 102, a fiber optic adapter 104, and one or more fiber optic connectors 106.

[0035] The fiber optic telecommunications tray 102 is configured to receive, store, and manage optical fibers therein. The tray 102 can be of various types, such as a splice tray, splitter tray, a combination thereof, and a housing device having other functions. The tray 102 includes a main body 112 that has a base plate 114 and a cable containment wall 116. In the illustrated example, the cable containment wall 116 extends upwardly from a front side (or a top surface) 118 of the base plate 114 and defines at least a portion of a periphery of the main body 112 of the tray 102 that surrounds the base plate 114. The cable containment wall 116 defines a cable management space 120 on the base plate 114. As described herein, the cable management space 120 are configured to route fibers, connect (e.g., splice) fibers, store slack or loops of fibers, and organize fibers as necessary. Various structures can be provided in the cable management space 120 including splices and/or storage of cables, which will be described below. Various additional structures can be provided for managing and organizing the fiber optic cables, including a divider wall and cable retention tabs.

[0036] The base plate 114 of the main body 112 is shown as including a generally flat body of a suitably rigid or resilient plastic or polymeric material, although alternatives are possible. According to some examples, the tray 102 may be formed of a polymeric material, such as, polypropylene, polyethylene, nylon, ABS, PMMA, some other material or any combination thereof. In other examples, the tray 102 may be formed of any suitable rigid or semi-rigid material.

[0037] In some examples, the tray 102 has a proximate side 122 and a distal side 124 opposite to the proximate side 122. As described herein, the tray 102 can be mounted to a structure at the proximate side 122, such as a tray mounting plate, a fiber optic terminal, a fiber optic splice terminal, or other type of housing/enclosure. For example, the tray 102 is pivotally mounted to such a structure at the proximate side 122 so that the distal side 124 can be rotated relative to the structure. The tray 102 is configured to have a thin plate profile, and thus a plurality of trays 102 is stackable in a limited space.

[0038] Further, the tray 102 has a first cable entrance side 126 and a second cable entrance side 128. The first and second cable entrance sides 126 and 128 are provided with various features, as described herein, which are configured to receive and guide cables or fibers entering or exiting the tray 102. The first cable entrance side 126 can be arranged to be opposite to the second cable entrance side 128. The first and second cable entrance sides 126 and 128 can be arranged in various configurations in other embodiments. In the illustrated example, the first and second cable entrance sides 126 and 128 are arranged at the proximate side 122 of the tray 102. In other examples, the first and second cable entrance sides 126 and 128 are arranged closer to the proximate side 122 than to the distal side 124 of the tray 102. In yet other examples, the first and second cable entrance sides 126 and 128 can be arranged in different configurations with respect to the proximate side 122 and the distal side 124 of the tray 102.

[0039] As described herein, the cable containment wall 116 can function as fiber guides and have curvatures suitable with minimum bend radius requirements of fibers managed on the tray 102.

[0040] The tray 102 includes a radius limiter structure 136 formed from a plurality of spaced apart lobes 138. Taken together, the lobes 138 ensure a minimum bend radius of fibers stored on the tray 102. The radius limiter structure 136 (e.g., fiber routing guide) is positioned on the top surface 118 of the base plate 114 in the cable management space 120 and configured to store optical fibers. The radius limiter structure 136 projects upwardly from the top surface 118 of the base plate 114 and cooperate to define a protected main fiber management path 140 (e.g., a fiber management loop) at the top surface 118 of the base plate 114. The radius limiter structure 136 is constructed to limit the bend radius of fibers or cables when the fibers or cables are wrapped about the limiters for storage and/or organizational purposes. The radius limiter structure 136 can also assist and retain optical fibers in a looped configuration. The management path 140 can also include the spaces between the lobes 138, which allow for additional cable routing pathways.

[0041] The main fiber management path 140 is defined between the lobes 138 and the fiber containment wall 116. To retain the optical fibers within the main fiber management path 140, a first plurality of cable management elements 142 (fingers, tines, etc.) extend from the lobes 138 over the main fiber management path 140 in a direction towards the fiber containment wall 116. Additionally, a second plurality of cable management elements 144 extend from the fiber containment wall 116 over the main fiber management path 140 in a direction towards the lobes

138. The elements 142, 144 extend towards each other, but leave a gap or space 146 therebetween such that cables or fibers can be inserted or removed from the main fiber management path 140.

[0042] In the example depicted, one radius limiter structure 136 is shown on the base plate 114. Although one radius limiter structure 136 is primarily shown, it is understood that no radius limiter structure or any number of radius limiter structures may be used in other examples. In one example, the radius limiter structure 136 may be monolithically formed with the base plate 114 to define a one-piece unit. In certain examples, at least one inner fiber guide wall (not shown) may be used as a fiber routing guide on the tray 102. The inner fiber guide wall can project upwardly from the top surface 118 of the base plate 114, although multiple inner fiber guide walls may be used.

[0043] Referring still to FIG. 1-4, the tray assembly 100 includes the fiber optic adapter 104 that is removably mounted to the tray 102. As described herein, the fiber optic adapter 104 is movably supported in the cable management space 120 for improved access to the fiber optic adapter 104 for connecting fiber optic connectors 106 therethrough. The fiber optic adapter 104 is configured to connect (e.g. couple or splice) a pair of fiber optic connectors 106 with each other. The fiber optic connectors 106 are used to terminate and provide connectorized fibers. The fiber optic connectors 106 used in the tray can be of various types, such LC, SC, MPO, MTP, MT-RJ, or any other suitable connectors. Accordingly, the fiber optic adapter 104 used in the tray can be configured to receive various types of such connectors. Further, some examples of the fiber optic adapter 104 are configured to receive two pairs (e.g., duplex) of fiber optic connectors. Other configurations of the fiber optic adapter 104 are also possible in other examples.

[0044] In the illustrated example, two fiber optic adapters 104 are movably retained in the tray 102. A first fiber optic adapter 104A and a second fiber optic adapter 104B are arranged to be parallel with each other. For example, the first fiber optic adapter 104A is disposed in the tray 102 along a first axis X1 extending between the first cable entrance side 126 and a second cable entrance side 128, and a second fiber optic adapter 104B is disposed in the tray 102 along a second axis X2 that is parallel with, and offset from, the first axis X1. In other examples, other arrangements are also possible. As illustrated in FIGS. 3A and 3B, the tray 102 is configured such that the fiber optic adapters 104 and the fiber optic connectors 106 do not extend beyond

the height of the fiber containment wall 116. Although the adapters 104 and connectors 106 are satisfactorily stored in the tray 102, the connectors 106 are not easily accessible when they are in a storage position as illustrated in FIGS. 1-4. As described herein, the tray 102 provides various features that allow enhance access to the adapters 104 so that the connectors 106 are installed to, or removed from, the adapters 104 easily.

[0045] As illustrated in FIG. 2, each of the adapters 104 includes an adapter body 302 having a first port 304 and a second port 306 opposite to, and aligned with, the first port 304. The first port 304 is configured to receive one of mating connectors 106 (i.e., a first connector which provides a first connectorized fiber), and the second port 306 is configured to receive the other of the mating connectors 106 (i.e., a second connector which provides a second connectorized fiber). In some examples, the adapter 104 is a simplex optical adapter including only these two ports 304, 306. In other examples, the adapter 104 can be a duplex optical adapter, which includes two first ports 304 and two second ports 306, a quadruplex adapter, which includes four first ports 304 and four second ports 306, or another type of optical adapter. Each adapter 104 can include side flanges 308 that extend outwards from the adapter body 302 intermediate the ports 304 and 306.

[0046] Referring to FIGS. 5-9, the fiber optic telecommunications tray 102 is further described.

[0047] In some examples, the cable containment wall 116 includes a main outer wall 150, a lower outer wall 152, a first entrance outer wall 154, and a second entrance outer wall 156. The main outer wall 150 is arranged at the distal side 124 of the tray 102 and extends upwards from the front side 118 of the base plate 114, defining a portion of the periphery of the main body 112 on the base plate 114 at the distal side 124. The lower outer wall 152 is arranged at the proximate side 122 of the tray 102, generally opposite to the main outer wall 150.

[0048] The first entrance outer wall 154 is arranged at the first cable entrance side 126 of the tray 102 and extends upwards from the front side 118 of the base plate 114, defining a portion of the periphery of the main body 112 on the base plate 114 at the first cable entrance side 126. In the illustrated example, the first entrance outer wall 154 extends continuously from the main outer wall 150, although alternatives are possible.

[0049] In some examples, the cable containment wall 116 further includes a first entrance inner wall 160 extending upwards from the front side 118 of the base plate 114 and arranged to

be parallel with the first entrance outer wall 154. A first cable guide channel 164 can be defined between the first entrance inner wall 160 and the first entrance outer wall 154 and configured to guide fibers or cables entering or exiting a first entrance opening 162. In some examples, the first entrance inner wall 160 extends continuously from the lower outer wall 152.

[0050] Opposite to the first entrance outer wall 154, the second entrance outer wall 156 is arranged at the second cable entrance side 128 of the tray 102 and extends upwards from the front side 118 of the base plate 114, defining a portion of the periphery of the main body 112 on the base plate 114 at the second cable entrance side 128. In the illustrated example, the second entrance outer wall 156 extends continuously from the main outer wall 150, although alternatives are possible.

[0051] In some examples, the cable containment wall 116 further includes a second entrance inner wall 166 extending upwards from the front side 118 of the base plate 114 and arranged to be parallel with the second entrance outer wall 156. A second cable guide channel 168 can be defined between the second entrance inner wall 166 and the second entrance outer wall 156 and configured to guide fibers or cables entering or exiting a second entrance opening 171. In some examples, the second entrance inner wall 166 extends continuously from the lower outer wall 152.

[0052] In some examples, the first entrance outer wall 154 has a height lower than a height of the main outer wall 150. In addition or alternatively, the second entrance outer wall 156 has a height lower than the height of the main outer wall 150. Similarly, the first entrance inner wall 160 has a height lower than the height of the main outer wall 150. In addition or alternatively, the second entrance inner wall 166 has a height lower than the height of the main outer wall 150. In the illustrated example, the first entrance outer wall 154 and the second entrance outer wall 156 have the same height H2, which is smaller than a height H1 of the main outer wall 150. In addition, the first entrance outer wall 154 and the second entrance outer wall 156 may have a height identical or similar to the height H2 of the first entrance outer wall 154 and the second entrance outer wall 156, which is smaller than the height H1 of the main outer wall 150. The lower heights of the first and second entrance outer wall 154 and 156 and the first and second entrance inner walls 160 and 166 than the main outer wall 150 improve access to a connectorized fiber connection device 200 (as further described in FIGS. 5-11) in the tray 102 and allow easy installation and removal of the fiber optic adapter 104 and the connectors 106 thereto.

[0053] In addition, the lower outer wall 152 is configured to be lower in height than the main outer wall 150. In the illustrated example, a height H3 of the lower outer wall 152 is configured to be identical or similar to the height H2 of the first entrance outer wall 154, the second entrance outer wall 156, the first entrance inner wall 160, and the second entrance inner wall 166.

[0054] Referring still to FIG. 5-8, a tray mounting interface 170 is provided to the tray 102, which is configured to mount the tray 102 to a structure, such as a tray mounting plate, a fiber optic terminal, a fiber optic splice terminal, or other type of housing/enclosure. In the illustrated example, the tray mounting interface 170 is provided to the lower outer wall 152 at the proximate side 122. The tray mounting interface 170 can include hinge members 172 attached to the lower outer wall 152 to pivotally connect the tray 102 to the structure. The tray mounting interface 170 allows the tray 102 to rotate or pivot upwardly or downwardly at an angle with respect to a plane of the structure. In other examples, the tray mounting interface 170 can include other mechanical coupling structures, such as pivot mounts, interference fitting, clamps, latches, straps, capture arms, or any other suitable mechanism.

[0055] In some examples, the hinge members 172 can include snap-in pivot devices 174 (e.g., pivot pins, pivot rods). The snap-in pivot devices 174 can be configured to engage, for example, clips positioned on the structure. The clips can be configured to hold the snap-in pivot devices 174. The snap-in pivot devices 174 can pivot within the clips of the structure to allow the tray 102 to swing out individually for accessing optical fiber on the tray 102. In other examples, the snap-in pivot devices 174 and clips may be reversed such that the snap-in pivot devices 174 are configured on the structure and the clips are configured on the tray mounting interface 170. An example system suitable for use with trays 102 and showing hinged trays in a stacked arrangement can be found in US patent application publication serial number 2014/0321825, the entirety of which is hereby incorporated by reference.

[0056] The hinge members 172 can have a hinge axis X3 that is perpendicular to a tray axis X4. The tray 102 is adapted to pivot around the hinge axis X3. In certain examples, lower ones of the trays 102 in a stack can be accessed without removal of superposed trays. One end of the stack can be lifted upwardly or pivoted. After work within that tray 102 is completed, the tray 102 can be returned to its located position in the stack merely by reversing the procedure.

[0057] As described herein, the tray 102 may include, for example, one or more fiber guides and one or more splice/termination holders. The tray 102 can include fiber routing paths for

routing excess fiber in looped configurations that prevent the fibers from being bent beyond their minimum bend radius requirements. Additionally, the tray 102 can retain and protect additional fiber optic components such as passive optical splitters and/or wavelength division multiplexors.

[0058] In certain examples, fiber management trays in accordance with the principles of the present disclosure can include structures for mounting optical fiber splices and/or additional passive optical components on major sides of the trays. In other examples, outputs of optical components can be routed to the tray for splicing to cables. Outputs of the optical component can also be spliced to optical fibers for forward feeding and/or back feeding signals through the main fiber optic cable.

[0059] With reference still to FIGS. 5-9, the tray 102 includes a connectorized fiber connection device 200 configured to connect connectorized or ruggedized fibers with each other in the tray 102. The connectorized fiber connection device 200 provides features for movably securing the fiber optic adapter 104 and allowing easy access to the fiber optic adapter 104 when the connectors 106 are inserted into, or removed from, the adapter 104.

[0060] The connectorized fiber connection device 200 is arranged in the cable management space 120 on the base plate 114. In some examples, the connectorized fiber connection device 200 is arranged on the base plate 114 at the proximate side 122 of the tray 102 while the radius limiter structure 136 is arranged on the base plate 114 at the distal side 124 of the tray 102. In some examples, an inner partition wall 180 is provided between the connectorized fiber connection device 200 and the radius limiter structure 136. The inner partition wall 180 extends upwards from the front side 118 of the base plate 114 and can be rounded at opposite ends thereof to generally accommodate the curvatures of the lobes 138.

[0061] Referring to FIGS. 10 and 11, the connectorized fiber connection device 200 are further described. The connectorized fiber connection device 200 provides an adapter holder arrangement on the base plate 114 of the tray 102 to receive one or more fiber optic adapters 104. In some examples, the adapter holder arrangement is configured to retain the adapters 104 when the adapters 104 are pushed onto the adapter holder arrangement on the base plate 114. The adapter holder arrangement can be configured to releasably hold the adapters 104.

[0062] In the illustrated example, the connectorized fiber connection device 200 is configured to secure two simplex optical adapters 104A and 104B. Although it is primarily described herein that the connectorized fiber connection device 200 is configured to

independently support two optical adapters 104A and 104B, it is understood that the connectorized fiber connection device 200 is similarly configured to support a single optical adapter 104 of the same or another type, or three or more of optical adapters 104 of the same or other types, in accordance with the structures and principles of the present disclosure.

[0063] The connectorized fiber connection device 200 includes a first adapter holder arrangement 202 and a second adapter holder arrangement 204. The first adapter holder arrangement 202 is configured to arrange and hold the first adapter 104A along the first axis X1. The second adapter holder arrangement 204 is similarly configured to arrange and hold the second adapter 104B along the second axis X1.

[0064] For each of the first and second adapter holder arrangements 202 and 204, the connectorized fiber connection device 200 includes an adapter access aperture 210 and adapter holding blocks 212.

[0065] The adapter access aperture 210 is defined through the base plate 114 and configured to allow the adapter 104 to at least partially pass therethrough. The adapter access aperture 210 extends along the axis X1, X2. In some examples, a balance bar 214 is provided which at least partially crosses the adapter access aperture 210 to divide the adapter access aperture 210 into two halves, such as a first sub access aperture 216 and a second sub access aperture 218. In the illustrated example, the balance bar 214 extends in a direction perpendicular to the axis X1, X2. As described herein, the balance bar 214 is configured to provide a pivot point around which the adapter 104 is rotated at least partially through either of the first sub access aperture 216 and the second sub access aperture 218, and arranged at an angle relative to the base plate 114.

[0066] The adapter holding blocks 212 extend from the base plate 114 and arranged in pairs across the adapter access aperture 210. Each pair of the adapter holding blocks 212 is disposed oppositely with the adapter access aperture therebetween. In the illustrated example, two pairs of adapter holding blocks 212 are provided for each of the adapter access apertures 210. A first pair 220 of adapter holding blocks 212 is oppositely arranged across the first sub access aperture 216, and a second pair 222 of adapter holding blocks 212 is oppositely arranged across the second sub access aperture 218.

[0067] Each pair of adapter holding blocks 212 is configured to movably hold the fiber optic adapter 104 therebetween. In some example, the adapter holding blocks 212 in pairs interference-fit the adapter 104 therebetween as the adapter 104 moves between a storage

position and an access position. For example, the adapter holding blocks 212 in pairs continue to press against the adapter 104 and hold the adapter 104 therebetween as the adapter 104 moves from the storage position to the access position or vice versa.

[0068] In the storage position, the fiber optic adapter 104 is held by the pairs of adapter holding blocks 212 above the adapter access aperture 210, as illustrated in FIGS. 1-4. As illustrated, the adapter 104 is arranged substantially to be parallel with the base plate 114, and the adapter 104 is not arranged to pass through the adapter access aperture 210. In the storage position, the adapter 104, with or without the connectors 106 inserted, is securely disposed within the tray 102.

[0069] In the access position, the fiber optic adapter 104 is held by the pair of adapter holding blocks 212 and arranged at an angle relative to the base plate 114. As illustrated in FIGS. 12 and 13, in some examples, the adapter 104 is arranged to pass through the adapter access aperture 210. In FIGS. 12 and 13, the adapter 104 is tilted in a rotational direction such that one side of the adapter 104 (e.g., the first port side 304) is lowered and passes through the first sub access aperture 216 while the other side of the adapter 104 (e.g., the second port side 306) is raised away from the second sub access aperture 218. When the adapter 104 is rotated in the opposite rotational direction, the one side of the adapter 104 (e.g., the first port side 304) is raised away from the first sub access aperture 216 while the other side of the adapter 104 (e.g., the second port side 306) is lowered and passes through the second sub access aperture 218. In some examples, the adapter 104 is rotated or tilted around the balance bar 214 that operates as a pivot point, as shown best in FIG. 13. As such, when the adapter 104 is in the access position, the adapter 104 is easily accessible for a technician to manage connection through the adapter 104.

[0070] The pairs of adapter holding blocks 212 maintain the interference fit against the adapter 104 throughout the movement of the adapter from the storage position to the access position, and vice versa.

[0071] In some examples, each adapter holding block 212 can include contact lips 230 configured to press against the adapter 104 (e.g., the adapter body 302 thereof) when the adapter 104 is held between the pair of adapter holding blocks 212. In the illustrated example, each adapter holding block 212 has a pair of contact lips 230 which are spaced apart and extend along longitudinal opposite edges of the adapter holding block 212.

[0072] In some examples, in addition to the adapter access aperture 210 and the adapter holding blocks 212, the connectorized fiber connection device 200 includes latching devices 240 (e.g., latching arms) configured to movably latch the adapter 104. The latching devices 240 extend from the base plate 114 and arranged in pairs across the adapter access aperture 210. Each pair of the latching devices 240 is disposed oppositely with the adapter access aperture therebetween. In the illustrated example, two pairs of latching devices 240 are provided for each of the adapter access apertures 210. A first pair 242 of latching devices 240 is oppositely arranged across the first sub access aperture 216, and a second pair 244 of latching devices 240 is oppositely arranged across the second sub access aperture 218.

[0073] Each latching device 240 can include a latching hook 246 at a free end thereof. The latching hook 246 is configured to extend over the fiber optic adapter 104 when the adapter 104 is latched between the pair of latching devices 240.

[0074] Each pair of the latching devices 240 is configured to movably latch the fiber optic adapter 104 therebetween. In some examples, the pairs of the latching devices 240 allow the adapter 104 to be at least partially removed therefrom. As the adapter 104 is rotated from the storage position (as illustrated in FIGS. 1-4) and moves to the access position (as illustrated in FIGS. 12 and 13), either side of the adapter 104 can be removed from the pair of latching devices 240. For example, when the adapter 104 is tilted such that one side of the adapter 104 (e.g., the first port side 304) is lowered and passes through the first sub access aperture 216 while the other side of the adapter 104 (e.g., the second port side 306) is raised away from the second sub access aperture 218, the other side of the adapter 104 (e.g., the second port side 306) is removed at least from the second pair 244 of latching devices 240 while the one side of the adapter 104 (e.g., the first port side 304) remains constrained under the latching hooks 246 of the first pair 242 of latching devices 240.

[0075] In some examples, at least one of the latching devices 240 in each pair is configured to flex as the adapter 104 moves with respect to the latching devices 240, so as to yield the adapter 104 removing from the constraint of the latching devices 240. In the illustrated example, the latching devices 240 arranged between adjacent adapter access apertures 210 are configured to be connected at a base (i.e., a portion close to the base plate 114) and split to form a gap or notch 250 at free ends thereof (i.e., a portion close to the latching hook 246). The latching devices 240 between the adapter access apertures 210 can be flexed when the adapter 104 slides

against the latching devices 240 (e.g., against the tip of the latching hooks 246), thereby allowing the adapter 104 to slide out from the latching devices 240.

[0076] In some examples, the adapter holding blocks 212 are arranged adjacent the latching devices 240. In the illustrated example, the latching devices 240 are arranged closer to the center of the adapter access aperture 210 (e.g., the balance bar 214) than the adapter holding blocks 212.

[0077] Some of the adapter holding blocks 212 and the latching devices 240 in the first adapter holder arrangement 202 are arranged at or adjacent an adapter support outer wall 182 at the proximate end 122. These adapter holding blocks 212 and latching devices 240 are paired with corresponding adapter holding blocks 212 and latching devices 240 arranged between the adjacent adapter access apertures 210. The adapter support outer wall 182 can extend upwards from the lower outer wall 152 and configured to support the adapter holding blocks 212 and/or the latching devices 240.

[0078] Some of the adapter holding blocks 212 and the latching devices 240 in the second adapter holder arrangement 204 are arranged at or adjacent the inner partition wall 180. These adapter holding blocks 212 and latching devices 240 are paired with corresponding adapter holding blocks 212 and latching devices 240 arranged between the adjacent adapter access apertures 210.

[0079] In this document, it will be understood that when an element is referred to as being “on” another element, it can be directly on the other element or intervening elements may be present therebetween. In contrast, when an element is referred to as being “directly on” another element, there are no intervening elements present. As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items.

[0080] It will be understood that, although the terms first, second, third etc. may be used herein to describe various elements, components, regions, layers and/or sections, these elements, components, regions, layers and/or sections should not be limited by these terms. These terms are only used to distinguish one element, component, region, layer or section from another element, component, region, layer or section. Thus, a first element, component, region, layer or section discussed below could be termed a second element, component, region, layer or section without departing from the teachings of the disclosure.

[0081] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms “a”,

“an” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms “comprises” and/or “comprising”, or “includes” and/or “including” or “has” and/or “having” when used in this specification, specify the presence of stated features, regions, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, regions, integers, steps, operations, elements, components, and/or groups thereof.

[0082] Furthermore, relative terms, such as “lower” or “bottom”, “upper” or “top”, and “left” and “right”, may be used herein to describe one element's relationship to another element as illustrated in the Figures. It will be understood that relative terms are intended to encompass different orientations of the device in addition to the orientation depicted in the Figures. For example, if the device in one of the figures is turned over, elements described as being on the “lower” side of other elements would then be oriented on “upper” sides of the other elements. The exemplary term “lower”, can therefore, encompasses both an orientation of “lower” and “upper”, depending of the particular orientation of the figure. Similarly, if the device in one of the figures is turned over, elements described as “below” or “beneath” other elements would then be oriented “above” the other elements. The exemplary terms “below” or “beneath” can, therefore, encompass both an orientation of above and below.

[0083] The various examples and teachings described above are provided by way of illustration only and should not be construed to limit the scope of the present disclosure. Those skilled in the art will readily recognize various modifications and changes that may be made without following the examples and applications illustrated and described herein, and without departing from the true spirit and scope of the present disclosure.

WHAT IS CLAIMED IS:

1. A fiber optic telecommunications tray comprising:
a base plate;
a cable containment wall extending from the base plate and defining a cable management space on the base plate; and
a connectorized fiber connection device arranged in the cable management space and including one or more adapter holder arrangements, each adapter holder arrangement including:
an adapter access aperture defined through the base plate and configured to allow a fiber optic adapter to at least partially pass therethrough; and
a pair of adapter holding blocks extending from the base plate and arranged oppositely with the adapter access aperture therebetween, the pair of adapter holding blocks configured to movably hold the fiber optic adapter therebetween by an interference fit and selectively allow the fiber optic adapter in a storage position or in an access position, wherein, in the storage position, the fiber optic adapter is held by the pair of adapter holding blocks above the adapter access aperture and arranged to be parallel with the base plate, and, in the access position, the fiber optic adapter is held by the pair of adapter holding blocks and arranged to pass through the adapter access aperture at an angle relative to the base plate.
2. The fiber optic telecommunications tray according to claim 1, wherein the pair of adapter holding blocks includes contact lips configured to press against an adapter body of the fiber optic adapter when the fiber optic adapter is held between the pair of adapter holding blocks.
3. The fiber optic telecommunications tray according to claim 1 or 2, wherein the connectorized fiber connection device further includes:
a pair of latching devices extending from the base plate and arranged oppositely with the adapter access aperture therebetween, the pair of latching devices configured to movably latch the fiber optic adapter therebetween.

4. The fiber optic telecommunications tray according to claim 3, wherein the pair of latching devices includes latching hooks extending over the fiber optic adapter when the fiber optic adapter is latched between the pair of latching devices.

5. The fiber optic telecommunications tray according to claim 3 or 4, wherein the pair of adapter holding blocks are arranged adjacent the pair of latching devices, respectively.

6. The fiber optic telecommunications tray according to any of claims 1-5, wherein the connectorized fiber connection device further includes:

a balance bar at least partially crossing the adapter access aperture and configured to provide a pivot point around which the fiber optic adapter is rotated and arranged at the angle relative to the base plate.

7. The fiber optic telecommunications tray according to any of claims 1-6, wherein the cable containment wall includes:

a main outer wall arranged at a distal side of the fiber optic telecommunications tray;

a first entrance outer wall arranged at a first cable entrance side of the fiber optic telecommunications tray and connected to the main outer wall; and

a second entrance outer wall arranged at a second cable entrance side of the fiber optic telecommunications tray and connected to the main outer wall, the second cable entrance side being opposite to the first cable entrance side,

wherein the first entrance outer wall has a height lower than a height of the main outer wall, and the second entrance outer wall has a height lower than the height of the main outer wall.

8. The fiber optic telecommunications tray according to claim 7, wherein the cable containment wall further includes:

a first entrance inner wall arranged to be parallel with the first entrance outer wall and defining a first cable guide channel between the first entrance inner wall and the first entrance outer wall; and

a second entrance inner wall arranged to be parallel with the second entrance outer wall and defining a second cable guide channel between the second entrance inner wall and the second entrance outer wall,

wherein the first entrance inner wall has a height lower than the height of the main outer wall, and the second entrance inner wall has a height lower than the height of the main outer wall.

9. The fiber optic telecommunications tray according to claim 7 or 8, wherein the cable containment wall further includes:

a lower outer wall arranged at a proximate side of the fiber optic telecommunications tray, the proximate side being opposite to the distal side.

10. The fiber optic telecommunications tray according to claim 9, wherein a tray mounting interface is arranged at the proximate side of the fiber optic telecommunications tray and configured to mount the fiber optic telecommunications tray to a structure.

11. The fiber optic telecommunications tray according to claim 9 or 10, wherein the connectorized fiber connection device is arranged adjacent the proximate side of the fiber optic telecommunications tray.

12. The fiber optic telecommunications tray according to any of claims 1-11, wherein the fiber optic adapter includes an adapter body having a first port and a second port opposite to the first port, the first port configured to receive a first connectorized fiber, and the second port configured to receive a second connectorized fiber.

13. The fiber optic telecommunications tray according to any of claims 1-12, wherein the connectorized fiber connection device includes two adapter holder arrangements.

14. A method for managing fibers, the method comprising:
providing the fiber optic telecommunications tray according to any of claims 1-13;
inserting a fiber optic adapter to the connectorized fiber connection device;

rotating the fiber optic adapter to the access position;
inserting connectorized fibers to the fiber optic adapter; and
rotating the fiber optic adapter to the storage position.

15. The method according to claim 13, further comprising:
pivotally mounting the fiber optic telecommunications tray to a structure.
16. The method according to claim 13 or 14, further comprising:
stacking a plurality of the fiber optic telecommunications tray according to any of claims
1-12.

ABSTRACT

A fiber optic telecommunications tray is provided with features that improve accessibility and handling of fibers and/or cables in the tray. The tray includes a connectorized fiber connection device for movably holding a fiber optic adapter in the tray. The connectorized fiber connection device includes an adapter access aperture and a pair of adapter holding blocks. The adapter access aperture is configured to allow the fiber optic adapter to at least partially pass therethrough. The pair of adapter holding blocks is configured to movably hold the fiber optic adapter therebetween by an interference fit and selectively allow the fiber optic adapter in a storage position or in an access position.

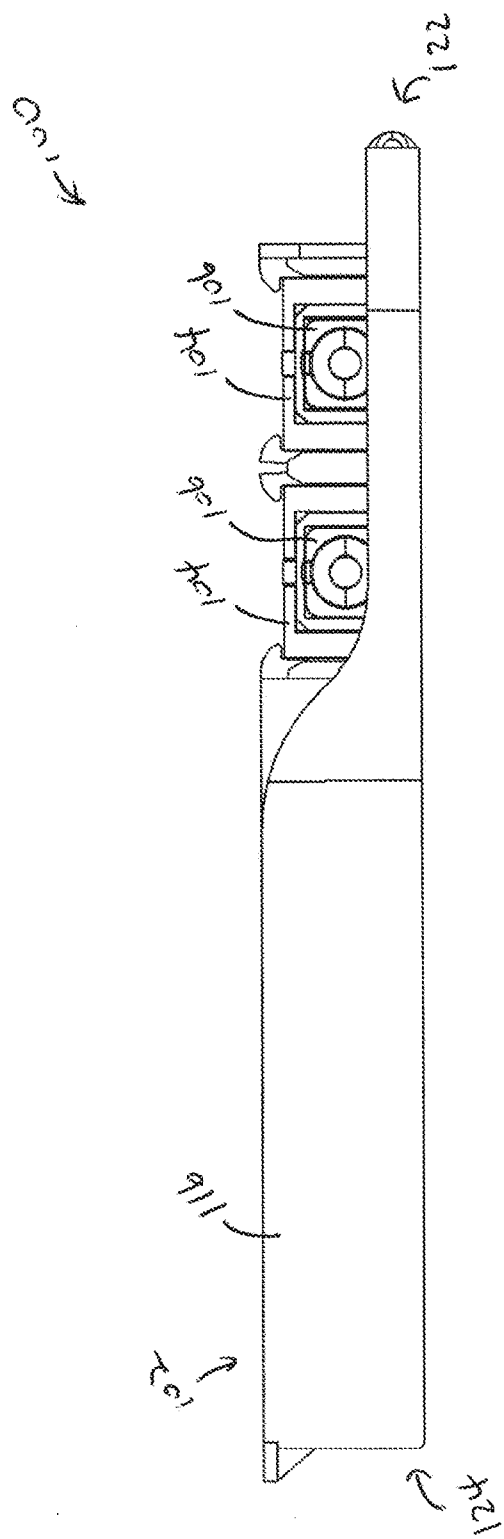


FIG. 3A

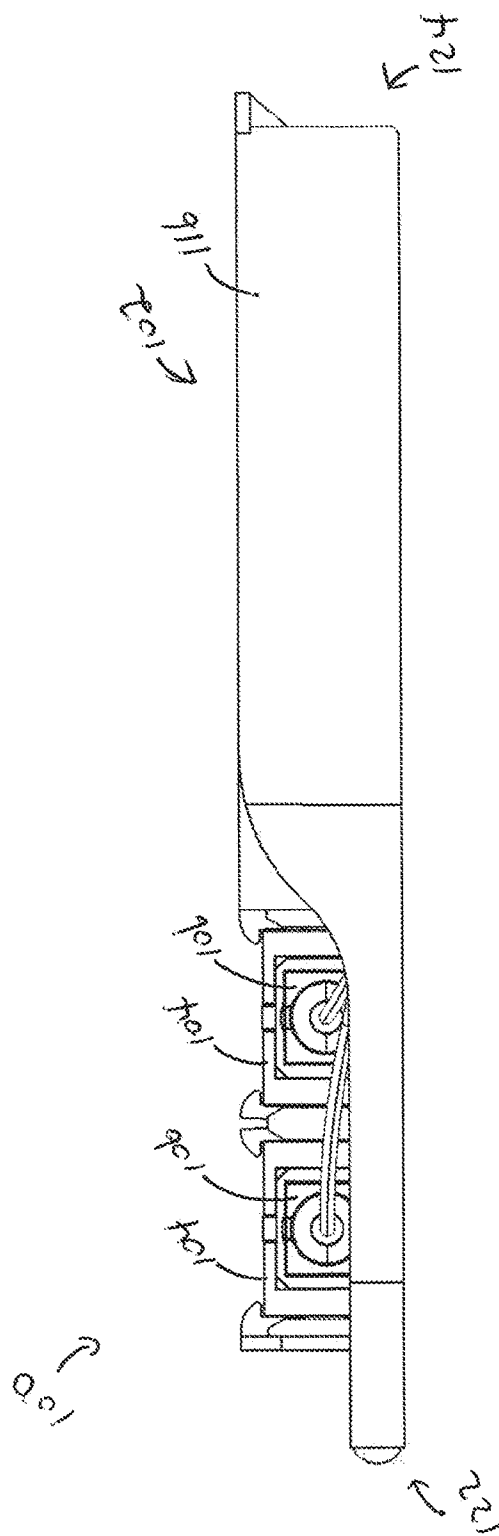


FIG. 3B

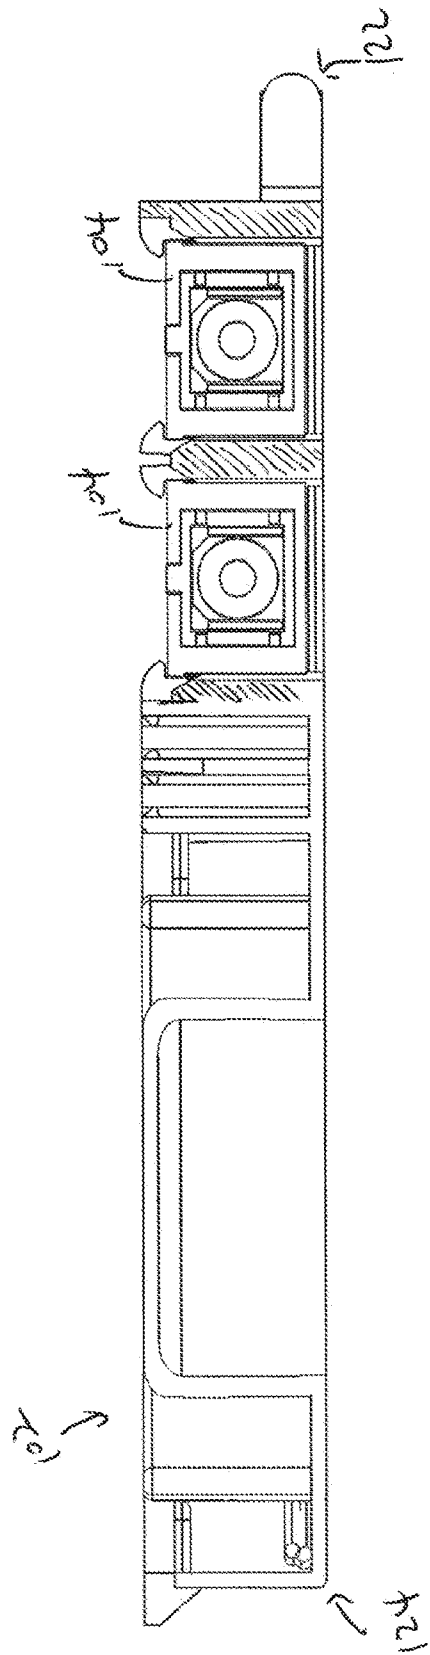


FIG. 4

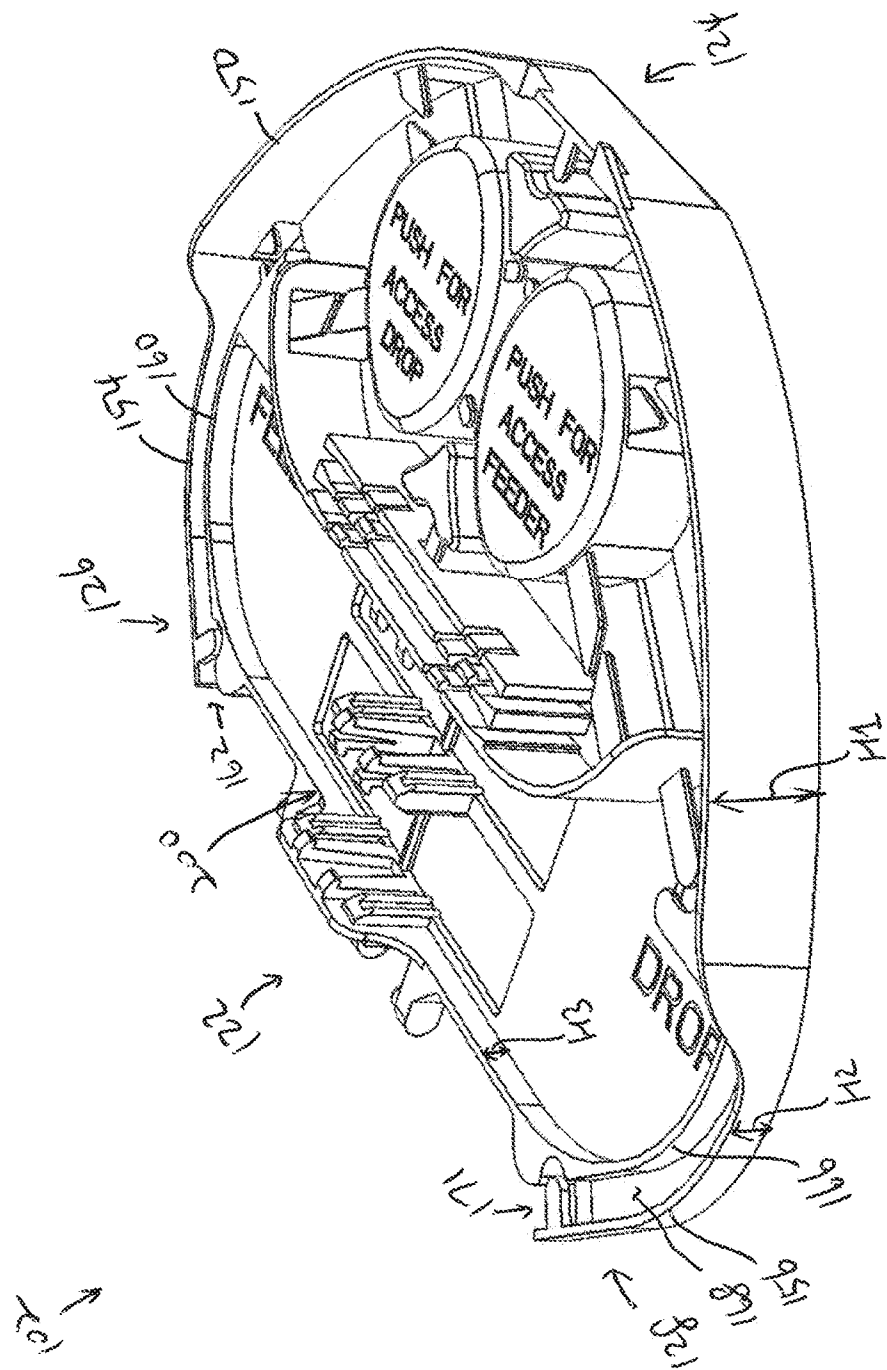
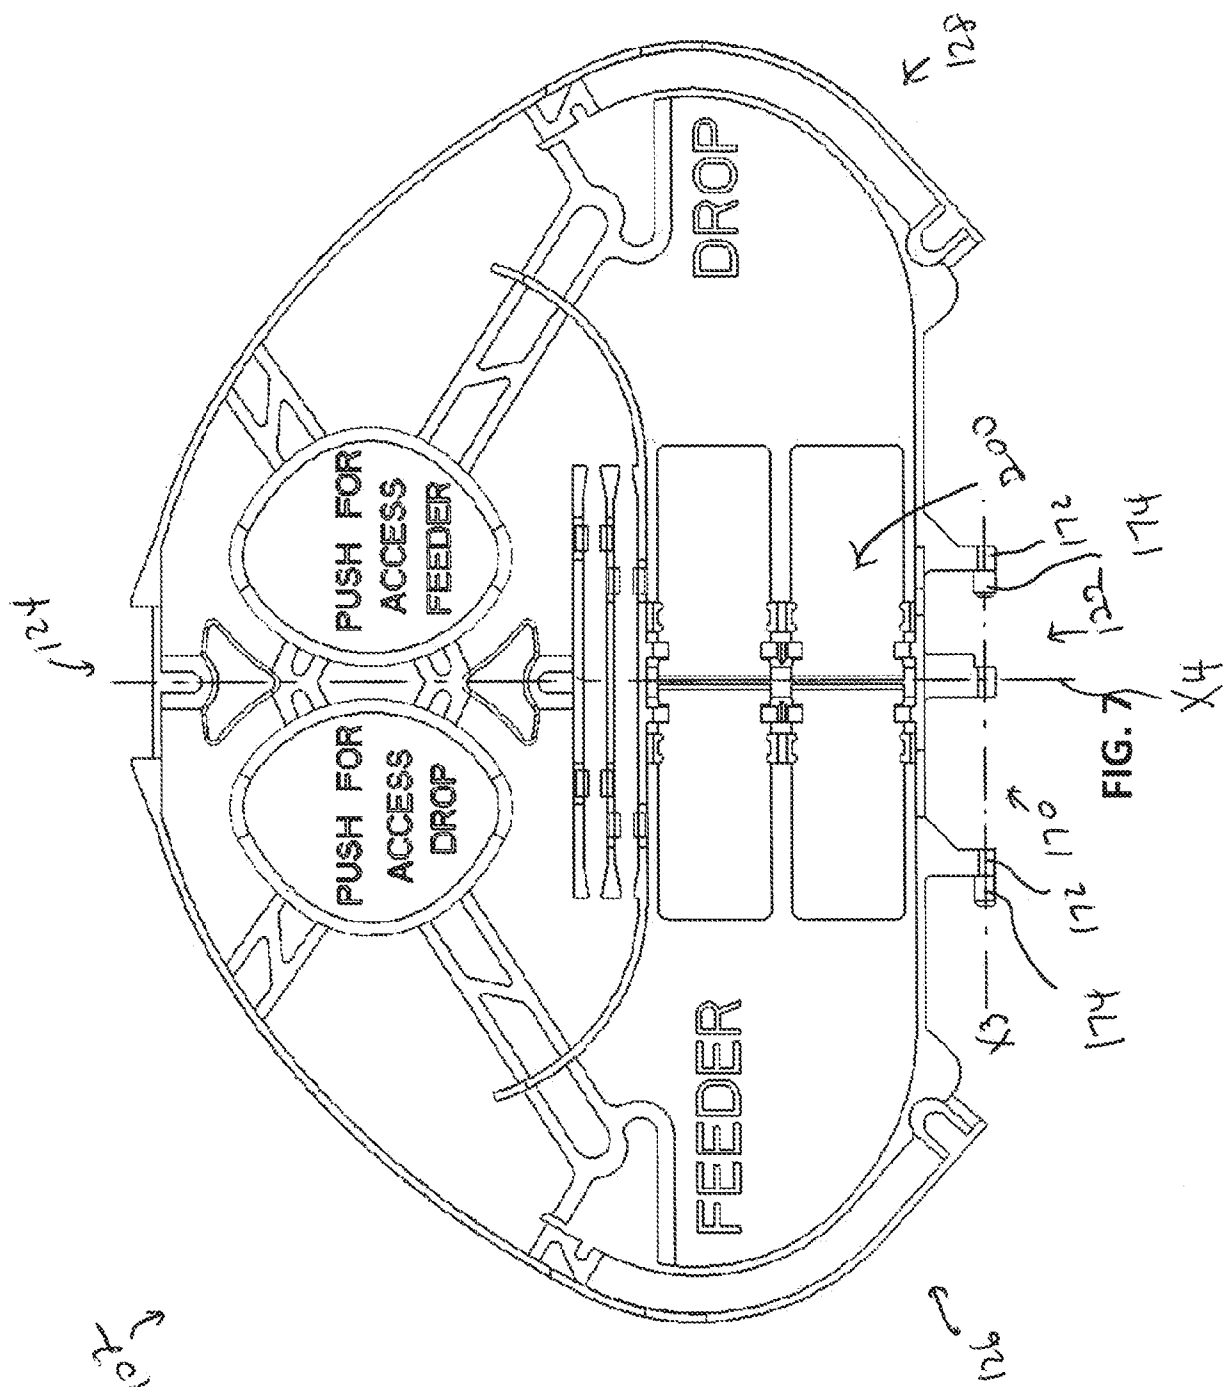


FIG. 6



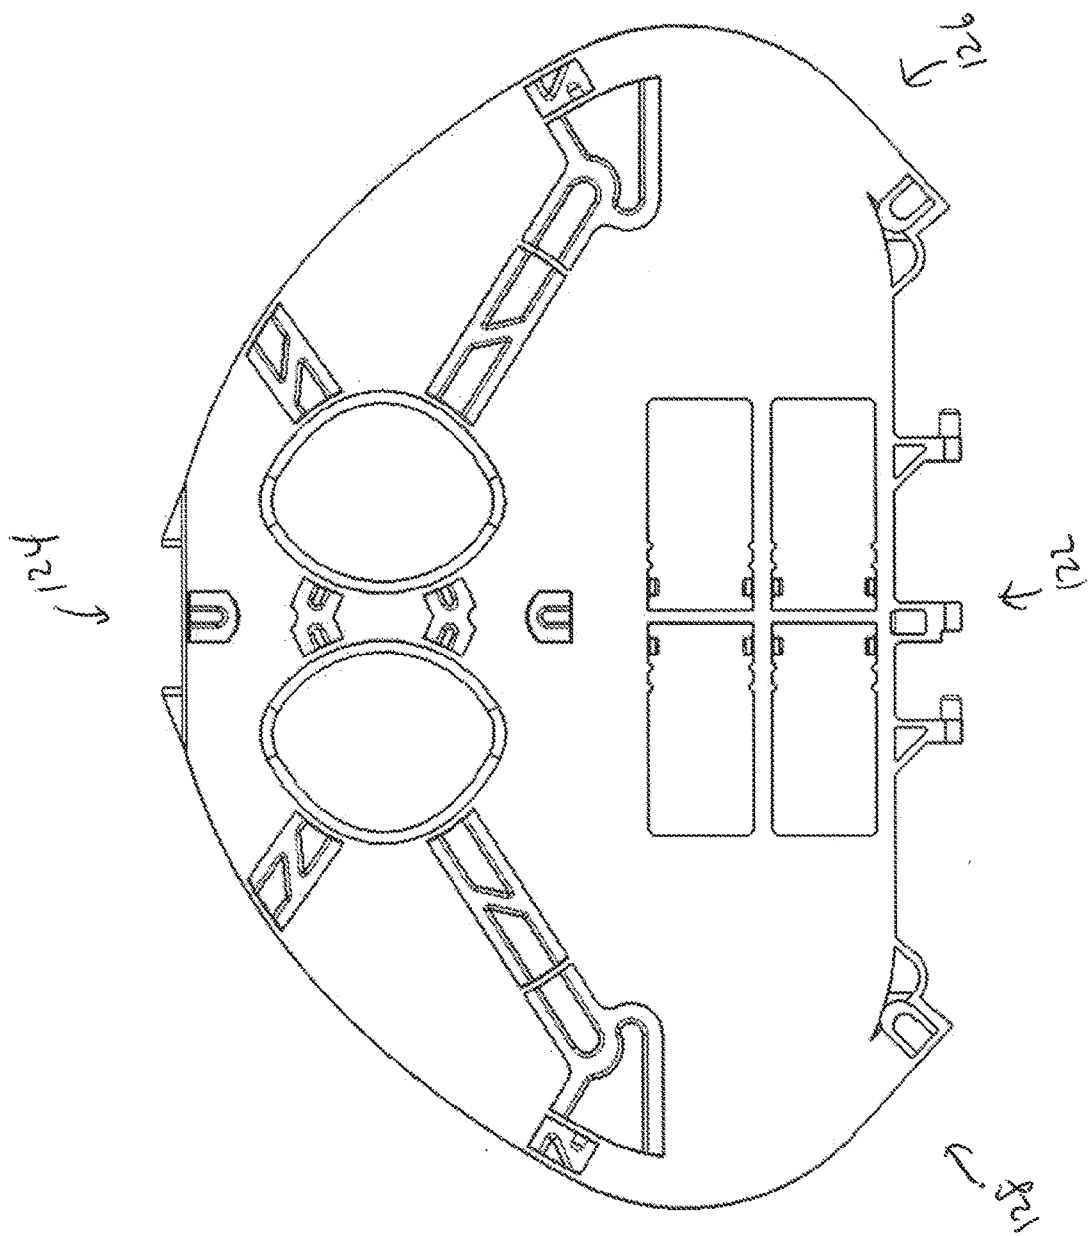


FIG. 8

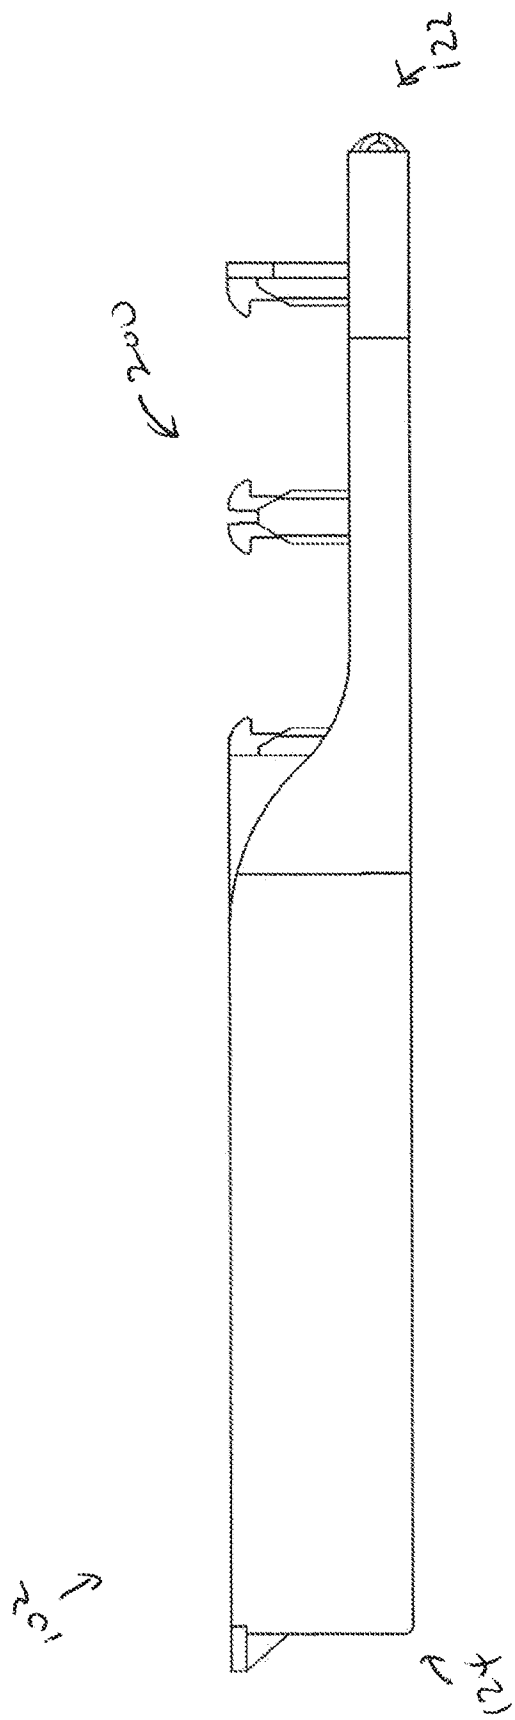


FIG. 9A



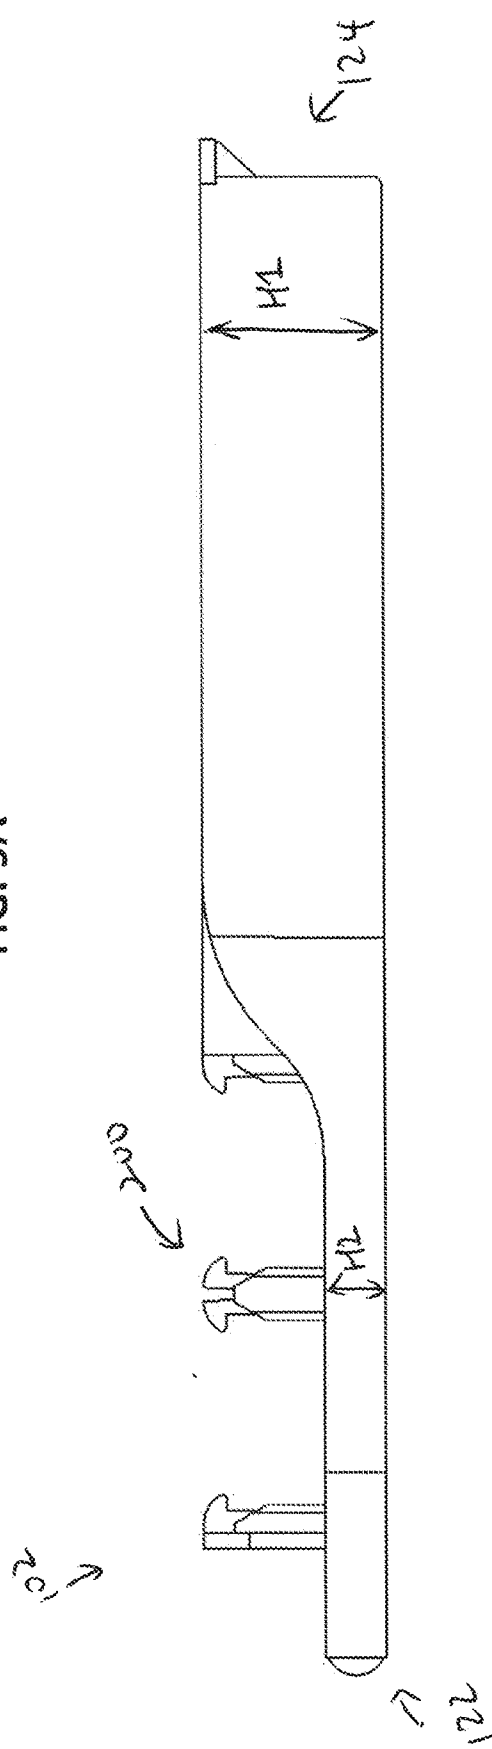


FIG. 9B

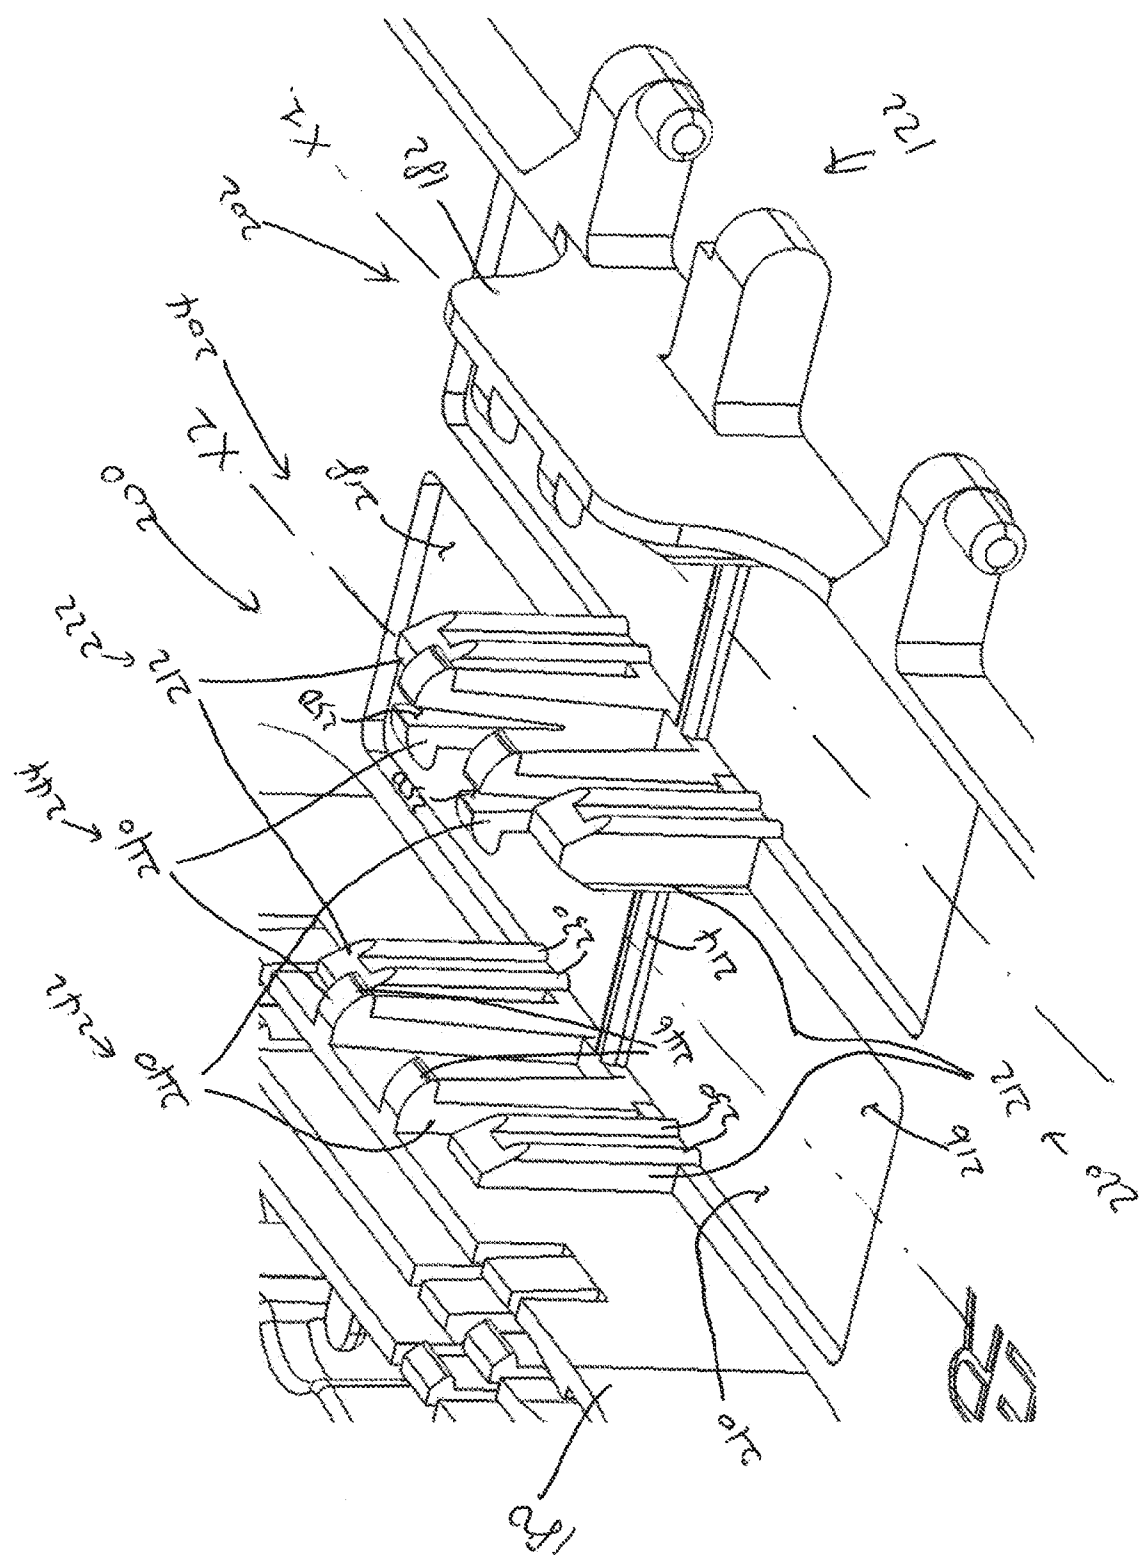

0155

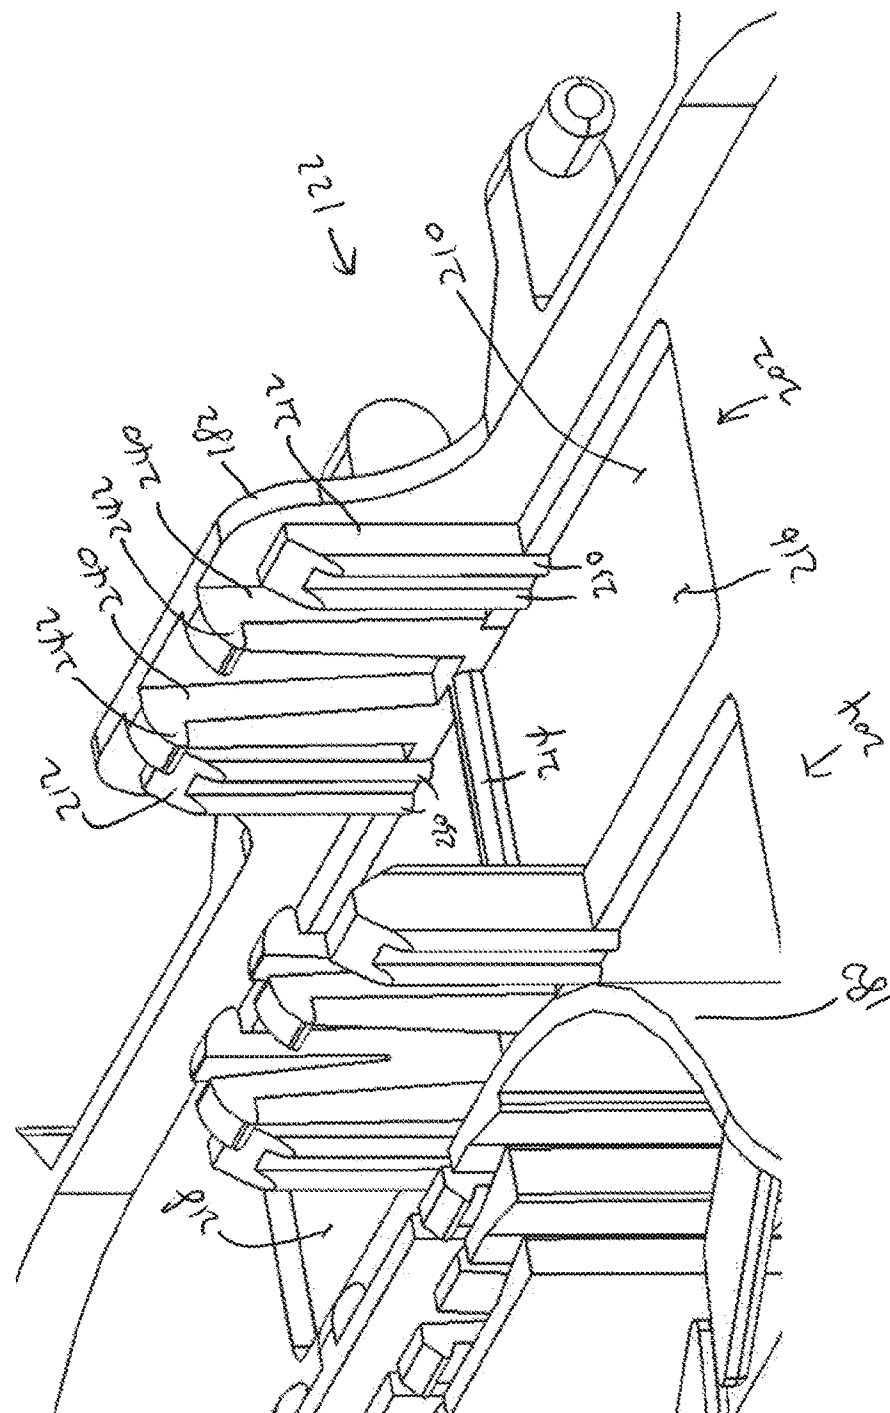

சென்னை

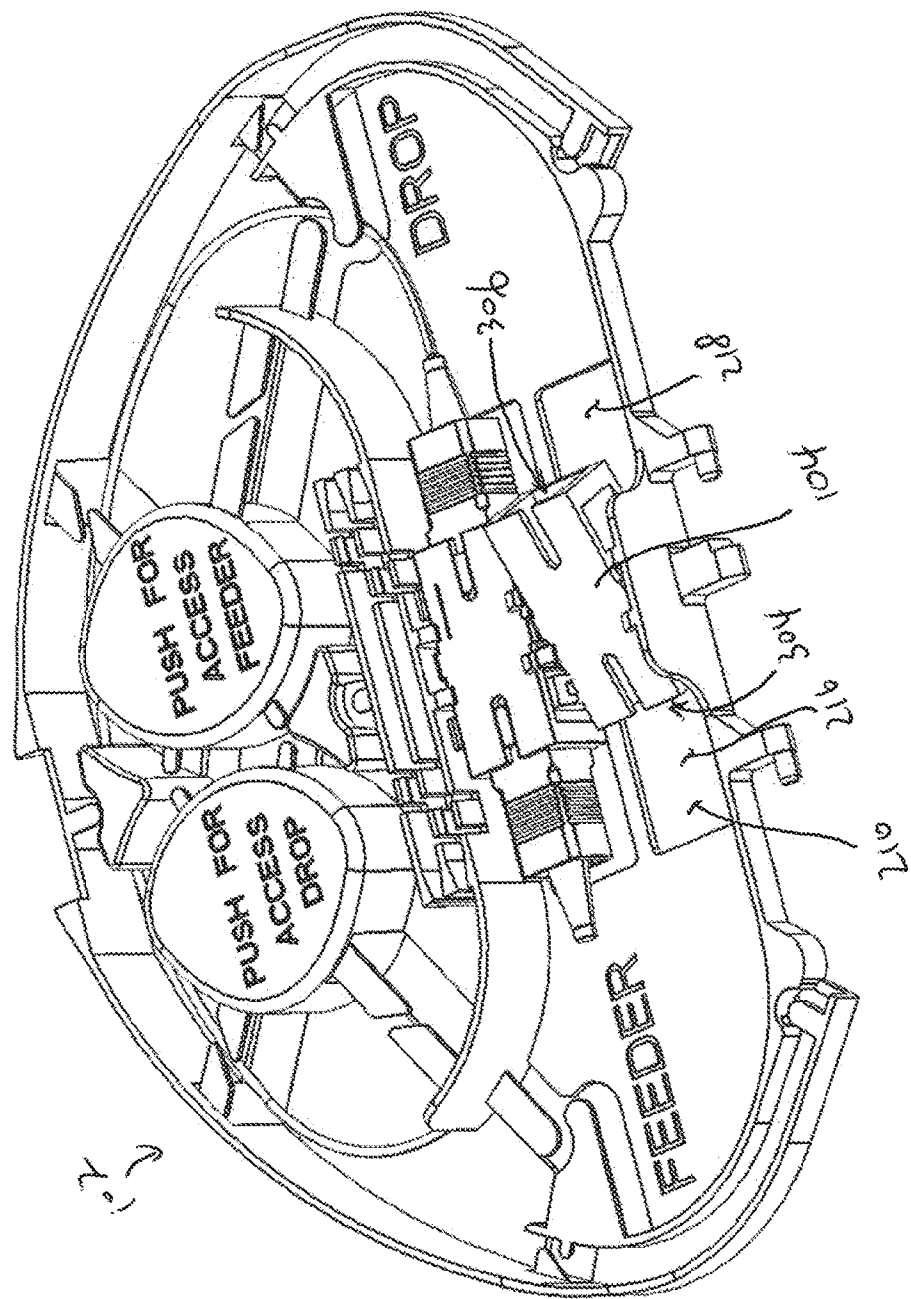


FIG. 12

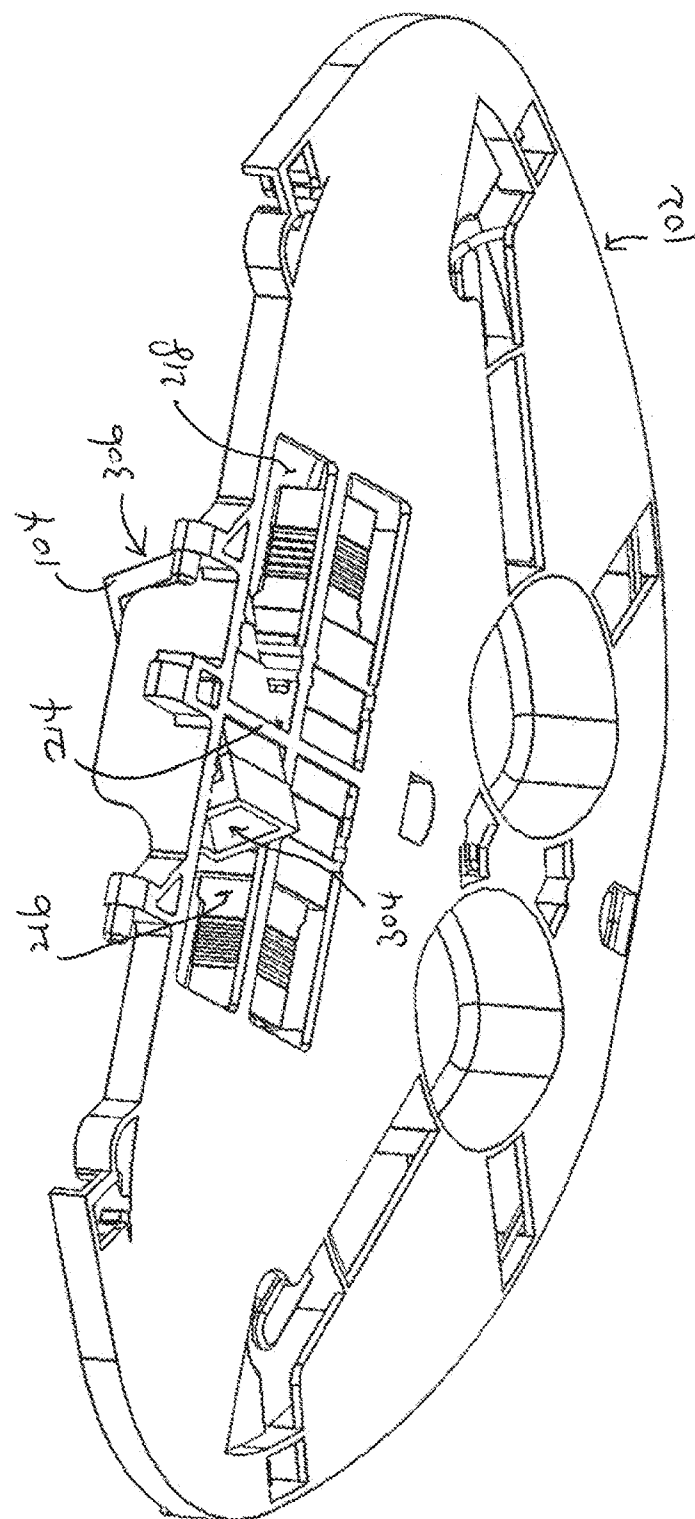


FIG. 13

Electronic Acknowledgement Receipt

EFS ID:	30602741
Application Number:	62569918
International Application Number:	
Confirmation Number:	1097
Title of Invention:	FIBER OPTIC TELECOMMUNICATIONS TRAY WITH ENHANCED ACCESSIBILITY
First Named Inventor/Applicant Name:	Dirk Kempeneers
Customer Number:	142510
Filer:	Sangki Park/Melissa Ziegler
Filer Authorized By:	Sangki Park
Attorney Docket Number:	02316.7384USP1/3533
Receipt Date:	09-OCT-2017
Filing Date:	
Time Stamp:	17:24:17
Application Type:	Provisional

Payment information:

Submitted with Payment	yes
Payment Type	CARD
Payment was successfully received in RAM	\$ 260
RAM confirmation Number	101017INTEFSW17261300
Deposit Account	132725
Authorized User	Melissa Ziegler
The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows: 37 CFR 1.16 (National application filing, search, and examination fees) 37 CFR 1.17 (Patent application and reexamination processing fees)	

37 CFR 1.19 (Document supply fees)

37 CFR 1.20 (Post Issuance fees)

37 CFR 1.21 (Miscellaneous fees and charges)

File Listing:

Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Application Data Sheet	2017-10-09-ADS-02316-7384USP1.PDF	1822965	no	8
			e22f3945b06d8878313b74af80f9e2fc4a302e1f		
Warnings:					
Information:					
2		2017-10-09-Application-02316-7384USP1.PDF	118584	yes	21
			fe3d3ebb0da66436b188a7465bd15629c14955f3		
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Specification		1	16	
	Claims		17	20	
	Abstract		21	21	
Warnings:					
Information:					
3	Drawings-only black and white line drawings	2017-10-09-Figures-02316-7384USP1.PDF	7738361	no	13
			5c25918668221d8d06638f8973a7bd5d76453e9a		
Warnings:					
Information:					
4	Fee Worksheet (SB06)	fee-info.pdf	30164	no	2
			8fed5afe55c7e5bf90a6c33e98079376c1e99d5b		
Warnings:					
Information:					
Total Files Size (in bytes):			9710074		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.