



(51) International Patent Classification:
B60R 9/058 (2006.01)

(21) International Application Number:
PCT/EP2019/067459

(22) International Filing Date:
28 June 2019 (28.06.2019)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
18183314.6 13 July 2018 (13.07.2018) EP

(71) Applicant: **THULE SWEDEN AB** [SE/SE]; Box 69,
33504 Hillerstorp (SE).

(72) Inventors: **OLAISON, Hannes**; Lustigknoppsvägen 2A,
791 37 Falun (SE). **NORDANGÅRD, Markus**; Fräken-


vägen 2, 33155 Värnamo (SE). **ANDERSSON, Joakim**;
Ågatan 119, 334 32 Anderstorp (SE). **PERSSON, Joakim**;
Norra Trädgårdsgatan 20, 56831 Skillingaryd (SE).
WIKSTRÖM, Peter; Sturegatan 57, 56831 Skillingaryd
(SE). **BOLMSTAM, Johan**; Nästa Nyagärde, 33195 Vär-
namo (SE).

(74) Agent: **WALLENTIN, Lars**; Thule AB Fosievägen 13,
214 31 Malmö (SE).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) Title: LOAD CARRIER

Fig. 5

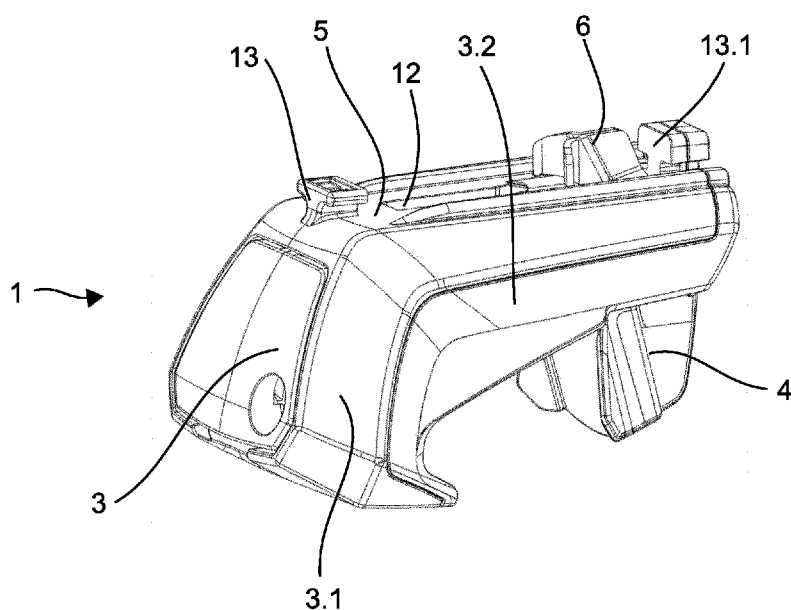

(57) Abstract: The present invention relates to a roof rack foot for securing a cross bar to a roof of a vehicle, the cross bar comprising a bottom wall with a slot extending in the longitudinal direction of the cross bar and a cavity for forming an abutment surface on the inner side of the bottom wall adjacent the slot in widthwise direction of the cross bar, wherein the slot comprises a centerline, the roof rack foot comprising a supporting surface for supporting the bottom wall of the cross bar thereupon, a first and a second clamping portion for clamping the roof rack foot to the roof of the vehicle, preferably for clamping a roof rail therebetween, the second clamping portion comprising an anchoring arm, preferably a plate-like anchoring arm, and being configured to extend through the slot into the cavity and lock the cross bar to the supporting surface of the roof rack foot by an engagement of the anchoring arm with the abutment surface of the cross bar, wherein, when the cross bar is locked to the roof rack foot, the anchoring arm stands upright on the abutment surface



SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

and, in a top view on the abutment surface, at least partially extends away from the centerline of the cross bar at an extension angle.