



(51) International Patent Classification:

B41J 2/045 (2006.01) B41J 2/14 (2006.01)

(21) International Application Number:

PCT/US2019/016786

(22) International Filing Date:

06 February 2019 (06.02.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **HEWLETT-PACKARD DEVELOPMENT COMPANY, L.P.** [US/US]; 10300 Energy Drive, Spring, Texas 77389 (US).

(72) Inventors: **LINN, Scott A.**; 1070 NE Circle Blvd., Corvallis, Oregon 97330-4239 (US). **GARDNER, James Michael**; 1070 NE Circle Blvd., Corvallis, Oregon 97330-4239 (US). **CUMBIE, Michael W.**; 1070 NE Circle Blvd., Corvallis, Oregon 97330-4239 (US).

(74) Agent: **PERRY, Garry A.** et al.; HP Inc., 3390 East Harmony Road, Mail Stop 35, Fort Collins, Colorado 80528 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

- with international search report (Art. 21(3))

(54) Title: DIE FOR A PRINthead

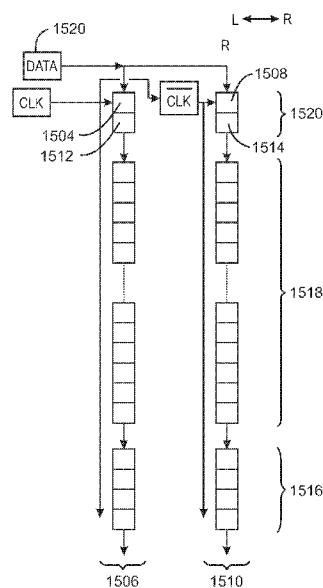


FIG. 15

(57) Abstract: A die for a printhead is provided in examples. The die includes a number of fluidic actuator arrays. A data block is associated with each of the plurality of fluidic actuator arrays. The die includes an interface comprising a data pad and a clock pad, wherein a data bit value present at the data pad is loaded into a first data block corresponding to a first fluidic actuator array on a rising clock edge and loaded into a second data block corresponding to a second fluidic actuator array on a falling clock edge.

