



(51) International Patent Classification:

C09K 8/575 (2006.01) E21B 33/13 (2006.01)

C09K 8/035 (2006.01) E21B 21/00 (2006.01)

E21B 41/00 (2006.01) E21B 21/06 (2006.01)

(21) International Application Number:

PCT/US2019/026177

(22) International Filing Date:

05 April 2019 (05.04.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 3000 N. Sam Houston Parkway E., Houston, Texas 77032-3219 (US).

(72) Inventors: **PEARL, Jr., William Cecil**; 30407 Aldine Westfield Rd., Spring, Texas 77386 (US). **SINGH, John Paul Bir**; 3603 Scenic Valley Dr., Kingwood, Texas 77345 (US). **LEWIS, Samuel Jason**; 3 Dahlia Trail Pl., Spring, Texas 77382 (US).

(74) Agent: **TUMEY, Corey S.**; P.O. Box 890226, Houston, Texas 77062-9998 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,


OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD FOR DESIGNING POLYMERS FOR EFFECTIVE FLUID LOSS CONTROL

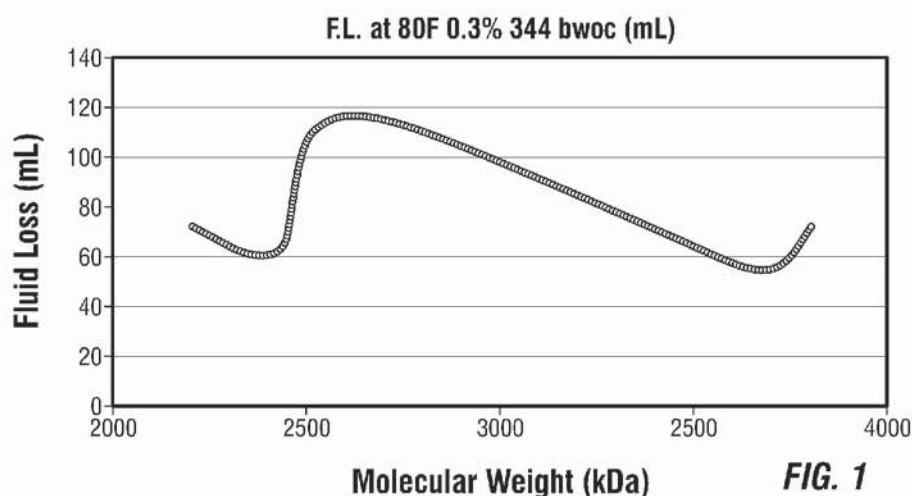

(57) Abstract: A method of well treatment may include: providing a polymer; correlating performance of the polymer to a least one physical property of the polymer; and preparing a treatment fluid comprising the polymer.