



(51) International Patent Classification:

H04W 52/02 (2009.01) H04W 84/12 (2009.01)

H04W 40/00 (2009.01) H04W 88/06 (2009.01)

(21) International Application Number:

PCT/EP2019/065196

(22) International Filing Date:

11 June 2019 (11.06.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)** [SE/SE]; SE-164 83 STOCKHOLM (SE).

(72) Inventors: **DI MARCO, Piergiuseppe**; Celsings väg 45, 192 79 SOLLENTUNA (SE). **OLSSON, Magnus L.**; Borrebackevägen 201, 218 52 KLAGSHAMN (SE). **SKILLERMARK, Per**; Årstavägen 70, 120 54 ÅRSTA (SE). **WILHELMSSON, Leif**; Lyftvägen 5, 247 55 DALBY (SE).

(74) Agent: **ALGEMEEN OCTROOI- EN MERKENBUREAU B.V.**; P.O. Box 645, 5600 AP EINDHOVEN (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A METHOD OF WAKING UP A MESH NODE IN A WIRELESS MESH NETWORK AS WELL AS A RELATED MESH NODE AND A COMPUTER PROGRAM PRODUCT

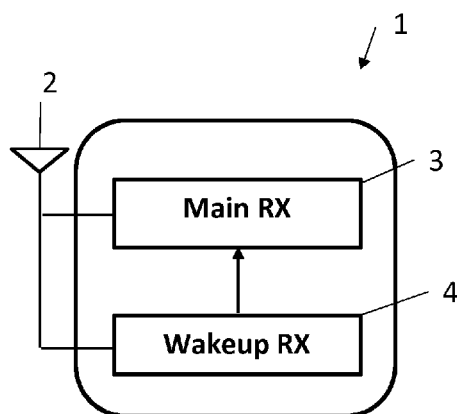


Fig. 1

(57) Abstract: A method of waking up a mesh node in a wireless mesh network, wherein said mesh node comprises a main receiver and a wakeup receiver, and wherein said method comprises the steps of receiving, by said wakeup receiver of said mesh node, a wake up signal message, wherein said wake up signal message comprises context information which is related to a path between a source mesh node and a destination mesh node corresponding to said wake up signal message, determining, by said wakeup receiver of said mesh node, that said context information is applicable for said mesh node, activating, by said wakeup receiver of said mesh node, said main receiver of said mesh node for subsequently receiving a data message.