



(51) International Patent Classification:

H04W 36/00 (2009.01)

(21) International Application Number:

PCT/CN2020/107816

(22) International Filing Date:

07 August 2020 (07.08.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PCT/CN2019/099744

08 August 2019 (08.08.2019)

CN

(71) Applicant: TELEFONAKTIEBOLAGET LM  
ERICSSON (PUBL) [SE/SE]; 164 83 Stockholm (SE).

(72) Inventor; and

(71) Applicant (for SC only): ZHU, Jinyin [CN/CN]; Building  
E, No. 1068 Tianshan Road, Shanghai 200335 (CN).

(72) Inventor: YANG, Yong; Heljereds Byvaeg 111B, 42836  
Kallered (SE).

(74) Agent: ZHONGZI LAW OFFICE; 7F, New Era Building,  
26 Pinganli Xidajie, Xicheng District, Beijing 100034 (CN).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,  
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,  
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,  
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,  
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,  
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,  
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,  
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,  
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,  
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,  
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,  
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
KM, ML, MR, NE, SN, TD, TG).

(54) Title: METHOD AND APPARATUS FOR 5GS INTERWORKING HANDLING

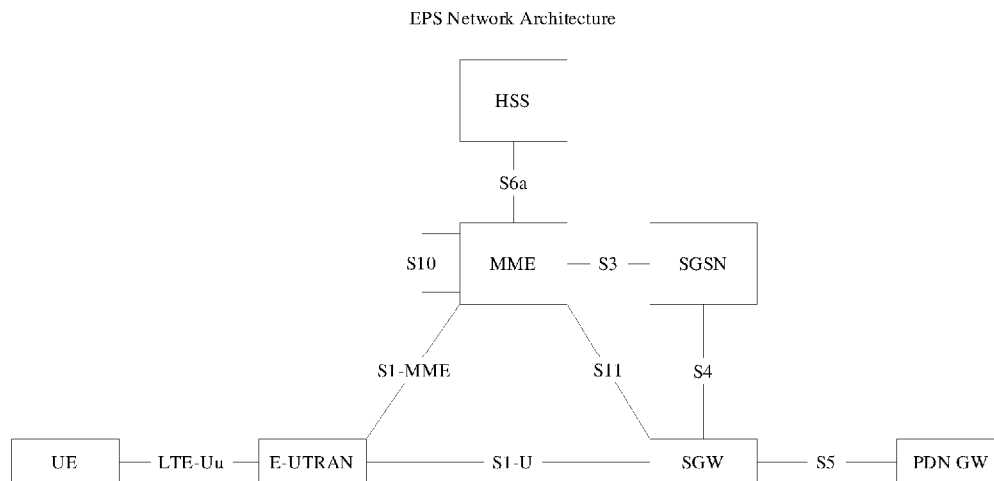


Fig. 1

(57) Abstract: The present disclosure discloses methods and devices for wireless communication. Specifically, a method performed by a first mobility management entity is provided. The method includes sending an indicator for a packet data network (PDN) connection to a second MME. The indicator indicates whether the PDN connection is allowed to be moved from an evolved packet system (EPS) to a fifth generation system (5GS).

**Published:**

— *with international search report (Art. 21(3))*