



(51) International Patent Classification:

F16L 55/16 (2006.01) F16L 11/20 (2006.01)

F16L 9/18 (2006.01) F16L 55/11 (2006.01)

F16L 11/16 (2006.01) F16L 55/17 (2006.01)

(21) International Application Number:

PCT/US2021/019735

(22) International Filing Date:

25 February 2021 (25.02.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16/805,627 28 February 2020 (28.02.2020) US

(71) Applicant: TRINITY BAY EQUIPMENT HOLDINGS, LLC [US/US]; 910 Louisiana Street, Suite 4400, Houston, Texas 77002 (US).

(72) Inventors: FRANCIS, Kirk Spencer; 910 Louisiana Street, Suite 4400, Houston, Texas 77002 (US). MARIETTA, Dale Brian; 910 Louisiana Street, Suite 4400, Houston, Texas 77002 (US).

(74) Agent: OSTERHAUS, Matthew G. et al.; P.O. Box 692289, Houston, Texas 77269 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: REPAIR SYSTEM AND METHOD

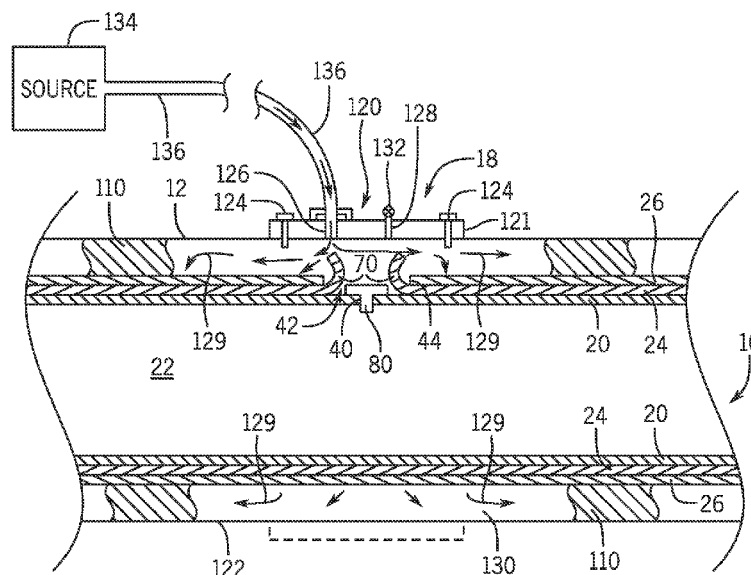


FIG. 9

(57) Abstract: A method of repairing a flexible pipe within a carrier pipe. The method then increases a first area of a first hole in the carrier pipe. The method then bends a first layer of the flexible pipe around a second hole in the first layer. The method then patches a third hole in a second layer of the flexible pipe.

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*