

CERTIFICATE OF AVAILABILITY OF A CERTIFIED PATENT DOCUMENT IN A DIGITAL LIBRARY

The International Bureau certifies that a copy of the patent application indicated below has been available to the WIPO Digital Access Service since the date of availability indicated, and that the patent application has been available to the indicated Office(s) as of the date specified following the relevant Office code:

Document details: Country/Office: US

Filing date: 22 Dec 2022 (22.12.2022)

Application number: 18087480

Date of availability of document: 31 Jan 2023 (31.01.2023)

The following Offices can retrieve this document by using the access code:

AR, AT, AU, BE, BR, CA, CL, CN, CO, DK, EA, EE, EP, ES, FI, GB,
GE, IB, IE, IL, IN, IT, JP, KR, LT, LV, MA, MC, MX, NL, NO, NZ, PL,
SE, US

Date of issue of this certificate: 05 Dec 2023 (05.12.2023)



THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

December 05, 2023

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 18/087,480
FILING DATE: *December 22, 2022*

THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS CONVENTION, IS *US18/087,480*



Certified by

Kathi

Under Secretary of Commerce
for Intellectual Property
and Director of the United States
Patent and Trademark Office

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	12397.256
		Application Number	
Title of Invention	Barrier Transition Framework		
The application data sheet is part of the provisional or nonprovisional application for which it is being submitted. The following form contains the bibliographic data arranged in a format specified by the United States Patent and Trademark Office as outlined in 37 CFR 1.76. This document may be completed electronically and submitted to the Office in electronic format using the Electronic Filing System (EFS) or the document may be printed and included in a paper filed application.			

Secrecy Order 37 CFR 5.2:

☐	Portions or all of the application associated with this Application Data Sheet may fall under a Secrecy Order pursuant to 37 CFR 5.2 (Paper filers only. Applications that fall under Secrecy Order may not be filed electronically.)
--------------------------	---

Inventor Information:

Inventor	1				Remove	
Legal Name						
Prefix	Given Name	Middle Name	Family Name	Suffix		
	Benjamin	Fraser	Powell			
Residence Information (Select One) ☒ US Residency ☐ Non US Residency ☐ Active US Military Service						
City	King City, ON		Country of Residence ⁱ	CA		
Mailing Address of Inventor:						
Address 1		14929 Keele Street				
Address 2						
City	King City		State/Province	ON		
Postal Code	L7B 1A3		Country ⁱ	CA		
Inventor	2				Remove	
Legal Name						
Prefix	Given Name	Middle Name	Family Name	Suffix		
	William	Price	Longstreet			
Residence Information (Select One) ☒ US Residency ☐ Non US Residency ☐ Active US Military Service						
City	Newport Beach	State/Province	CA	Country of Residence	US	
Mailing Address of Inventor:						
Address 1		P. O. Box 13222				
Address 2						
City	Newport Beach		State/Province	CA		
Postal Code	92658		Country ⁱ	US		
Inventor	3				Remove	
Legal Name						
Prefix	Given Name	Middle Name	Family Name	Suffix		
	Dean	Clinton	Albersen			

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	12397.256
		Application Number	
Title of Invention	Barrier Transition Framework		

Residence Information (Select One) ☒ US Residency ☐ Non US Residency ☐ Active US Military Service					
City	Ingram	State/Province	TX	Country of Residence	US
Mailing Address of Inventor:					
Address 1	499 Connie Lane #557				
Address 2					
City	Ingram	State/Province	TX		
Postal Code	78025	Country i	US		
All Inventors Must Be Listed - Additional Inventor Information blocks may be generated within this form by selecting the Add button.					Add

Correspondence Information:

Enter either Customer Number or complete the Correspondence Information section below. For further information see 37 CFR 1.33(a).			
☐ An Address is being provided for the correspondence Information of this application.			
Customer Number	62529		
Email Address	patents@solidcounsel.com	Add Email	Remove Email

Application Information:

Title of the Invention	Barrier Transition Framework		
Attorney Docket Number	12397.256	Small Entity Status Claimed	☒
Application Type	Nonprovisional		
Subject Matter	Utility		
Total Number of Drawing Sheets (if any)	10	Suggested Figure for Publication (if any)	

Filing By Reference:

Only complete this section when filing an application by reference under 35 U.S.C. 111(c) and 37 CFR 1.57(a). Do not complete this section if application papers including a specification and any drawings are being filed. Any domestic benefit or foreign priority information must be provided in the appropriate section(s) below (i.e., "Domestic Benefit/National Stage Information" and "Foreign Priority Information").

For the purposes of a filing date under 37 CFR 1.53(b), the description and any drawings of the present application are replaced by this reference to the previously filed application, subject to conditions and requirements of 37 CFR 1.57(a).

Application number of the previously filed application	Filing date (YYYY-MM-DD)	Intellectual Property Authority or Country

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	12397.256
		Application Number	
Title of Invention	Barrier Transition Framework		

Publication Information:

☐	Request Early Publication (Fee required at time of Request 37 CFR 1.219)
☐	Request Not to Publish. I hereby request that the attached application not be published under 35 U.S.C. 122(b) and certify that the invention disclosed in the attached application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.

Representative Information:

Representative information should be provided for all practitioners having a power of attorney in the application. Providing this information in the Application Data Sheet does not constitute a power of attorney in the application (see 37 CFR 1.32). Either enter Customer Number or complete the Representative Name section below. If both sections are completed the customer Number will be used for the Representative Information during processing.											
<table border="1"> <tr> <td>Please Select One:</td> <td>☒ Customer Number</td> <td>US Patent Practitioner</td> <td>☐ Limited Recognition (37 CFR 11.9)</td> </tr> <tr> <td>Customer Number</td> <td colspan="3">52529</td> </tr> </table>				Please Select One:	☒ Customer Number	US Patent Practitioner	☐ Limited Recognition (37 CFR 11.9)	Customer Number	52529		
Please Select One:	☒ Customer Number	US Patent Practitioner	☐ Limited Recognition (37 CFR 11.9)								
Customer Number	52529										

Domestic Benefit/National Stage Information:

This section allows for the applicant to either claim benefit under 35 U.S.C. 119(e), 120, 121, 365(c), or 386(c) or indicate National Stage entry from a PCT application. Providing benefit claim information in the Application Data Sheet constitutes the specific reference required by 35 U.S.C. 119(e) or 120, and 37 CFR 1.78. When referring to the current application, please leave the "Application Number" field blank.

Prior Application Status	Pending	Remove	
Application Number	Continuity Type	Prior Application Number	Filing or 371(c) Date (YYYY-MM-DD)
	Claims benefit of provisional	63343828	2022-05-19
Additional Domestic Benefit/National Stage Data may be generated within this form by selecting the Add button.			Add

Foreign Priority Information:

This section allows for the applicant to claim priority to a foreign application. Providing this information in the application data sheet constitutes the claim for priority as required by 35 U.S.C. 119(b) and 37 CFR 1.55. When priority is claimed to a foreign application that is eligible for retrieval under the priority document exchange program (PDX)ⁱ the information will be used by the Office to automatically attempt retrieval pursuant to 37 CFR 1.55(i)(1) and (2). Under the PDX program, applicant bears the ultimate responsibility for ensuring that a copy of the foreign application is received by the Office from the participating foreign intellectual property office, or a certified copy of the foreign priority application is filed, within the time period specified in 37 CFR 1.55(g)(1).

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	12397.256
		Application Number	
Title of Invention	Barrier Transition Framework		

			Remove
Application Number	Country ⁱ	Filing Date (YYYY-MM-DD)	Access Code ^j (if applicable)
Additional Foreign Priority Data may be generated within this form by selecting the Add button.			Add

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications

☐ This application (1) claims priority to or the benefit of an application filed before March 16, 2013 and (2) also contains, or contained at any time, a claim to a claimed invention that has an effective filing date on or after March 16, 2013. NOTE: By providing this statement under 37 CFR 1.55 or 1.78, this application, with a filing date on or after March 16, 2013, will be examined under the first inventor to file provisions of the AIA.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	12397.256
		Application Number	
Title of Invention	Barrier Transition Framework		

Authorization or Opt-Out of Authorization to Permit Access:

When this Application Data Sheet is properly signed and filed with the application, applicant has provided written authority to permit a participating foreign intellectual property (IP) office access to the instant application-as-filed (see paragraph A in subsection 1 below) and the European Patent Office (EPO) access to any search results from the instant application (see paragraph B in subsection 1 below).

Should applicant choose not to provide an authorization identified in subsection 1 below, applicant **must opt-out** of the authorization by checking the corresponding box A or B or both in subsection 2 below.

NOTE: This section of the Application Data Sheet is **ONLY** reviewed and processed with the **INITIAL** filing of an application. After the initial filing of an application, an Application Data Sheet cannot be used to provide or rescind authorization for access by a foreign IP office(s). Instead, Form PTO/SB/39 or PTO/SB/69 must be used as appropriate.

1. Authorization to Permit Access by a Foreign Intellectual Property Office(s)

A. Priority Document Exchange (PDX) - Unless box A in subsection 2 (opt-out of authorization) is checked, the undersigned hereby **grants the USPTO authority** to provide the European Patent Office (EPO), the Japan Patent Office (JPO), the Korean Intellectual Property Office (KIPO), the State Intellectual Property Office of the People's Republic of China (SIPO), the World Intellectual Property Organization (WIPO), and any other foreign intellectual property office participating with the USPTO in a bilateral or multilateral priority document exchange agreement in which a foreign application claiming priority to the instant patent application is filed, access to: (1) the instant patent application-as-filed and its related bibliographic data, (2) any foreign or domestic application to which priority or benefit is claimed by the instant application and its related bibliographic data, and (3) the date of filing of this Authorization. See 37 CFR 1.14(h)(1).

B. Search Results from U.S. Application to EPO - Unless box B in subsection 2 (opt-out of authorization) is checked, the undersigned hereby **grants the USPTO authority** to provide the EPO access to the bibliographic data and search results from the instant patent application when a European patent application claiming priority to the instant patent application is filed. See 37 CFR 1.14(h)(2).

The applicant is reminded that the EPO's Rule 141(1) EPC (European Patent Convention) requires applicants to submit a copy of search results from the instant application without delay in a European patent application that claims priority to the instant application.

2. Opt-Out of Authorizations to Permit Access by a Foreign Intellectual Property Office(s)

☐ A. Applicant **DOES NOT** authorize the USPTO to permit a participating foreign IP office access to the instant application-as-filed. If this box is checked, the USPTO will not be providing a participating foreign IP office with any documents and information identified in subsection 1A above.

☐ B. Applicant **DOES NOT** authorize the USPTO to transmit to the EPO any search results from the instant patent application. If this box is checked, the USPTO will not be providing the EPO with search results from the instant application.

NOTE: Once the application has published or is otherwise publicly available, the USPTO may provide access to the application in accordance with 37 CFR 1.14.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	12397.256
		Application Number	
Title of Invention	Barrier Transition Framework		

Applicant Information:

Providing assignment information in this section does not substitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.

Applicant	1	Remove
If the applicant is the inventor (or the remaining joint inventor or inventors under 37 CFR 1.45), this section should not be completed. The information to be provided in this section is the name and address of the legal representative who is the applicant under 37 CFR 1.43; or the name and address of the assignee, person to whom the inventor is under an obligation to assign the invention, or person who otherwise shows sufficient proprietary interest in the matter who is the applicant under 37 CFR 1.46. If the applicant is an applicant under 37 CFR 1.46 (assignee, person to whom the inventor is obligated to assign, or person who otherwise shows sufficient proprietary interest) together with one or more joint inventors, then the joint inventor or inventors who are also the applicant should be identified in this section. Clear		
☒ Assignee	Legal Representative under 35 U.S.C. 117	Joint Inventor
Person to whom the inventor is obligated to assign.		Person who shows sufficient proprietary interest
If applicant is the legal representative, indicate the authority to file the patent application, the inventor is:		
Name of the Deceased or Legally Incapacitated Inventor:		
If the Applicant is an Organization check here. ☒		
Organization Name	Vandorf BT1 Inc.	
Mailing Address Information For Applicant:		
Address 1	180 Ram Forest Road	
Address 2		
City	Stouffville	State/Province ON
Country	CA	Postal Code L4A 2G8
Phone Number		Fax Number
Email Address		
Additional Applicant Data may be generated within this form by selecting the Add button. Add		

Assignee Information including Non-Applicant Assignee Information:

Providing assignment information in this section does not substitute for compliance with any requirement of part 3 of Title 37 of CFR to have an assignment recorded by the Office.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	12397.256
		Application Number	
Title of Invention	Barrier Transition Framework		

Assignee	1			
Complete this section if assignee information, including non-applicant assignee information, is desired to be included on the patent application publication. An assignee-applicant identified in the "Applicant Information" section will appear on the patent application publication as an applicant. For an assignee-applicant, complete this section only if identification as an assignee is also desired on the patent application publication.				
Remove				
If the Assignee or Non-Applicant Assignee is an Organization check here. ☐				
Prefix	Given Name	Middle Name	Family Name	Suffix
Mailing Address Information For Assignee including Non-Applicant Assignee:				
Address 1				
Address 2				
City		State/Province		
Country ⁱ		Postal Code		
Phone Number		Fax Number		
Email Address				
Additional Assignee or Non-Applicant Assignee Data may be generated within this form by selecting the Add button.				Add

Signature:

Remove

NOTE: This Application Data Sheet must be signed in accordance with 37 CFR 1.33(b). However, if this Application Data Sheet is submitted with the **INITIAL** filing of the application and either box A or B is not checked in subsection 2 of the "Authorization or Opt-Out of Authorization to Permit Access" section, then this form must also be signed in accordance with 37 CFR 1.14(c).

This Application Data Sheet **must** be signed by a patent practitioner if one or more of the applicants is a **juristic entity** (e.g., corporation or association). If the applicant is two or more joint inventors, this form must be signed by a patent practitioner, **all** joint inventors who are the applicant, or one or more joint inventor-applicants who have been given power of attorney (e.g., see USPTO Form PTO/AIA/81) on behalf of **all** joint inventor-applicants.

See 37 CFR 1.4(d) for the manner of making signatures and certifications.

Signature	/John G. Fischer/		Date (YYYY-MM-DD)	2022-12-22	
First Name	John G.	Last Name	Fischer	Registration Number	41748
Additional Signature may be generated within this form by selecting the Add button.				Add	

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	12397.256
		Application Number	
Title of Invention	Barrier Transition Framework		

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether the Freedom of Information Act requires disclosure of these records.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspections or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

BARRIER TRANSITION FRAMEWORK

RELATED APPLICATION

[001] This application claims priority to Provisional Application 63/343,828, filed May 19, 2022.

FIELD OF THE DISCLOSURE

[002] This disclosure relates to a preassembled traffic barrier system designed for the special application of road to anchor transitions, such as a bridge transition, where the transition resist deflection in multiple planes.

BACKGROUND

[003] Road-side guardrails installed along highways protect motorists from the road-side hazards including non-recoverable slopes and rigid objects. The most common type of road-side protection is the American Association of State Highway and Transportation Officials (AASHTO) M 180 W-Beam Guardrail Panel (guardrail). Guardrail and other types of road-side safety devices are deemed ‘crashworthy’ or proven acceptable for use under specified conditions either through physical crash testing via AASHTO Manual of Assessing Safety Hardware (MASH) or in-service performance.

[004] Where road-side guardrail is to be connected to a rigid object, such as a bridge barrier or bridge pier, the approach road-side guardrail is gradually stiffened so vehicular pocketing, snagging, or penetration at the point of connection between transition and a rigid object can be avoided. Pocketing is an undesirable behavior of guardrail involving relatively large lateral displacements within a relatively short longitudinal distance that can result in large longitudinal decelerations as the front of a vehicle contacts a portion of a barrier deformed at a sharp angle relative to the vehicle's path.

[005] Penetration is the overall failure and separation of a guardrail, allowing an impacting vehicle to access an area of concern/hazard the guardrail intends to shield. Snagging is contact between a portion of a vehicle, such as a wheel or frame element, and the guardrail component that is approximately perpendicular to the normal direction of vehicle travel. The most common type of snagging is when a wheel engages the side of a guardrail post. The degree of snagging depends on the degree of engagement.

[006] Transitions for locations where drainage features (e.g., curbs, drainage drop-basins, curb inlets, drainage swales, and public utilities (telecommunications, natural gas)) are constructed directly adjacent to the rigid object are susceptible to initiating vehicular instability that can, in some instances, adversely affect the crashworthiness of the transition. However, some transition designs incorporate a curb to reduce the probability of a vehicle snagging on the end of a ridged bridge railing. The most common method in practice today uses nesting or stacked w-beam or thrie-beam guardrail panels to stiffen the transition to a ridged object that has a relative short distance between the last transition post and the ridged object and, in many cases, is equivalent to a single guardrail transition post spacing (i.e., 2ft. thru 3ft 6in.). This distance is problematic for utilities requiring a larger gap distance between the last transition post and the ridged object being shielded.

[007] In addition to its application for use as a bridge transition, the disclosed barrier transition framework can be used in other locations where transitioning from a flexible barrier system to a solid barrier system. These would include, for example, transitioning from a W-Beam roadside barrier system to a rigid concrete or steel structure. The benefits of this application include providing a structure of intermediate flexibility capable of transitioning over drainage and utility features as described above.

[008] Attempts to lengthen the transition span have resulted in systems that lack the tolerable transitional deflection limits needed for a bridge approach. One experimental attempt to increase the resistance to deflection when the span was increased included placing wooden poles between field-side facing and road-side facing W beams. While it provided additional resistance to deflection in the horizontal direction, it did not provide or allow the benefits of the spatial end anchoring of the present invention, required a field-side thrie-beam, required on site assembly which was cumbersome, and failed to provide the level of resistance to deflection achieved by the present invention.

[009] A significant disadvantage of conventional guardrail bridge transitions is that they often conflict with utilities and drain structures. A disadvantage of conventional guardrail bridge transitions is that there is an eight-foot gap between the anchoring and post supported guardrail. The guardrail spanning is required to accommodate underground utilities and/or drop basin inlets for off structure drainage, rendering the guardrail spanning this space unreliable. Another

disadvantage of conventional guardrail bridge transitions is that they are often anchored in poor soil conditions.

[0010] Another disadvantage of conventional guardrail bridge transitions is that they require an overpour of filler on hillsides leading to bridges. These provide unreliable foundations for anchoring guardrail posts. Another disadvantage of conventional guardrail bridge transitions is that drainage at the transition degrades the overpour of filler and poor soil surrounding support posts. Another disadvantage of conventional guardrail bridge transitions as they provide a guardrail that is too rigid, or too soft. An example of a guardrail that is too soft is one in which posts are secured in soft soil.

[0011] Therefore, there is a need for a guardrail bridge transition system that overcomes these disadvantages and provides a safer entry and exit between roads and bridges. Specifically, there is a need for a guardrail bridge transition assembly that accommodates utilities and drainage structures without interference, is not subject to poor soil foundation for securing guardrail posts and is not subject to excessive erosion by drainage. There is also a need for a guardrail bridge transition system that provides a greater resistance to deflection, even though extending over a longer span before attachment to a subterranean post. Finally, there is a need for a guardrail bridge transition that minimizes on location assembly and construction requirements.

[0012] An advantage of the embodiments of the disclosed guardrail bridge transition system is that it provides an improved performance that is applicable to both existing transition installations and new transition installations. Another advantage of the embodiments of the disclosed invention is that it comprises a sled component that arrives on-site preassembled and ready for installation. Another advantage of the embodiments of the disclosed invention is that it provides significant time savings on schedule, where post driving operations are reduced by eliminating at least three larger transition posts.

[0013] Another advantage of the present invention is that it can be used to replace in-service transitions, as well as new installations. Another advantage of the present invention is that it is fully reversible for use on either side of the road. Another advantage of the present invention is that it provides a visually seamless integration with a three-beam guardrail installed before the transition.

[0014] A primary advantage of the embodiments of the disclosed invention is that it provides a traffic bridge barrier system that uniquely resists deflection in multiple planes, thus providing

safer entry and exit transitions between roads and bridges. Another advantage of the embodiments of the disclosed invention is that it provides a bridge transition assembly that accommodates utilities and drainage structures without interference by means of a longer span than conventional transitions. Another advantage of the embodiments of the disclosed invention is that it provides a system that is less vulnerable to failure due to poor soil features proximate to the bridge.

[0015] Another advantage of the embodiments of the disclosed invention is that it provides a foundation for securing guardrail posts that is less vulnerable to excessive erosion by drainage.

[0016] In summary, the disclosed invention provides a unique solution to the engineering constraints and challenges of providing a bridge transition that provides increased safety and cost-efficient installation and repair and overcomes the disadvantages of known solutions. Further, the embodiments of the disclosed invention satisfy the crash test requirements of AASHTO MASH Test Level 3, Test 3-20, and Test 3-21.

[0017] The advantages and features of the embodiments presently disclosed will become more readily understood from the following detailed description and appended claims when read in conjunction with the accompanying drawings in which like numerals represent like elements.

SUMMARY

[0018] A transition framework and transition assembly are disclosed. In one embodiment, a prefabricated transition framework for use when transitioning from standard road barriers to an anchored road barrier, such as at the foundation of a bridge transition, is disclosed. The transition framework is a hot-dipped galvanized steel having a pair of 4½" OD schedule 80 tubular chords. The ends of the tubulars are beveled and welded in solid connection to an approach deflector at one end and an anchorage plate at the other to maintain the tubulars in stiff parallel orientation.

[0019] As disclosed herein, the transition framework uniquely resists deflection in two planes, the horizontal plane and the vertical plane, thus providing a significantly improved performance over known previous designs. By anchoring the ends of the transition chords, vertical expansion of the impacted thrie-beam panel is resisted, absorbing more energy in the thrie-beam distortion and providing greater resistance to horizontal displacement. This allows the transition framework to provide the required stiffness while also providing a greater gap distance of 108 inches (9 ft.) between the center of a connecting transition post and a ridged bridge barrier. The tested and

proven uninterrupted span of 105 inches accommodates all utilities at any transition requiring additional room (i.e., drop-basin for off-structure drainage, public utilities, etc.).

[0020] In one embodiment, a transition for anchorage to a concrete barrier at a bridge entrance is disclosed, comprising a tubular upper chord having first and second ends. A tubular lower chord is provided, also having first and second ends. The first end of each of the upper and lower chords is welded to an approach deflector. The second end of each of the upper and lower chords is welded to an anchorage plate. The transition as described provides a preassembled solid four bar assembly with exceptional strength and resistance to deflection in both the vertical and horizontal planes.

[0021] In another embodiment, the approach deflector is connectable to a subterranean mounted guardrail post, and the end anchor is connectable to a bridge anchor.

[0022] In another embodiment, the upper chord and lower chord have a 4.5" outside diameter. In another embodiment, the upper chord and lower chord are schedule 80 tubulars. In another embodiment, the center of the upper chord to the center of the lower chord is separated by a distance of 15¼".

[0023] In another embodiment, the first and second ends of the tubular upper chord and the first and second ends of the tubular lower chord are beveled.

[0024] In another embodiment, the approach deflector further comprises a weldment panel welded to the first beveled end of the upper and lower chords, a connection panel disposed at an obtuse angle to the weldment panel, and a plurality of vertically separated fastener holes on the connection panel for fastener connection to an embedded post. A deflection panel is disposed at an obtuse angle to the connection panel to prevent snagging of vehicles impacting the approach deflector.

[0025] In another embodiment, the anchorage plate further comprises a weldment panel welded to the second beveled end of each of the upper and lower chords, and a connection panel disposed at an obtuse angle to the weldment panel. A plurality of vertically separated holes is provided on the connection panel for receiving fasteners for connection to a concrete block at a bridge entrance.

[0026] In another embodiment, a bridge transition assembly is disclosed having a transition framework comprising a tubular upper chord having first and second ends, a tubular lower chord

having first and second ends, an approach deflector welded to the first end of the upper and lower chords, and an anchorage plate welded to the second end of the upper and lower chords. The approach deflector is affixed to a guardrail post, and the anchorage plate is affixed to a bridge anchor. A first thrie-beam guardrail having a first end and an opposite second end is positioned on the road-side of the bridge transition, and over the upper and lower chords. The thrie-beam is affixed to the approach deflector and the guardrail post at its first end, and to a thrie-beam terminal connector at its second end. The terminal connector is attached to the anchorage plate and bridge anchor at its second end.

[0027] In a related embodiment, a second thrie-beam guardrail is provided, having a first end and an opposite second end. The second thrie-beam is positioned on top of the first thrie-beam in a nested configuration. The second thrie-beam is affixed to the first thrie-beam, the approach deflector, and the guardrail post at its first end, and to the first thrie-beam at its second end.

[0028] In another related embodiment, a field-side thrie-beam guardrail is provided.

BRIEF DESCRIPTION OF THE FIGURES

[0029] FIG. 1 is a front (road-side) perspective view of the bridge transition in accordance with one embodiment of the invention.

[0030] FIG. 2 is a back (field-side) perspective view of the bridge transition in accordance with the embodiment of FIG. 1.

[0031] FIG. 3 is a front side view of the bridge transition in accordance with the embodiment of FIGS. 1-2.

[0032] FIG. 4 is a top view of the bridge transition in accordance with the embodiment of FIGS. 1-3.

[0033] FIG. 5 is a back side view of the bridge transition in accordance with the embodiment of FIGS. 1-4.

[0034] FIG. 6 is an end view of the bridge transition of the present invention, illustrated as having thrie-beams positioned on the front and the back of the embodiment of the bridge transition disclosed in FIGS. 1-5, and as connected together with threaded fasteners.

[0035] FIG. 7 is a front side sectional view of a thrie-beam terminal connector connected to the embodiment of the bridge transition disclosed in FIGS. 1-7.

[0036] FIG. 8 is an isometric exploded view of an assembly including the disclosed embodiment of the bridge transition positioned as the transition between road-side thrie-beam guardrails and a bridge anchor.

[0037] FIG. 9 is an isometric view of the assembled components of FIG. 8, including the disclosed embodiment of the bridge transition as the transition between road-side thrie-beam guardrails and a bridge anchor.

[0038] FIG. 10 is a top view of a MASH Test 3-20 vehicle crash test which was performed in which the disclosed bridge transition was used as the bridge transition and secured with front and back side thrie-beams.

[0039] FIG. 11 is a top view of a MASH Test 3-21 vehicle crash test which was performed in which the disclosed bridge transition was used as the bridge transition and secured with front and back side thrie-beams.

DETAILED DESCRIPTION

[0040] The following description is presented to enable any person skilled in the art to make and use the invention and is provided in the context of a particular application and its requirements. Various modifications to the disclosed embodiments will be readily apparent to those skilled in the art, and the general principles defined herein may be applied to other embodiments and applications without departing from the spirit and scope of the present invention. Thus, the present invention is not intended to be limited to the embodiments shown but is to be accorded the widest scope consistent with the principles and features disclosed herein.

[0041] FIG. 1 is a front (road-side) perspective view of a transition framework 1, illustrated in accordance with an embodiment of the invention. As seen in FIG.1, transition framework 1 comprises a tubular upper chord 10 and a lower chord 20. As best seen in FIG. 4, a first end 12 of upper chord 10 and a first end 22 of lower chord 20 are welded to a road-side 32 of an approach deflector 30. A second end 14 of upper chord 10 and a second end 24 of lower chord 20 are welded to road-side 52 of an anchorage plate 50.

[0042] FIG. 2 is a back (field-side) perspective view of transition framework 1 in accordance with the embodiment of FIG. 1. As seen in this view, approach deflector 30 has a field-side 34 opposite to road-side 32. Anchorage plate 50 has a field-side 54 opposite to road-side 52.

[0043] FIG. 3 is a front side view of transition framework 1 in accordance with the embodiment of FIGS. 1-2. In FIG. 3, the road-side view of transition framework 1 is seen. Anchorage plate 50 has a plurality of fastener holes 60. Fastener holes 60 receive fasteners 62 for connection of anchorage plate 50 to a concrete bridge anchor 100. Approach deflector 30 has a plurality of fastener holes 40. Fastener holes 40 receive fasteners 62 for connection of approach deflector 30 to a guardrail post 110.

[0044] FIG. 4 is a top view of transition framework 1 in accordance with the embodiment of FIGS. 1-3. FIG. 5 is a back side view of transition framework 1 in accordance with the embodiment of FIGS. 1-4. As illustrated in FIG. 4, approach deflector 30 comprises a weldment panel 36 to which are welded the first beveled ends 12 and 22 of tubular upper chord 10 and lower chord 20.

[0045] A connection panel 38 is disposed at an obtuse angle to weldment panel 36. As best seen in FIG. 5, fastener holes 40 are disposed on connection panel 38. Referring back to FIG. 4, a deflector panel 42 is disposed at an obtuse angle to connection panel 38. As best seen in FIG. 11 Deflector panel 42 serves to discourage an impacting vehicle from snagging on guardrail post 110.

[0046] In one embodiment, upper chord 10 and lower chord 20 have an outside diameter of approximately 4.5". In another embodiment, upper chord 10 and lower chord 20 are made from schedule 80 tubulars.

[0047] FIG. 6 is an end view of transition framework 1, illustrated as incorporated in bridge transition assembly 5. In this embodiment, a first thrie-beam 70 is positioned on the road-side of transition framework 1, and over upper chord 10 and lower chord 20 so as to nest first thrie-beam 70 over upper chord 10 and lower chord 20. In the embodiment illustrated, a field-side thrie-beam 80 is positioned on the field-side of transition framework 1, and over upper chord 10 and lower chord 20 so as to nest field-side thrie-beam 80 over upper chord 10 and lower chord 20. Fasteners 90 connect first road-side thrie-beam 70 to field-side thrie-beam 80 between upper chord 10 and lower chord 20.

[0048] Also, in the embodiment illustrated, a second road-side thrie-beam 74 is nested over first road-side thrie-beam 70 to provide additional strength and resistance to deformation. As seen in this view, thrie-beams 70 and 74 have an accordion-like profile that is presented road-side for impact by a vehicle. The center of thrie-beams 70 and 74 would normally expand thrie-beams 70 and 74 vertically in response to a direct impact.

[0049] Unique to the present invention, the solid four bar configuration of transition framework 1 resists vertical expansion of thrie-beams 70 and 72, and coincident horizontal deformation. As disclosed, the impact of the disclosed invention requires horizontal buckling at the center of thrie-beams 70 and 72 between upper chord 10 and lower chord 20, which absorbs much more energy than horizontal expansion if upper chord 10 and lower chord 20 were not solidly anchored at their ends. The benefits increase resistance to deflection and increased probability of a repairable bridge transition on lower to medium vehicle impacts.

[0050] FIG. 7 is a front side sectional view of a thrie-beam terminal connector 72 incorporated in the disclosed embodiments of bridge transition assembly 5. As illustrated in FIG. 7 and as best seen in FIG. 8, terminal connector 72 is connected to anchor plate 50 of transition framework 1 and concrete anchor 100 at the entrance to a bridge. Fasteners 62 are located in receiving holes on terminal connector 72 and pass through fastener holes 60 on connector plate 52 of anchorage plate 50 (see FIG. 3).

[0051] FIG. 8 is an isometric exploded view of bridge transition assembly 5. As seen in FIG. 8, transition framework 1 is positioned as the transition between guardrail post 110 and concrete anchor 100. Fasteners 90 connect transition framework 1 and road-side thrie-beams 70 and 74 to guardrail post 110. Guardrail post 110 is the first connecting guardrail post on the approach side of concrete anchor 100.

[0052] As further seen in FIG. 8, fasteners 62 rigidly connect anchor plate 50 of transition framework 1 and terminal connector 72 to concrete anchor 100 at the entrance to a bridge. First road-side thrie-beam 70 is positioned over upper chord 10 and lower chord 20. Second road-side thrie-beam 74 is nested over first road-side thrie-beam 70 to provide additional strength and resistance to deformation.

[0053] Field-side thrie-beam 80 is positioned on the field-side of transition framework 1, and over upper chord 10 and lower chord 20 so as to nest field-side thrie-beam 80 over upper chord 10 and lower chord 20. Fasteners 90 connect first road-side thrie-beam 70 to field-side thrie-beam 80 between upper chord 10 and lower chord 20 to form an envelope over upper chord 10 and lower chord 20.

[0054] First road-side thrie-beam 70 and second road-side thrie-beam 74 are connected to terminal connector 72 by threaded fasteners 62. The opposite ends of first road-side thrie-beam

70 and second road-side thrie-beam 74 are connected by threaded fasteners 90 to approach deflector 30 and guiderail post 110.

[0055] FIG. 9 is an isometric view of the assembled components of FIG. 8, illustrating bridge transition assembly 5 assembled with transition framework 1 extending between guardrail post 110 and concrete anchor 100 at a bridge entrance. In this manner, construction of bridge transition assembly 5 is complete.

[0056] It is noted that the disclosed embodiments permit the addition of one or more second road-side thrie-beams 74 as nested over first road-side thrie-beam 70. It is further noted that the disclosed embodiments permit the inclusion of one or more field-side thrie-beams 80. Unique to the present invention, transition framework 1 does not require field-side thrie-beam 80 to support rigidly anchored upper chord 10 and lower chord 20, facilitating the very advantageous premanufacture of transition framework 1 for use at the bridge location.

[0057] Transition framework 1, as preassembled, can advantageously be used to replace in-service transitions, as well as new installations. Additionally, transition framework 1 is fully reversible for use on either side of the road. Transition framework 1 provides further significant installation time savings in that it eliminates up to four guardrail posts for post pounding operations.

[0058] In the embodiments illustrated, transition framework 1 and bridge transition assembly 5 permit a successfully MASH tested distance of 108 inches (9 ft.) between the center of guardrail post 110 and the edge of ridged concrete anchor 100. The tested and proven span of 108 inches provides 105 inches of uninterrupted space that accommodates all utilities at a structure requiring additional room (i.e., drop-basin for off-structure drainage, public utilities, etc.) to obtain the benefits of the invention. The increased span increases reliability as the primary guidepost is further distanced from the soil at the bridge interface.

[0059] FIG. 10 is a top view of a MASH Test 3-20 vehicle crash test which was performed in which the disclosed transition framework 1 was incorporated into bridge transition assembly 5 as the bridge transition tested in accordance with MASH testing protocols. In FIG. 10, the vehicle has a centerline of travel 120, and a line of critical impact point, or CIP 122. To satisfy the test requirements, vehicle centerline 120 as at an angle of 25° to bridge transition assembly 5.

[0060] In the TL3-20 testing, a 2,425-lb vehicle impacts the critical impact point (CIP) of the transition at a nominal impact speed and angle of 62 mi/h (100 km/hr) and 25 degrees, respectively. This test investigates a barrier's ability to successfully contain and redirect a small passenger vehicle.

[0061] On April 19, 2022, testing was performed on the disclosed embodiment of the invention having a single field-side thrie beam 80 and a pair of nested road-side thrie beams 70 and 74. Table 1 below demonstrates the success of bridge transition assembly 5 in actual MASH testing on a small sedan weighing 2,603 lbs. performed by Applus IDIADA KARCO Engineering.

[0062] TABLE 1

General Information

Test Agency: Applus IDIADA KARCO Engineering, LLC

Test Number: P42020-01

Test Date: 4/19/22

Test Article: Northern Infrastructure Products, Bridge Connection Test Vehicle

Test Vehicle

Description: 1100C, MASH 3-20

Test Inertial Mass: 1101 kg

Gross Static Mass: 1183 kg

Impact Conditions

Speed: 101.6 km/h

Angle: 25.0 degrees

Occupant Risk Factors

Impact Velocity (m/s) at 0.0762 seconds on left side of interior
x-direction 7.1

y-direction -10.7

THIV (km/hr): 45.3 at 0.0748 seconds on left side of interior

THIV (m/s): 12.6

Ridedown Accelerations (g's)

x-direction -17.1 (0.0770 - 0.0870 seconds)

y-direction 6.5 (0.2046 - 0.2146 seconds)

PHD (g's): 17.5 (0.0769 - 0.0869 seconds)

ASI: 2.59 (0.0523 - 0.1023 seconds)

Max. 50msec Moving Avg. Accelerations (g's)

x-direction -15.0 (0.0381 - 0.0881 seconds)

y-direction 20.3 (0.0263 - 0.0763 seconds)

z-direction -3.5 (0.0033 - 0.0533 seconds)

Max Roll, Pitch, and Yaw Angles (degrees)

Roll -12.6 (0.3501 seconds)

Pitch -5.1 (0.2347 seconds)

Yaw 52.9 (0.5998 seconds)

[0063] FIG. 11 is a top view of a MASH Test 3-21 with a test vehicle that was performed with the disclosed transition framework 1 incorporated into bridge transition assembly 5, tested in accordance with MASH testing protocols. In FIG. 11, the vehicle has a centerline of travel 120, and a line of critical impact point, or CIP 122. To satisfy the test requirements, vehicle centerline 120 as at an angle of 25° to bridge transition assembly 5. As seen in FIG. 11 Deflector panel 42 serves to discourage an impacting vehicle from snagging on guardrail post 110.

[0064] In the MASH 3-21 test, a 5000-lb pickup truck impacts the CIP of the transition at a nominal impact speed and angle of 62 mi/h and 25 degrees, respectively. This test investigates a barrier's ability to successfully contain and redirect light trucks and sport utility vehicles.

[0065] On April 19, 2022, testing was performed on the disclosed embodiment of the invention having a single field-side thrie beam 80 and a pair of nested road-side thrie beams 70 and 74. Table 2 below demonstrates the success of bridge transition assembly 5 in actual testing on a 2006 Dodge Ram 1500 weighing 4,950 lbs. performed by Applus IDIADA KARCO Engineering.

[0066] TABLE 2

General Information

Test Agency: Applus IDIADA KARCO Engineering, LLC

Test Number: P42020-01

Test Date: 4/19/22

Test Article: Northern Infrastructure Products, Bridge Connection

Test Vehicle

Description: 2270P, MASH 3-21

Test Inertial Mass: 2277 kg

Gross Static Mass: 2277 kg

Impact Conditions

Speed: 100.5 km/h

Angle: 25.0 degrees

Occupant Risk Factors

Impact Velocity (m/s) at 0.0977 seconds on left side of interior

x-direction 7.1

y-direction -8.1

THIV (km/hr): 37.7 at 0.0943 seconds on left side of interior

THIV (m/s): 10.5

Ridedown Accelerations (g's)

x-direction -10.3 (0.1262 - 0.1362 seconds)

y-direction 9.2 (0.1009 - 0.1109 seconds)

PHD (g's): 12.9 (0.0942 - 0.1042 seconds)

ASI: 1.57 (0.0801 - 0.1301 seconds)

Max. 50msec Moving Avg. Accelerations (g's)

x-direction -9.8 (0.0407 - 0.0907 seconds)

y-direction 11.4 (0.0461 - 0.0961 seconds)
z-direction 4.0 (1.9955 - 2.0455 seconds)
Max Roll, Pitch, and Yaw Angles (degrees)
Roll -54.6 (0.5143 seconds)
Pitch -15.8 (1.1275 seconds)
Yaw 46.9 (0.4890 seconds))

[0067] As seen from the test results, transition framework 1 as incorporated in bridge transition assembly 5 provides a safe bridge transition for vehicles of very different sizes that passes all criteria of MASH Test 3-20 and MASH Test 3-21 requirements and provides the several advantages described herein.

[0068] It will be readily understood by a person of ordinary skill in the art that transition framework 1 and transition assembly 5 are not limited to the application of bridge entrance and egress, but can be used where other solidly anchored road barrier elements need to be transitioned to less resistive barrier elements.

[0069] Having thus described the present invention by reference to certain of its preferred embodiments, it is noted that the embodiments disclosed are illustrative rather than limiting in nature and that a wide range of variations, modifications, changes, and substitutions are contemplated in the foregoing disclosure and, in some instances, some features of the present invention may be employed without a corresponding use of the other features. Many such variations and modifications may be considered desirable by those skilled in the art based upon a review of the foregoing description of preferred embodiments. Accordingly, it is appropriate that the appended claims be construed broadly and, in a manner, consistent with the scope of the invention.

CLAIMS

1. A transition framework for connection to a concrete anchor at a bridge entrance in a bridge barrier transition, comprising:
 - a tubular upper chord having first and second ends;
 - a tubular lower chord having first and second ends;
 - an approach deflector welded to the first end of the upper and lower chords; and,
 - an anchorage plate welded to the second end of each of the upper and lower chords.
2. The transition framework of claim 1, further comprising:
 - the approach deflector connectable to a guardrail post; and,
 - the anchorage plate connectable to a bridge anchor.
3. The transition framework of claim 1, further comprising:
 - the upper chord and lower chord being 4.5" outside diameter, schedule 80 tubulars.
4. The transition framework of claim 1, further comprising:
 - wherein impact forced separation of the upper chord and the lower chord is resisted by the weldment of the ends of the upper chord and the lower chord to the approach deflector and the anchorage plate.
5. The transition framework of claim 1, further comprising:
 - the first and second ends of the tubular upper chord being beveled ends; and,
 - the first and second ends of the tubular lower chord being beveled ends.
6. The transition framework of claim 5, the approach deflector further comprising:
 - a weldment panel welded to the first beveled end of the tubular upper and lower chords;
 - a connection panel disposed at an obtuse angle to the weldment panel;
 - a plurality of vertically separated fastener holes on the connection panel; and,
 - a deflection panel disposed at an obtuse angle to the connection panel.
7. The transition framework of claim 5, the anchorage plate further comprising:
 - a weldment panel welded to the second beveled end of each of the upper and lower chords;
 - a connection panel disposed at an obtuse angle to the weldment panel; and,

- a plurality of vertically separated holes on the connection panel.
8. A transition assembly, comprising:
- a transition framework comprising:
 - a tubular upper chord having first and second ends;
 - a tubular lower chord having first and second ends;
 - an approach deflector welded to the first end of each of the upper and lower chords;
 - an anchorage plate welded to the second end of each of the upper and lower chords;
 - the approach deflector affixed to a guardrail post;
 - the anchorage plate affixed to an anchor structure;
 - a first thrie-beam having a first end and an opposite second end;
 - the first thrie-beam positioned on a road-side of the transition assembly, and over the upper chord and the lower chord;
 - the first thrie-beam affixed to the approach deflector and the guardrail post at its first end, and to a terminal connector at its second end; and,
 - the terminal connector attached to the anchorage plate and the anchor structure at its second end.
9. The transition assembly of claim 8, further comprising:
- a second thrie-beam having a first end and an opposite second end;
 - the second thrie-beam positioned on top of the first thrie-beam in a nested configuration;
 - the second thrie-beam affixed to the first thrie-beam, the approach deflector, and the guardrail post at its first end; and,
 - the second thrie-beam attached to the first thrie-beam at its second end.
10. The transition assembly of claim 8, further comprising:
- a field-side thrie-beam having a first end and an opposite second end;
 - the field-side thrie-beam positioned on a field side of the transition assembly, and on top of the upper chord and the lower chord; and,
 - the field-side thrie-beam connected to the first thrie-beam with fasteners.
11. The transition assembly of claim 8, further comprising:
- the approach deflector connectable to a guardrail post; and,

- the anchorage plate connectable to the anchor.
12. The transition assembly of claim 8, further comprising:
the upper chord and lower chord being 4.5" outside diameter, schedule 80 tubulars.
 13. The transition assembly of claim 8, further comprising:
vertical expansion of the thrie-beam on impact is resisted by fixed endpoints of the upper chord and lower chord, thus increasing the resistance to deformation.
 14. The transition assembly of claim 8, the transition assembly further comprising:
the first and second ends of the tubular upper chord being beveled ends; and,
the first and second ends of the tubular lower chord being beveled ends.
 15. The transition assembly of claim 14, the anchorage plate further comprising:
a weldment panel welded to the second beveled end of each of the upper and lower chords;
a connection panel disposed at an obtuse angle to the weldment panel; and,
a plurality of vertically separated holes on the connection panel.
 16. The transition assembly of claim 9, the approach deflector further comprising:
a weldment panel welded to the first beveled end of the upper and lower chords;
a connection panel disposed at an obtuse angle to the weldment panel;
a plurality of vertically separated fastener holes on the connection panel; and,
a deflection panel disposed at an obtuse angle to the connection panel.
 17. The transition assembly of claim 9, the anchorage plate further comprising:
a weldment panel welded to the second beveled end of each of the upper and lower chords;
a connection panel disposed at an obtuse angle to the weldment panel; and,
a plurality of vertically separated holes on the connection panel.
 18. The transition assembly of claim 9, further comprising:
wherein vertical expansion of the thrie-beam on impact is resisted by its positioning over the transition framework, and the weldment of the ends of the upper chord and

the lower chord of the transition framework to the approach deflector and the anchorage plate.

ABSTRACT

A barrier transition framework such as for use as a bridge transition, is disclosed for connection to a concrete anchor at an entrance, comprising a tubular upper transition chord having first and second beveled ends, and a tubular lower transition chord having first and second beveled ends. The first beveled ends of each of the upper and lower chords are welded to an approach deflector. The second beveled ends of each of the upper and lower chords are welded to an anchorage plate. A transition assembly is formed by connecting thrie-beams to the road-side of the transition framework. A thrie-beam may also be connected to the field-side of the transition framework. The disclosed transition framework provides a preassembled solid four bar structure with exceptional resistance to deflection in both the vertical and horizontal planes, that spans a greater distance than convention transitions.

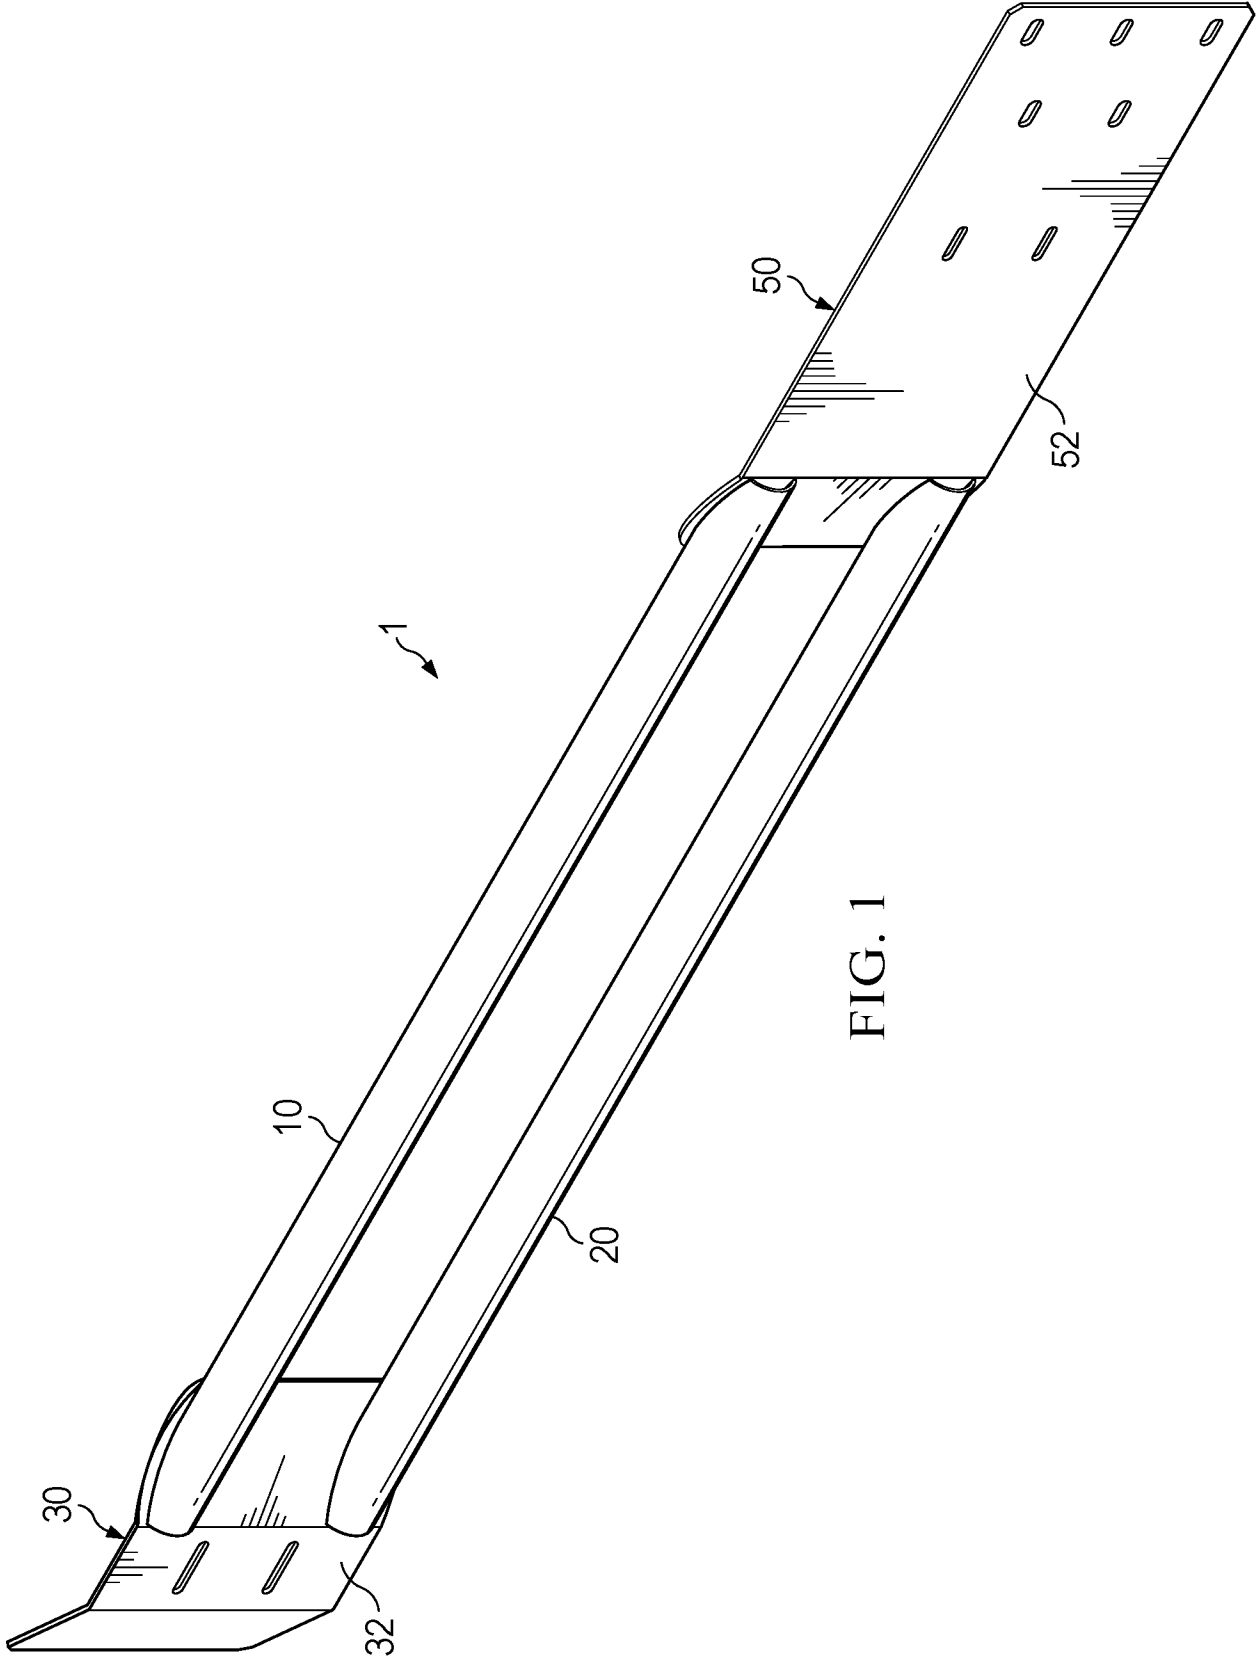
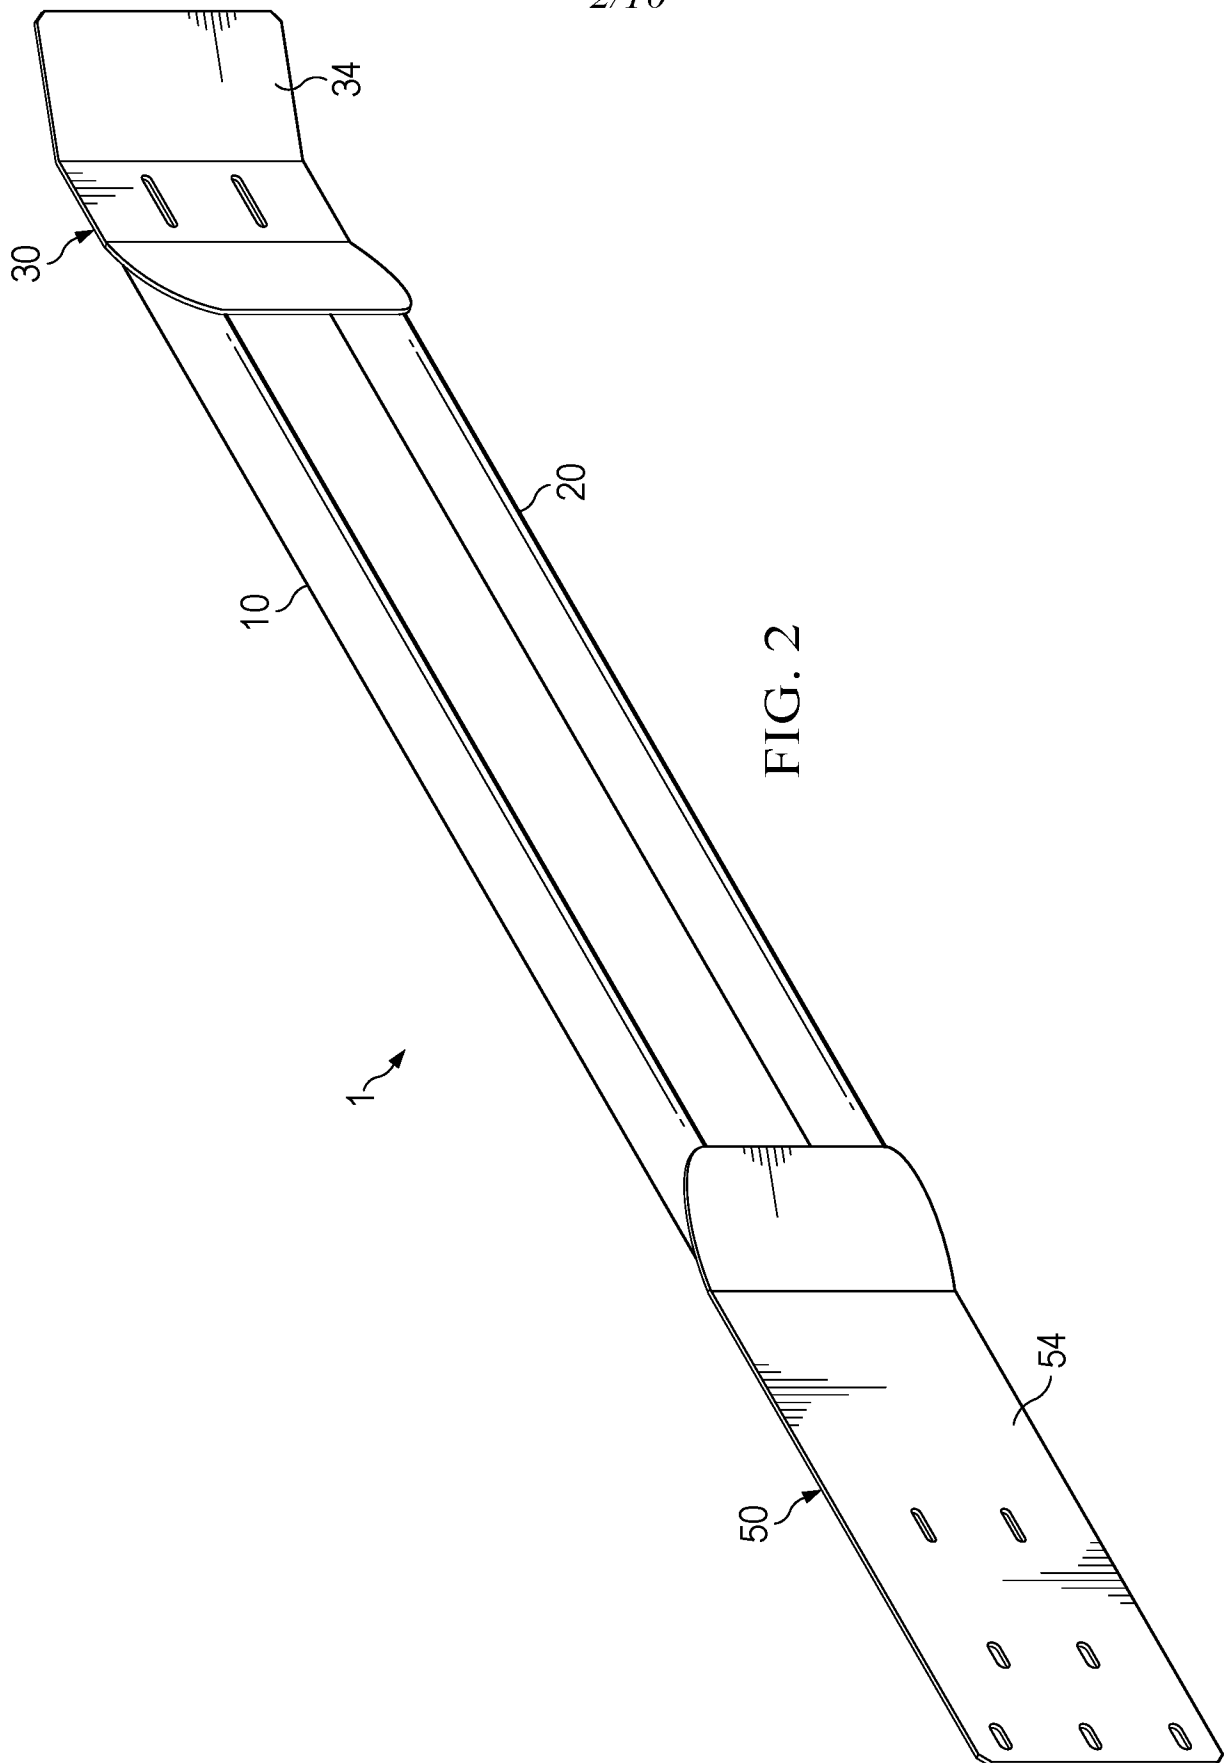


FIG. 1



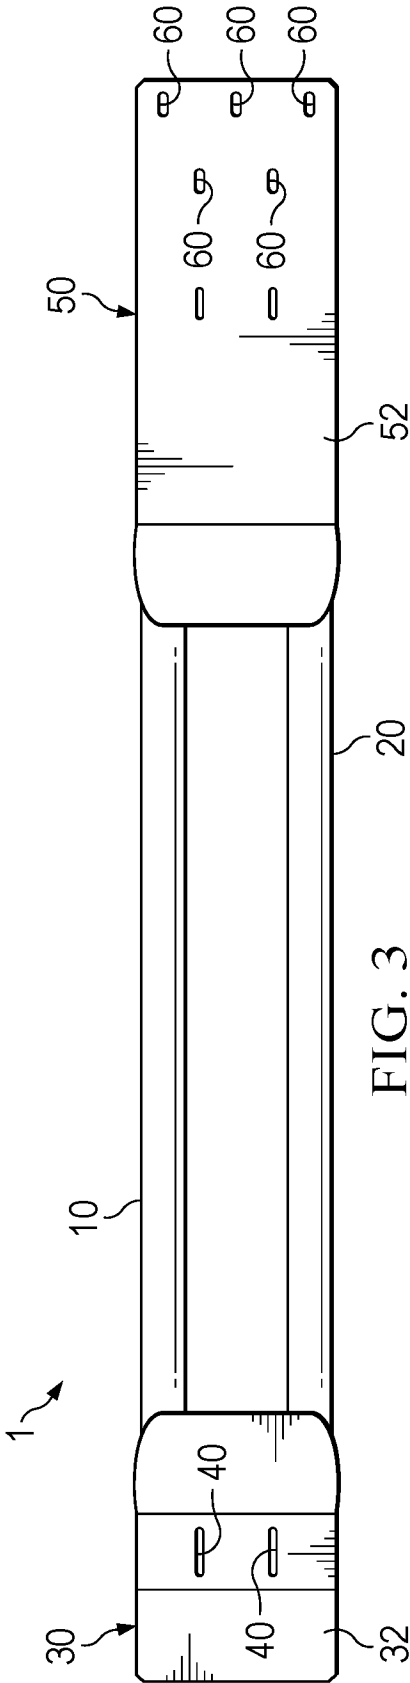


FIG. 3

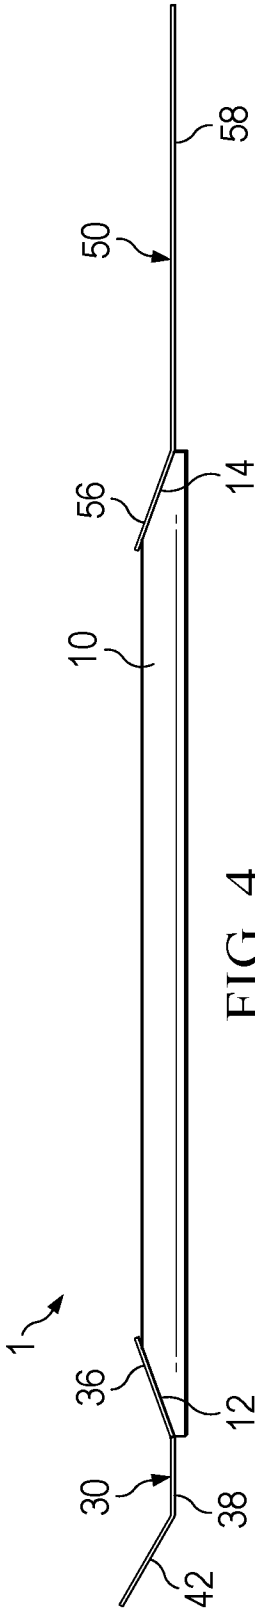
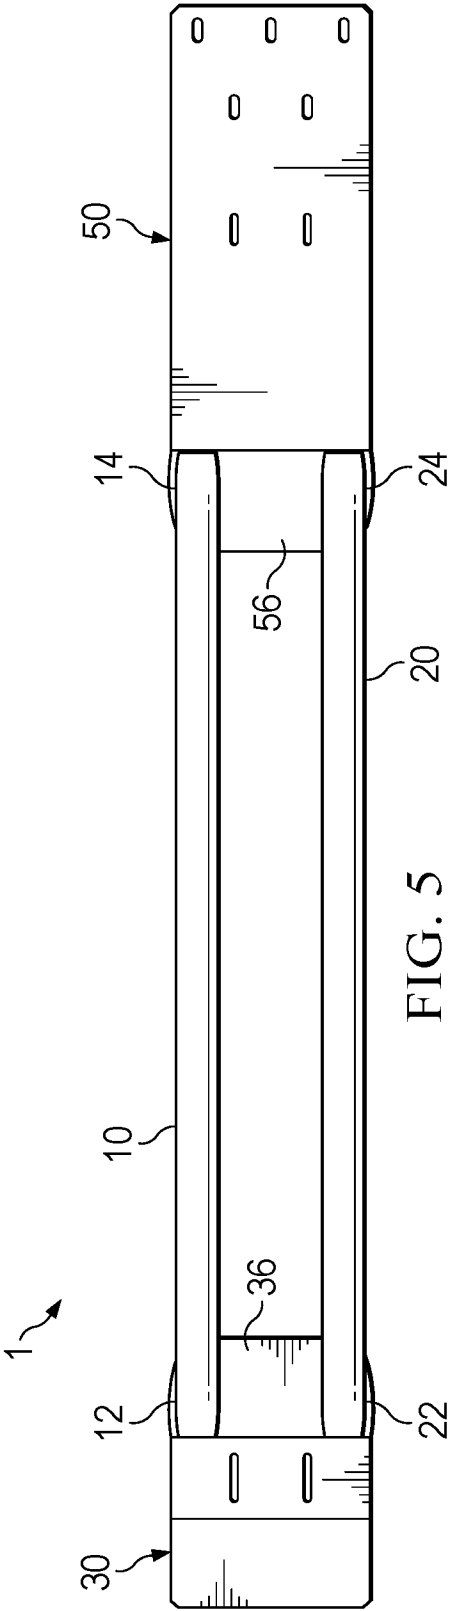


FIG. 4



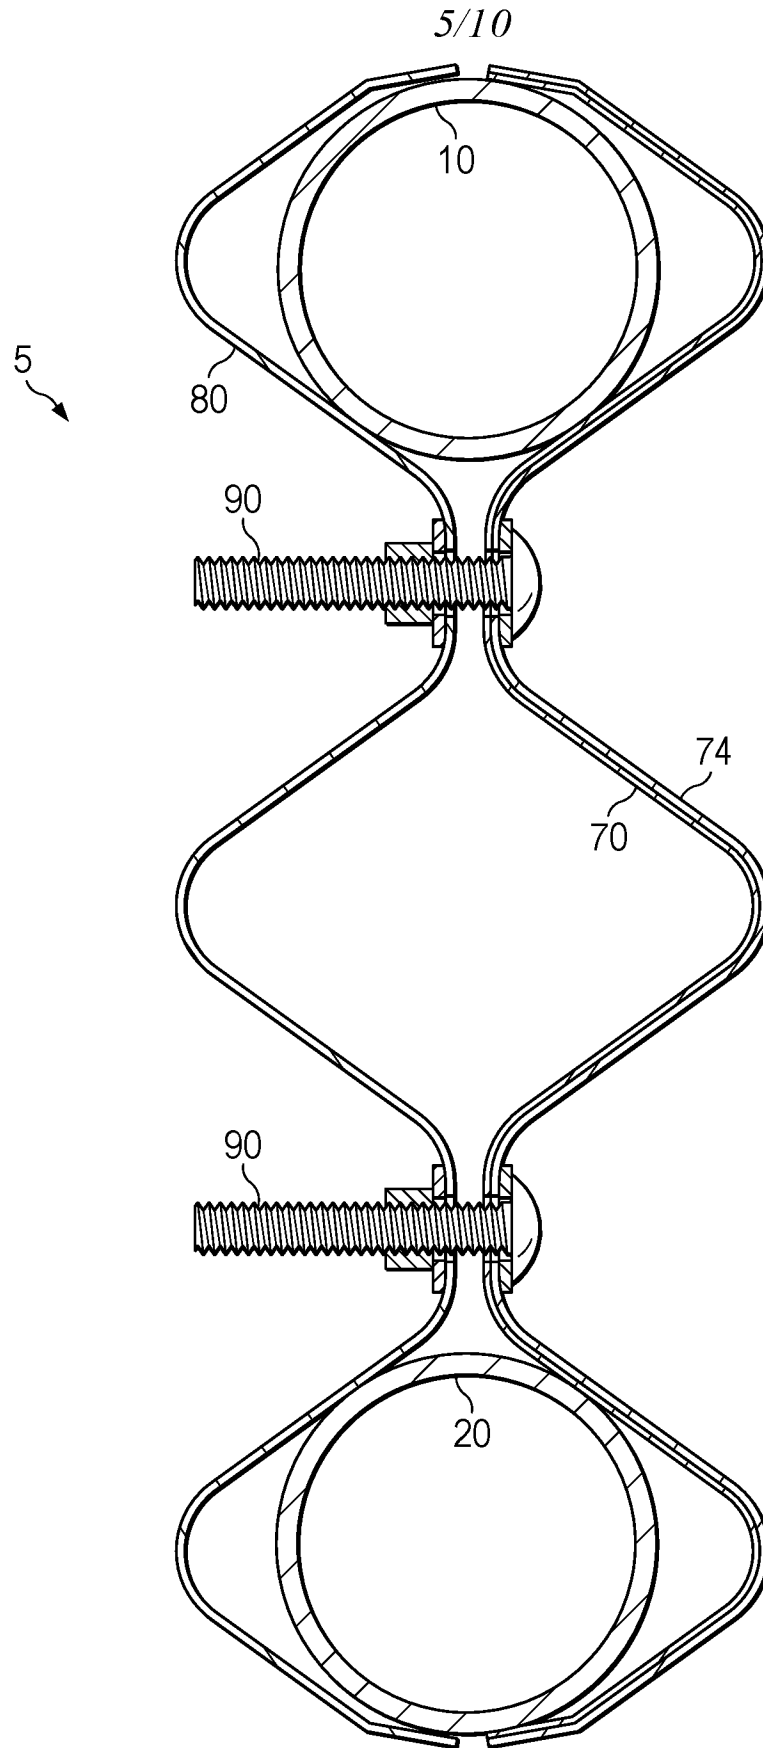


FIG. 6

6/10


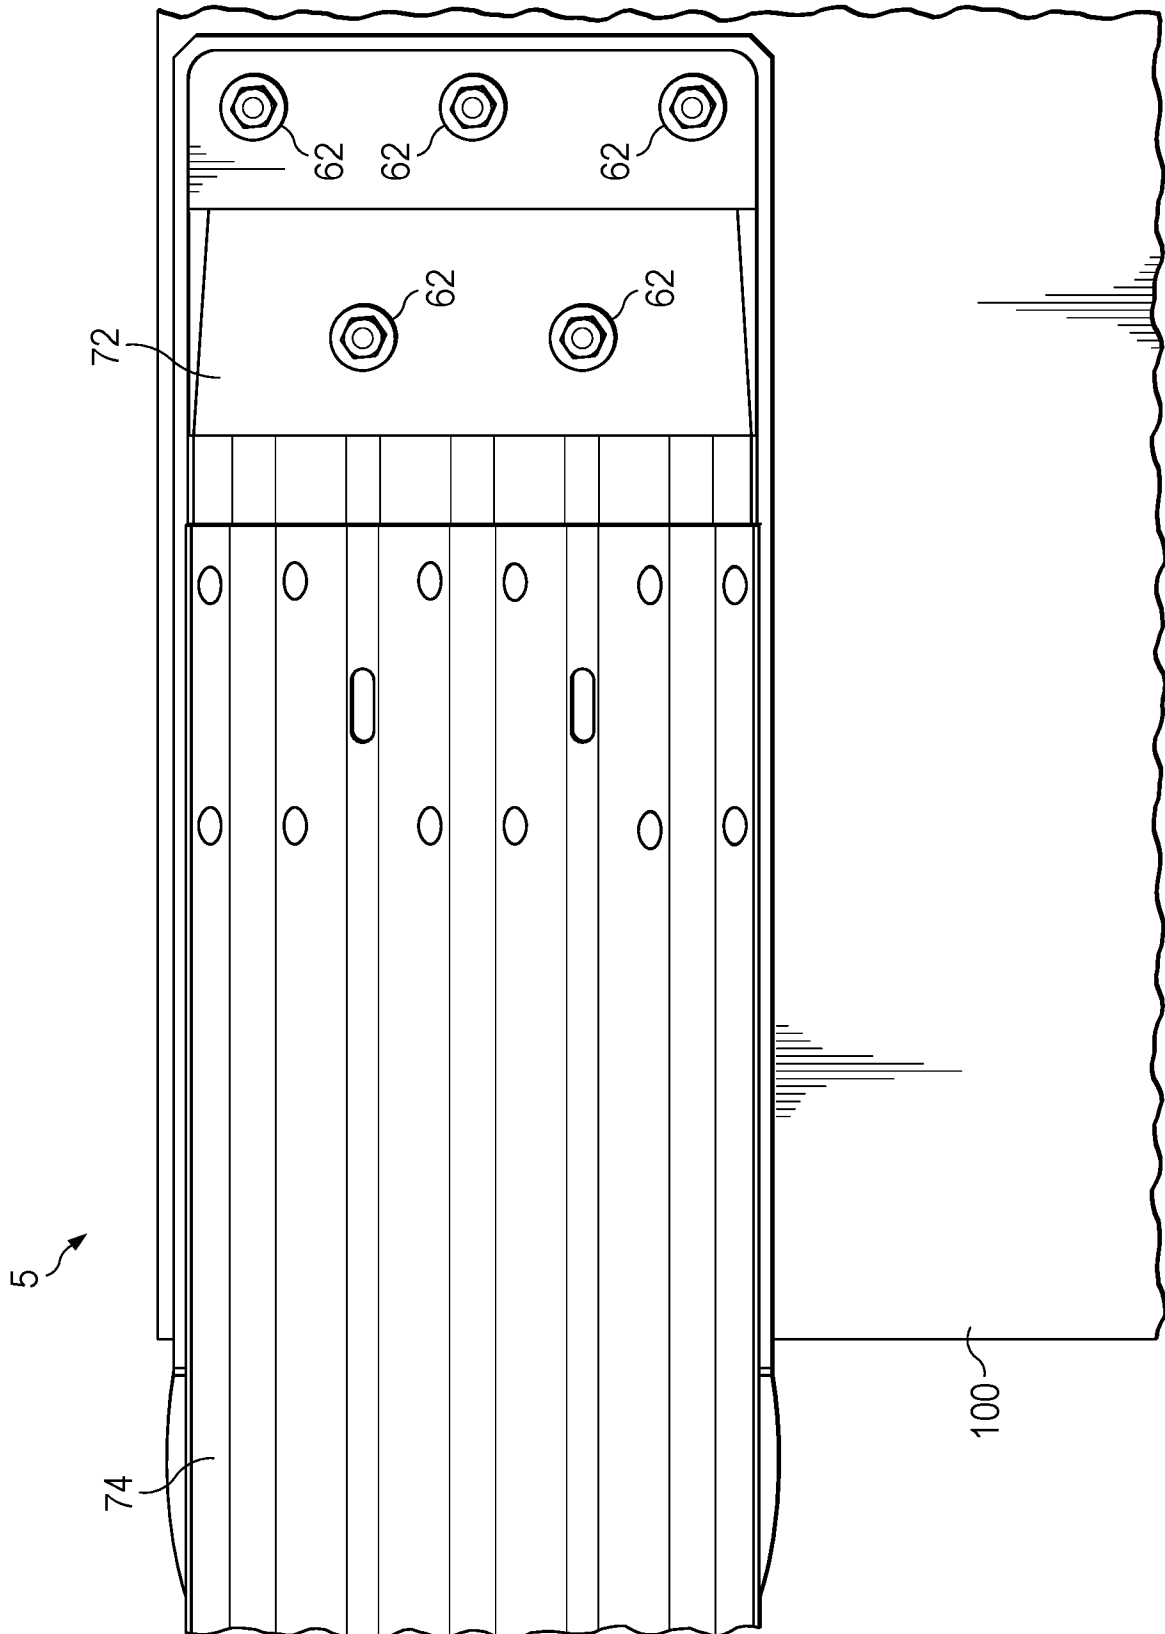


FIG. 7

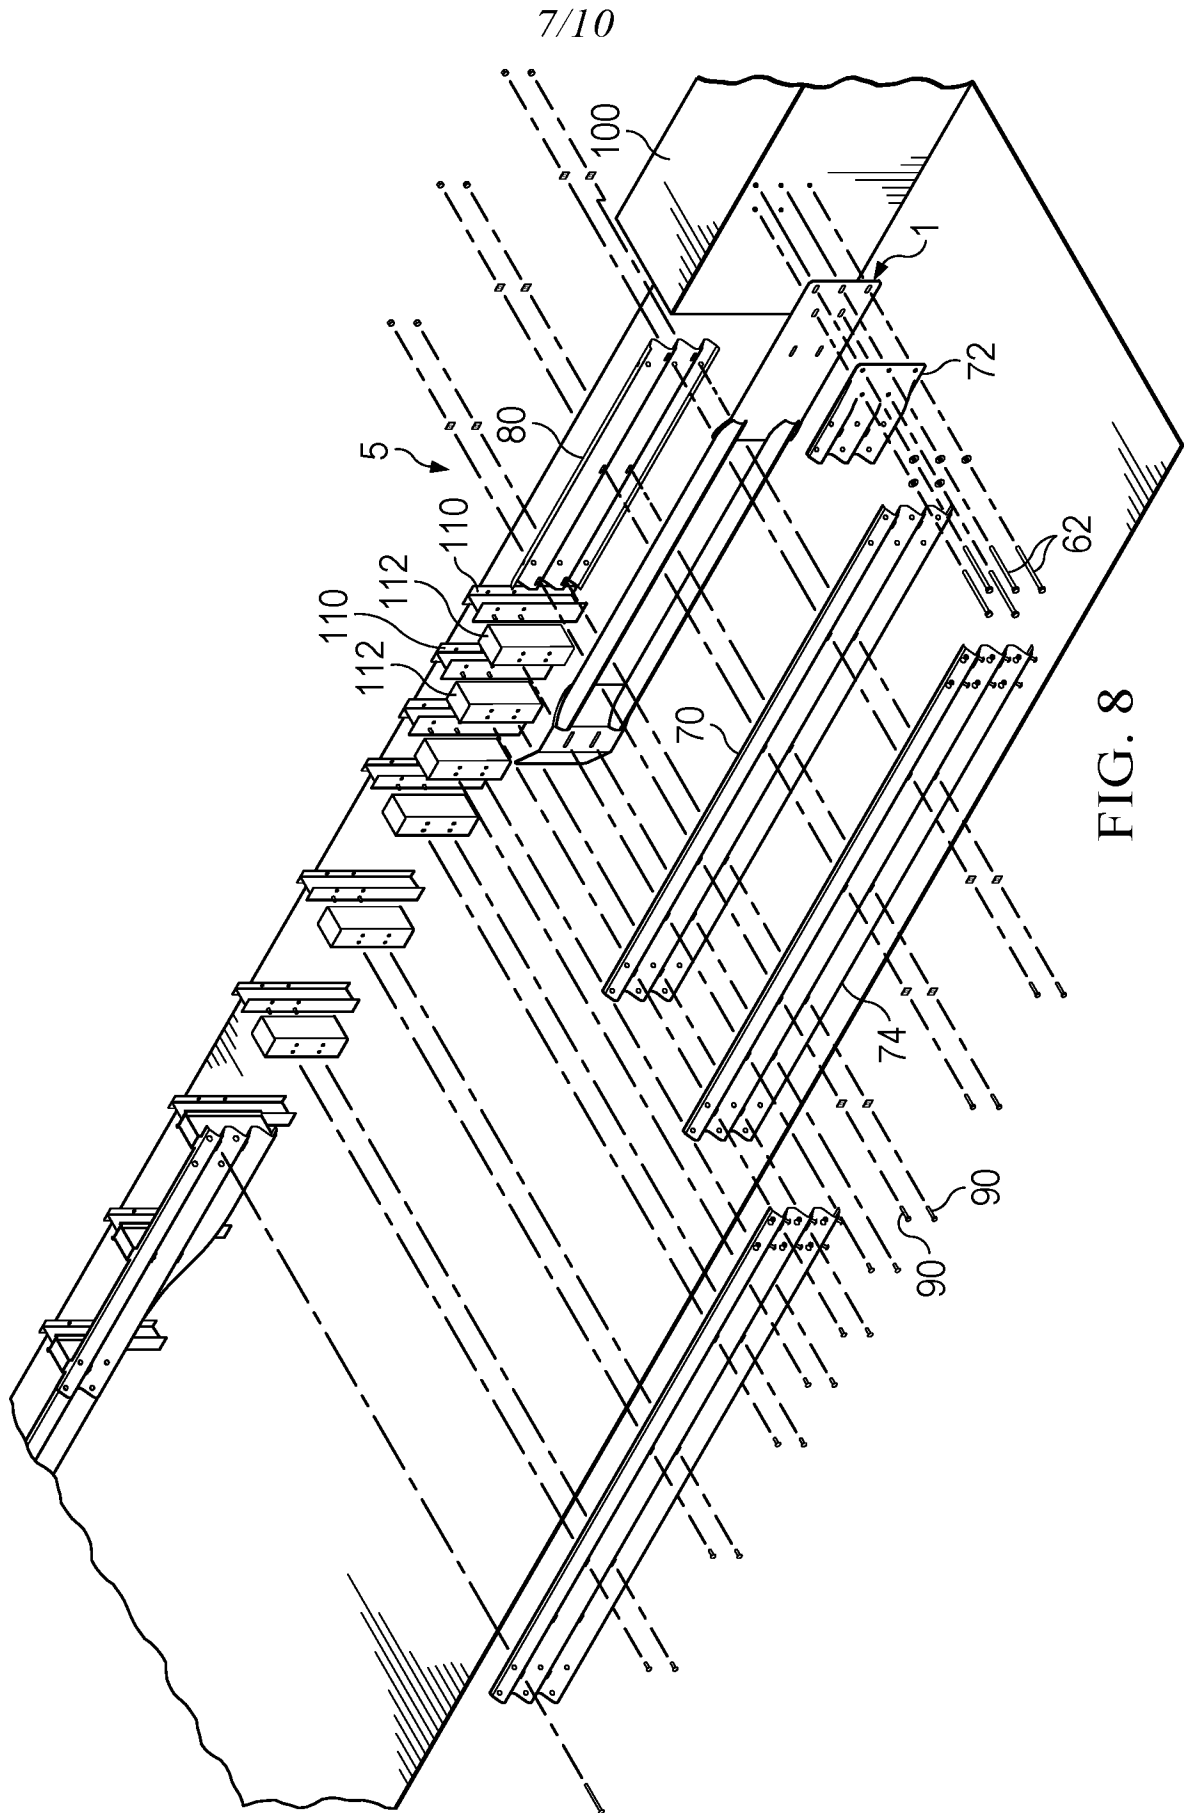

8/10

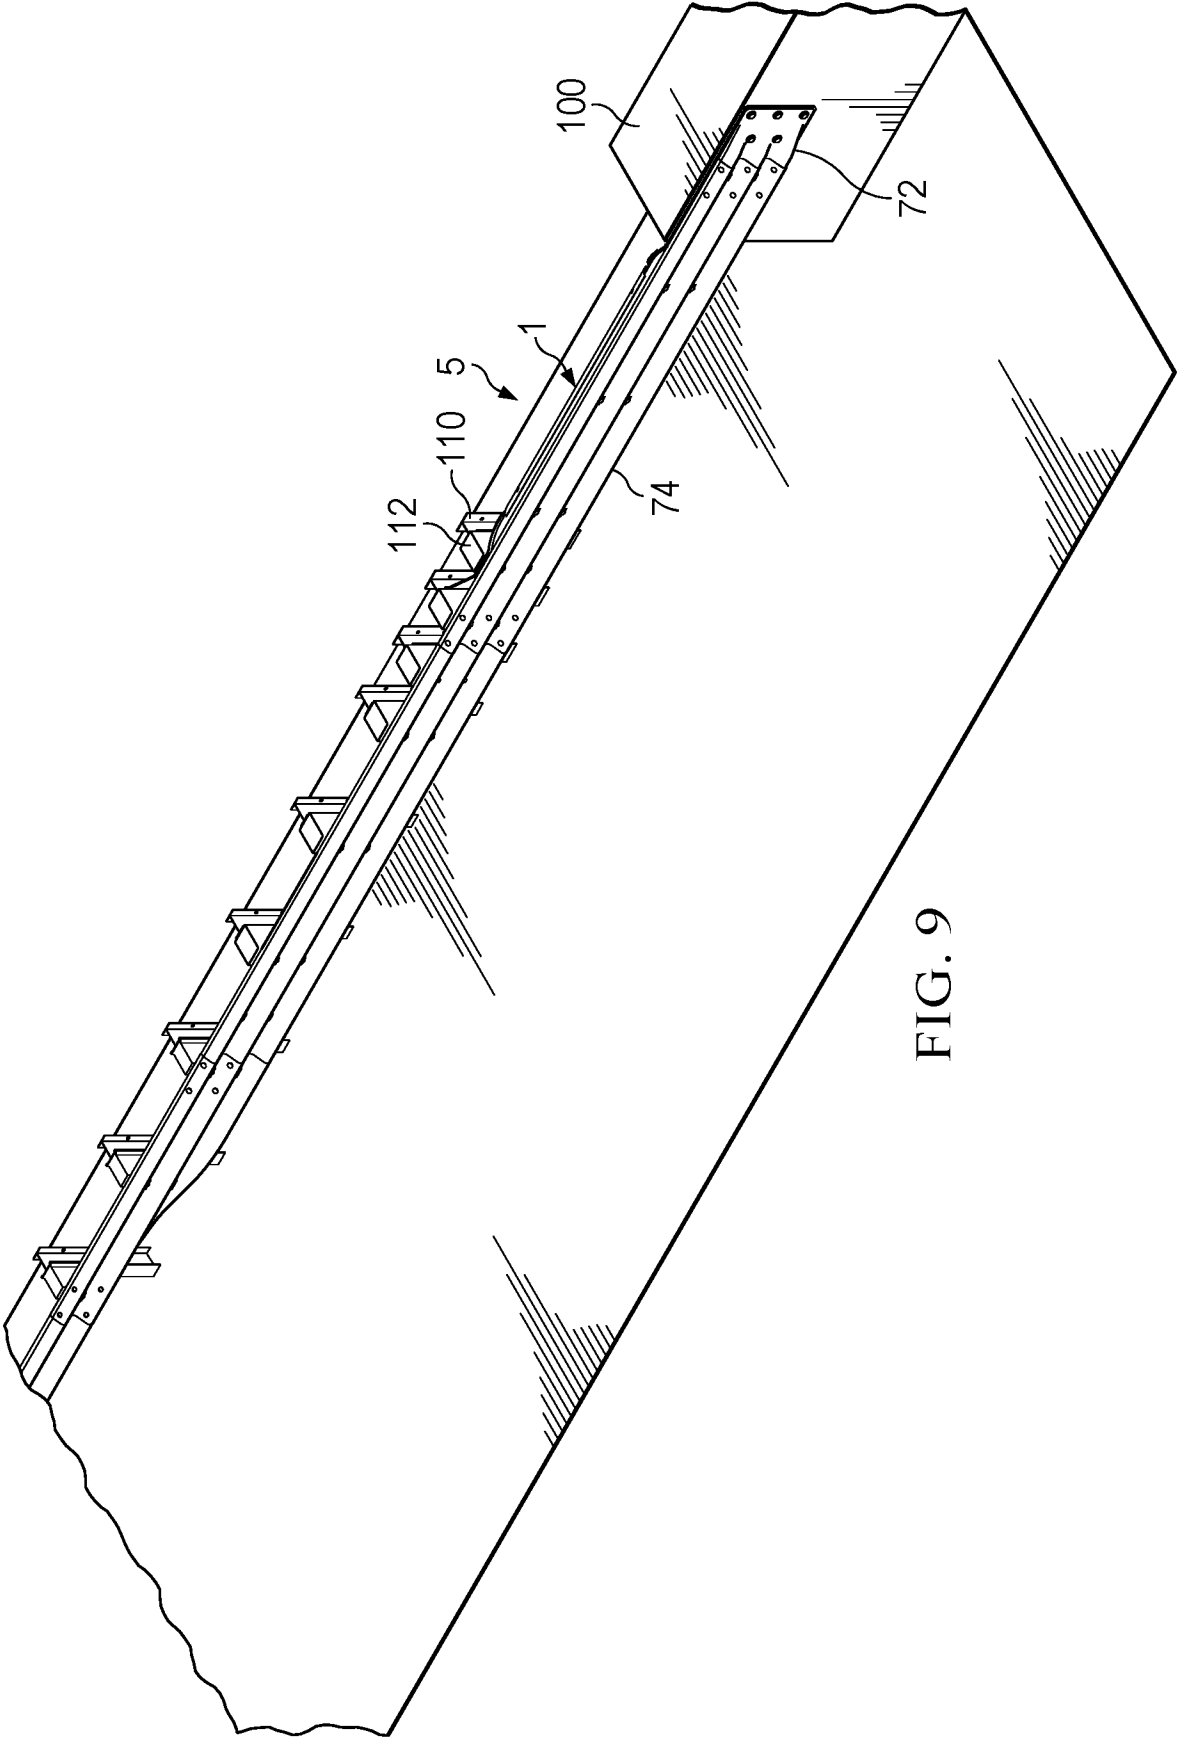


FIG. 9


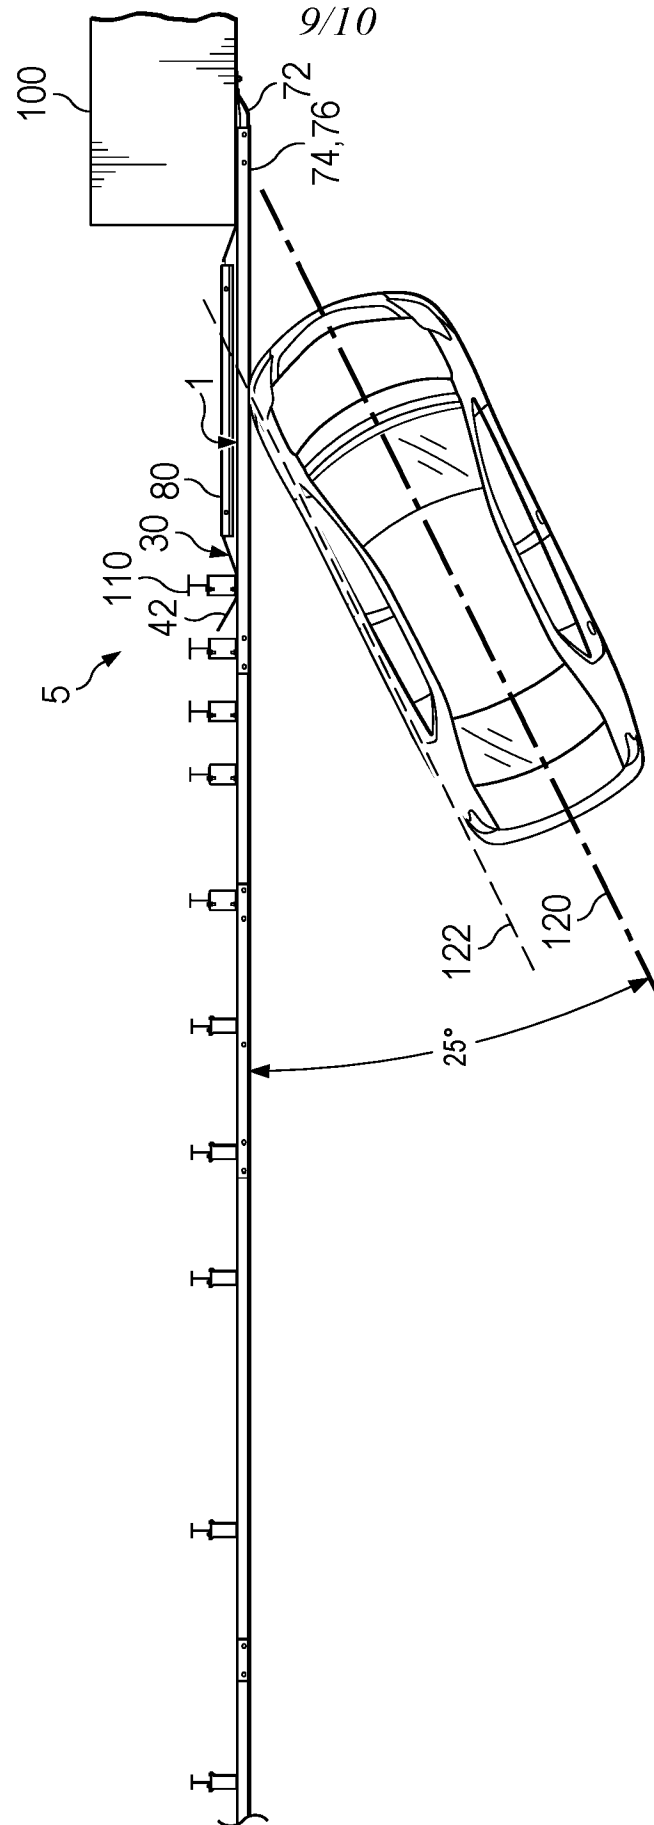


FIG. 10

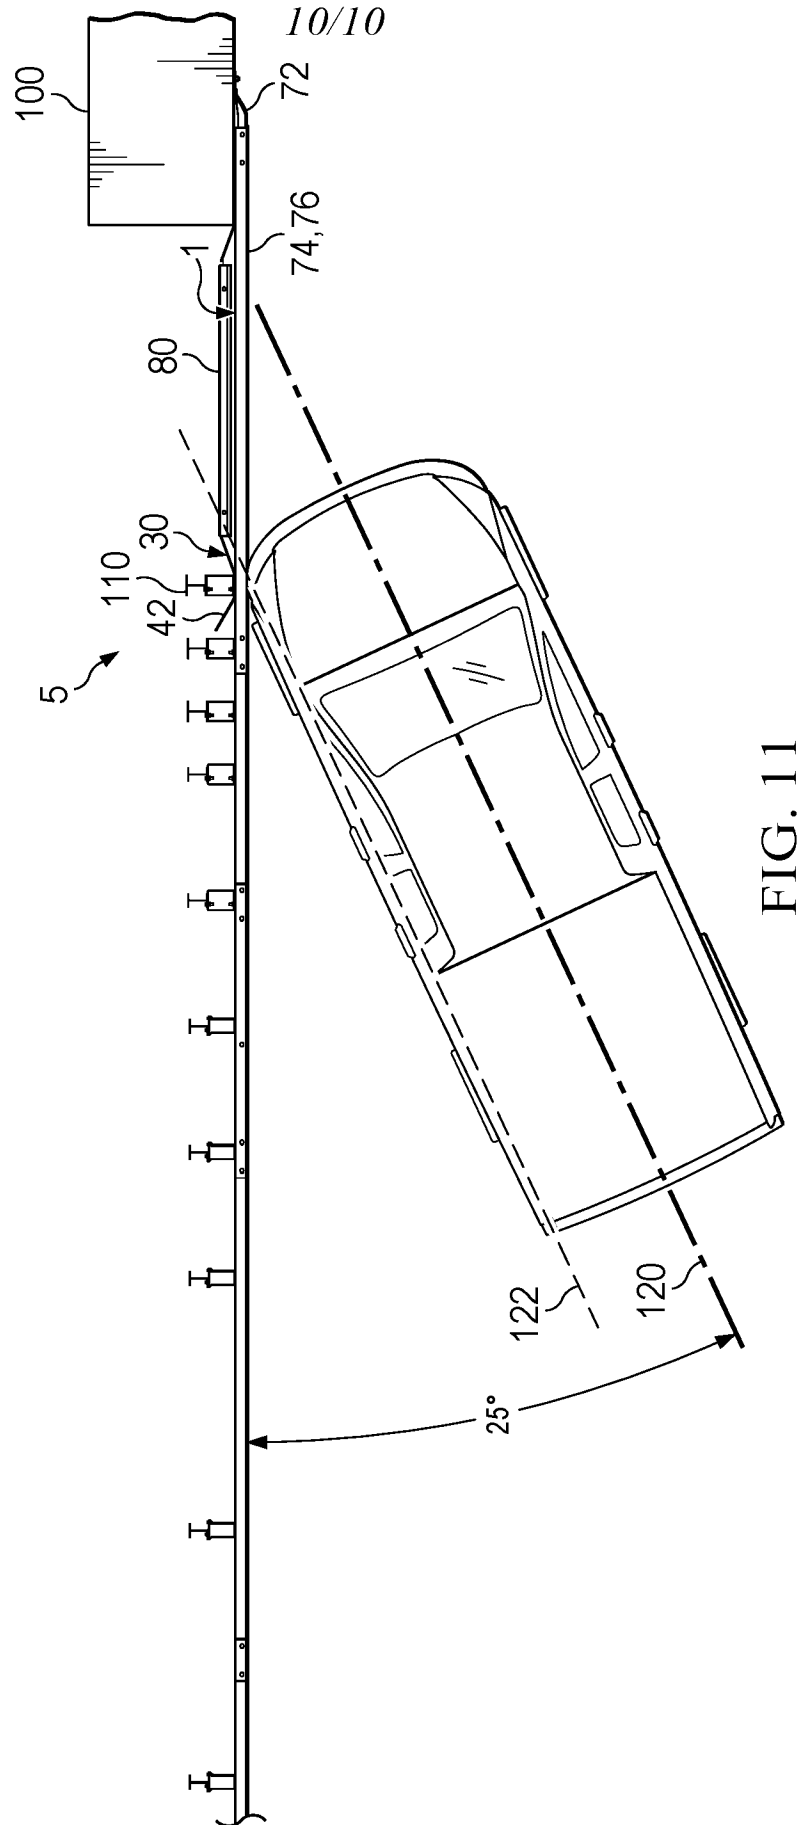

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**DECLARATION (37 CFR 1.63) FOR UTILITY OR DESIGN APPLICATION USING AN
APPLICATION DATA SHEET (37 CFR 1.76)****Title of
Invention**

Barrier Transition Framework

As the below named inventor, I hereby declare that:


This declaration ☒ The attached application, or
is directed to:☐ United States application or PCT international application number _____
filed on _____

The above-identified application was made or authorized to be made by me.

I believe that I am the original inventor or an original joint inventor of a claimed invention in the application.

I hereby acknowledge that any willful false statement made in this declaration is punishable under 18 U.S.C. 1001
by fine or imprisonment of not more than five (5) years, or both.**WARNING:**

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

LEGAL NAME OF INVENTORInventor: Benjamin Fraser PowellDate (Optional): December 22, 2022Signature: 

Note: An application data sheet (PTO/SB/14 or equivalent), including naming the entire inventive entity, must accompany this form or must have been previously filed. Use an additional PTO/AIA/01 form for each additional inventor.

This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 1 minute to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

DECLARATION (37 CFR 1.63) FOR UTILITY OR DESIGN APPLICATION USING AN APPLICATION DATA SHEET (37 CFR 1.76)

Title of
Invention

Barrier Transition Framework

As the below named inventor, I hereby declare that:

This declaration
is directed to:



The attached application, or



United States application or PCT international application number _____

filed on _____

The above-identified application was made or authorized to be made by me.

I believe that I am the original inventor or an original joint inventor of a claimed invention in the application.

I hereby acknowledge that any willful false statement made in this declaration is punishable under 18 U.S.C. 1001 by fine or imprisonment of not more than five (5) years, or both.

WARNING:

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

LEGAL NAME OF INVENTOR

Inventor: William Price Longstreet

Date (Optional): 12/22/22

Signature:



Note: An application data sheet (PTO/SB/14 or equivalent), including naming the entire inventive entity, must accompany this form or must have been previously filed. Use an additional PTO/AIA/01 form for each additional inventor.

This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 1 minute to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**DECLARATION (37 CFR 1.63) FOR UTILITY OR DESIGN APPLICATION USING AN
APPLICATION DATA SHEET (37 CFR 1.76)****Title of
Invention**

Barrier Transition Framework

As the below named inventor, I hereby declare that:

This declaration
is directed to:

The attached application, or



United States application or PCT international application number _____


filed on _____

The above-identified application was made or authorized to be made by me.

I believe that I am the original inventor or an original joint inventor of a claimed invention in the application.

I hereby acknowledge that any willful false statement made in this declaration is punishable under 18 U.S.C. 1001
by fine or imprisonment of not more than five (5) years, or both.**WARNING:**

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to the USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

LEGAL NAME OF INVENTORInventor: Dean Clinton AlbersonDate (Optional): December 22, 2022Signature: 

Note: An application data sheet (PTO/SB/14 or equivalent), including naming the entire inventive entity, must accompany this form or must have been previously filed. Use an additional PTO/AIA/01 form for each additional inventor.

This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 1 minute to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

Electronic Acknowledgement Receipt

EFS ID:	47265137
Application Number:	18087480
International Application Number:	
Confirmation Number:	8184
Title of Invention:	Barrier Transition Framework
First Named Inventor/Applicant Name:	Benjamin Fraser Powell
Customer Number:	52529
Filer:	John G. Fischer/Karen Roper
Filer Authorized By:	John G. Fischer
Attorney Docket Number:	12397.256
Receipt Date:	22-DEC-2022
Filing Date:	
Time Stamp:	17:14:19
Application Type:	Utility under 35 USC 111(a)

Payment information:

Submitted with Payment	yes
Payment Type	CARD
Payment was successfully received in RAM	\$ 3000
RAM confirmation Number	E2022BLH17211335
Deposit Account	502032
Authorized User	Karen Roper

The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:

37 CFR 1.17 (Patent application and reexamination processing fees)

37 CFR 1.21 (Miscellaneous fees and charges)

File Listing:					
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Track One Request	TrackOneRequest_aia0424_12397-256.pdf	131124	no	2
			30d18ac748fbb32ba063c26460a93f7e5d1c7fe2		
Warnings:					
Information:					
2	Application Data Sheet	ADS_12397-256.pdf	2226249	no	9
			2f24f38a64304149f9263127262ea9e7633f4b44		
Warnings:					
Information:					
3		Application_12397-256.pdf	260682	yes	18
			1cdf6970ee7e6e2e057c5fe19b76a58fbf2542b4		
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Specification		1	13	
	Claims		14	17	
	Abstract		18	18	
Warnings:					
Information:					
4	Drawings-only black and white line drawings	Drawings_12397-256.pdf	227768	no	10
			2313a6da04a7f5d3d2517d15bf344cf6f8aa4ffe		
Warnings:					
Information:					
5	Oath or Declaration filed	Declaration_Powell_12397-256.pdf	582930	no	1
			664855160af443b8762bcecd798930138b383354		

Warnings:					
Information:					
6	Oath or Declaration filed	Declaration_Longstreet_12397-256.pdf	383274	no	1
			bcbe8a8e293f3b818d06db7a205696adb3454c0a		
Warnings:					
Information:					
7	Oath or Declaration filed	Declaration_Albersen_12397-256.pdf	575102	no	1
			38528d03281ca28cb55cc840afca520fa6fec8b0		
Warnings:					
Information:					
8	Fee Worksheet (SB06)	fee-info.pdf	51097	no	2
			93a7b76473739a1bb936822d00270f6014e9cef6		
Warnings:					
Information:					
Total Files Size (in bytes):			4438226		
This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503. <u>New Applications Under 35 U.S.C. 111</u> If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application. <u>National Stage of an International Application under 35 U.S.C. 371</u> If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course. <u>New International Application Filed with the USPTO as a Receiving Office</u> If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.					