

FIGURAS

FIG. 1

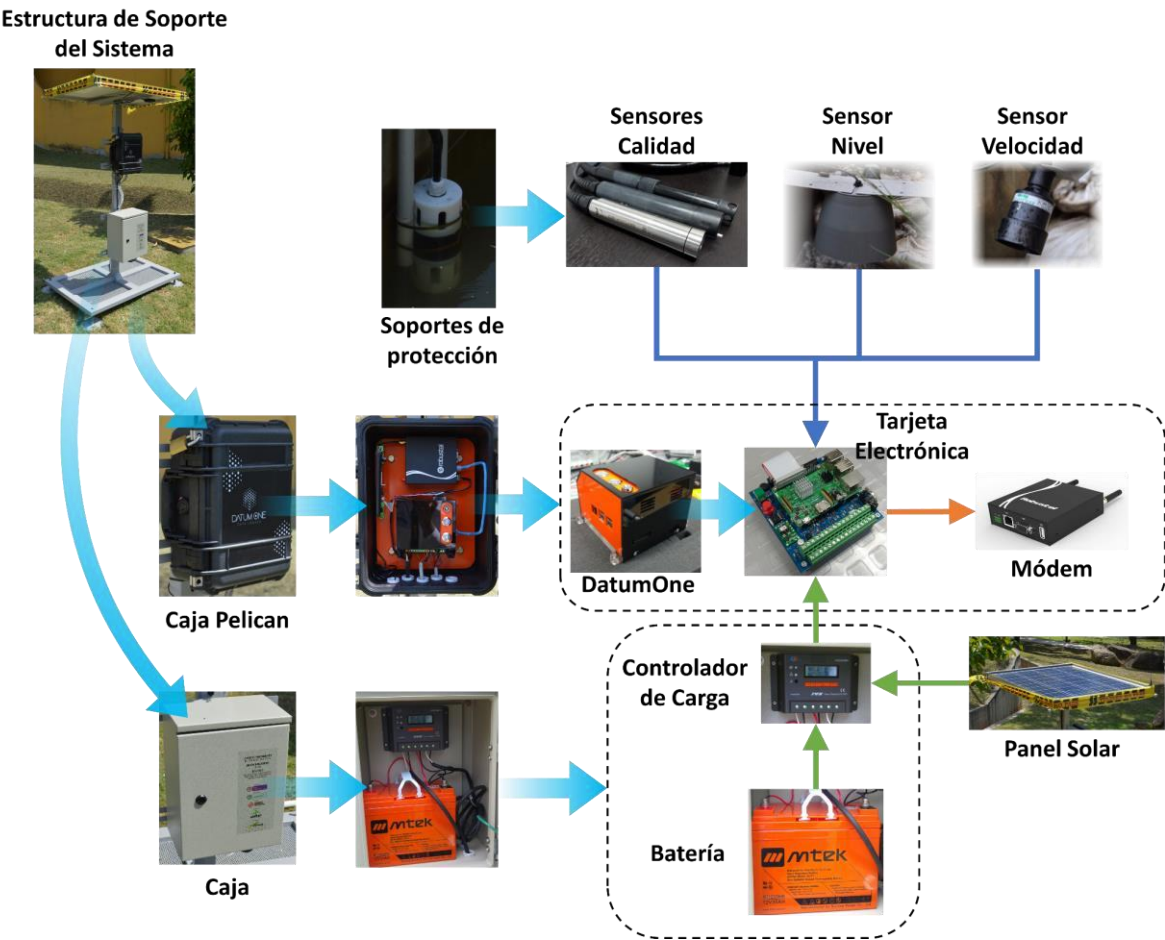


FIG. 2

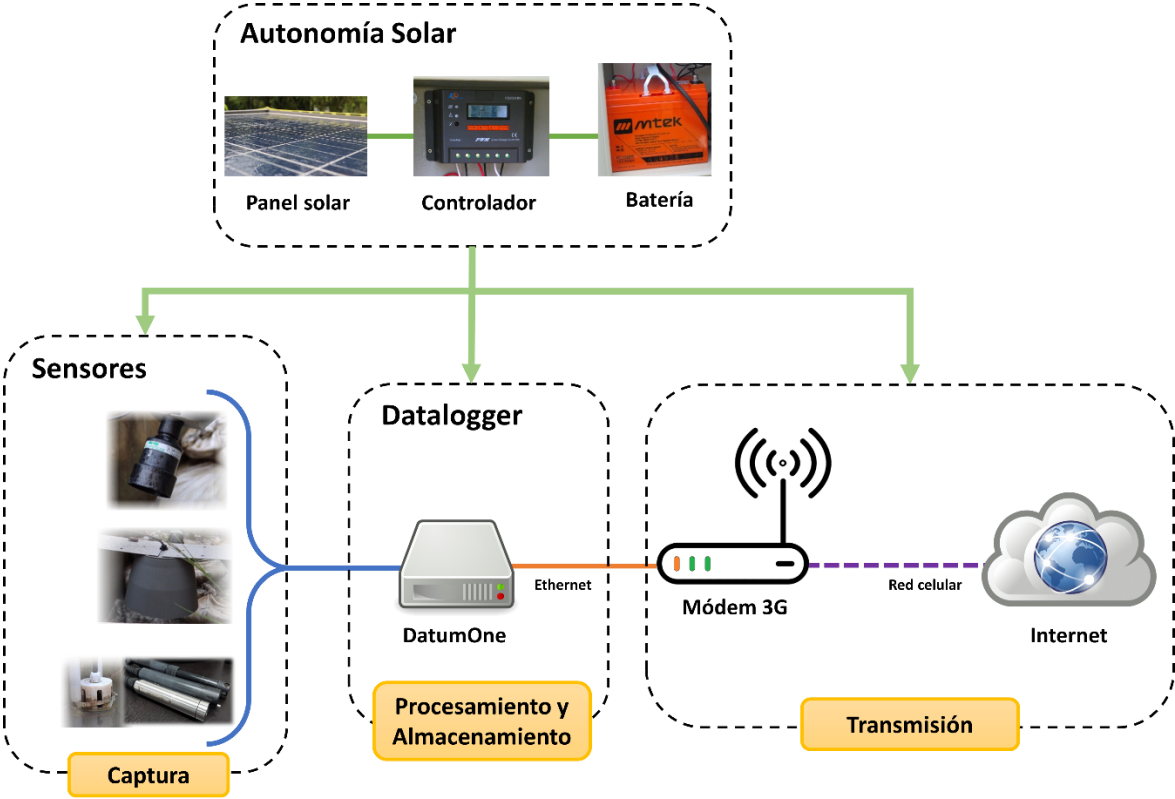


FIG. 3

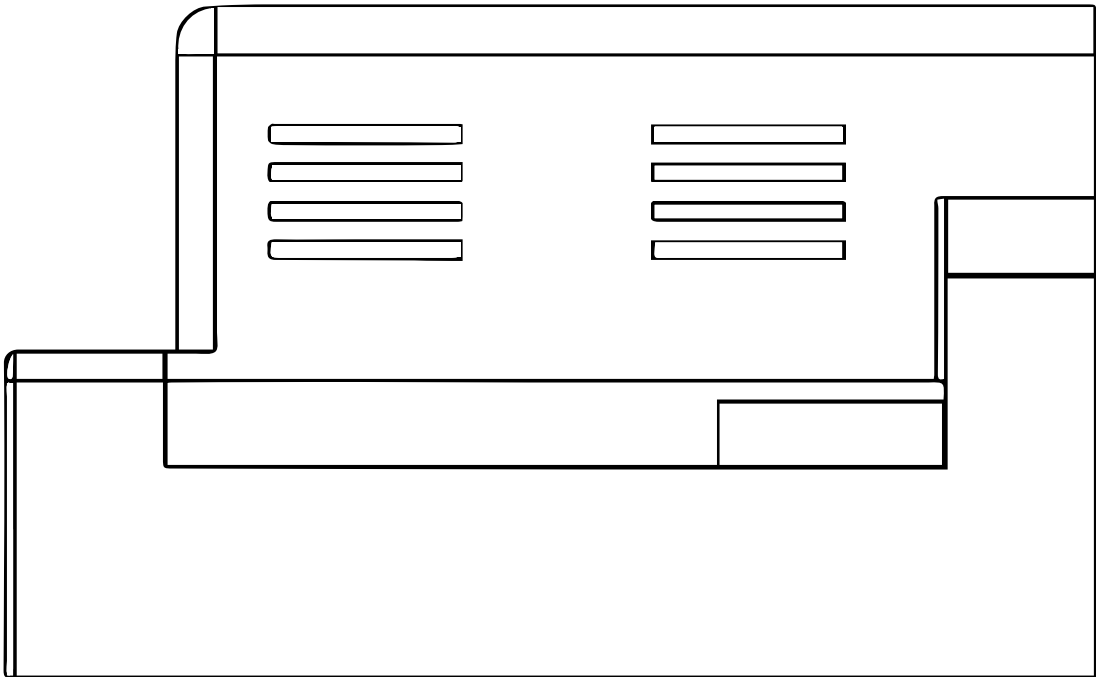


FIG. 4

VISTA SUPERIOR

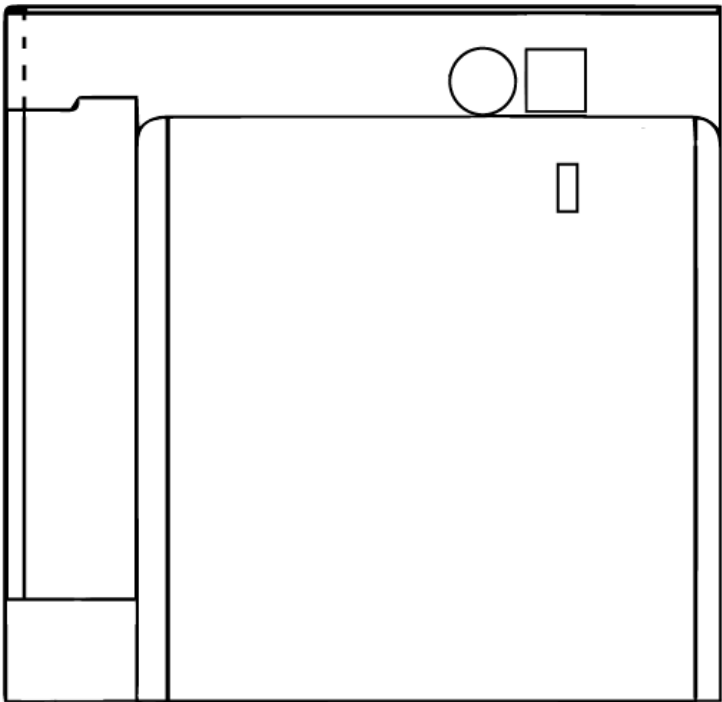


FIG. 5

VISTA LATERAL DERECHA

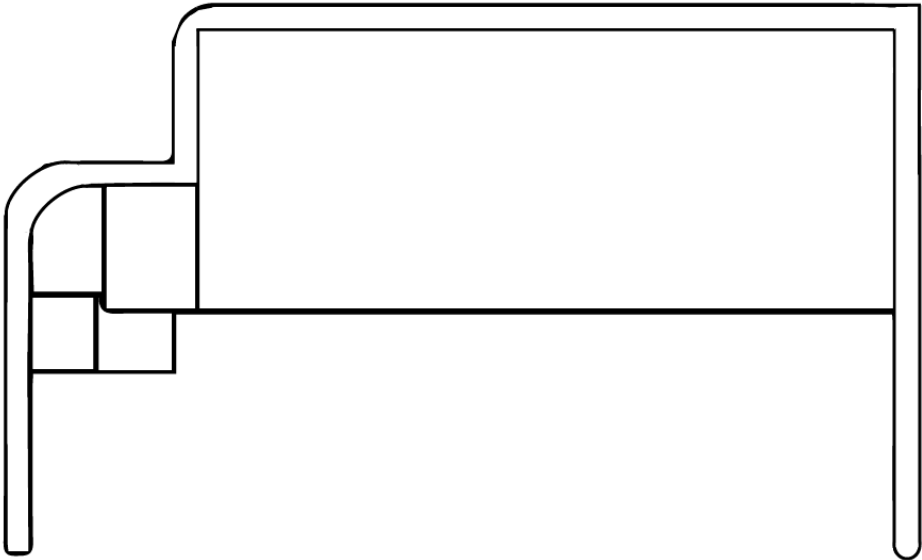


FIG. 6

VISTA TRASERA


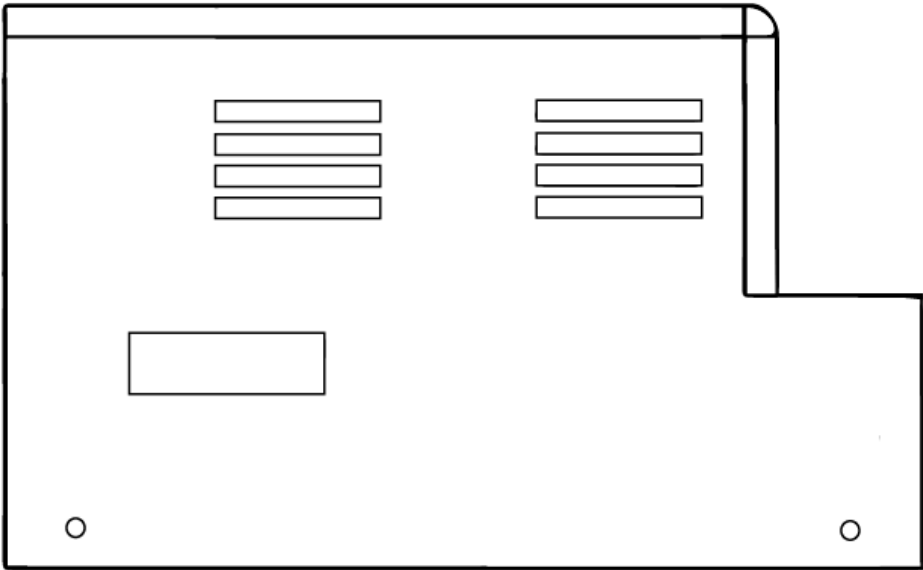



FIG. 7

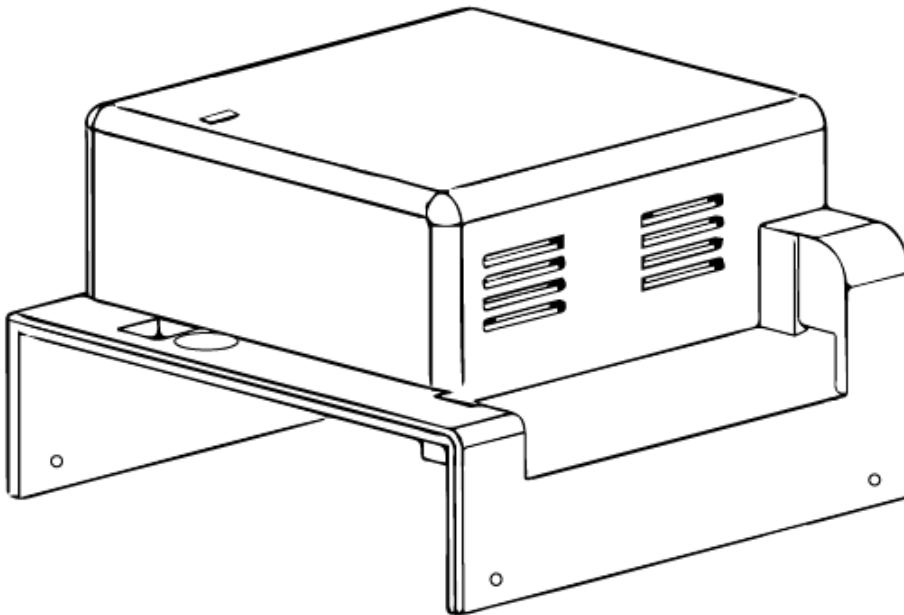VISTA ISOMÉTRICA 1





5

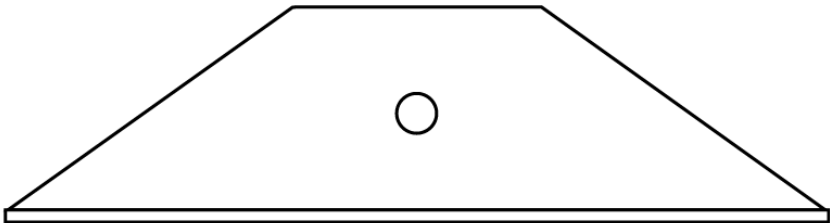FIG. 8




10

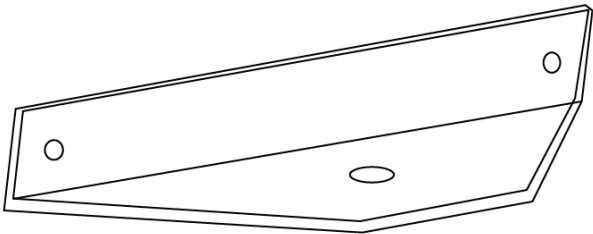


15

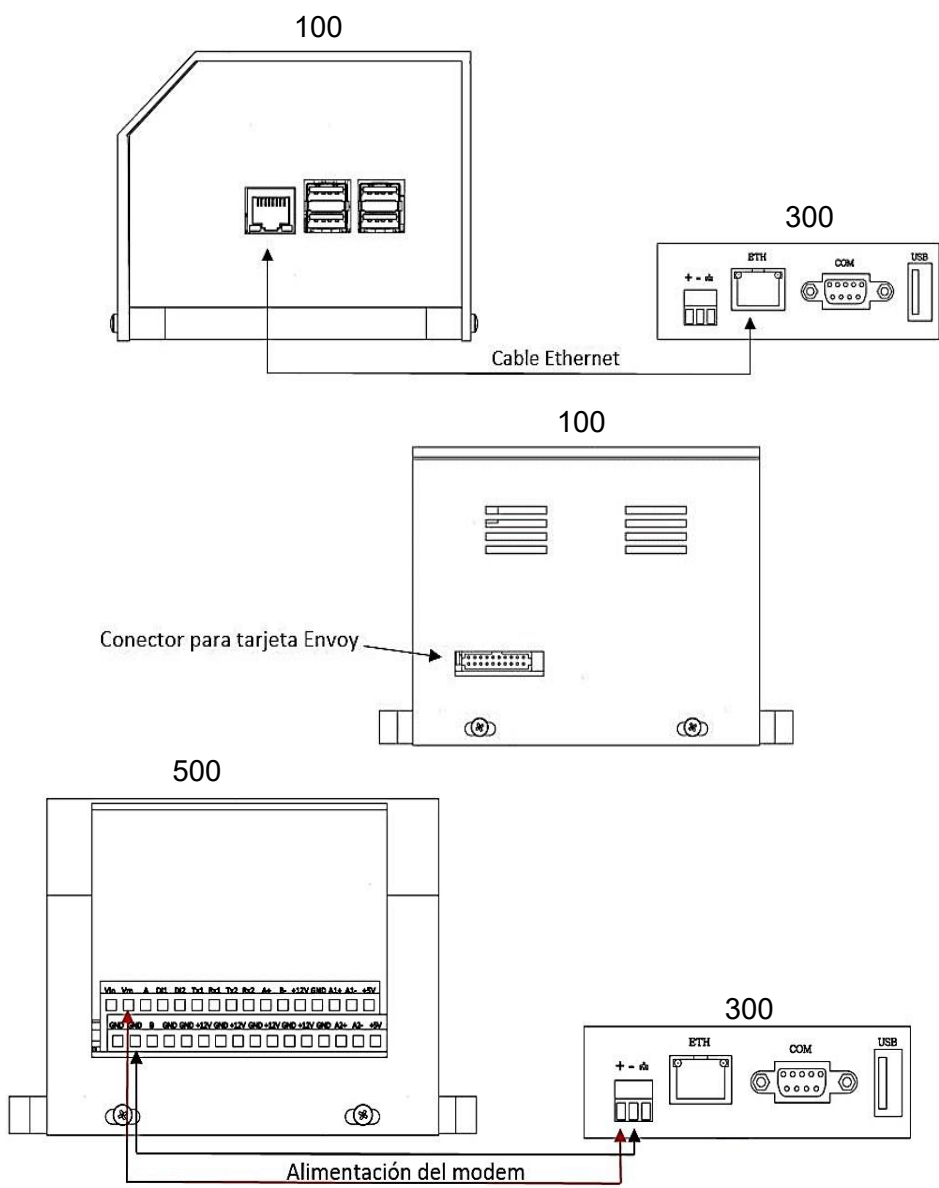FIG. 9



5

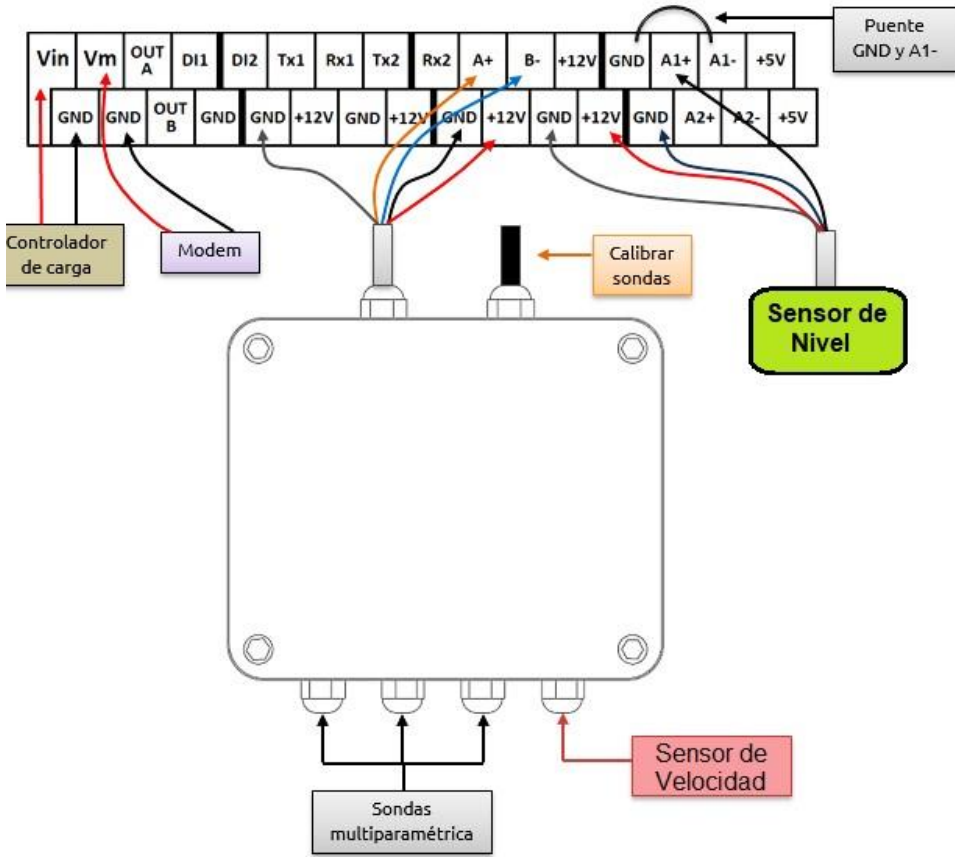
FIG. 10



10

5

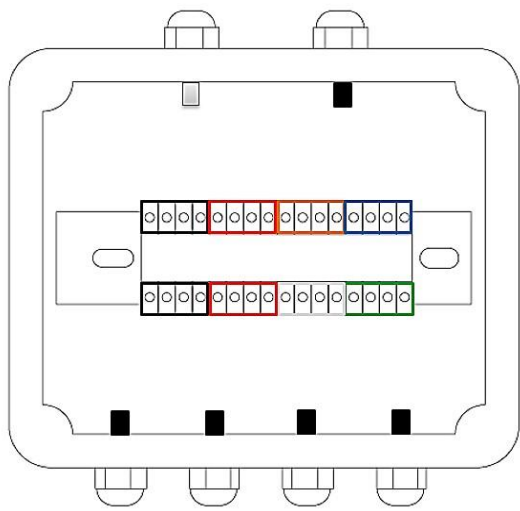FIG. 11




Identificación por colores:

- Negro Negativo de alimentación.
- Rojo Positivo de alimentación.
- Gris A+ rs485.
- Verde B- rs485.

10

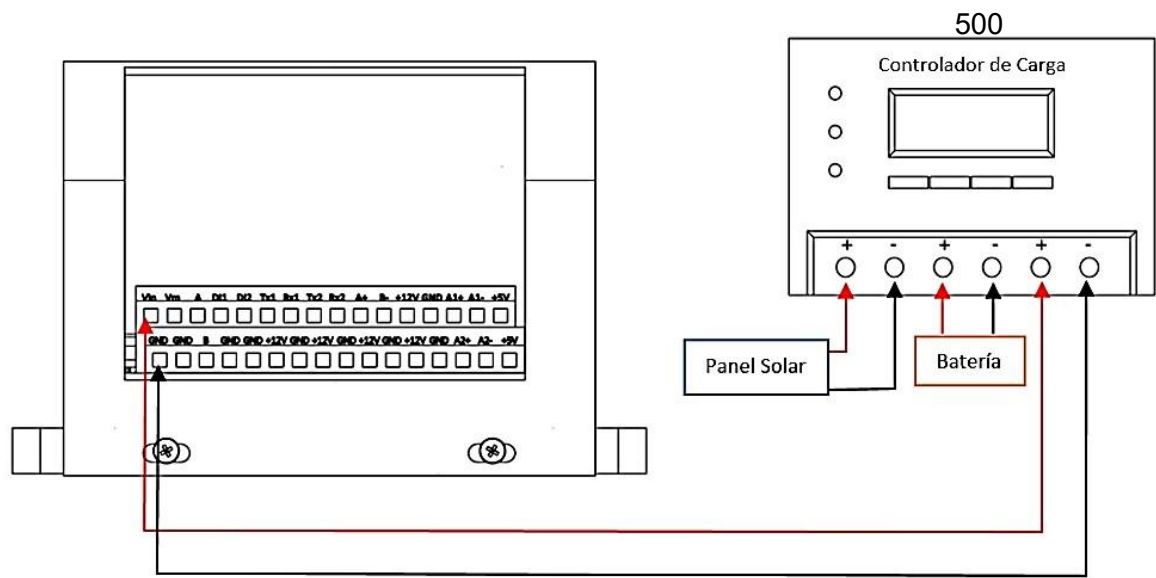FIG. 12




5

FIG. 13

200

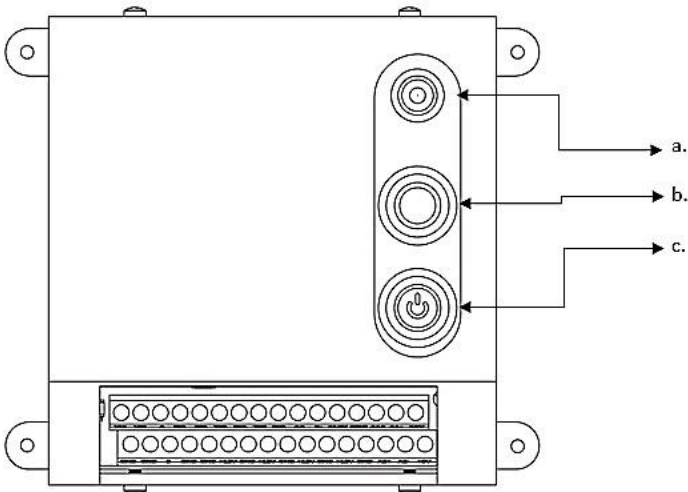10



210
220
230


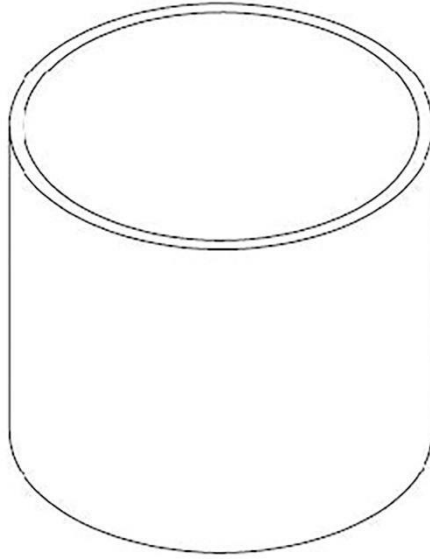
FIG. 14

Fig. 15

5

FIG. 16

10

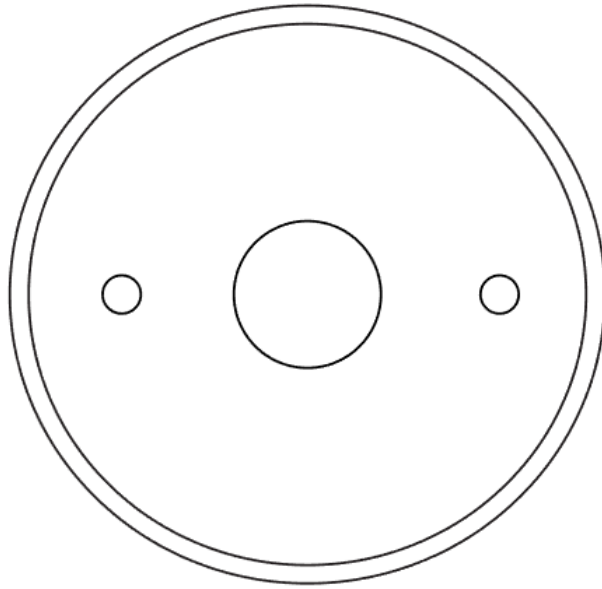

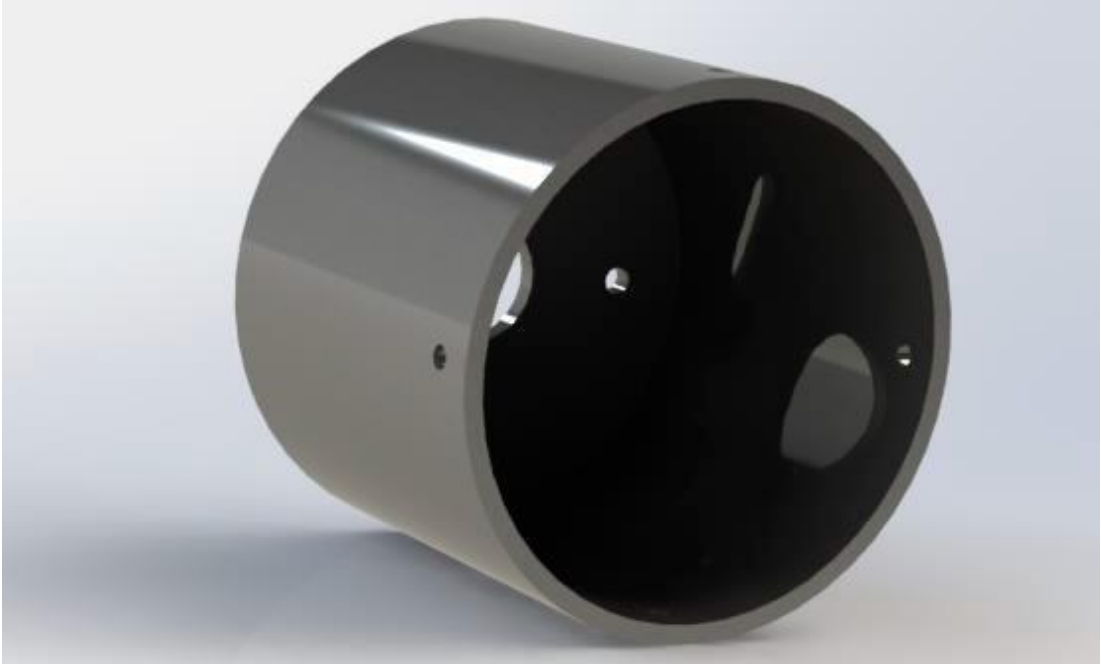
FIG. 17


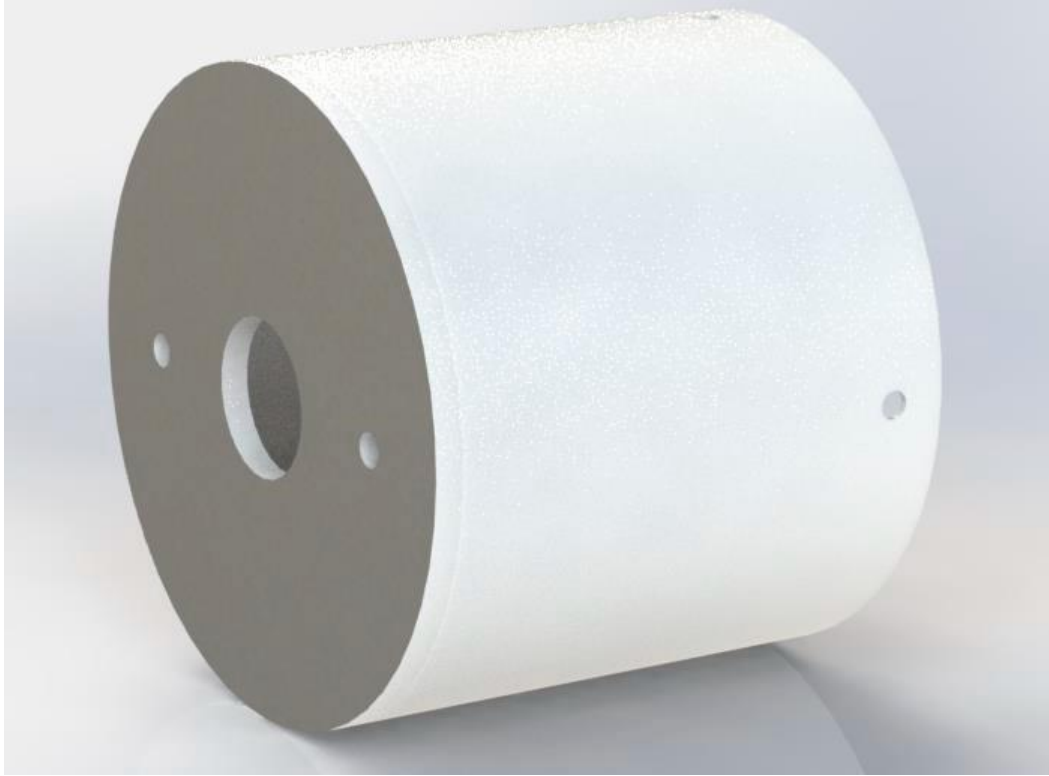
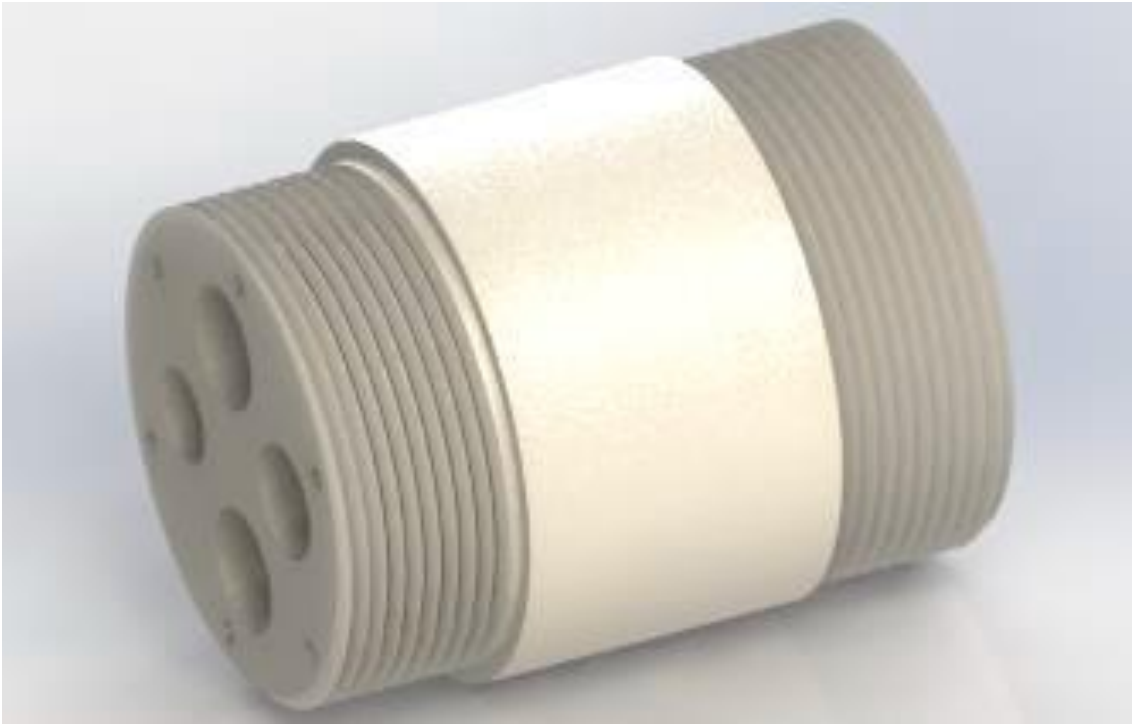
FIG. 18

FIG. 19

5

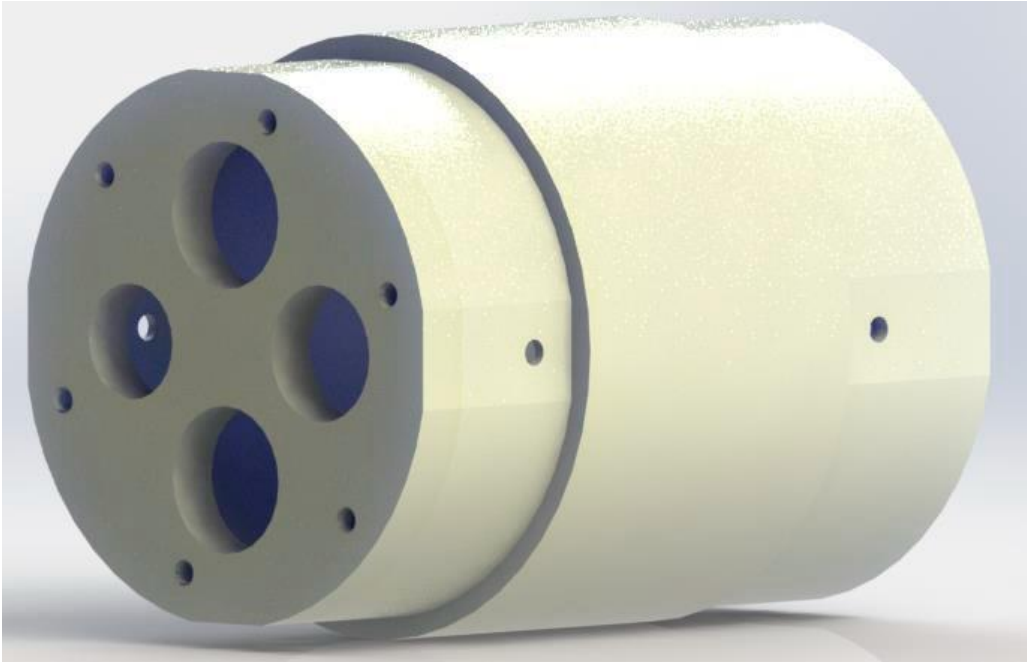FIG. 20




10

10

FIG. 21

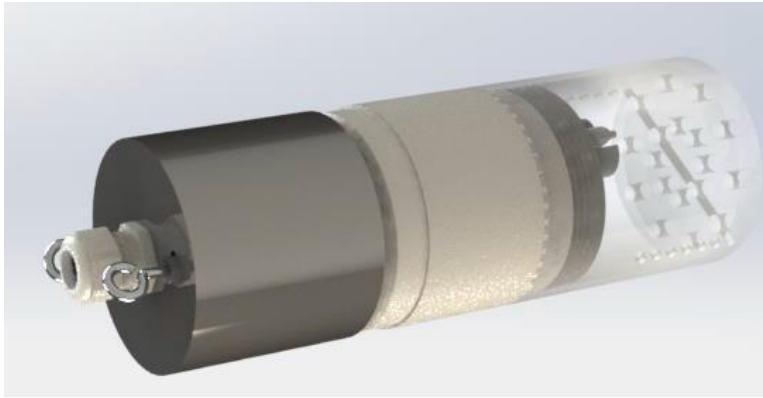FIG. 22



5

10

FIG. 23

5

0

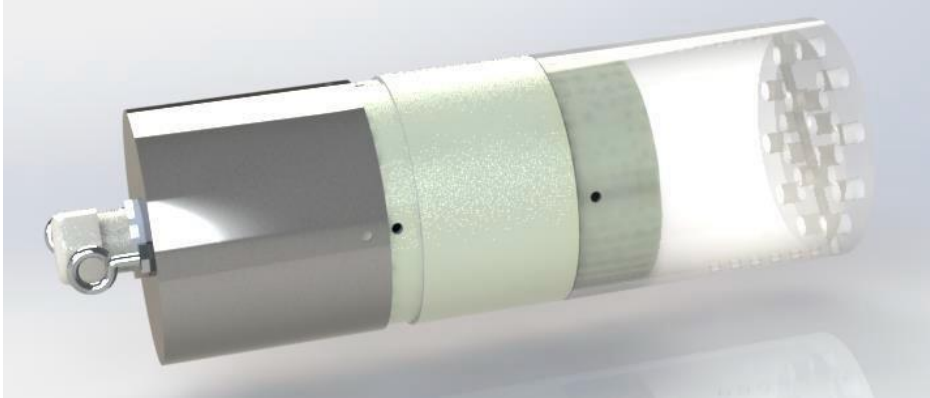
FIG. 24

FIG. 25

