

LOS ESTADOS UNIDOS DE AMÉRICA

A QUIEN INTERESE:

**DEPARTAMENTO DE COMERCIO DE ESTADOS UNIDOS
Oficina de Patentes y Marcas de Estados Unidos**

Julio 8, 2024

**LA PRESENTE ES PARA CERTIFICAR QUE LO ADJUNTO ES COPIA FIEL DE
LOS REGISTROS DE LA OFICINA DE PATENTES Y MARCAS DE ESTADOS
UNIDOS DE AQUELLOS PAPELES DE LA SOLICITUD DE PATENTE ABAJO
IDENTIFICADA QUE CUMPLIÓ CON LOS REQUISITOS PARA SER
OTORGADA UNA FECHA DE PRESENTACIÓN BAJO 35 USC 111.**

**NÚMERO DE SOLICITUD: 18/366,995
FECHA DE PRESENTACIÓN: Agosto 8, 2023**

**EL CÓDIGO DE PAÍS Y NÚMERO DE SU SOLICITUD DE PRIORIDAD,
PARA SER USADO PARA PRESENTACIÓN EN EL EXTRANJERO BAJO EL
CONVENIO DE PARÍS, ES 18/366,995**

**En ejercicio de las funciones y
deberes del Subsecretario de
Comercio para Propiedad
Intelectual y Director de la Oficina
de Patentes y Marcas de Estados
Unidos**

**[Firma]
Sylvia Holley
Funcionario certificador**

8504213



THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office

July 8, 2024

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A
FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 18/366,995

FILING DATE: August 8, 2023

THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY
APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS
CONVENTION, IS US 18/366,995

By Authority of the
Under Secretary of Commerce for Intellectual Property
and Director of the United States Patent and Trademark Office

Sylvia Holley
Sylvia Holley
Certifying Officer





UNITED STATES
PATENT AND TRADEMARK OFFICE

P.O. Box 1450
Alexandria, VA 22313 - 1450
www.uspto.gov

ELECTRONIC ACKNOWLEDGEMENT RECEIPT

APPLICATION #
18/366,995

RECEIPT DATE / TIME
08/08/2023 02:18:41 PM ET

ATTORNEY DOCKET #
086563-0860

Title of Invention

Metal Shot Cup

Application Information

APPLICATION TYPE Utility - Nonprovisional Application
 under 35 USC 111(a)

PATENT # -

CONFIRMATION # 6075

FILED BY Sarah Sesterhenn-Lee

PATENT CENTER # 62578541

FILING DATE -

CUSTOMER # 22922

FIRST NAMED INVENTOR Mark David Stowers

CORRESPONDENCE ADDRESS -

AUTHORIZED BY Christine McLinn

Documents

TOTAL DOCUMENTS: 30

DOCUMENT	PAGES	DESCRIPTION	SIZE (KB)
086563-0860-0001.pdf Utility_Application_Transmittal.pdf	2	Transmittal of New Application	102 KB
086563-0860-0002.pdf Application_Data_Sheet.pdf	5	Application Data Sheet	113 KB
Warning: This is not a USPTO supplied ADS fillable form. Data in the form cannot be automatically loaded to other USPTO systems.			
086563-0860-0003.pdf 0860_Formal_Figures.pdf	12	Drawings-only black and white line drawings	138 KB
086563-0860-0004.pdf 086563-0860_PoA.pdf	2	Power of Attorney	799 KB

086563-0860_Declaration.pdf	4	Oath or Declaration filed	693 KB
086563-0860-IDS_Transmittal.pdf	3	Transmittal Letter	119 KB
086563-0860-SB08.pdf	3	Information Disclosure Statement (IDS) Form (SB08)	185 KB
Warning: This is not a USPTO supplied IDS fillable form. Data in the form cannot be automatically loaded to other USPTO systems.			
AU202210141.pdf	2	Foreign Reference	300 KB
CA1185544.pdf	12	Foreign Reference	1723 KB
CH145594.pdf	8	Foreign Reference	668 KB
CN2021308418558.pdf	4	Foreign Reference	166 KB
CN104939489A.pdf	16	Foreign Reference	1123 KB
CN112264548.pdf	8	Foreign Reference with Images	1195 KB
CN2020306570749.pdf	5	Foreign Reference	488 KB
EM008203194-0001.pdf	6	Foreign Reference	1101 KB
EM008827489-0001.pdf	3	Foreign Reference	423 KB
GB6109969.pdf	7	Foreign Reference	990 KB
GB6186004.pdf	2	Foreign Reference	77 KB
GB673137.pdf	11	Foreign Reference	3043 KB
JP4761786.pdf	17	Foreign Reference	2742 KB
KR20020082183.pdf	18	Foreign Reference	1924 KB

NO086826.pdf	5	Foreign Reference	78 KB
RU127231.pdf	11	Foreign Reference	855 KB
SG30202008675Y.pdf	15	Foreign Reference	863 KB
WO2018147916.pdf	28	Foreign Reference	4119 KB
WO2020131922A1.pdf	27	Foreign Reference	1545 KB
WO2020123291.pdf	43	Foreign Reference	5681 KB
086563-0828_ISRWO.pdf	12	Other reference- Patent/Application/Search Documents	4040 KB
086563-0860_App.pdf	17	Auxiliary PDF of Application	135 KB
086563-0860_App- APP.TEXT.docx	17	Application body structured text document	51 KB

Warning: All artifacts (SmartArt, Drawings, Charts, etc) have been replaced with images.
Bookmarks were found and have been removed. One or more pages are missing page
numbering. Page numbering will be automatically applied after submission.

Digest	
DOCUMENT	MESSAGE DIGEST(SHA-512)
086563-0860- Utility_Application_Transmittal.p df	F87BA0A64CD9E471088E200BD7287F41F875873E0FC9CB637 63CE2881ACD970E7F490F45FF54535FC736E008419235F2E3F 33C7DBFF12541789893E35EFDD7C0
086563-0860- Application_Data_Sheet.pdf	9E089CEC014D20C7E5C0A1FCEA1089EE386795FE65A2AFC7 2AFFEA1D1FB514F7925C15B6A35B375F3DDB05F091DB7B782 0CBFAB5A1F769424F99FBA11873A04A
086563-	9B0940E26CA2FF7CA5A1B85DC781364D99D355847C928F953

0860_Formal_Figures.pdf	4DDA7A938D59ECAC239C5564EB3EAF9C6E8C517B2738070F 72CAA02F3FB54717EE34C2A3A2ED406
086563-0860_PoA.pdf	5D0A1933425AF031AD72225611D166E137BD45DA034844A4D4 92B167BC36E77DBD8B5E416B2BEEFC195931E05791B3803A3 8FBD37937688C16A104813D89CDE2
086563-0860_Declaration.pdf	A8AACF1C43EE8209580E59336BF51152BF8E2CAF0222E783B 80C94912B1E15F80FD1C9CD96C5B341C0F5CFB6DFD8A34A3 DCF99D48EBC8B9576FD662EF274B42E
086563-0860- IDS_Transmittal.pdf	779970F7C8D0770D8CCBF71E92F01C0D8E02FB2E0BE0F1AA FE3AFADDAFB14EFDBF322834EFFA37846198F0D996477AC1F B35DED6EBB0FCF9D09EAB210942973A
086563-0860-SB08.pdf	4B701810550AE4F93499CC83EDB013E1762811A6E9E9DB84E 309D12049B90FC24F2298CFD8C46AA23EF3A6AEFB2CADC5D 04FF71E0A0CEE6188B6B710CAC3A983
AU202210141.pdf	442A7DD502530B41CB555D2FF69AEC50743D0B9A1A296EEBE 6FD0139C131E9DAA555CC48586A4836D08E34DC6220241374 4946647C4183FFA172922F732FB666
CA1185544.pdf	F5A9EB066B0C86ABE18508125D7DF60B42150D1E61E6CBFBF A7DBF34D21BC365F0F58C619CFF8864BD1199D0BAD2BC9F6 A784D46803A82B0CACCE13DE0E1FB18
CH145594.pdf	B621A95D15F11418FC2F63CEC9DA08E13CD8CFCCB325C6BE B19C2BCCBEC26FDEC28B843D4895468977F7F6A41752A6A1A 8B0E7C42D247B4CEE1C2304EEEEFC6D
CN2021308418558.pdf	3CD463DFE8832573F1E42D434743C353776AA960D591B297AB 7E83B95D5636EBE21BE2513A323FF0556C5081698F05048E8E AC88737161088431107C3E16F396
CN104939489A.pdf	EFB84AAEEF3E41BEC420BF7BB91A2DE091E2C3E6486A8424 078CAA96A2C3813377FFBC1C1ECE3B30D506485006D3A649B 69B2091EB4992530FC8AC410FE5DF7C
CN112264548.pdf	15424AE770D0787257B7921881EE084D7214FAEE39A0DF865B

49177B6CFA72D8C489D6B7E3C7F526D900A3C5EC90B18E7C
4BDA26C28CBC3DD3B7E6996B956FC1

CN2020306570749.pdf

808BA498AD122B1CA94769F6108FF4FAFAEA053E5B0DD826B1
0579EF249B96B1B527522AA4BE31551833A19D42F4C97700B2
395AF97281AC8D9FC9F4F49C2BFB3

EM008203194-0001.pdf

86138A9D156D397BA8A282E792E72C2AF250B502BAEEC554E
2D12ECE80DE89D39971950E6EEFF744D4126700149C41B806
BBBAF0DCD87958419B496B2FE25C6C

EM008827489-0001.pdf

1C1B847A2AC565612E11A85EA2CEC6C7787876B329B5E2B80
AF37AA2A5C0BE3EFF57AE587C1FCCEBF040B38F9DAC94285
0C82EAEDB33094026F28F01AC939B36

GB6109969.pdf

A79ACA49C61D94DBAC3BBEA56C008095B5F7787D4D352095
324B59DAE97A287A65BB2333EA823A40563437033970FAD71B
C72FBB9079E6ECBCB957C0DA3FD12D

GB6186004.pdf

F1A413BDE1AF52AA13B039A596F27BD0EBCD4EB52CAE64A3
4A76A642ED8E2568ACF08A3F7F89A079EA5739CA8AB23CBB5
6BF56FF85CB03007A2E88EF6EFF34E5

GB673137.pdf

BD8B3E4FDB5D3BD3FF892BB13FD89621B30D7784657E94B86
AFE5979FCEC9FE5B8172F562C032F9CED759980AD677F2B25
60366280C7EA29894ABE57022CE1AF

JP4761786.pdf

E181DFB5B77CEB8020A1B2D352F2E716AB08C68A71FCE922
D4152C48976F6AA3C8707F2DBBF8CF361BD3C625A0C13C6D
BA8AC885B4C27C18FC0905BEDE86B6EE

KR20020082183.pdf

C0A77E90A6CEEAA44C9FD01E7981CC4B50862ABF696C0259B
6500D083CA6B058695A61F104DB866C71030A8EBC8A8F599E
C481F06E10D569DCC23A9B4BDF9507D

NO086826.pdf

931510DC86A8F7AD961692C7A3CF6832CDA031AB73A5AD895
57CCDE1D3BDEF156BFB9D95BFB5EAC003736903C3B346141
1D90EF29F7CC96A278A443D4D896EC5

RU127231.pdf

73F7094239AED3F1472652B832D7FDC9C19C5401F1C830BD4

E18907407058A58A0D16ABEB73584EFB63B410BB2506CAB51
F567C4AFA1A42798BE5A9597CFAB6B

SG30202008675Y.pdf F175BDA2F4D1A952EE063759FAA44978AFA2A44E4B2665F9A
F3F6D45AE5AEF31BC91F40BD3976F05703D93BB7C4293DEDD6
4499BB7237BE79A8AE71CFC4279D84

WO2018147916.pdf C838C238C68E25E6A9AA09370D780AE7447FF346F569D5D3D
6B6362F9C0AD6EF1CBD9868DA63C647C3E7662F66C095FF57
A5171A31F0C2E2F2D432E6955617E6

WO2020131922A1.pdf 4151C94EF6FD4FB51E8F299CB6EE3C2AFC21560B57C039C67
9EB051BBB9FB3AA1E947B347569EFDB4BD4F95EA7A56989D9
6EC5168F7B1CC4DDBE7BE18203A823

WO2020123291.pdf A8C40F9B20AF24D23A0F32A3ADB55C1EF95BA9F2F0E1EEDF
47807AC5EF8A9D679EB13B0A20AEE2B172037106EC6BC33D7
06EB47DAC37DB95F0F98B72EF31E31A

086563-0828_ISRWO.pdf 6DFF24DD6B926D94D8ED5F25C5DCFF4CEBB6D4204D4F5FF
E14639332D6B7B8D8CEE764BF685D19B24401C64F5E2466E
6CDD9642E9717A9A590D0DAF0465822E

086563-0860_App.pdf 0ADD8C51AF4E29C0107D9EB7A16A262987E7F900D9ED5FC4
26314B1C9D10A832359B0FE360AF773180B2A81B193E837D16
9E101567AAD8A48EF5539EB072F149

086563-0860_App-
APP.TEXT.docx 5AD0BEE009BE5129D8CB5BF749F13C0B8E5F5F3A7EF1A555
BB0F8799198EE19FA48EA1707D6848B3A0FBB3D6B036951458
F44BF226A2CB96B4205577730E243C

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage

submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

Title: Metal Shot Cup

Appl. No.: To be determined

Filing Date: Aug 14, 2023

Examiner: To be determined

Art Unit: To be determined

UTILITY PATENT APPLICATION TRANSMITTAL

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is the nonprovisional utility patent application of:

Silgan Containers LLC

Enclosed are:

- ☒ Application Data Sheet (37 CFR 1.76)
- ☒ Cover Page, Description, Claims, and Abstract
- ☒ Formal drawings
- ☒ Inventor Declaration and Power of Attorney
- ☒ Power of Attorney from Assignee/Applicant
- ☒ Information Disclosure Statement

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Silgan Containers LLC

Title: Metal Shot Cup

Appl. No.: To be determined

Filing Date: August 8, 2023

Examiner: To be determined

Art Unit: To be determined

UTILITY PATENT APPLICATION
TRANSMITTAL

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is the nonprovisional utility patent application of:

Silgan Containers LLC

Enclosed are:

- ☒ Application Data Sheet (37 CFR 1.76)
- ☒ Cover Page, Description, Claims, and Abstract
- ☒ Formal drawings
- ☒ Inventor Declaration and Power of Attorney
- ☒ Power of Attorney from Assignee/Applicant
- ☒ Information Disclosure Statement

[X] Form PTO/SB/08

[X] References

The requisite fees are being charged to Deposit Account No. 18-0882.

The Commissioner is hereby authorized to charge any additional fees which may be required regarding this application under 37 C.F.R. §§ 1.16-1.17, or credit any overpayment, to Deposit Account No. 18-0882.

Please direct all correspondence to the undersigned attorney or agent at the address indicated below.

Respectfully submitted,

Date August 8, 2023

By /Christine S. McLinn/

Reinhart Boerner Van Deuren s.c.
Customer Number: 22922
Telephone: (414) 298-8367
Facsimile: (414) 298-8097

Christine S. McLinn
Attorney for Applicant
Registration No. 79,460

U.S. PATENT APPLICATION

For

METAL SHOT CUP

Inventors: Mark David Stowers
 Micah Roger Millspaw

METAL SHOT CUP

BACKGROUND OF THE INVENTION

[0001] The present invention relates generally to the field of metal containers. The present invention relates specifically to a metal shot cup. A typical shot cup is frequently fabricated from plastic and is designed to contain liquid. However, plastic shot cups are designed for single use. The production of such plastic cups not only creates carbon dioxide emissions, but also potentially negatively impacts the environment because a large proportion of plastic cups are sent to landfills and may end up adding to pollution of the environment. Additionally, some plastic cups are produced with chemicals (e.g., BPA) that may cause adverse health conditions in people who drink from the cups. Given the negative environmental and health impacts associated with single use plastic cups, metal would be a more desirable material from which to manufacture a reusable shot cup.

[0002] Furthermore, it is not just the use of metal which is important, it is also the selection of the metal and particular configuration changes from a typical plastic container which are important. In particular, the container must be configured to permit high speed, economical manufacturing, configured to permit dense packing for shipping, and configured to include a similar volume and/or have a volume indicator associated with the typical volume of liquid in a shot cup. In addition to the particular metal and configuration selection, the selection of coating for the container is also important because it affects the manufacturability of the container, the handling of the container and the impact of the container on the contained liquid.

SUMMARY OF THE INVENTION

[0003] One embodiment of the invention relates to a metal shot cup. The shot cup includes a first end and a second end that opposes the first end of the shot cup. The shot cup further includes a circular rim extending between an outside edge and an inside edge centered on a longitudinal axis. The circular rim has a radius less than .05 inches. The shot cup has a sidewall

extending between the first end and the second end of the shot cup, the sidewall is centered on the longitudinal axis. The sidewall includes an exterior surface, an interior surface, and a plurality of tapered sections. The tapered sections extend between the first end and the second end of the shot cup. The shot cup includes a bottom with a circular surface generally parallel to the circular rim and centered on the longitudinal axis, the circular surface connects to a trough at an outside edge of the circular surface. The shot cup further includes a polymer coating on at least a portion of the sidewall.

[0004] Another embodiment of the invention relates to a one-piece metal shot cup. The shot cup includes an open end with a bore and a closed end that opposes the open end of the shot cup. The shot cup further includes a rim extending between an outside edge and an inside edge centered on a longitudinal, central axis. The shot cup has a sidewall extending between the open end and the closed end of the shot cup, the sidewall is centered on the longitudinal, central axis. The sidewall includes an exterior surface, an interior surface, a first tapered section, a second tapered section, and an upper section. The first tapered section extends at a first angle relative to the longitudinal, central axis. The second tapered section extends at a second angle relative to the longitudinal, central axis. The shot cup further includes a bottom with a circular surface generally parallel to the rim and centered on the longitudinal, central axis. The circular surface connects to a trough at an outside edge of the circular surface. The first tapered section is positioned between the bottom and the second tapered section. The upper section is positioned between the second tapered section and the rim.

[0005] Another embodiment of the invention relates to a one-piece metal shot cup kit. The one-piece metal shot cup kit includes a plurality of one-piece metal shot cups. Each one-piece metal shot cup includes an open end with a central bore and a closed end opposing the open end of the shot cup. The one-piece metal shot cup includes a circular rim extending between an outside edge and an inside edge centered on a longitudinal axis. The circular rim has a radius less than .05 inches. Each one-piece metal shot cup includes an exterior surface, an interior surface, and a plurality of tapered sections extending between the open end and the closed end. The plurality of tapered sections each extend at an angle relative to the longitudinal axis. Each one-piece metal shot cup further includes a bottom with a circular surface generally parallel to the

circular rim and centered on the longitudinal axis. The circular surface connects to a trough at an outside edge of the circular surface. The one-piece metal shot cup kit further includes a container configured to hold the plurality of one-piece metal shot cups when the plurality of one-piece metal shot cups are stacked.

[0006] Additional features and advantages will be set forth in the detailed description which follows, and will be readily apparent to those skilled in the art from the description or recognized by practicing the embodiments as described in the written description and/or shown in the accompany drawings. It is to be understood that both the foregoing general description and the following detailed description are exemplary.

[0007] The accompanying drawings are included to provide further understanding and are incorporated in and constitute a part of this specification. The drawings illustrate one or more embodiments and, together with the description, serve to explain principles and operation of the various embodiments. In addition, alternative exemplary embodiments relate to other features and combinations of features as may be generally recited in the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] This application will become more fully understood from the following detailed description, taken in conjunction with the accompanying figures, wherein like reference numerals refer to like elements in which:

[0009] FIG. 1 is a perspective view of a metal shot cup, according to an exemplary embodiment.

[0010] FIG. 2 is a front side view of the metal shot cup of FIG. 1.

[0011] FIG. 3 is a rear side view of the metal shot cup of FIG. 1.

[0012] FIG. 4 is a right side view of the metal shot cup of FIG. 1.

[0013] FIG. 5 is a left side view of the metal shot cup of FIG. 1.

[0014] FIG. 6 is a top view of the metal shot cup of FIG. 1.

[0015] FIG. 7 is a bottom view of the metal shot cup of FIG. 1.

[0016] FIG. 8 is a cross-sectional view of the metal shot cup taken along line 8—8 in FIG. 5.

[0017] FIG. 9 is a perspective view of a stack of the metal shot cups of FIG. 1, according to an exemplary embodiment.

[0018] FIG. 10 is a packaging for metal shot cups according to an exemplary embodiment.

[0019] FIG. 11 is a packaging for metal shot cups according to another exemplary embodiment.

[0020] FIG. 12 is a packaging for metal shot cups according to another exemplary embodiment.

DETAILED DESCRIPTION

[0021] Referring generally to the figures, various embodiments of a metal container, such as a metal shot cup, are shown. As discussed herein, Applicant has developed a one-piece multi-tapered metal shot cup with a number of improvements relative to single-use plastic cups. In one embodiment, the metal shot cup includes a wall thickness that is relatively small allowing for an overall smaller weight of the cup while the metal material creates a robust shot cup suitable for multiple uses. The metal shot cup includes one or more tapered sections allowing for dense packaging. The metal material, the reusable nature of the metal shot cup, and the tapered shape contribute to decreased negative health and environmental impact (i.e., less chemical ingestion by users, pollution, dense packing, etc.) compared to conventional plastic shot cups.

Furthermore, the multi-tapered shape of the shot cup allows for improved grasping for users.

[0022] Referring to FIG. 1, a metal container, shown as a thin-walled, metal shot cup 10, is shown according to an exemplary embodiment. Metal shot cup 10 includes a body 12 coupled to a rolled top edge shown as rim 18. Body 12 extends along and is centered on a longitudinal axis, shown as a central axis 20 between a top end or first end 14 and a bottom or second end 16. The top end or first end 14 is positioned adjacent to rim 18 and the bottom or second end 16 opposes the top end 14. Top end 14 of body 12 includes an opening or bore 22 centered around longitudinal, central axis 20.

[0023] Body 12 is at least partially defined by a sidewall 24. Body 12 further includes an exterior surface 28 and an interior surface 26. An inner edge 19 of rim 18 at least partially defines bore 22. Bore 22 extends along and is centered on longitudinal, central axis 20 between

top end 14 and bottom end 16. In various embodiments, metal shot cup 10 may include a container lid or cover 30. The container cover may be any element that allows the metal shot cup 10 to be sealed such that the container is capable of enclosing a liquid (i.e., prevent spilling). In various specific embodiments, cover 30 is a snap top. In other specific embodiments, cover 30 is formed from cellulose such as a cellophane cover. In other specific embodiments, cover 30 is a foil cover.

[0024] In various specific embodiments, metal shot cup 10 is formed as a single, unitary, integral, or one-piece cup. In various embodiments, metal shot cup 10 is formed from aluminum. In such an embodiment, metal shot cup 10 is formed from aluminum alloy 3104.

[0025] In various specific embodiments, metal shot cup 10 includes a polymer coating on at least a portion of sidewall 24. In various specific embodiments, metal shot cup 10 includes a polymer coating on at least one of the exterior surface 28 and interior surface 26. Applicant believes the use of a polymer coating provides protection to the surface of the metal shot cup and/or reduces metallic taste. In a specific embodiment, the polymer coating is a PPE (polyphenylene ether) coating. The polymer coating is not a PET coating (polyethylene terephthalate) that can oxidize and result in degradation of the coating and/or the taste of the liquid that interacts with the coating. Applicant believes the PPE coating provides durable protection with reduced likelihood of degradation and/or oxidization that may alter the taste of the liquid within the metal shot cup 10.

[0026] In various embodiments, the polymer coating is on both interior surface 26 and exterior surface 28 of metal shot cup 10. In such an embodiment, the coating on interior surface 26 has a first color and the coating on exterior surface 28 has a second color. The first color is different from the second color. In various specific embodiments, the first color is white and the second color is green. In other embodiments, the first color is white and the second color is one of various colors (e.g., green, red, yellow, blue, etc.). In other embodiments, the coating is on one of interior surface 26 and exterior surface 28. In various embodiments, the coating has a thickness defined between the exterior of the coating and the interior surface 26 or exterior surface 28 of metal shot cup 10. The coating thickness is between 35 and 15 microns, more specifically between 30 and 20 microns and in such an embodiment, the coating is about 25

microns $\pm$ 5 microns. In various specific embodiments the coating thickness is less than 35 microns and specifically less than 30 microns.

[0027] Referring to FIGS. 2-5, side views of metal shot cup 10 are shown, according to an exemplary embodiment. As noted above, body 12 and/or sidewall 24 include more than one taper or tapered section. In various embodiments, sidewall 24 includes a first tapered section 32, a second tapered section 34 and an upper section 36. First tapered section 32 extends generally upward from a bottom wall 40. Bottom wall 40 includes a bottom wall edge 38 at second end 16 of metal shot cup 10 and a trough 42 (see e.g., FIGS. 6 and 8) at the periphery of bottom wall 40.

[0028] First tapered section 32 is positioned between bottom wall 40 and second tapered section 34. Second tapered section 34 is positioned between first tapered section 32 and upper section 36. Upper section 36 is positioned between second tapered section 34 and rim 18. Sidewall 24 includes an upper boundary or edge 44 of first tapered section 32. Upper boundary 44 is positioned between first tapered section 32 and second tapered section 34. Sidewall 24 further includes a lower boundary or edge 46 of upper section 36. Lower boundary 46 is positioned between upper section 36 and second tapered section 34. In various embodiments, upper section 36 is a third tapered section. In such an embodiment, metal shot cup 10 is entirely stackable due to the taper. In other embodiments, upper section 36 is generally vertical (i.e., perpendicular to bottom wall 40 and/or rim 18 plus or minus 10 degrees) extending along longitudinal axis 20.

[0029] In various specific embodiments, the lower boundary 46 of upper section 36 which is the upper boundary of second tapered section 34 is positioned to indicate a volume of 1 oz. In general, metal shot cup 10 and specifically bore 22 can contain 1.5 oz. of liquid.

[0030] In various specific embodiments, the tapered sections 32, 34, 36 of sidewall 24 may have varying angles relative to a reference parallel to longitudinal axis 20. A first angle, shown as A1 is defined as the angle between the wall of first tapered portion 32 and longitudinal axis 20. In a specific embodiment A1 is between 1 and 10 degrees, more specifically between 1 and 5 degrees and in such an embodiment A1 is about 2 degrees (i.e., 2 degrees $\pm$ 0.5 degrees).

[0031] In various embodiments, second tapered section 34 includes a second angle A2, defined as the angle between the wall of second tapered section 34 and longitudinal axis 20. In

various embodiments, A2 is greater than A1. In a specific embodiment A2 is between 30 and 38 degrees, more specifically between 32 and 36 degrees and in such an embodiment A2 is about 34 degrees (i.e., 34 degrees $\pm$ 2 degrees). In various embodiments, upper section 36 includes a third angle A3, defined as the angle between the wall of upper section 36 and longitudinal axis 20. In various specific embodiments, A3 is less than A1 and A2. In a specific embodiment, A3 of upper section 36 is about 0 degrees (i.e., 0 degrees $\pm$ 0.5 degrees). In various specific embodiment A3 is between 0 and 2 degrees, more specifically between 0 and 1 degrees and in such an embodiment A3 is about 0 degrees (i.e., 0 degrees $\pm$ 1 degrees).

[0032] Referring to FIG. 5, a first height, shown as H1 is defined between rim 18 and lower boundary 46 of upper section 36. In a specific embodiment, H1 is between .4 and .5 inches and in such an embodiment H1 is about .44 $\pm$ 0.02 inches.

[0033] Referring to FIGS. 6-7, a top view and bottom view of metal shot cup 10 are shown. The difference in the diameters of the tapered sections 32, 34 and upper section 36 and bottom wall 40 are shown. Trough 42 defines a lowermost point of bottom wall 40. Bottom wall 40 further includes an exterior bottom surface 37 connected to bottom wall edge 38 by trough 42. As shown in FIG. 8, trough 42 includes a depth, shown as B1. In various specific embodiments, B1, is between .03 and .05 inches, more specifically between .035 and .045 inches, and in such an embodiment is about .04 inches $\pm$ 0.02 inches.

[0034] Referring to FIG. 8, a cross-sectional view of metal shot cup 10 and cover 30 is shown, according to an exemplary embodiment. A total height of metal shot cup 10, shown as H2 is defined between a top of rim 18 and a bottom of trough 42. In various specific embodiments, the height of the metal shot cup 10 is less than 2.5 inches and more specifically less than 2 inches. In a specific embodiment, H2 is between 1.5 and 2.1 inches, more specifically between 1.6 and 2 inches and in such an embodiment is about 1.8 inches $\pm$ 0.1 inches.

[0035] At top end 14 of body 12, a first diameter shown as D1 is defined between opposing outside edges of rim 18. In a specific embodiment, D1 is between 1.5 and 2.1 inches, more specifically between 1.6 and 2 inches and in such an embodiment is about 1.8 inches $\pm$ 0.02 inches. Bore 22 and interior surface 26 define a second diameter, shown as D2. Specifically, D2 is defined at top end 14 defining the diameter of upper section 36. In a specific embodiment, D2

is between 75% and 95% of D1, specifically between 80% and 90% of D2 and more specifically between 84% and 87% of D1. In a specific embodiment, D2 is between 1.4 and 1.7 inches and in such embodiments D2 is about 1.56 inches ± 0.02 inches.

[0036] At bottom end 16 of body 12, defines a third diameter shown as D3. D3 is defined as an outside diameter between opposing portions of trough 42. In a specific embodiment, D3 is between 1.2 and 1.6 inches and in such embodiments D3 is about 1.4 inches ± 0.02 inches. In a specific embodiment D3 is between 65% and 85% of D1, specifically between 70% and 80% of D1 and more specifically between 76% and 79% of D1.

[0037] Rim 18 is tightly curved and includes a thickness, shown as T1. In a specific embodiment, T1 is between .07 and .1 inches, more specifically between .085 and .095 and in such an embodiment is about .09 inches ± 0.01 inches. In various specific embodiments, T1 is less than .1 inches. Rim 18 includes an outer curved surface 25. Outer curved surface 25 defines a first radius shown as R1. In various specific embodiments, R1 is less than .1 inches, specifically less than .075 inches, and more specifically less than .05 inches. In a specific embodiment, R1 is between .03 and .06 inches, more specifically between .04 and .05 inches and in such embodiments is about .045 ± 0.01 inches. In other words, rim 18 has a small radius with a high curvature.

[0038] A wall thickness of sidewall 24 shown as T2 is defined between exterior surface 28 and interior surface 26 at upper section 36. In various specific embodiments, T2 is between 0.0062 and 0.0078 inches, more specifically between 0.0062 and 0.0070 inches and in such embodiments is about 0.0065 ± 0.0005 inches. A wall thickness of sidewall 24 shown as T3 is defined between exterior surface 28 and interior surface 26 at first tapered portion 32. In various specific embodiments, T3 is between 0.0062 and 0.0078 inches, more specifically between 0.0062 and 0.0070 inches and in such embodiments is about 0.0065 ± 0.0005 inches.

[0039] An internal curved surface 35 connects upper section 36 to second tapered section 34 along interior surface 26. Internal curved surface 35 has a radius shown as R2. In a specific embodiment, R2 is between .02 and .06 inches, more specifically between .03 and .05 inches and in such an embodiment R2 is about .04 ± 0.01 inches.

[0040] Referring to FIGS. 9-12, a plurality of metal shot cups 10 are shown in a stacked arrangement, according to an exemplary embodiment. The multi-tapered shape of the metal shot cup 10 allows for ease of stacking (i.e., positioning one metal shot cup 10 within the bore 22 of another metal shot cup 10) and packing a plurality of cups into a kit (see e.g., FIGS. 10-12). As shown in FIG. 9, the plurality of metal shot cups 10 together form a stack 100. In various embodiments, when A3 of upper section 36 is about 0 degrees, the upper section 36 of the metal shot cup 10 will extend upward (in the orientation shown in FIG. 9) and outward from the lower metal shot cup 10 when the plurality of metal shot cups 10 are in stack 100. In various embodiments, when A3 of upper section 36 is greater than zero (i.e., tapered), the upper section 36 is positioned and/or received within the lower metal shot cup 10 in stack 100 such that upper section 36 is positioned within the bore 22 of an adjacent shot cup in stack 100. In other words, when upper section 36 includes a taper, metal shot cups 10 allow for complete stacking.

[0041] Referring to FIG. 10, a kit 110 is shown according to an exemplary embodiment. Kit 110 includes a plurality of metal shot cups 10 and a container, shown as generally cylindrical tube 112 configured to store the plurality of metal shot cups 10. Kit 110 includes a stack 100 of metal shot cups 10 positioned within a bore 114 of a generally cylindrical tube 112. In other words, cylindrical tube 112 generally has the shape of a cylindrical prism. In various embodiments, stack 100 includes a plurality of metal shot cups 10. In various specific embodiments, stack 100 includes ten metal shot cups 10. In other embodiments, stack 100 includes a different number of metal shot cups 10 (i.e., 6, 8, 12, 20, 24, etc.).

[0042] Referring to FIG. 11, a kit 120 is shown according to an exemplary embodiment. Kit 120 includes a stack 100 of metal shot cups 10 positioned within a bore 112 of a generally triangular tube 122. In other words, triangular tube 122 generally has the shape of a triangular prism. Referring to FIG. 12, a kit 130 is shown according to an exemplary embodiment. Kit 130 includes a stack 100 of metal shot cups 10 positioned within a bore 134 of a generally rectangular tube 132. In other words, rectangular tube 132 generally has the shape of a rectangular prism with bore 134 having a square shape.

[0043] It should be understood that the figures illustrate the exemplary embodiments in detail, and it should be understood that the present application is not limited to the details or

methodology set forth in the description or illustrated in the figures. It should also be understood that the terminology is for the purpose of description only and should not be regarded as limiting.

[0044] Further modifications and alternative embodiments of various aspects of the disclosure will be apparent to those skilled in the art in view of this description. Accordingly, this description is to be construed as illustrative only. The construction and arrangements, shown in the various exemplary embodiments, are illustrative only. Although only a few embodiments have been described in detail in this disclosure, many modifications are possible (e.g., variations in sizes, dimensions, structures, shapes and proportions of the various elements, values of parameters, mounting arrangements, use of materials, colors, orientations, etc.) without materially departing from the novel teachings and advantages of the subject matter described herein. Some elements shown as integrally formed may be constructed of multiple parts or elements, the position of elements may be reversed or otherwise varied, and the nature or number of discrete elements or positions may be altered or varied. The order or sequence of any process, logical algorithm, or method steps may be varied or re-sequenced according to alternative embodiments. Other substitutions, modifications, changes and omissions may also be made in the design, operating conditions and arrangement of the various exemplary embodiments without departing from the scope of the present disclosure.

[0045] Unless otherwise expressly stated, it is in no way intended that any method set forth herein be construed as requiring that its steps be performed in a specific order. Accordingly, where a method claim does not actually recite an order to be followed by its steps or it is not otherwise specifically stated in the claims or descriptions that the steps are to be limited to a specific order, it is in no way intended that any particular order be inferred. In addition, as used herein, the article "a" is intended to include one or more component or element, and is not intended to be construed as meaning only one.

[0046] For purposes of this disclosure, the term "coupled" means the joining of two components directly or indirectly to one another. Such joining may be stationary in nature or movable in nature. Such joining may be achieved with the two members and any additional intermediate members being integrally formed as a single unitary body with one another or with the two members or the two members and any additional member being attached to one another.

Such joining may be permanent in nature or alternatively may be removable or releasable in nature. As used herein, "rigidly coupled" refers to two components being coupled in a manner such that the components move together in a fixed positional relationship when acted upon by a force.

[0047] While the current application recites particular combinations of features in the claims appended hereto, various embodiments of the invention relate to any combination of any of the features described herein whether or not such combination is currently claimed, and any such combination of features may be claimed in this or future applications. Any of the features, elements, or components of any of the exemplary embodiments discussed above may be used alone or in combination with any of the features, elements, or components of any of the other embodiments discussed above.

[0048] In various exemplary embodiments, the relative dimensions, including angles, lengths and radii, as shown in the Figures are to scale. Actual measurements of the Figures will disclose relative dimensions, angles and proportions of the various exemplary embodiments. Various exemplary embodiments extend to various ranges around the absolute and relative dimensions, angles and proportions that may be determined from the Figures. Various exemplary embodiments include any combination of one or more relative dimensions or angles that may be determined from the Figures. Further, actual dimensions not expressly set out in this description can be determined by using the ratios of dimensions measured in the Figures in combination with the express dimensions set out in this description.

WHAT IS CLAIMED IS:

1. A metal shot cup comprising:
 - a first end of the shot cup;
 - a second end of the shot cup opposing the first end of the shot cup;
 - a circular rim extending between an outside edge and an inside edge centered on a longitudinal axis, the circular rim having a radius less than .05 inches;
 - a sidewall extending between the first end and second end of the shot cup and centered on the longitudinal axis, the sidewall comprising:
 - an exterior surface;
 - an interior surface; and
 - a plurality of tapered sections, the tapered sections extending between the first end and the second end of the shot cup;
 - a bottom including a circular surface generally parallel to the circular rim and centered on the longitudinal axis, the circular surface connecting to a trough at an outside edge of the circular surface; and
 - a polymer coating on at least a portion of the sidewall.
2. The metal shot cup of claim 1, wherein the metal shot cup is formed from a single, integral piece of metal.
3. The metal shot cup of claim 2, wherein the metal shot cup is formed from aluminum.
4. The metal shot cup of claim 1, wherein the polymer coating is on the interior surface and the exterior surface of the sidewall.
5. The metal shot cup of claim 4, wherein the polymer coating on the interior surface has a first color and wherein the polymer coating on the exterior surface has a second color.

6. The metal shot cup of claim 5, wherein the first color is different from the second color.

7. The metal shot cup of claim 4, wherein the polymer coating is formed from polyphenylene ether.

8. The metal shot cup of claim 1, wherein the plurality of tapered sections comprises:

a first tapered section, the first tapered section extending generally upward from the bottom and having a first angle; and

a second tapered section having a second angle;

wherein the first tapered section is positioned between the bottom and the second tapered section.

9. The metal shot cup of claim 8, further comprising an upper section, the upper section positioned between the second tapered section and the circular rim.

10. The metal shot cup of claim 1, further comprising a cover couplable to the circular rim, the cover forming a tight seal that seals contents stored within the metal shot cup.

11. A one-piece metal shot cup comprising:
an open end of the shot cup including a bore;
a closed end of the shot cup opposing the open end of the shot cup;
a rim extending between an outside edge and an inside edge centered on a longitudinal, central axis;
a sidewall extending between the open end and closed end of the shot cup and centered on the longitudinal, central axis, the sidewall comprising:
an exterior surface;
an interior surface;

a first tapered section, the first tapered section extending at a first angle relative to the longitudinal, central axis;

a second tapered section extending at a second angle relative to the longitudinal, central axis;

an upper section;

a bottom including a circular surface generally parallel to the rim and centered on the longitudinal, central axis, the circular surface connecting to a trough at an outside edge of the circular surface;

wherein the first tapered section is positioned between the bottom and the second tapered section; and

wherein the upper section is positioned between the second tapered section and the rim.

12. The one-piece metal shot cup of claim 11, further comprising an upper boundary of the second tapered section, the upper boundary of the second tapered section positioned between the second tapered section and the upper section, wherein the upper boundary indicates a volume of 1 oz.

13. The one-piece metal shot cup of claim 11, wherein the second angle is greater than the first angle.

14. The one-piece metal shot cup of claim 11, wherein a thickness of the rim is defined between the outside edge of the rim and the inside edge of the rim, wherein the thickness of the rim is less than .1 inches.

15. The one-piece metal shot cup of claim 11, further comprising a polyphenylene ether coating on the interior surface and the exterior surface of the sidewall.

16. The one-piece metal shot cup of claim 15, wherein the polyphenylene ether coating on the interior surface has a first color and wherein the polyphenylene ether coating on the exterior surface has a second color.

17. A one-piece metal shot cup kit comprising:
a plurality of one-piece metal shot cups, each one-piece metal shot cup comprising:
an open end of the shot cup including a central bore;
a closed end of the shot cup opposing the open end of the shot cup;
a circular rim extending between an outside edge and an inside edge centered on a longitudinal axis, the circular rim having a radius less than .05 inches;
a sidewall extending between the open end and closed end of the shot cup and centered on the longitudinal axis, the sidewall comprising:
an exterior surface;
an interior surface; and
a plurality of tapered sections extending between the open end and the closed end of the shot cup, the plurality of tapered sections each extending at an angle relative to the longitudinal axis;
a bottom including a circular surface generally parallel to the circular rim and centered on the longitudinal axis, the circular surface connecting to a trough at an outside edge of the circular surface; and
a container configured to hold the plurality of one-piece metal shot cups when the plurality of one-piece metal shot cups are stacked.
18. The one-piece metal shot cup kit of claim 17, wherein each of the plurality of one-piece metal shot cups includes a height defined between a top of the circular rim and a lower edge of the trough and wherein the height is less than 2 inches.
19. The one-piece metal shot cup kit of claim 17, the container further comprising a cylindrical tube with a bore, wherein the plurality of one-piece metal shot cups are stacked within the bore of the cylindrical tube.
20. The one-piece metal shot cup kit of claim 17, further comprising a plurality of covers, each cover couplable to the circular rim of the plurality of shot cups.

ABSTRACT

Various embodiments of a metal container, such as a shot cup are described. The metal shot cup includes a body with a tightly curled rim at the top end of the cup. The body includes multiple tapered sections such that the diameter of the cup may be different at different places along a height of the cup. In various embodiments, the metal shot cup includes a polymer coating on at least one of the interior and exterior surfaces.

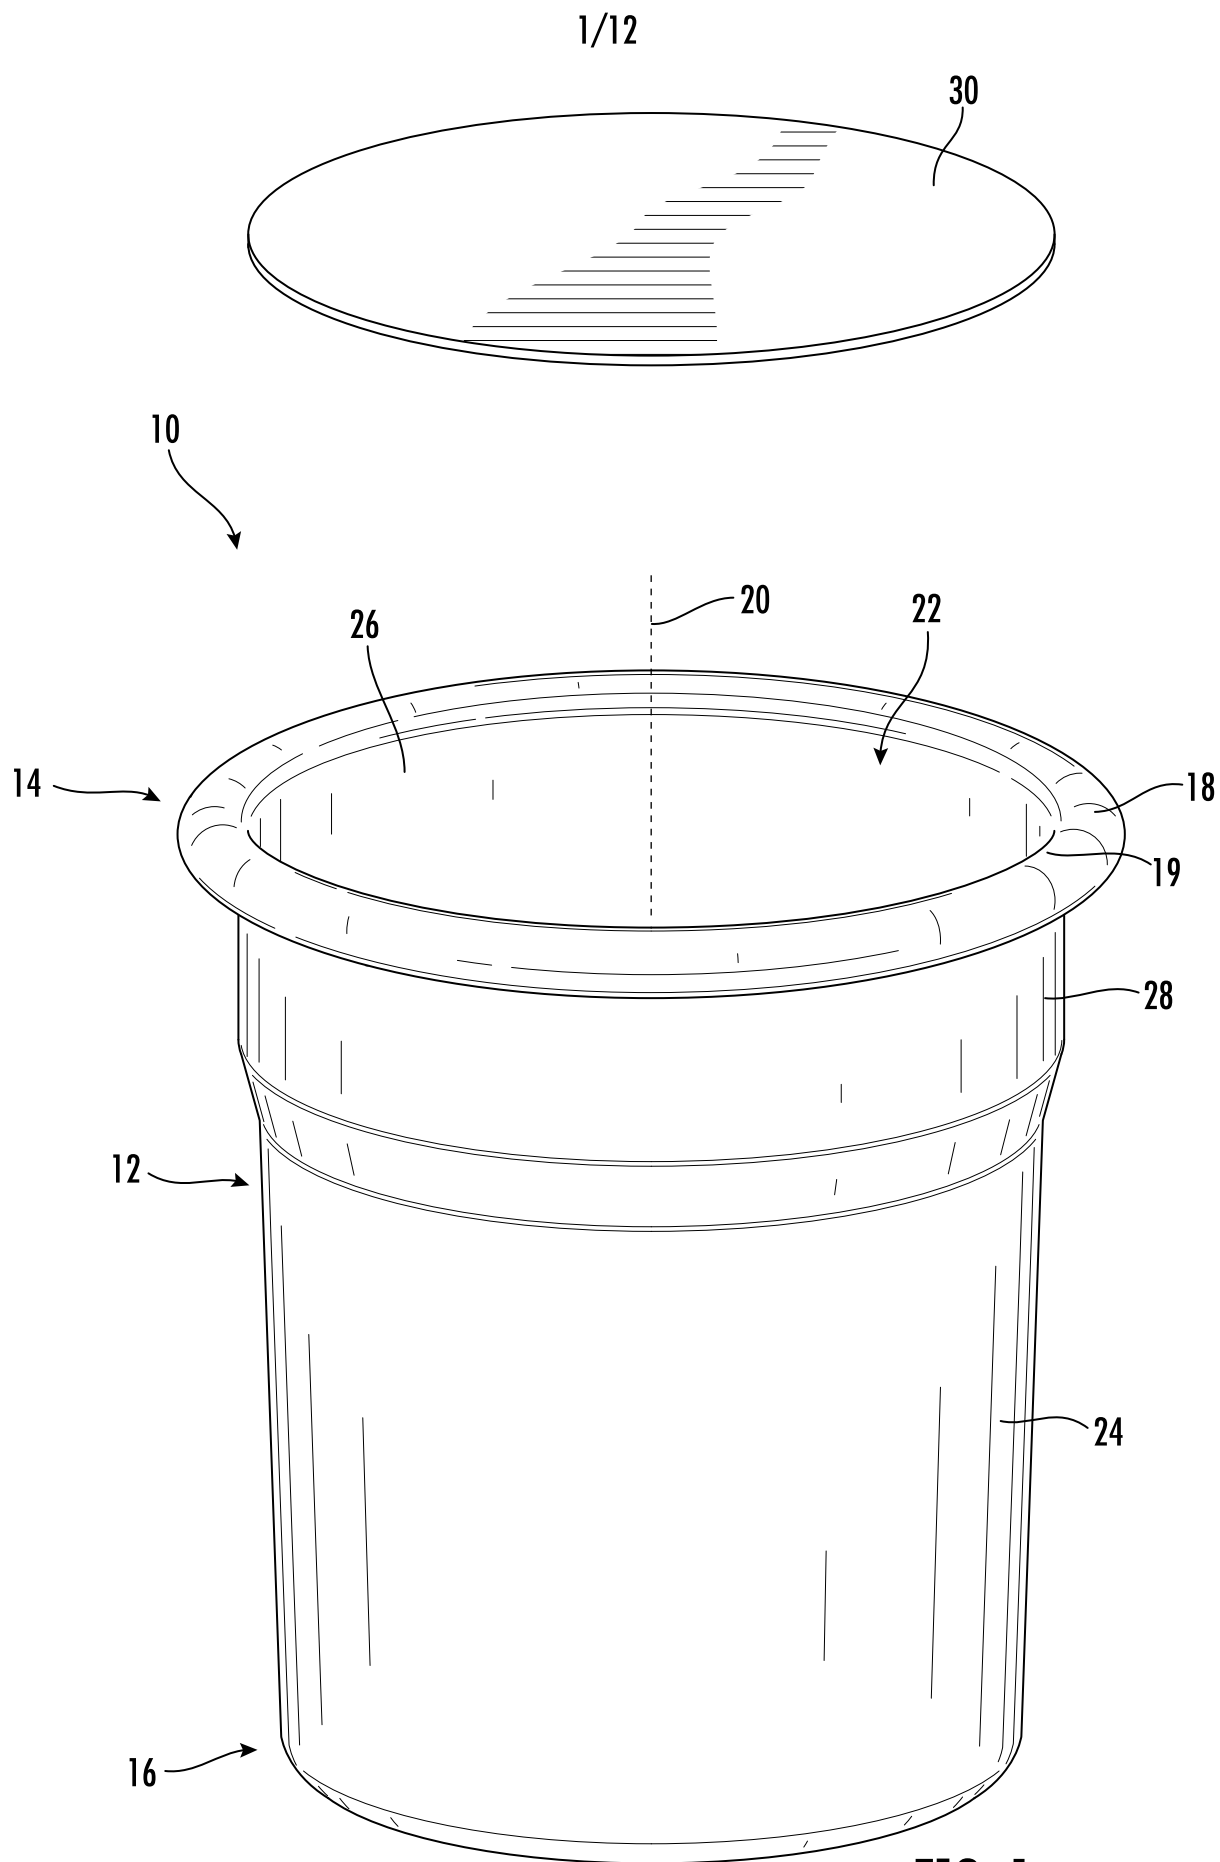


FIG. 1

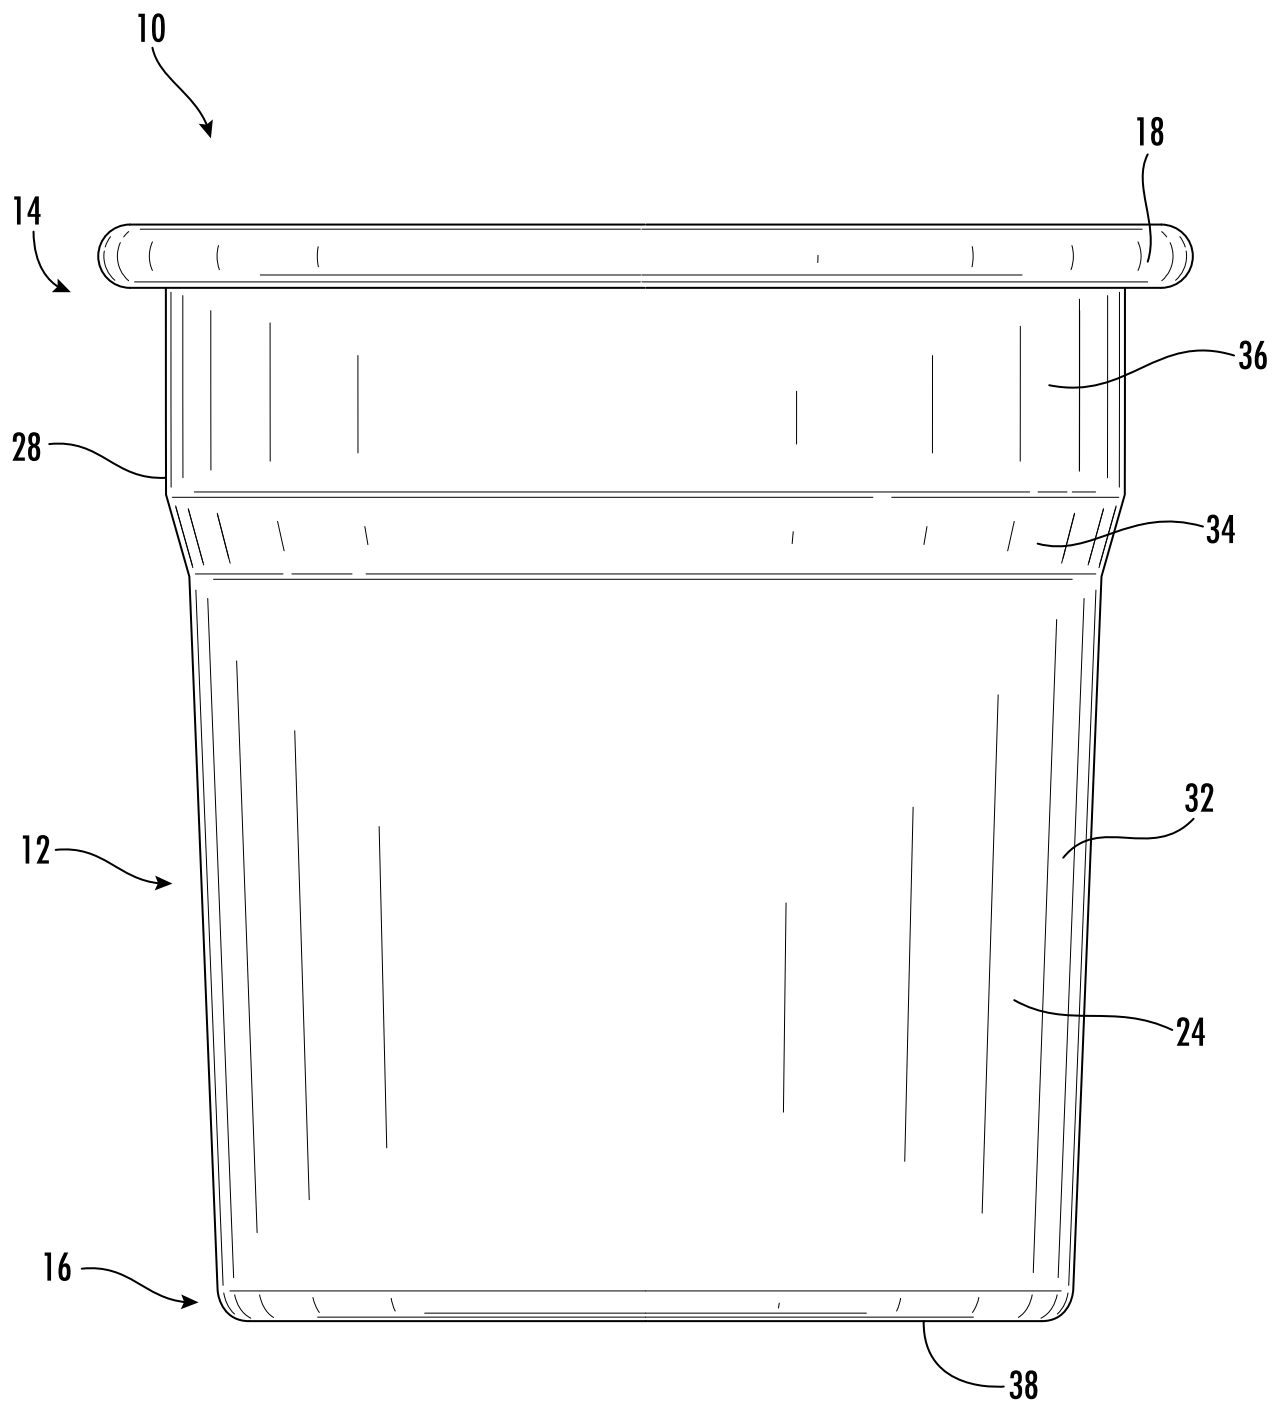


FIG. 2

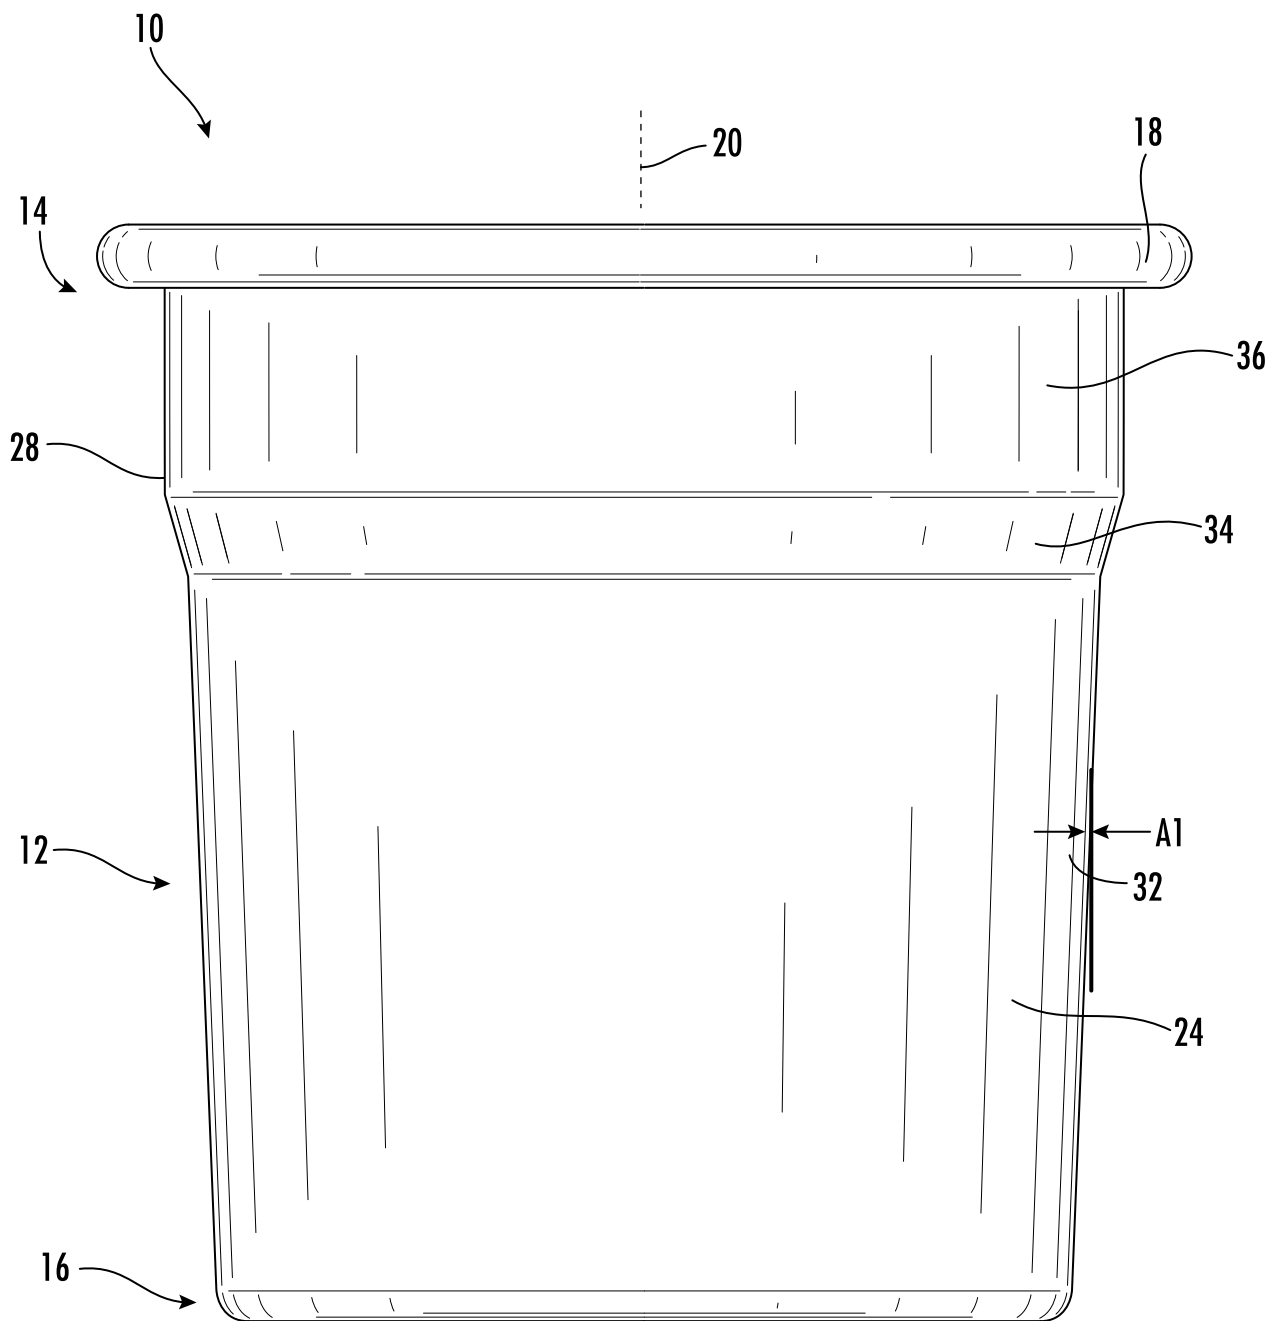


FIG. 3

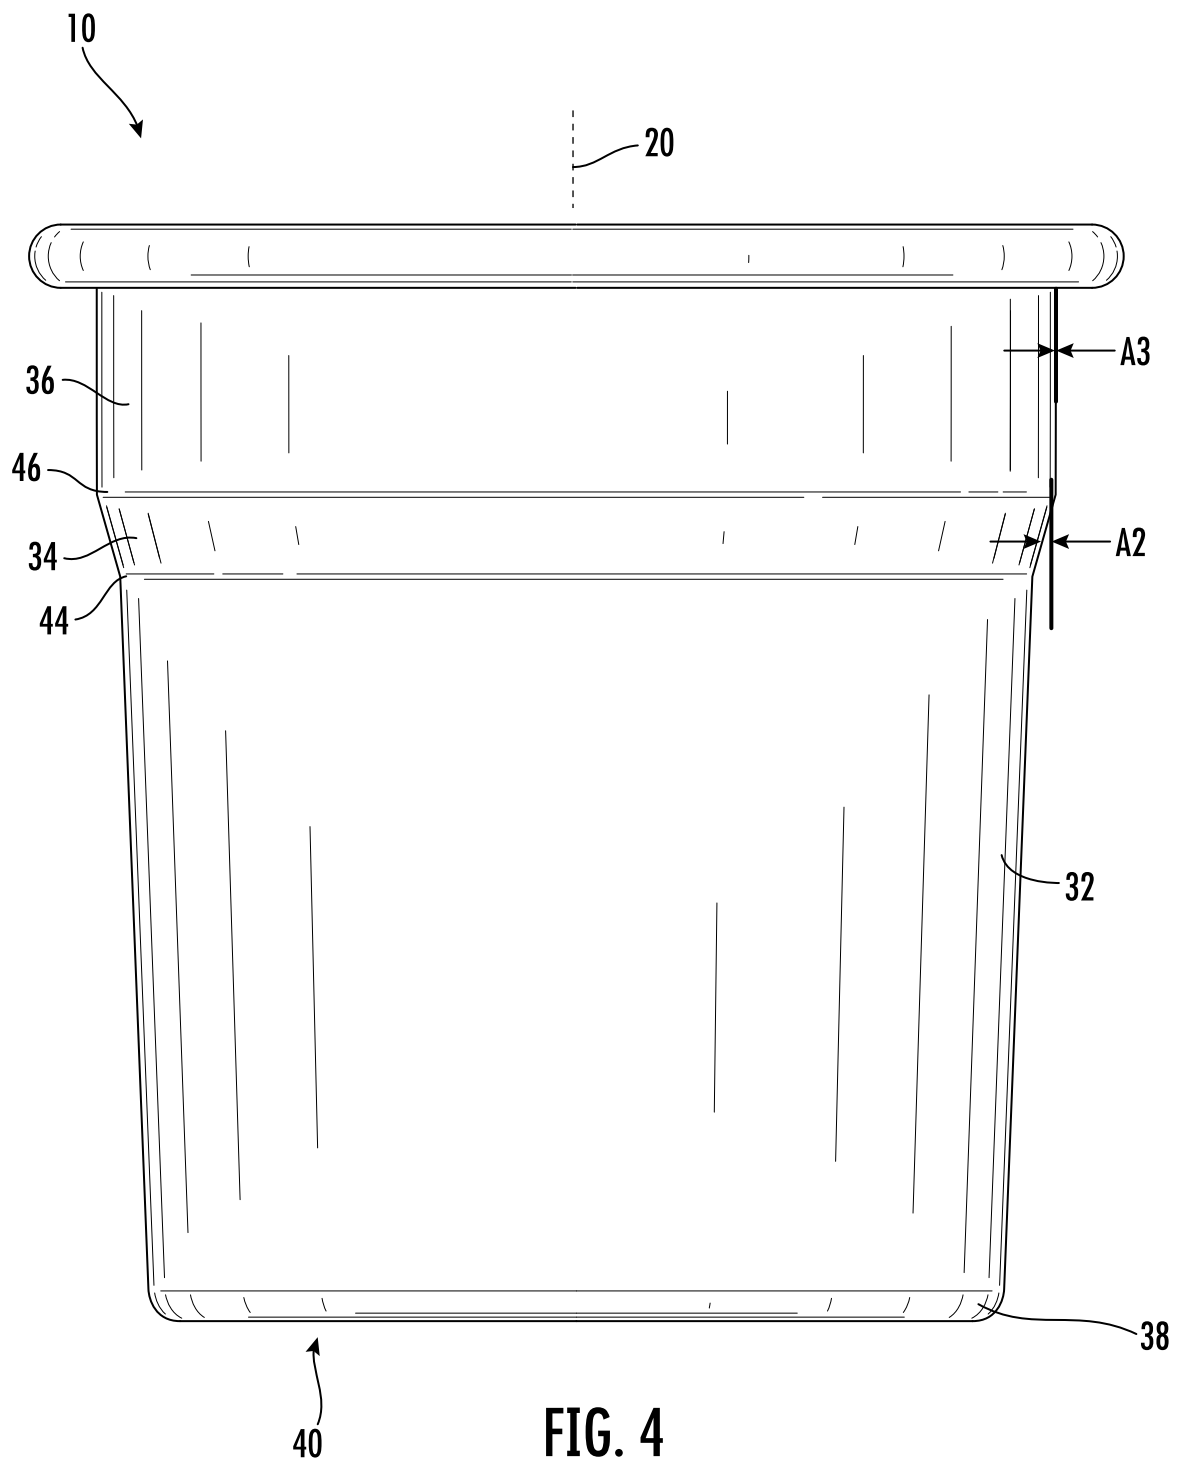


FIG. 4

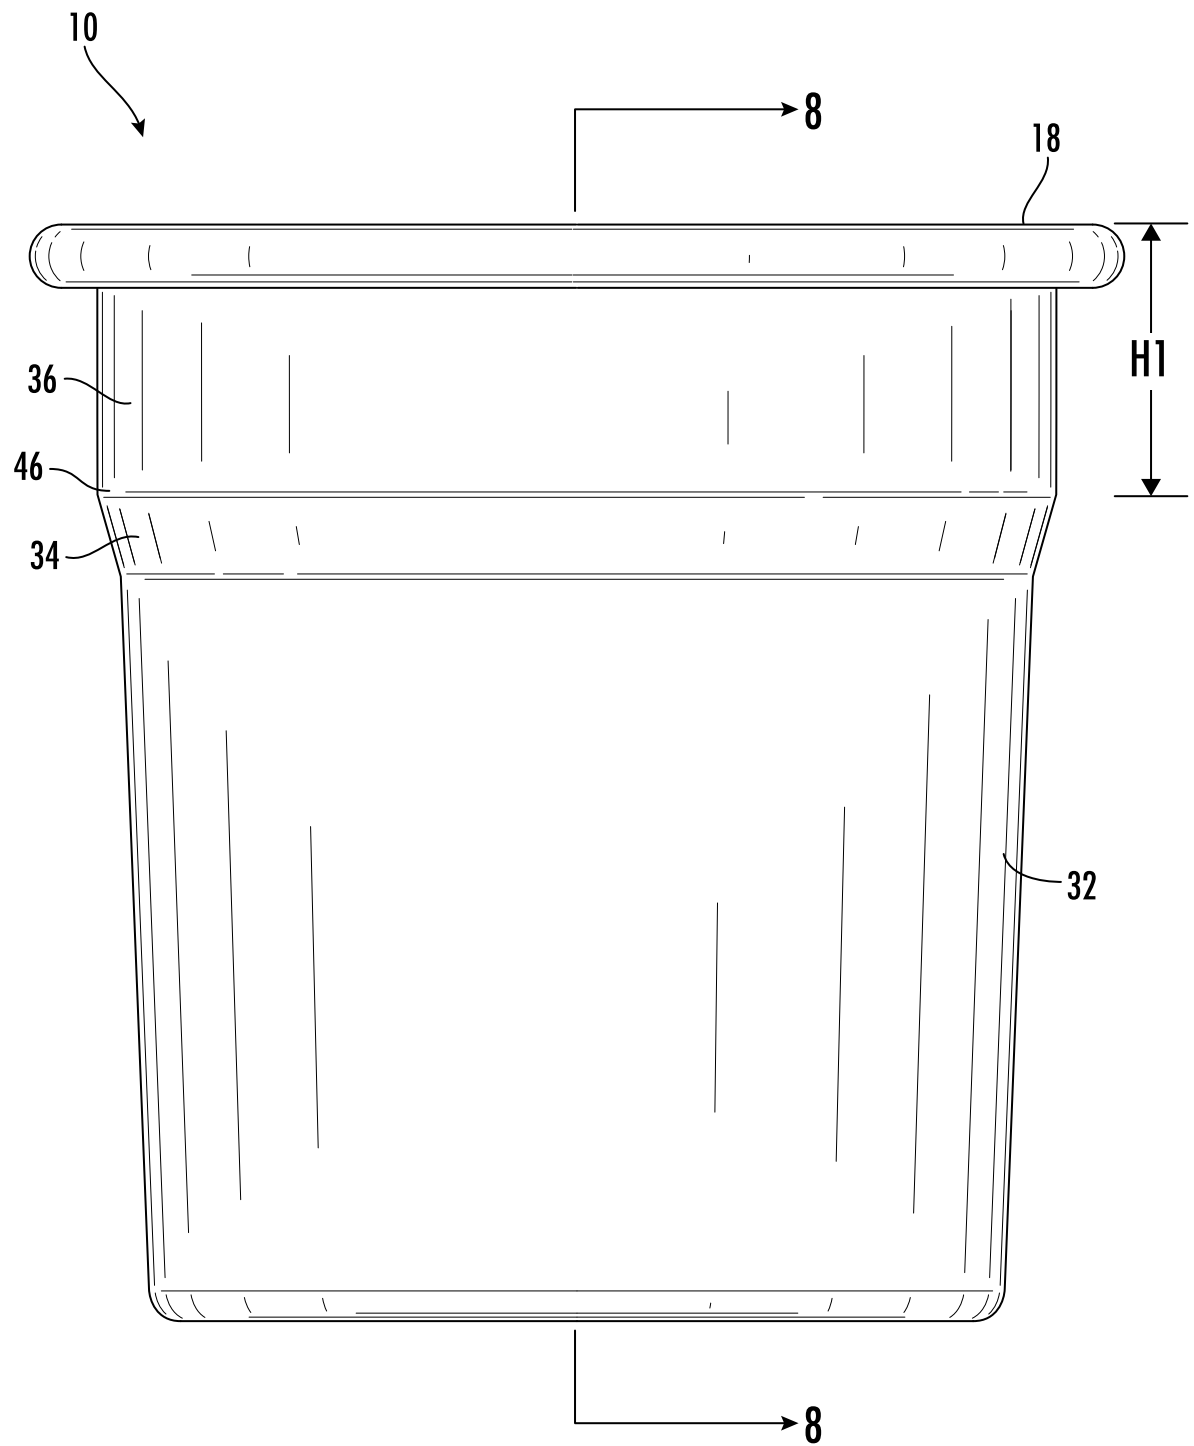


FIG. 5

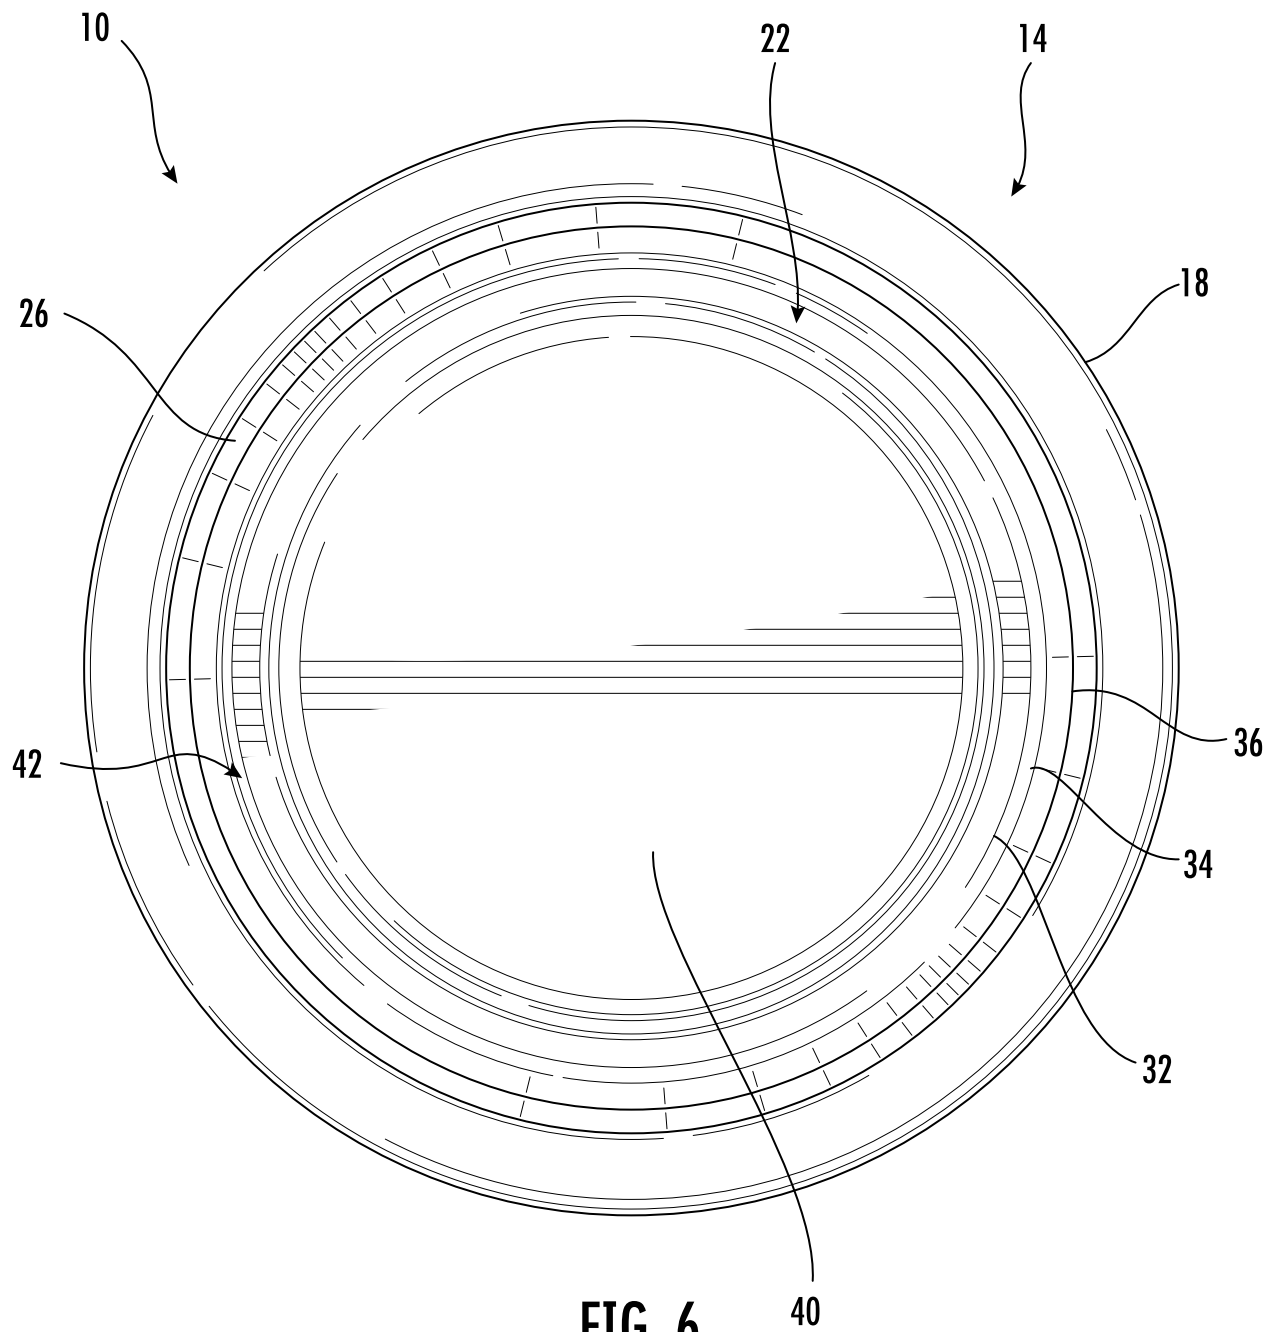


FIG. 6

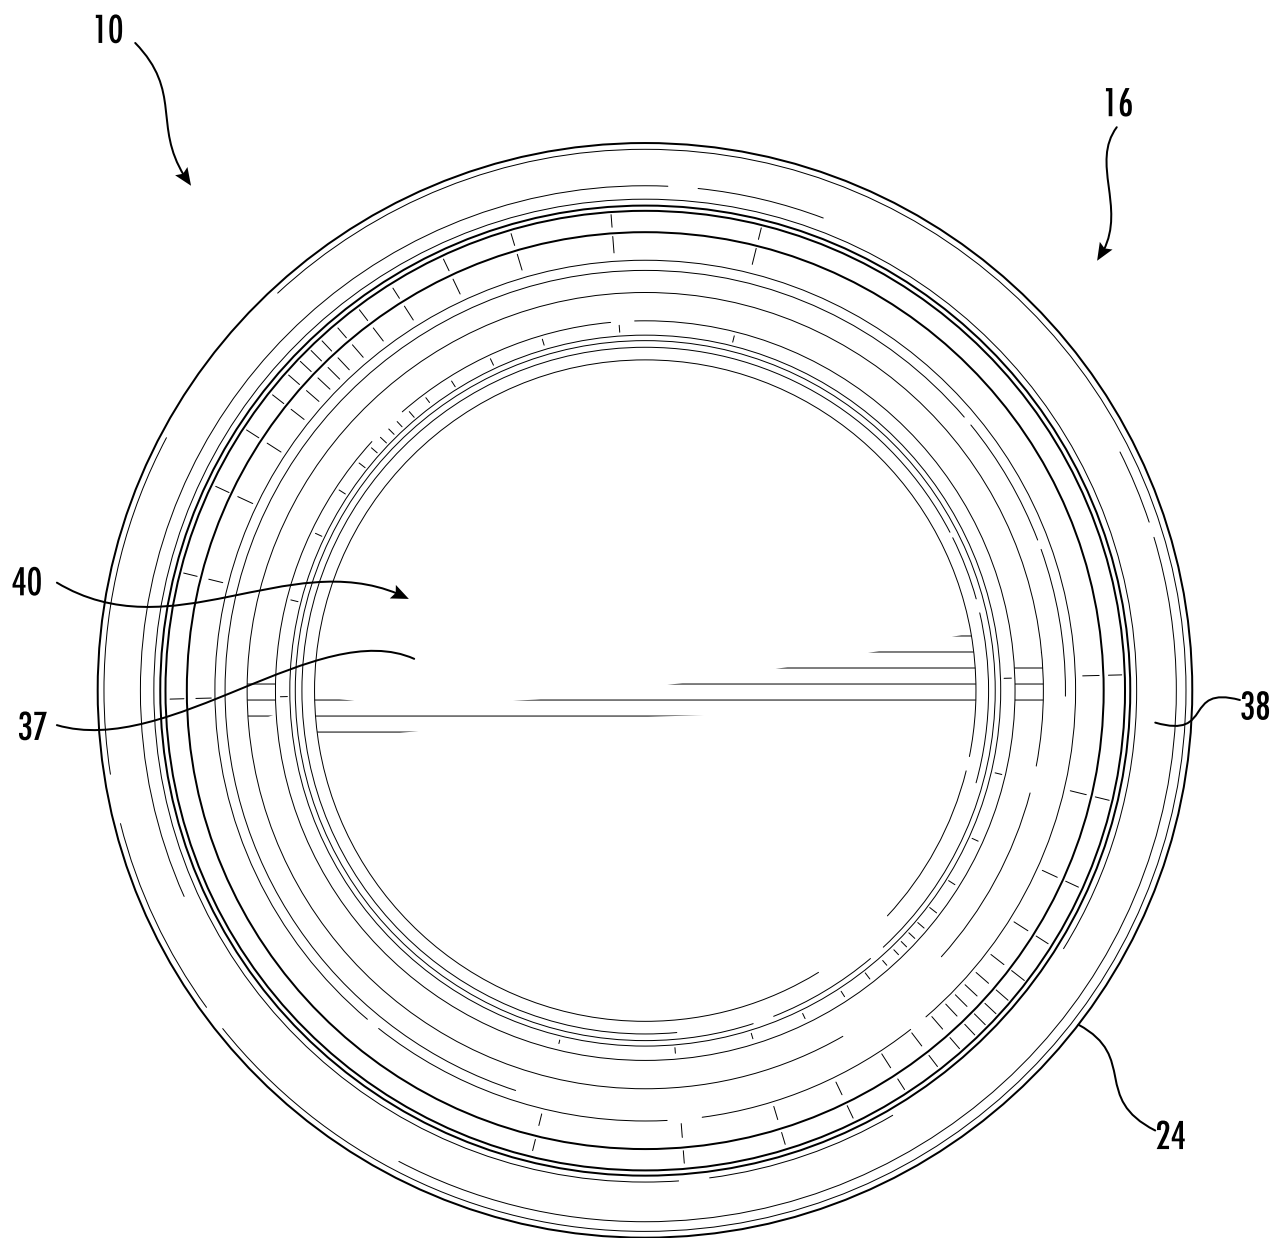


FIG. 7


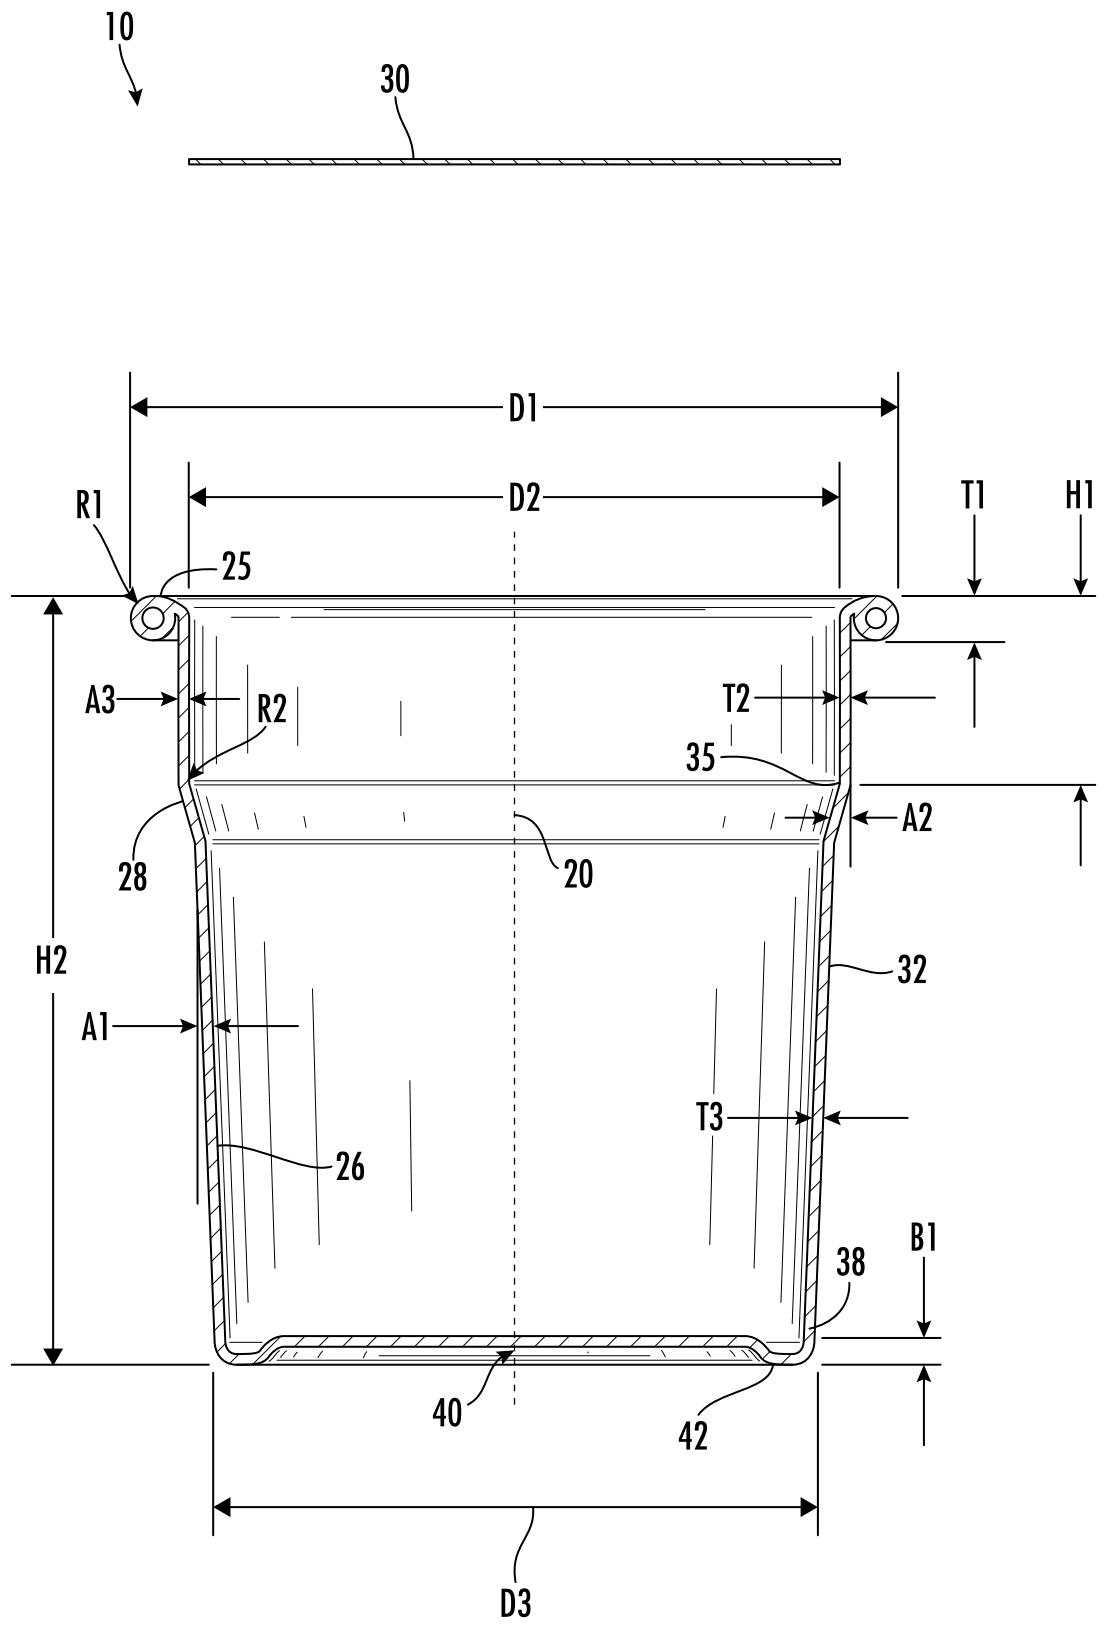


FIG. 8

9/12

100

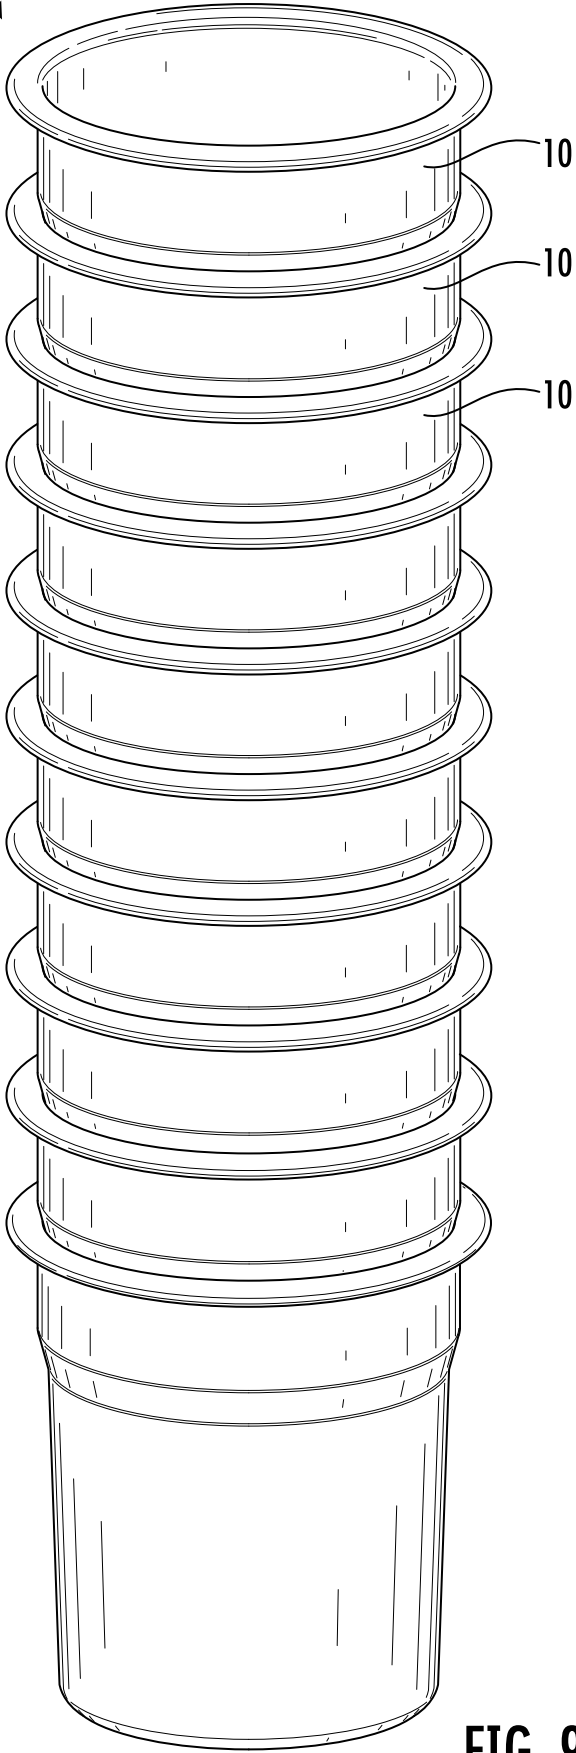

10

10

10

FIG. 9

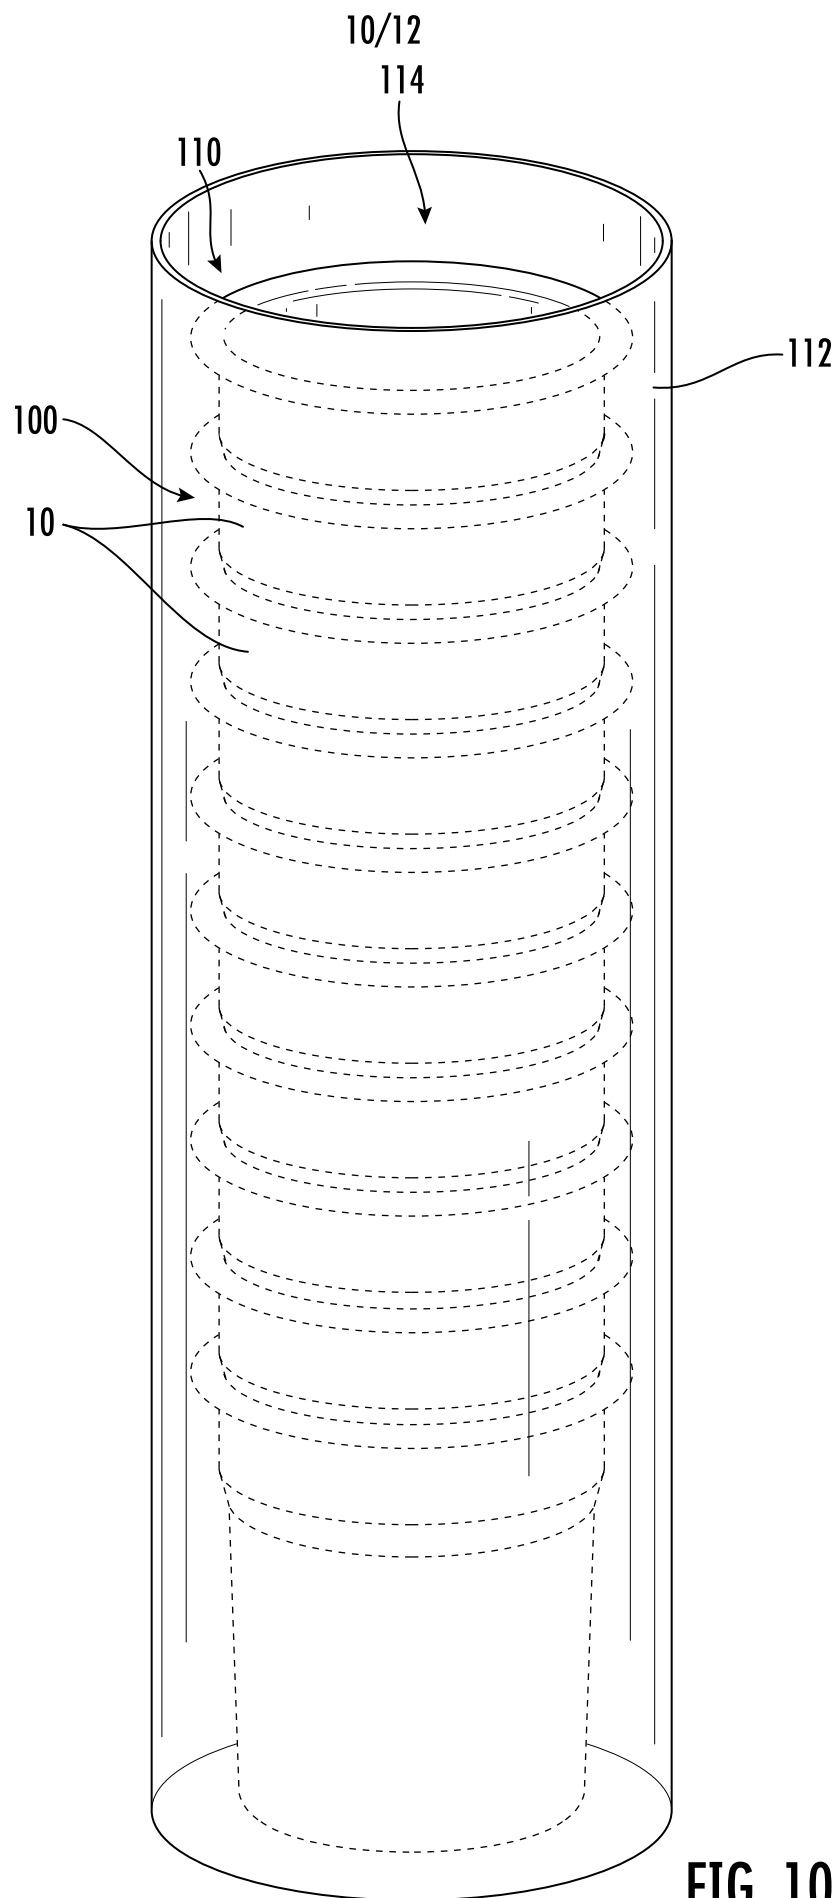


FIG. 10


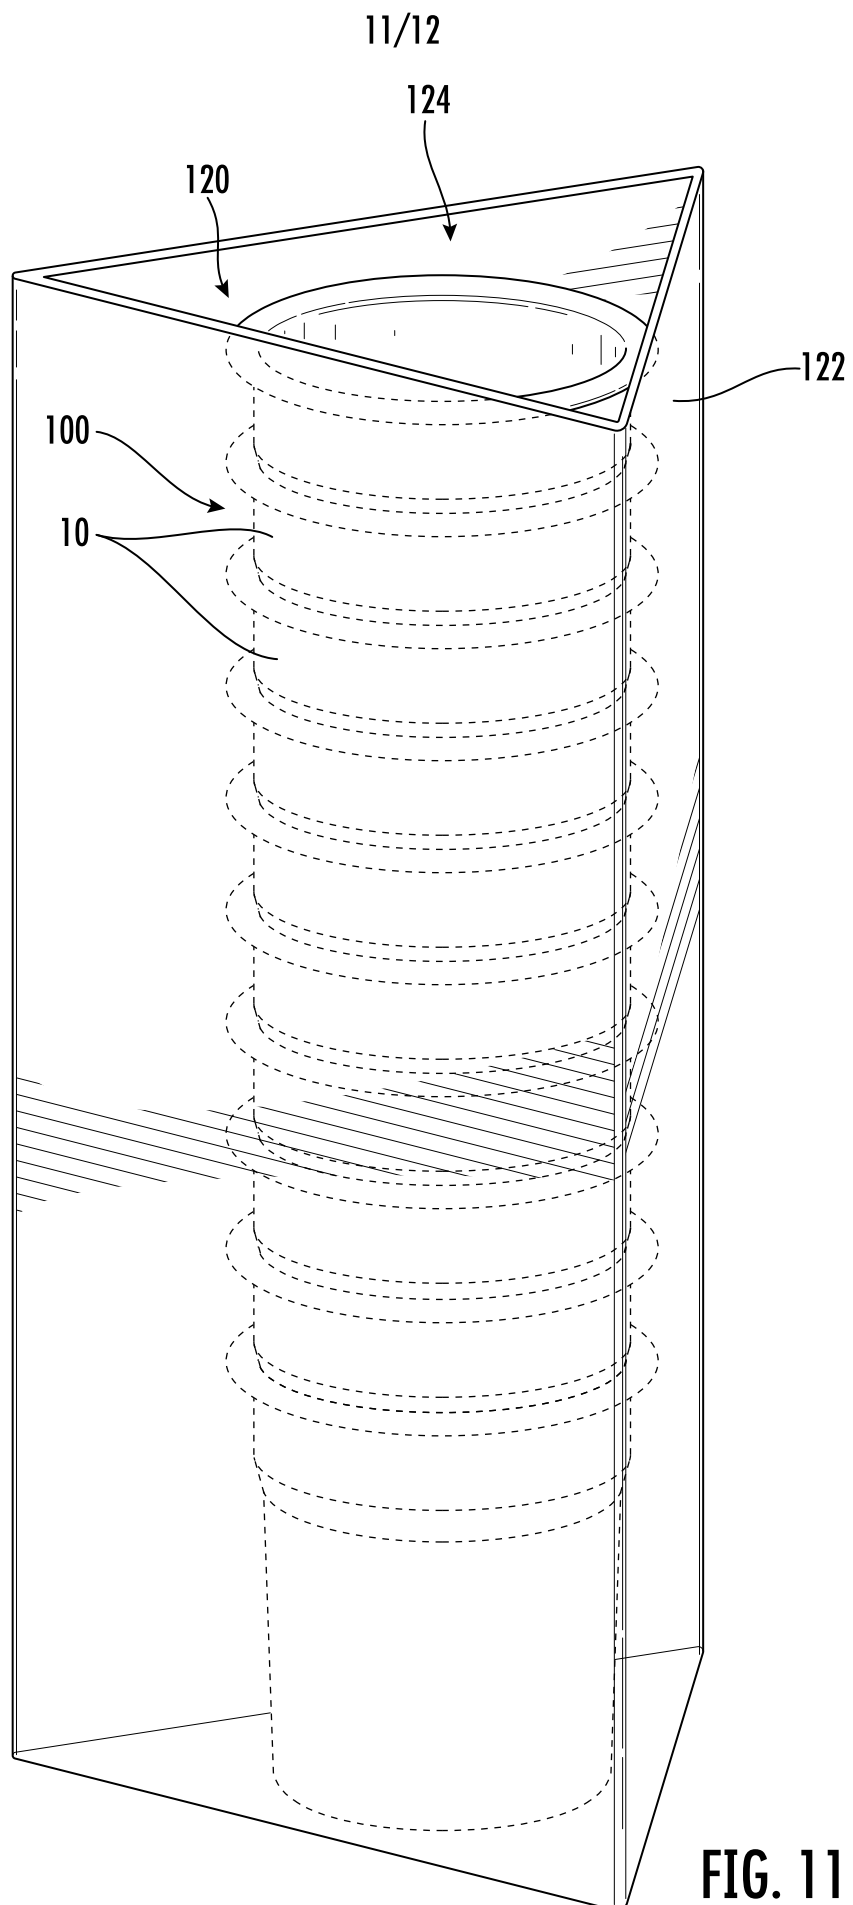


FIG. 11

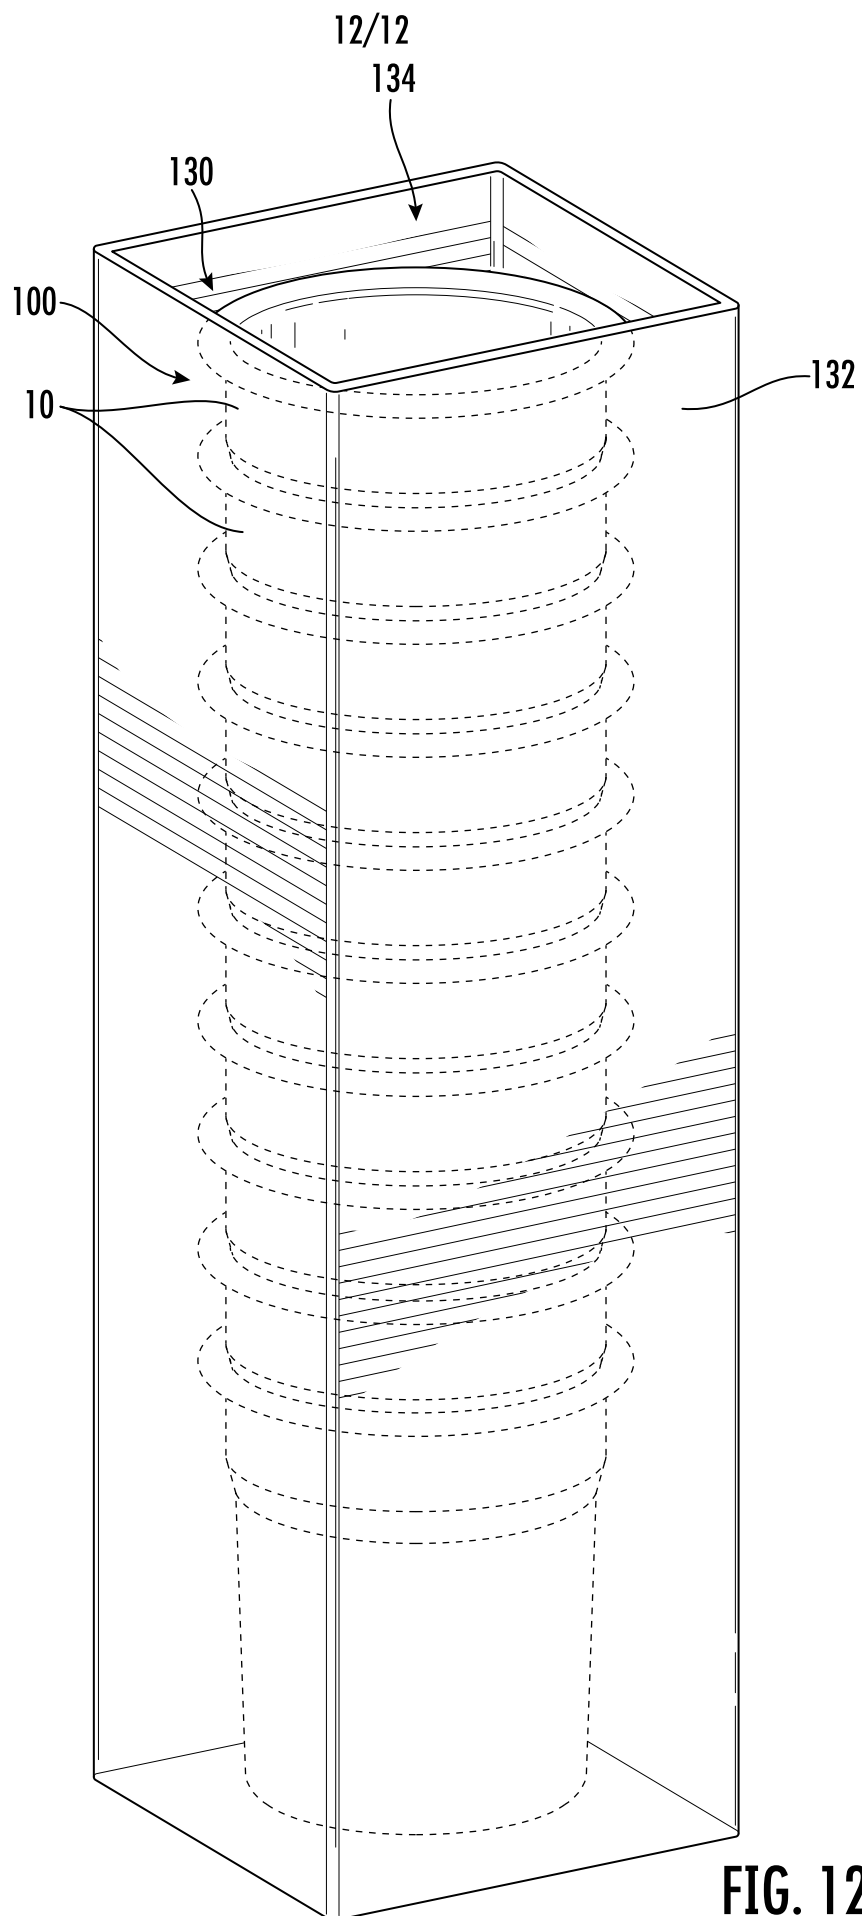

Application Data Sheet

Application Information

Application Number:	To Be Determined
Application Type:	Nonprovisional
Subject Matter:	Utility
CD-ROM or CD-R:	None
Computer Readable Form (CRF):	No
Title:	Metal Shot Cup
Attorney Docket Number:	086563-0860
Request for Early Publication:	No
Request for Non-Publication:	No
Suggested Drawing Figure:	1
Total Drawing Sheets:	12
Small Entity:	No
Petition included:	No
Secrecy Order in Parent Appl.:	No

Inventor Information

Status:	Full Capacity
Given Name:	Mark David
Family Name:	Stowers
City of Residence:	Lancaster
State or Province of	South Carolina

Residence:	
Country of Residence:	US
Street of mailing address:	10249 Lake Shore Drive
City of mailing address:	Lancaster
State or Province of mailing	South Carolina
address:	
Country of mailing address:	US

Postal or Zip Code of mailing address: 29720

Status: Full Capacity
Given Name: Micah Roger
Family Name: Millspaw
City of Residence: Ixonia
State or Province of Residence: Wisconsin
Country of Residence: US
Street of mailing address: 5701 Frontier Road
City of mailing address: Oconomowoc
State or Province of mailing address: Wisconsin
Country of mailing address: US
Postal or Zip Code of mailing address: 53066

Correspondence Information

Correspondence Customer Number: 22922
E-Mail address: ipadmin@reinhardtllaw.com

Representative Information

Representative Customer Number:	22922	
---------------------------------	-------	--

Domestic Priority Information

Application:	Continuity Type:	Prior Application No.:	Parent Filing Date:	Prior Application Status:	Patent No.:
This Application					
	Claims the benefit under 35 U.S.C. 119(e)				

Foreign Priority Information

Country:	Application number:	Filing Date:	Priority Claimed:

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications

☐ This application (1) claims priority to or the benefit of an application filed before March 16, 2013 and (2) also contains, or contained at any time, a claim to a claimed invention that has an effective filing date on or after March 16, 2013.

NOTE: By providing this statement under 37 CFR 1.55 or 1.78, this application, with a filing date on or after March 16, 2013, will be examined under the first inventor to file provisions of the AIA.

Authorization or Opt-Out of Authorization to Permit Access:

When this Application Data Sheet is properly signed and filed with the application, applicant has provided written authority to permit a participating foreign intellectual property (IP) office access to the instant application-as-filed (see paragraph A in subsection 1 below) and the European Patent Office (EPO) access to any search results from the instant application (see paragraph B in subsection 1 below).

Should applicant choose not to provide an authorization identified in subsection 1 below, applicant **must opt-out** of the authorization by checking the corresponding box A or B or both in subsection 2 below.

NOTE: This section of the Application Data Sheet is **ONLY** reviewed and processed with the **INITIAL** filing of an application. After the initial filing of an application, an Application Data Sheet cannot be used to provide or rescind authorization for access by a foreign IP office(s). Instead, Form PTO/SB/39 or PTO/SB/69 must be used as appropriate.

1. Authorization to Permit Access by a Foreign Intellectual Property Office(s)

A. Priority Document Exchange (PDX) - Unless box A in subsection 2 (opt-out of authorization) is checked, the undersigned hereby **grants the USPTO authority** to provide the European Patent Office (EPO), the Japan Patent Office (JPO), the Korean Intellectual Property Office (KIPO), the State Intellectual Property Office of the People's Republic of China (SIPO), the World Intellectual Property Organization (WIPO), and any other foreign intellectual property office participating with the USPTO in a bilateral or multilateral priority document exchange agreement in which a foreign application claiming priority to the instant patent application is filed, access to: (1) the instant patent application-as-filed and its related bibliographic data, (2) any foreign or domestic application to which priority or benefit is claimed by the instant application and its related bibliographic data, and (3) the date of filing of this Authorization. See 37 CFR 1.14(h)(1).

B. Search Results from U.S. Application to EPO - Unless box B in subsection 2 (opt-out of authorization) is checked, the undersigned hereby **grants the USPTO authority** to provide the EPO access to the bibliographic data and search results from the instant patent application when a European patent application claiming priority to the instant patent application is filed. See 37 CFR 1.14(h)(2).

The applicant is reminded that the EPO's Rule 141(1) EPC (European Patent Convention) requires applicants to submit a copy of search results from the instant application without delay in a European patent application that claims priority to the instant application.

2. Opt-Out of Authorizations to Permit Access by a Foreign Intellectual Property Office(s)

☐ A. Applicant **DOES NOT** authorize the USPTO to permit a participating foreign IP office access to the instant application-as-filed. If this box is checked, the USPTO will

not be providing a participating foreign IP office with any documents and information identified in subsection 1A above.

[] B. Applicant **DOES NOT** authorize the USPTO to transmit to the EPO any search results from the instant patent application. If this box is checked, the USPTO will not be providing the EPO with search results from the instant application.

NOTE: Once the application has published or is otherwise publicly available, the USPTO may provide access to the application in accordance with 37 CFR 1.14.

Applicant Information

Applicant 1:

☒ Assignee	☐ Legal Representative under 35 U.S.C. 117	☐ Person to whom the inventor is obligated to assign	☐ Person who shows sufficient proprietary interest
--	---	---	---

If applicant is the legal representative, indicate the authority to file the patent application, the inventor is:

Name of the Deceased or Legally Incapacitated Inventor:

If the Assignee is an Organization check here [X]

Organization Name:	Silgan Containers LLC
21600 Oxnard Street, Suite 1600 Woodland Hills, California 91367	

Signature:	/Christine S. McLinn/	Date:	August 8, 2023
First Name:	Christine S.	Last Name:	McLinn
Registration No.:	79,460		