

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2024 年 8 月 15 日 (15.08.2024)



(10) 国际公布号
WO 2024/164932 A1

(51) 国际专利分类号:

H04W 28/04 (2009.01)

(21) 国际申请号:

PCT/CN2024/075297

(22) 国际申请日:

2024 年 2 月 1 日 (01.02.2024)

(25) 申请语言:

中文

(26) 公布语言:

中文

(30) 优先权:

202310143514.1 2023年2月9日 (09.02.2023) CN

(71) 申请人: 华为技术有限公司 (**HUAWEI TECHNOLOGIES CO., LTD.**) [CN/CN]; 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。

(72) 发明人: 杨若男 (**YANG, Ruonan**); 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。 陈莹 (**CHEN, Ying**); 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。 王俊 (**WANG, Jun**); 中

国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。


(74) 代理人: 北京中博世达专利商标代理有限公司 (**BEIJING ZBSD PATENT & TRADEMARK AGENT LTD.**); 中国北京市海淀区交大东路 31 号 11 号楼 8 层, Beijing 100044 (CN)。

(81) 指定国(除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。

(84) 指定国(除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚

(54) **Title:** COMMUNICATION METHOD, APPARATUS AND SYSTEM

(54) 发明名称: 通信方法、装置及系统

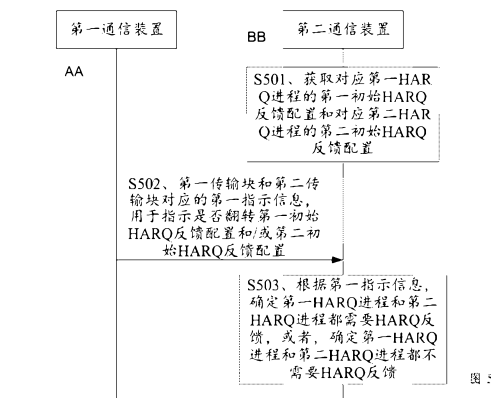

- S501 Acquire a first initial HARQ feedback configuration corresponding to a first HARQ process and a second initial HARQ feedback configuration corresponding to a second HARQ process
- S502 First indication information corresponding to a first transmission block and a second transmission block is used for indicating whether to flip the first initial HARQ feedback configuration and/or the second initial HARQ feedback configuration
- S503 According to the first indication information, determine that both the first HARQ process and the second HARQ process require HARQ feedback, or determine that neither of the first HARQ process and the second HARQ process requires HARQ feedback
- AA First communication apparatus
- BB Second communication apparatus

(57) **Abstract:** Provided in the present application are a communication method, apparatus and system, which are applied to the technical field of communications. The communication method provided in the present application comprises: acquiring a first initial HARQ feedback configuration corresponding to a first HARQ process and a second initial HARQ feedback configuration corresponding to a second HARQ process; receiving first control information, wherein the first control information comprises first indication information corresponding to a first transmission block and a second transmission block, and the first indication information is used for indicating whether to flip the first initial HARQ feedback configuration and/or the second initial HARQ feedback configuration; and according to the first indication information, determining that both the first HARQ process and the second HARQ process require HARQ feedback, or determining that neither of the first HARQ process and the second HARQ process requires HARQ feedback. On the basis of the communication method provided in the present application, a receiving end can determine, according to first indication information, whether to flip a first initial HARQ feedback configuration and/or a second initial HARQ feedback configuration, such that HARQ feedback configurations of two HARQ processes are consistent, thereby

(AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布：
— 包括国际检索报告(条约第21条(3))。

preventing the mutual influence between HARQ processes having different HARQ feedback configurations.

(57) 摘要: 本申请提供了通信方法、装置及系统, 应用于通信技术领域。本申请提供的通信方法包括: 获取对应第一HARQ进程的第一初始HARQ反馈配置和对应第二HARQ进程的第二初始HARQ反馈配置; 接收第一控制信息; 第一控制信息包括第一传输块和第二传输块对应的第一指示信息; 第一指示信息用于指示是否翻转第一初始HARQ反馈配置和/或第二初始HARQ反馈配置; 根据第一指示信息, 确定第一HARQ进程和第二HARQ进程都需要HARQ反馈, 或者, 确定第一HARQ进程和第二HARQ进程都不需要HARQ反馈。基于本申请提供的通信方法, 接收端可以根据第一指示信息, 确定是否翻转第一初始HARQ反馈配置和/或第二初始HARQ反馈配置, 从而实现两个HARQ进程的HARQ反馈配置一致, 避免不同HARQ反馈配置的HARQ进程相互影响。