

- (51) International Patent Classification:

H02G 1/04 (2006.01) H02G 7/12 (2006.01)
- (21) International Application Number:

PCT/US2024/027745
- (22) International Filing Date:

03 May 2024 (03.05.2024)
- (25) Filing Language:

English
- (26) Publication Language:

English
- (30) Priority Data:

63/499,849 03 May 2023 (03.05.2023) US
- (71) Applicant: MARMON UTILITY LLC [US/US]; 53 Old Wilton Road, Milford, New Hampshire 03055 (US).
- (72) Inventors: NEUMANN, Robert Frederick; c/o Marmon Utility LLC, 53 Old Wilton Road, Milford, New Hampshire
- 03055 (US). LAUGHLIN, Edward William; c/o Marmon Utility LLC, 53 Old Wilton Road, Milford, New Hampshire 03055 (US). BAKER, Mark A.; c/o Marmon Utility LLC, 53 Old Wilton Road, Milford, New Hampshire 03055 (US).
- (74) Agent: HARRIS, Michael J. et al.; Arnold & Porter Kaye Scholer LLP, 601 Massachusetts Ave., NW, Washington DC, District of Columbia 20001-3743 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,

(54) Title: DUAL MESSENGER ROLLING SPACER

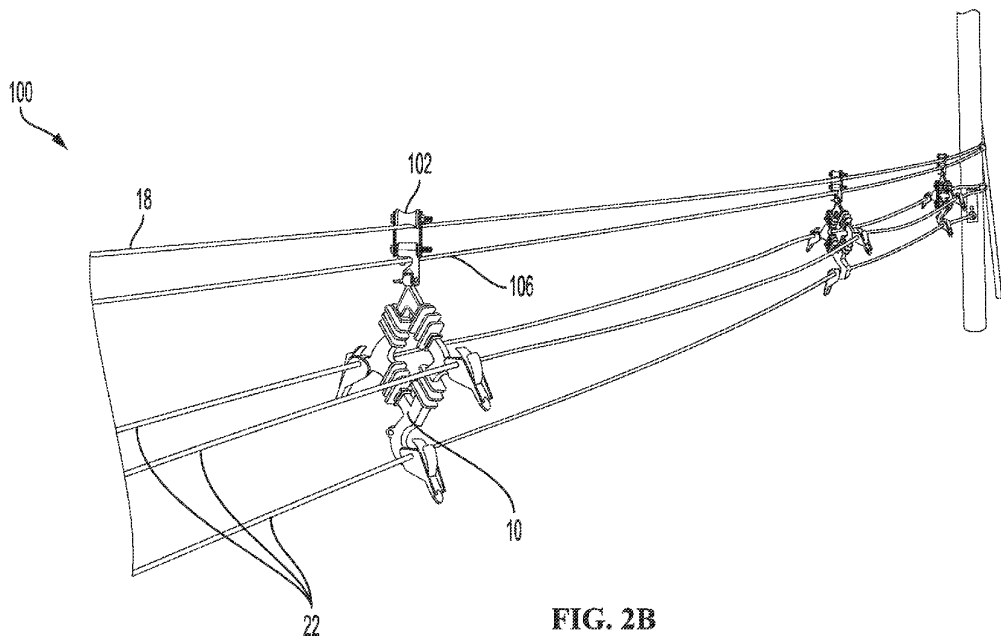


FIG. 2B

(57) Abstract: An apparatus for installing cables in overhead transmission and distribution systems and a corresponding method of use are disclosed herein. The apparatus described herein may comprise a dual messenger rolling cable spacer used to install cables in overhead transmission and distribution systems. In various embodiments, the method of using the dual messenger rolling cable spacer may include installing a carrier messenger wire across a span between utility structures. One or more rolling spacers may then be hung from the carrier messenger wire via a roller such that the roller is in contact with the carrier messenger wire. A set of cables and a circuit messenger wire may be affixed to the one or more rolling spacers. The circuit messenger wire may then be pulled across the span causing the one or more rolling spacers to roll along the carrier messenger wire, thereby pulling the set of cables across the span.

TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*