

JOSE LLOREDA CAMACHO & CO.

ABOGADOS

Calle 72 No. 5-83 Piso 5, Bogotá, D.C. Tel: 6069700 Fax 6069701

SUPERINTENDENCIA DE INDUSTRIA Y COMERCIO



No. 12-049720- -00001-0000

Fecha: 2012-04-17 17:32:12 Dep. 2020 DIR.NUEVASCR
Tra. 2 PATENTES Eve: 1 REGDEPOSITO
Act. 329 CTOINFORMACION Folios: 50

Señor

SUPERINTENDENTE DE INDUSTRIA Y COME
DIVISIÓN DE NUEVAS CREACIONES

E. _____ S. _____ D. _____

Re: PI.-ROHM AND HAAS COMPANY.-Solicitud de Patente de Invención
para "COMPOSICIONES DE LIBERACIÓN CONTROLADA".-Clase
A01N 27/00.-Expediente número 12-049.720.-

1. Me refiero a mi Solicitud de Patente de Invención radicada ante ese Despacho el 23 de Marzo de 2012.
2. Atentamente me permito presentar a ese Despacho el documento que acredita el traspaso, que el autor de la patente de la referencia hace a favor de mi representado, de los derechos sobre la misma, debidamente apostillado y legalizado hasta por el Ministerio de Relaciones Exteriores de Colombia, junto con su Traducción Oficial No. 2012-04-12-220.
3. Adicionalmente, me permito presentar a ese Despacho copia debidamente certificada de la Solicitud de Patente **respecto de la cual reclamo prioridad**, dentro del trámite de la Solicitud arriba referida, a saber, la Solicitud Estadinense número **61/471,786** de 5 de Abril de 2011, junto con su Traducción Oficial número 2012-04-12-221, correspondiente a dicho documento.
4. Ruego a usted tomar atenta nota de lo anterior y proceder de conformidad.

Señor Superintendente,

ALICIA LLOREDA RICAURTE

T.P. 53.215

2

3

TRADUCCION OFICIAL No. 2012-04-12-220
DE UN DOCUMENTO ESCRITO EN INGLES

APOSTILLA

(Convención de La Haya del 5 de octubre de 1961)

1. País: Estados Unidos de América
2. Este documento público ha sido firmado por Dorothy E Kennedy
3. actuando como Notario Público
4. lleva el sello/estampilla de Dorothy E Kennedy, Notario Público, Condado de Filadelfia, Mancomunidad de Pennsylvania
- Certificado
5. en Harrisburg, Pennsylvania
6. el día 21 de marzo de 2012
7. por Carol Aichele, Secretario de la Mancomunidad de Pennsylvania
8. No. 201209460
9. Sello/Estampilla
10. Firma: (ilegible)
- Secretario de la Mancomunidad de Pennsylvania
- Carol Aichele

Esta Apostilla certifica exclusivamente la autenticidad de la firma y la competencia de la persona que ha firmado el documento público, y, si es apropiado, la identidad del sello o estampilla que el documento lleva.

Esta Apostilla no certifica el contenido del documento para el cual fue expedido.

Esta Apostilla no es válida para ser usada en ninguna parte dentro de los Estados Unidos de América, sus territorios o posesiones.

TRADUCTORA OFICIAL
RES. 2177/89 MINJUSTICIA

ANITA ESCOBAR DE TAMAYO

COPIA FIEL

A TODOS A QUIENES LOS PRESENTES LLEGAREN,

Por el presente certifico que el documento(s) adjunto es una COPIA(S) FIEL del documento(s) original que he comparado.

En Filadelfia, PA 19106, EE.UU.

Este día 8 de marzo de 2012

(firma: ilegible)
Janice Soulas
Profesional de Oficina
THE DOW CHEMICAL COMPANY

CERTIFICADO NOTARIAL

ESTADOS UNIDOS DE AMERICA)
MANCOMUNIDAD DE PENNSYLVANIA) SS
Condado/Parroquia DE FILADELFIA)

En este día 8 de marzo de 2012, compareció personalmente ante mí Janice Soulas, a quien conozco o se identificó ante mí como la persona que suscribió el documento anterior y reconoció que el mismo es un acto y acción libres para los fines y propósitos ahí expresados.

SELLO (firma: ilegible)
Notario Público
Dorothy Kennedy
NOTARIO PUBLICO, FILADELFIA, PENNSYLVANIA
MI NOMBRAMIENTO:
MANCOMUNIDAD DE PENNSYLVANIA

SELLO NOTARIAL
DOROTHY E. KENNEDY, Notario Público
Ciudad de Filadelfia, Condado de Filadelfia
Mi Nombramiento Expira el 15 de septiembre de 2015

TRASPASO INDIVIDUAL Y DECLARACION DEL INVENTOR
(con Derechos de Prioridad)

Yo/Nosotros verdaderamente creo que yo/nosotros soy el inventor original, primero y único/conjunto de la materia objeto comprendida por y para la cual se busca una patente sobre la invención llamada: COMPOSICIONES DE LIBERACION CONTROLADA

invención que fue hecha e inventada por mí/nosotros de y en el curso de mi/nuestro empleo con mis/nuestros respectivos empleadores según se indica debajo de mi /nuestros nombre(s). Reconozco que yo/nosotros poseo la invención y todas las patentes y otros derechos y facultades obtenidos o ejercibles respecto de ello en fiducia para nuestros respectivos empleadores. Como fiduciario(s), y por consideración y/o remuneración buena y valiosa recibida por mi/nuestro trabajo, yo/nosotros vendo, cedo y transfiero a:

Rohm and Haas Company
100 Independence Mall West
Filadelfia, PA 19106
ESTADOS UNIDOS DE AMERICA

una sociedad de responsabilidad limitada constituida y existente bajo las leyes del Estado de Delaware EE.UU. (en adelante llamada el "Cesionario"), todo mi/nuestro derecho, titulo e interés en todo el mundo, en y de la invención y todos los derechos y facultades para hacer solicitudes, incluyendo solicitudes provisionales cuando la ley lo permita, para Patente de Invención en su propio nombre, o en el nombre de su designado (o nominatario(s)); y todos los derechos y facultades para presentar cualquier solicitud correspondiente o equivalente en cualquiera y todos los países, incluyendo todos los derechos para reivindicar prioridad bajo todas las leyes de los Estados Unidos, Convención(es) Internacional y Tratados en nombre del Cesionario, y por el presente autorizo al Cesionario o a su designado que inserte acá el Número de Prioridad, Fecha de Presentación y País de Presentación

Número de Prioridad	Fecha de Presentación	País de Presentación
61/471,786	4/5/2012	Estados Unidos de América

de la solicitud, sobre la cual la reivindicación de prioridad se basará; y en y de cualquier Patente de Invención que se expida para la invención en cualquiera y todos los países. Yo/Nosotros por el presente acuerdo ayudarle al Cesionario en la prosecución de la solicitud(es) y en cualquier

interferencia, conflicto, oposición o litigio que pudiese surgir que comprenda la invención o la patente o patentes sobre ella, y firmar para cualquiera y todos los países cualquier documento relacionado con solicitudes que se deriven de, correspondientes a o equivalentes a la solicitud anteriormente identificada como el Cesionario solicite.

Yo/nosotros por el presente autorizo al Cesionario o a su designado para que traduzca este Traspaso a todos los idiomas que sean necesarios; y le solicito que dicha Patente de Invención sea expedida al Cesionario; y consiento el registro de este Traspaso, o una Copia Notarial Fiel del mismo; estando bajo acuerdo no sólo que yo/nosotros tengo plena facultad para hacer el mismo, pero también que dichas facultades traspasadas no están gravadas por ningún otorgamiento, licencia u otra facultad dada por el presente.


Suscrito y Declarado ante mí/nosotros:

En: Spring House, PA este día 28 de febrero de 2012 Con vigencia el 5 de abril de 2011 Firma: (ilegible) Nombre: Richard Martin Jacobson Residencia: 11 Deerpath Road Chalfont, PA 18914 País: Estados Unidos de América Ciudadanía: Estados Unidos de América Dirección Postal: la misma residencia Empleado por: Rohm and Haas Company De: Estados Unidos de América	En: este día ____ de _____ de 20__ Con vigencia el Firma: _____ Nombre: Residencia: País: Ciudadanía: Dirección Postal: Empleado por: De:
---	---

Traducido según mi mejor saber y entender, este día 12 de abril de 2012, en la ciudad de Bogotá, D.C., por Anita Escobar de Tamayo, Traductora Oficial, Res. 2177 de 1989, Ministerio de Justicia, República de Colombia.

TRADUCTORA OFICIAL
RES. 2177/89 MINJUSTICIA

ANITA ESCOBAR DE TAMAYO



REPÚBLICA DE COLOMBIA
MINISTERIO DE RELACIONES EXTERIORES
LEGALIZACION

País: REPUBLICA DE COLOMBIA
(Country: - Pays:)

El presente documento público
(This public document - Le présent acte public)

Ha sido firmado por: ESCOBAR DE TAMAYO ANITA CECILE
(Has been signed by: - A été signé par:)

Actuando en calidad de: TRADUCTOR OFICIAL
(Acting in the capacity of: - Agissant en qualité de:)

Lleva el sello/estampilla de: TRADUCTOR E INTERPRETE OFICIAL
(Bears the seal/stamp of: - Est revêtu du sceau de / timbre de:)

Certificado
(Certified - Attesté)

En: BOGOTA D.C
(At: - À:)

El: 4/13/2012 11:56:53 a.m.
(On: - Le:)

Por: APOSTILLA Y LEGALIZACIÓN
(By: The Ministry of Foreign Affairs of Colombia - Par: Ministère des Affaires Étrangères de la Colombie)

No: LMEN115652911
(Under Number: - Sous le numéro:)

Nombre del Titular: 201209460
(Name of the holder of document: - Nom du titulaire:)

Tipo de documento: TRADUCCION APOSTILLA
(Type of document: - Type du document:)

Número de hojas: 4
(Number of pages: - Nombre de pages:)

01304100128554601009

Firmado Digitalmente por: (Digitally Signed by:)
Ministerio de Relaciones Exteriores de Colombia
AMPARO DE LA CRUZ TAMAYO RODRIGUEZ
Reason: DOCUMENT AUTHENTICITY
BOGOTA - COLOMBIA

La autenticidad de este documento puede ser verificada en el Registro Electrónico que se encuentra en la siguiente página
The authenticity of this document may be verified by accessing the e-Register on the following web site:
L'authenticité de cette document peut être vérifiée en accédant l'e-Registre sur le site web suivant:


www.cancilleria.gov.co/legalizaciones

APOSTILLE
(Convention de La Haye du 5 octobre 1961)

1. Country : United States of America
2. This public document has been signed by **DOROTHY E KENNEDY**
3. acting in the capacity of NOTARY PUBLIC
4. bears the seal/stamp DOROTHY E KENNEDY , NOTARY PUBLIC, PHILADELPHIA COUNTY, COMMONWEALTH OF PENNSYLVANIA

Certified

5. at Harrisburg, Pennsylvania
6. The 21st day of March, 2012
7. by Carol Aichele, Secretary of the Commonwealth of Pennsylvania
8. No: 201209460
9. Seal/Stamp
10. Signature

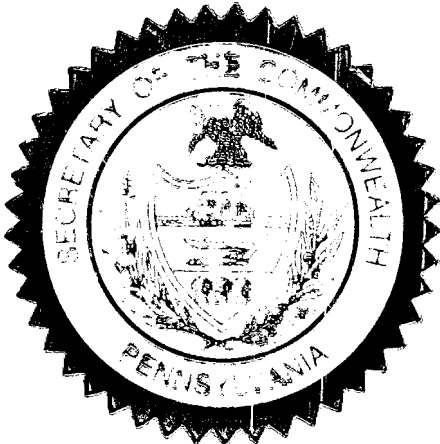



Carol Aichele

This Apostille only certifies the authenticity of the signature and the capacity of the person who has signed the public document, and, where appropriate, the identity of the seal or stamp which the public document bears.

This Apostille does not certify the content of the document for which it was issued.

This Apostille is not valid for use anywhere within the United States of America, its territories or possessions.

Colombia

TRUE COPY

this 8th day of March, 2012


Janice Soulas
 Office Professional
 THE DOW CHEMICAL COMPANY

NOTARIAL CERTIFICATE

UNITED STATES OF AMERICA)
COMMONWEALTH OF PENNSYLVANIA) SS
County/Parish of PHILADELPHIA)

On this 8th day of March, 2012, personally appeared before me,


Janice Soulas

known or identified to me to be the individual who executed the foregoing document and acknowledged the same as a free act and deed for uses and purposes therein expressed.

SEAL



Notary Public
Dorothy Kennedy
NOTARY PUBLIC, PHILADELPHIA, PENNSYLVANIA
MY COMMISSION EXPIRES:



This Assignment 110 is in the
FORM 110 (R 5/97)

(with Priority Rights)

which invention was made and invented by me/us out of and in the course of my/our employment with my/our respective employers as stated below my/our name(s). I/we acknowledge that I/we hold the invention and all patent and other rights and powers obtainable or exercisable in respect thereof in trust for our respective employers. As trustee(s), and for good and valuable consideration and/or the remuneration received for my/our work, I/we sell, assign and transfer unto:

a **limited liability company** organized and existing under the laws of the **State of DELAWARE, U.S.A.** (hereinafter referred to as the "Assignee"); my/our entire right, title and interest throughout the world, in and to the invention and all rights and powers to make applications, including provisional applications when permitted by law, for Letters Patent in its own name, or in the name of its designee (or nominee(s)); and all rights and powers to file any corresponding or equivalent applications in any and all countries, including all rights to claim priority under all United States domestic laws, International Convention(s) and Treaties in the name of Assignee, and do hereby authorize Assignee or its designee to insert here the Priority Number, Filing Date, and Filing Country

of the application, on which the claim for priority will be based; and in and to any Letters Patent that may be issued for the invention in any and all countries. I/we do hereby agree to assist Assignee in the prosecution of the application(s) and in any interference, conflict, opposition or litigation which may arise involving the invention or the patent or patents thereon, and to execute for any and all countries any document relating to applications derived from, corresponding to or equivalent to the above identified application as Assignee may request.

I/we authorize Assignee or its designee to translate this Assignment into all languages necessary; and we request that any such Letters Patent be issued to Assignee; and consent to the recordal of this Assignment, or a Notarial True Copy thereof, being under covenant not only that I/we have full power to make the same, but also that such assigned rights are not encumbered by any grant, license, or other right heretofore given.

Subscribed and Declared by me/us:

At: Spring House PA
this 28 day of February, 20 12
Effective as of April 5, 2011

Signature: 
Full Name: Richard Martin Jacobson
Residence: 11 Deerpath Road
Chalfont, PA 18914

Country: USA
Citizenship: USA
P.O. Address: Same as Residence
Employed By: Rohm and Haas Company
Of Country: USA

At: _____
this _____ day of _____, 20 _____
Effective as of _____

Signature: _____
Full Name: _____
Residence: _____

Country: _____
Citizenship: _____
P.O. Address: _____
Employed By: _____
Of Country: _____

At: _____
this _____ day of _____, 20 _____
Effective as of _____

Signature: _____
Full Name: _____
Residence: _____

Country: _____
Citizenship: _____
P.O. Address: _____
Employed By: _____
Of Country: _____

At: _____
this _____ day of _____, 20 _____
Effective as of _____

Signature: _____
Full Name: _____
Residence: _____

Country: _____
Citizenship: _____
P.O. Address: _____
Employed By: _____
Of Country: _____

() Additional names and signatures are attached.

Enter the 4th inventor's PO Box number if different from residence (default is Same as Residence)

TRADUCCION OFICIAL No. 2012-04-12-221
DE UN DOCUMENTO ESCRITO EN INGLES

LOS ESTADOS UNIDOS DE AMERICA
A TODOS A QUIENES LOS PRESENTES LLEGAREN:
DEPARTAMENTO DE COMERCIO DE LOS ESTADOS UNIDOS
Oficina de Marcas y Patentes de los Estados Unidos

28 de febrero de 2012

POR EL PRESENTE CERTIFICO QUE ADJUNTO AL PRESENTE SE ENCUENTRA UNA COPIA FIEL DE LOS REGISTROS DE LA OFICINA DE PATENTES Y MARCAS DE LOS ESTADOS UNIDOS DE AQUELLOS DOCUMENTOS DE LA SOLICITUD DE PATENTE IDENTIFICADA A CONTINUACION QUE CUMPLIO LOS REQUERIMIENTOS PARA QUE SE LE OTORGUE UNA FECHA DE PRESENTACION BAJO 35 USC 111.

NUMERO DE SOLICITUD: 61/471,786
FECHA DE PRESENTACION: 05 de abril de 2011

EL CODIGO DEL PAIS Y EL NUMERO DE SU SOLICITUD DE PRIORIDAD, PARA SER USADOS PARA PRESENTACION EN EL EXTERIOR BAJO LA CONVENCION DE PARIS, ES US61/471,786

Oficina de Patentes y Marcas de los
Estados Unidos
Departamento de Comercio

Por Autoridad del
Subsecretario de Comercio para
Propiedad Intelectual
y Director de la Oficina de Patentes y
Marcas de los Estados Unidos
(firma: ilegible)
E. BORNETT
Funcionario que Certifica

Recibo de Reconocimiento Electrónico					
ID EFS:		9809410			
Número de Solicitud:		61471786			
Número de Solicitud Internacional					
Número de Confirmación:		1767			
Título de la Invención:		COMPOSICIONES DE LIBERACION CONTROLADA			
Primer Inventor/Nombre del Solicitante:		Richard Martin Jacobson			
Número del Cliente:		21898			
Registrador		Carl P. Hemenway/Janice Soulas			
Registrador Autorizado por:		Carl P. Hemenway			
Número de Expediente:		70762			
Fecha de Recepción:		05-APRIL-2011			
Fecha de Presentación:					
Estampilla de Tiempo:		12:40:00			
Tipo de Solicitud:		Provisional			
Información de Pago:					
Presentada con Pago		Sí			
Tipo de Pago:		Cuenta de Depósito			
El pago fue exitosamente recibido en RAM		\$220			
Número confirmación RAM		9331			
Cuenta de Depósito		041512			
Usuario Autorizado					
El Director de la USPTO por el presente está facultado para cargar los derechos indicados y acreditar cualquier sobre pago así: Cargar cualquier Derecho Adicional requerido bajo 37 C.F.R. Sección 1.16 (Presentación de solicitud nacional, búsqueda y derechos de examen) Cargar cualquier Derecho Adicional requerido bajo 37 C.F.R. Sección 1.17 (Solicitud de patente y derechos de procesamiento de reexamen) Cargar cualquier Derecho Adicional requerido bajo 37 C.F.R. Sección 1.19 (Derechos de suministro de documentos) Cargar cualquier Derecho Adicional requerido bajo 37 C.F.R. Sección 1.20 (Derechos de expedición postal) Cargar cualquier Derecho Adicional requerido bajo 37 C.F.R. Sección 1.21 (Derechos y cargos varios)					
Listas de Archivos:					
Número del Documento	Descripción del Documento	Nombre del Archivo	Tamaño del Archivo(Bytes)/Message Digest	MultiPartes/zip	Páginas (si aplica)
1	Hoja de Datos de la Solicitud	ADS.pdf	1030711	no	4
			94494c666066c0f633dd1d1bc057f444181bef20		
Advertencias:					
Información:					
2		70762.pdf	164266	sí	28
			943b5e76078v7ffe7e290213be0a5511f4249c		

Descripción Multipartes/Archivos PDF en descripción .zip					
Descripción del Documento		Inicio		Fin	
Descripción		1		25	
Reivindicaciones		26		27	
Resumen		29		28	
Advertencias:					
Información:					
3	Hoja de Cálculo de Derechos (PTO-875)	fee-info.pdf	29438	no	2
			F6d6000a e78fd9a90 8e2646e8 7b6564e2 64a735d3		
Advertencias:					
Información:					
Tamaño Total de Archivos (en bytes):			1224415		

Este Recibo de Reconocimiento evidencia el recibo en la fecha indicada por la USPTO de los documentos indicados, caracterizados por el solicitante, e incluyendo conteo de páginas, donde aplica. Sirve como evidencia de recibo semejante a una Tarjeta Postal, según se describe en MPEP 503.

Nuevas Solicitudes Bajo 35 U.S.C. 111

Si una nueva solicitud se presenta y la solicitud incluye los componentes necesarios para una fecha de presentación (ver 37 CFR 1.53(b)-(d) y MPEP 506), se expedirá un Recibo de Presentación (37 CFR 1.54) en el debido curso y la fecha mostrada en este Recibo de Reconocimiento establecerá la fecha de presentación de la solicitud.

Fase Nacional de una Solicitud Internacional Bajo 35 U.S.C. 371

Si una presentación oportuna para registro en la fase nacional de una solicitud internacional cumple con las condiciones de 35 U.S.C. 371 y otros requerimientos que aplican se expedirá un Formato PCT/DO/EO/903 indicando aceptación de la solicitud como presentación en la fase nacional bajo 35 U.S.C. 371 además del Recibo de Presentación, en el curso debido.

Nueva Solicitud Internacional Presentada ante la USPTO como Oficina que Recibe

Si se presenta una nueva solicitud internacional y la solicitud internacional incluye los componentes necesarios para una fecha de presentación internacional (ver Artículo 11 PCT y MPEP 1810), se expedirá una Notificación del Número de la Solicitud Internacional y de la Fecha de Presentación Internacional (Formato PCT/RO/105) en el curso debido, sujeta a las prescripciones relacionadas con la seguridad nacional, y la fecha que aparece en este Recibo de Reconocimiento establecerá la fecha de presentación internacional de la solicitud.

REIVINDICACIONES:


1. Una composición que comprende
 - (a) una matriz sólida fundible que comprende
 - (i) una o más sustancias hidrofóbicas, y
 - (ii) una o más sustancia hidrofílicas, y
 - (b) distribuidos en dicha matriz, uno o más complejos de encapsulación de un compuesto de ciclopropeno volátil encapsulado en un agente de encapsulación molecular.
2. La composición de la reivindicación 1 en la cual se distribuye en dicha matriz una o más sustancias adsorbentes de agua.
3. La composición de la reivindicación 1 en la cual se distribuye en dicha matriz uno o más humectantes, una o más sustancias deliquescentes o una de sus mezclas.
4. La composición de la reivindicación 1 en la cual dicha matriz adicionalmente comprende uno o más dispersantes.
5. La composición de la reivindicación 1 en la cual el compuesto de ciclopropeno volátil es 1-metilciclopropeno.
6. La composición de la reivindicación 1 en la cual el agente de encapsulación molecular es alfa-ciclodextrina.
7. La composición de la reivindicación 1 en la cual la cantidad de compuesto de ciclopropeno volátil es del 0,01% al 1% en peso, en función del peso de dicha composición.
8. Un método para tratar plantas o partes de plantas que comprende colocar dichas plantas o partes de plantas y la composición de la reivindicación 1 en un recipiente y permitir que dichas plantas o partes de plantas y dicha composición de la reivindicación 1 permanezcan juntas en dicho recipiente durante 1 día o más.
9. El método de la reivindicación 8 en el cual dicho compuesto de ciclopropeno volátil es 1-metilciclopropeno, y en el cual dicho agente de encapsulación molecular es alfa-ciclodextrina.

10. El método de la reivindicación 9 en el cual la cantidad de 1-metilciclopropeno colocada en dicho recipiente es de 1 microgramo por litro a 500 microgramos por litro.

Traducido según mi mejor saber y entender, este día 12 de abril de 2012, en la ciudad de Bogotá, D.C., por Anita Escobar de Tamayo, Traductora Oficial, Res. 2177 de 1989, Ministerio de Justicia, República de Colombia.

TRADUCTORA OFICIAL
RES. 2177/89 MINJUSTICIA


ANITA ESCOBAR DE TAMAYO

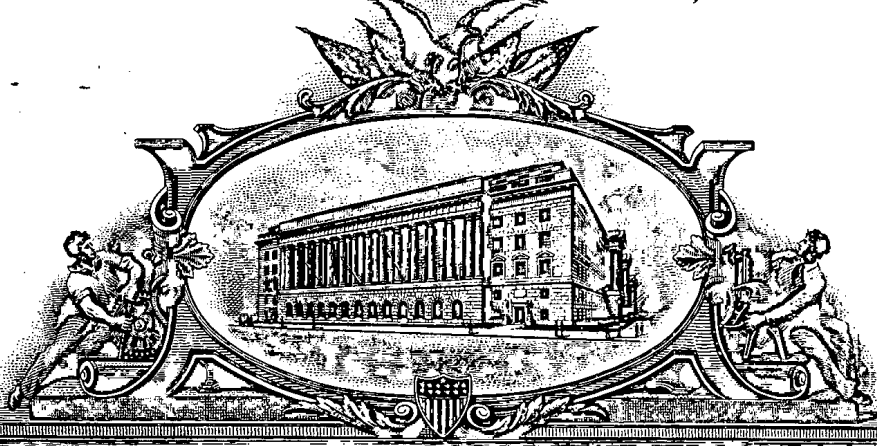

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

**UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office**

February 28, 2012

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A
FILING DATE UNDER 35 USC 111.**

APPLICATION NUMBER: 61/471,786

FILING DATE: April 05, 2011

**THE COUNTRY CODE AND NUMBER OF YOUR PRIORITY
APPLICATION, TO BE USED FOR FILING ABROAD UNDER THE PARIS
CONVENTION, IS US61/471,786**

**By Authority of the
Under Secretary of Commerce for Intellectual Property
and Director of the United States Patent and Trademark Office**



E. Bornett
E. BORNETT
Certifying Officer

Electronic Acknowledgement Receipt	
EFS ID:	9809410
Application Number:	61471786
International Application Number:	
Confirmation Number:	1767
Title of Invention:	CONTROLLED RELEASE COMPOSITIONS
First Named Inventor/Applicant Name:	Richard Martin Jacobson
Customer Number:	21898
Filer:	Carl P. Hemenway/Janice Soulas
Filer Authorized By:	Carl P. Hemenway
Attorney Docket Number:	70762
Receipt Date:	05-APR-2011
Filing Date:	
Time Stamp:	12:40:00
Application Type:	Provisional

Payment information:

Submitted with Payment	yes
Payment Type	Deposit Account
Payment was successfully received in RAM	\$220
RAM confirmation Number	9331
Deposit Account	041512
Authorized User	
The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows: Charge any Additional Fees required under 37 C.F.R. Section 1.16 (National application filing, search, and examination fees) Charge any Additional Fees required under 37 C.F.R. Section 1.17 (Patent application and reexamination processing fees)	

Charge any Additional Fees required under 37 C.F.R. Section 1.19 (Document supply fees)					
Charge any Additional Fees required under 37 C.F.R. Section 1.20 (Post Issuance fees)					
Charge any Additional Fees required under 37 C.F.R. Section 1.21 (Miscellaneous fees and charges)					
File Listing:					
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Application Data Sheet	ADS.pdf	1030711	no	4
			94494c666066c0f633dd1d1bc057f444181bef20		
Warnings:					
Information:					
2		70762.pdf	164266	yes	28
			943b5e76078c7ffee7e290213be50a5511f4249c		
	Multipart Description/PDF files in .zip description				
	Document Description		Start	End	
	Specification		1	25	
	Claims		26	27	
	Abstract		28	28	
Warnings:					
Information:					
3	Fee Worksheet (PTO-875)	fee-info.pdf	29438	no	2
			f6d600ae78fd9a908e2646e87b6564e264a735d3		
Warnings:					
Information:					
Total Files Size (in bytes):			1224415		

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

CONTROLLED RELEASE COMPOSITIONS

[0001] Handling volatile compounds presents a variety of problems. One method of making a volatile compound easier to handle is to form a molecular encapsulation complex in which a molecular encapsulating agent encapsulates the molecules of the volatile compound. In some cases, the molecular encapsulation complex is in the form of a powder, which may optionally be blended with other solid particles of other materials to form a blended powder. Such powders are generally easier to store, to transport, and/or to use than the pure volatile compound.

[0002] When it is desired to make use of the volatile compound that is contained in such a powder, one common method involves bringing the powder into contact with a release compound, which is a compound that, when it contacts an encapsulation complex, promotes or causes release of the volatile compound from the molecular encapsulation complex. For some useful molecular encapsulation complexes, water is a release compound.

[0003] However, providing a molecular encapsulation complex as a powder does not solve all the problems associated with the use of the volatile compounds. For example, when using a release compound to release the volatile compound from such a powder, the contact between the powder and the release compound may not be intimate, and the release of the volatile compound may be incomplete or undesirably slow or both. In such cases it may be necessary to take some measure to enhance the release of the volatile compound, such as, for example, waiting an undesirably long time for the volatile compound to release; providing some mechanical aid (e.g., shaking, stirring, forcing gas into the water to create bubbles, etc.); or providing additives to the powder that cause effervescent action on contact with water. U.S. Patent No. 6,426,319 describes a composition containing a molecular encapsulation complex of a molecular encapsulating agent with a cyclopropene compound, mixed with a water absorbent material.

[0004] In many situations, it is desired that the volatile compound is released gradually when the composition containing the volatile compound is exposed to a release compound. However, compositions like those of U.S. Patent No. 6,426,319 generally release the cyclopropene compound relatively quickly when exposed to water vapor.

[0005] It is desired to provide a composition that contains a useful volatile compound in a molecular encapsulation complex and that releases that useful volatile compound desirably gradually when exposed to liquid water or to water vapor.

[0006] The following is a statement of the invention.

[0007] The first aspect of the present invention is a composition comprising (a) a meltable solid matrix comprising (i) one or more solid hydrophobic substance, and (ii) one or more solid hydrophilic substance, and (b) distributed in said matrix, one or more encapsulation complex of a volatile cyclopropene compound encapsulated in a molecular encapsulation agent.

[0008] Another aspect of the present invention is a method of treating plants or plant parts comprising placing said plants or plant parts and the composition of the first aspect into a container and allowing said plants or plant parts and said composition of claim 1 to remain together in said container for 1 day or longer.

[0009] The following is a detailed description of the invention.

[0010] As used herein, the following terms have the designated definitions, unless the context clearly indicates otherwise.

[0011] As used herein, "hydrocarbon" refers to a chemical group or a compound, the atoms of which include one or more carbon atom, one or more hydrogen atom, and no other atoms.

[0012] As used herein, a "matrix" is a material that is a solid and that has continuity. In a macroscopic sample of a composition that contains a matrix, the matrix will form a continuous 3-dimensional body. The matrix may connect with the entire surface of the sample; if it does not connect with the entire surface of the sample, it will connect to multiple places on the surface of the sample. At least 50% of the total surface area of the sample will connect to the matrix. The matrix may be a pure material or may be a mixture of two or more materials.

[0013] A macroscopic sample is a body that has volume of at least one cubic centimeter and has a shortest axis of 3 mm or longer. An axis is a line segment that passes through the center of mass of the body and that has end points that reside on the surface of the body.

[0014] If the matrix is a mixture, the ingredients in the mixture will form either a solution or a dispersion or a combination thereof. In a solution, the ingredients are miscible with each other; that is, they will be dissolved in each other (i.e., intimately mixed on the molecular level). In a dispersion, one ingredient (or a solution of ingredients) is present as a continuous phase, and one or more other ingredients is present as small particles (1 millimeter in diameter or smaller) that are distributed throughout the continuous phase.

[0015] A particle (whether in a powder or dispersed in a matrix) is characterized by its diameter. If the particle is not spherical, the diameter of the particle is considered herein to be the diameter of a sphere that has the same volume as the particle.

[0016] As used herein, material is said to be solid if it is in the solid state over a range of temperatures that includes at least 0°C to 40°C. Solids include, for example, crystalline solids, amorphous glassy solids, waxy solids, and rubbery solids. A macroscopic sample of a solid will not deform appreciably under its own weight. A cube of a solid material that is 1 cm X 1 cm X 1 cm in size; and that is placed on a flat surface at 25°C for 7 days, will maintain at least 95% of its height.

[0017] As used herein, a material is said to be a meltable solid if it is a solid as defined herein above and if it also has a melting point or a softening point higher than 40°C and lower than 120°C. The softening point is a temperature above which a material is liquid or, if not liquid, is soft enough to be blended or masticated with a mechanical device such as, for example, a stirrer, an extruder, or a kneader.

[0018] A compound is said herein to be volatile if that compound has a boiling point at 1 atmosphere pressure of 100°C or lower.

[0019] As used herein, a hydrophobic substance is a substance that meets one or more of the following hydrophobicity criteria. The first hydrophobicity criterion is the water contact angle. A substance is hydrophobic if a clean surface of that substance has contact angle with a drop of water of 90° or higher. The contact angle is measured by test D7334-08 (ASTM International, West Conshohocken, PA, USA).

[0020] The second hydrophobicity criterion is the composition. A substance is hydrophobic if it is a pure hydrophobic substance or if it is a hydrophobic mixture. A hydrophobic mixture contains one or more pure hydrophobic substance, and the amount of all the pure hydrophobic substances in the mixture is 75% or more by weight, based on the weight of the mixture. A substance is a pure hydrophobic substance if its molecule has one or more fatty groups and if it has solubility in water at 25°C of less than 1% by weight based on the weight of the water. A fatty group is one of the following: (1) an aliphatic group that has 8 or more carbon atoms; that has only hydrogen atoms and carbon atoms; that is linear, branched, cyclic, or a combination thereof; (2) a chemical group of category (1) in which one or more hydrogen atom is replaced with a halogen atom; or (3) a silicone group. A silicone group is a group that contains a linear chain of 5 or more siloxane groups. A siloxane group has the following structure (I):



where each R^{s} is, independent of every other R^{s} , hydrogen, a hydrocarbon group with 6 or fewer carbon atoms, or another siloxane group.

[0021] The third hydrophobicity criterion is water absorptivity. When a hydrophobic substance is in equilibrium at 25°C with air having 100% relative humidity, the hydrophobic substance will absorb water from the air in an amount such that the quotient of the weight of absorbed water divided by the dry weight of hydrophilic substance is 0.0001 or lower.

[0022] The fourth hydrophobicity criterion is water vapor transmission rate. When a film of a hydrophobic material that is 40 micrometers thick is tested at 37.8°C and 90% relative humidity, its water vapor transmission rate is less than 25 grams of water vapor per square meter of film per day.

[0023] The fifth hydrophobicity criterion is as follows: a polymer that is a copolymer of ethylene and vinyl acetate is hydrophobic if the amount of vinyl acetate in that copolymer is less than 20% by weight, based on the weight of the copolymer.

[0024] As used herein, a hydrophilic substance is a substance that meets one or both of the following hydrophilicity criteria. The first hydrophilicity criterion is water absorptivity: when a hydrophilic substance is in equilibrium at 25°C with air having 100% relative humidity, the hydrophilic substance will absorb water from the air in an amount such that the quotient of the weight of absorbed water divided by the dry weight of hydrophilic substance is 0.001 or higher.

[0025] The second hydrophilicity criterion is water vapor transmission rate. When a film of a hydrophilic material that is 40 micrometers thick is tested at 37.8°C and 90% relative humidity, its water vapor transmission rate is more than 50 grams of water vapor per square meter of film per day.

[0026] The third hydrophilicity criterion is as follows: a polymer that is a copolymer of ethylene and vinyl acetate is hydrophilic if the amount of vinyl acetate in that copolymer is 20% or more by weight, based on the weight of the copolymer.

[0027] As used herein, a humectant is a substance that, when placed in contact with air of 100% relative humidity at 25°C, will absorb water from the air. When a humectant reaches equilibrium with air of 100% relative humidity at 25°C, the quotient of the weight of

water absorbed by the humectant divided by the dry weight of the humectant is 0.1 or higher. Some humectants are deliquescent substances. A deliquescent substance, in equilibrium at 25°C with air having 100% relative humidity, will absorb sufficient water from the air to form a liquid solution of the deliquescent substance in water.

[0028] As used herein, a water-adsorptive substance is a solid material that has pores, tunnels, or other cavities that have the capacity to trap water molecules. The molecules of a water-adsorptive substance do not swell or otherwise re-arrange in response to the presence of an adsorbed water molecule. Prior to exposure to water, the cavities are empty (i.e., each cavity contains only air or vacuum). A water molecule that enters such a cavity and remains there for a finite time period is known herein as "adsorbed" water.

[0029] When a molecular encapsulation agent encapsulates a compound or a portion of a compound, the resulting combination is referred to herein as a molecular encapsulation complex.


[0030] A "polymer," as used herein and as defined by FW Billmeyer, JR. in **Textbook of Polymer Science**, second edition, 1971, is a relatively large molecule made up of the reaction products of smaller chemical repeat units. Polymers may have structures that are linear, branched, star shaped, looped, hyperbranched, crosslinked, or a combination thereof; polymers may have a single type of repeat unit ("homopolymers") or they may have more than one type of repeat unit ("copolymers"). Copolymers may have the various types of repeat units arranged randomly, in sequence, in blocks, in other arrangements, or in any mixture or combination thereof. A compound that reacts with identical and/or non-identical compounds to become a repeat unit in a polymer is known herein as a "monomer." The repeat unit that results from such a reaction is known herein as a "residue" of that monomer.

[0031] Polymer molecular weights can be measured by standard methods such as, for example, size exclusion chromatography (SEC, also called gel permeation chromatography or GPC). Polymers have number-average molecular weight (Mw) of 500 or more.


[0032] Polymers are crosslinked if some or all of the polymer chains are branched. A polymer is lightly crosslinked if sufficient branching is present to affect the physical properties of the polymer and the polymer has finite molecular weight. A polymer is fully crosslinked if sufficient branching is present to pass the percolation threshold. A fully crosslinked polymer is not soluble in any solvent, even a solvent in which a linear polymer of the same composition is soluble. A fully crosslinked polymer is said to have infinite molecular weight.

[0033] One useful characterization of a composition is the solids content. The solids content of a composition is determined by making a layer of the composition that is 1 mm or less in thickness, allowing volatile compounds to leave the composition, for example by placing that layer in an oven that circulates air at 100°C for one hour. The weight of the remaining material after the volatiles have left, divided by the original weight of the composition, expressed as a percentage, is the solids content.

[0034] The present invention involves the use of one or more cyclopropene compounds. As used herein a cyclopropene compound is any compound with the formula



where each R^1 , R^2 , R^3 and R^4 is independently selected from the group consisting of H and a chemical group of the formula:



where n is an integer from 0 to 12. Each L is a bivalent radical. Suitable L groups include, for example, radicals containing one or more atoms selected from H, B, C, N, O, P, S, Si, or mixtures thereof. The atoms within an L group may be connected to each other by single bonds, double bonds, triple bonds, or mixtures thereof. Each L group may be linear, branched, cyclic, or a combination thereof. In any one R group (i.e., any one of R^1 , R^2 , R^3 and R^4) the total number of heteroatoms (i.e., atoms that are neither H nor C) is from 0 to 6.

[0035] Independently, in any one R group the total number of non-hydrogen atoms is 50 or less.

[0036] Each Z is a monovalent radical. Each Z is independently selected from the group consisting of hydrogen, halo, cyano, nitro, nitroso, azido, chlorate, bromate, iodate, isocyanato, isocyanido, isothiocyanato, pentafluorothio, and a chemical group G , wherein G is a 3 to 14 membered ring system.

[0037] The R^1 , R^2 , R^3 , and R^4 groups are independently selected from the suitable groups. The R^1 , R^2 , R^3 , and R^4 groups may be the same as each other, or any number of them may be different from the others. Groups that are suitable for use as one or more of R^1 , R^2 , R^3 , and R^4 may be connected directly to the cyclopropene ring or may be connected to the cyclopropene ring through an intervening group such as, for example, a heteroatom-containing group.

[0038] As used herein, a chemical group of interest is said to be "substituted" if one or more hydrogen atoms of the chemical group of interest is replaced by a substituent. Suitable substituents include, for example, alkyl, alkenyl, acetylamino, alkoxy, alkoxyalkoxy, alkoxycarbonyl, alkoxyimino, carboxy, halo, haloalkoxy, hydroxy, alkylsulfonyl, alkylthio, trialkylsilyl, dialkylamino, and combinations thereof.

[0039] Among the suitable R^1 , R^2 , R^3 , and R^4 groups are, for example, substituted and unsubstituted versions of any one of the following groups: aliphatic, aliphatic-oxy, alkylcarbonyl, alkylphosphonato, alkylphosphato, alkylamino, alkylsulfonyl, alkylcarboxyl, alkylaminosulfonyl, cycloalkylsulfonyl, cycloalkylamino, heterocyclyl (i.e., aromatic or non-aromatic cyclic groups with at least one heteroatom in the ring), aryl, hydrogen, fluoro, chloro, bromo, iodo, cyano, nitro, nitroso, azido, chlorato, bromato, iodato, isocyanato, isocyanido, isothiocyanato, pentafluorothio; acetoxo, carboethoxy, cyanato, nitrate, nitrito, perchlorato, allenyl; butylmercapto, diethylphosphonato, dimethylphenylsilyl, isoquinolyl, mercapto, naphthyl, phenoxy, phenyl, piperidino, pyridyl, quinolyl, triethylsilyl, and trimethylsilyl.

[0040] Among the suitable R^1 , R^2 , R^3 , and R^4 groups are those that contain one or more ionizable substituent groups. Such ionizable groups may be in non-ionized form or in salt form.

[0041] Also contemplated are embodiments in which R^3 and R^4 are combined into a single group, which is attached to the number 3 carbon atom of the cyclopropene ring by a double bond. Some of such compounds are described in US Patent Publication 2005/0288189.

[0042] In preferred embodiments, one or more cyclopropene compound is used in which each of R^1 , R^2 , R^3 , and R^4 is independently hydrogen or a substituted or unsubstituted alkyl, alkenyl, alkynyl, cycloalkyl, cycloalkylalkyl, phenyl, or naphthyl group; where the substituents, when present, are independently halogen, alkoxy, or substituted or unsubstituted phenoxy. In more preferred embodiments, one or more of R^1 , R^2 , R^3 , and R^4 is hydrogen and each of R^1 , R^2 , R^3 , and R^4 that is not hydrogen is independently a substituted or unsubstituted alkyl, alkenyl, alkynyl, cycloalkyl, cycloalkylalkyl, phenyl, or naphthyl group; where the substituents, when present, are independently halogen, alkoxy, or substituted or unsubstituted phenoxy. In more preferred embodiments, each of R^2 , R^3 , and R^4 is hydrogen, and R^1 is hydrogen or an unsubstituted alkyl, alkenyl, alkynyl, cycloalkyl, cycloalkylalkyl, phenyl, or naphthyl group independently.

[0043] In preferred embodiments, one or more cyclopropene compound is used in which one or more of R^1 , R^2 , R^3 , and R^4 is hydrogen each of R^1 , R^2 , R^3 , and R^4 that is not hydrogen is (C1-C4) alkyl. In more preferred embodiments, R^1 is (C1-C4) alkyl and each of R^2 , R^3 , and R^4 is hydrogen. In more preferred embodiments, R^1 is methyl and each of R^2 , R^3 , and R^4 is hydrogen, and the cyclopropene compound is known herein as "1-MCP."

[0044] In preferred embodiments, a cyclopropene compound is used that has boiling point at one atmosphere pressure of 25°C or lower; more preferred is 15°C or lower. Independently, in preferred embodiments, a cyclopropene compound is used that has boiling point at one atmosphere pressure of -100°C or higher; more preferred is -50°C or higher; more preferred is -25°C or higher; more preferred is 0°C or higher.

[0045] The composition of the present invention includes at least one molecular encapsulating agent that encapsulates one or more cyclopropene compound or a portion of one or more cyclopropene compound. A complex that contains a cyclopropene compound molecule or a portion of a cyclopropene compound molecule encapsulated in a molecule of a molecular encapsulating agent is known herein as a "cyclopropene compound complex."

[0046] In preferred embodiments, at least one cyclopropene compound complex is present that is an inclusion complex. In such an inclusion complex, the molecular encapsulating agent forms a cavity, and the cyclopropene compound or a portion of the cyclopropene compound is located within that cavity.

[0047] Preferably, in such inclusion complexes, the interior of the cavity of the molecular encapsulating agent is substantially apolar or water-incompatible or both, and the cyclopropene compound (or the portion of the cyclopropene compound located within that cavity) is also substantially apolar or water-incompatible or both. While the present invention is not limited to any particular theory or mechanism, it is contemplated that, in such apolar cyclopropene compound complexes, van der Waals forces, or water-incompatibility interactions, or both, cause the cyclopropene compound molecule or portion thereof to remain for substantial amounts of time within the cavity of the molecular encapsulating agent.

[0048] The amount of molecular encapsulating agent can usefully be characterized by the quotient ("Q1") of the number of moles of molecular encapsulating agent divided by the number of moles of cyclopropene compound. In preferred embodiments, Q1 is 0.1 or larger; more preferably 0.2 or larger; more preferably 0.5 or larger; more preferably 0.9 or larger. Independently, in preferred embodiments, Q1 is 10 or lower; more preferably 5 or lower; more preferably 2 or lower; more preferably 1.5 or lower.

[0049] Suitable molecular encapsulating agents include, for example, organic and inorganic molecular encapsulating agents. Preferred are organic molecular encapsulating agents, which include, for example, substituted cyclodextrins, unsubstituted cyclodextrins, and crown ethers. Suitable inorganic molecular encapsulating agents include, for example, zeolites. Mixtures of suitable molecular encapsulating agents are also suitable. In preferred embodiments, the encapsulating agent is alpha cyclodextrin, beta cyclodextrin, gamma cyclodextrin, or a mixture thereof. In more preferred embodiments of the invention, alpha cyclodextrin is used.

[0050] The present invention involves the use of one or more solid hydrophobic substance (i) (herein referred to synonymously as "hydrophobic substance (i)" or "substance (i)"). Preferred hydrophobic substances (i) are fatty compounds, hydrocarbon waxes, olefin polymers, and mixtures thereof.

[0051] A fatty compound is a compound that has one or more fatty group. Fatty compounds include, for example, fatty acids, fatty oils, modified versions thereof, and mixtures thereof. Suitable modifications include any process, including chemical reactions, that alters the composition of a fatty compound, as long as the resulting compound still meets the definition of fatty compound. Modifications include, for example, hydrogenation, esterification, trans-esterification, de-esterification, polymerization, attachment of functional groups, and combinations thereof. Fatty acids have the formula $R-COOH$, where the R group contains a fatty group. Fatty oils are fatty compounds that contain one or more ester group, hydroxyl group, aldehyde group, ketone group, or combination thereof.

[0052] Among fatty acids, preferred are those that include at least one fatty group having 12 or more carbon atoms. More preferred are fatty acids that include at least one fatty group having 16 or more carbon atoms; more preferred are fatty acids that include at least one fatty group having 18 or more carbon atoms. Preferred fatty acids are those that include at least one fatty group having 22 or fewer carbon atoms. Preferred are fatty acids that include at least one fatty group that is a hydrocarbon group that is saturated (i.e., within that group, the bonds between carbon atoms are all single bonds). Among fatty acids, more preferred is stearic acid, palmitic acid, and mixtures thereof. Among fatty acids, more preferred is double pressed stearic acid, which is a mixture of fatty acids in which a mixture of stearic and palmitic acids comprises 93% to 100% by weight, based on the weight of the double pressed stearic acid.

[0053] Also among the suitable hydrophobic substances are fatty oils. Preferred among fatty oils are triglycerides. Triglycerides are triesters of glycerol with three fatty acids. Preferred triglycerides are hydrogenated vegetable oils.

[0054] Hydrocarbon waxes are hydrocarbon compounds having 12 to 120 carbon atoms. A hydrocarbon molecule in a hydrocarbon wax may be straight, branched, non-aromatic cyclic, or a combination thereof. Hydrocarbon waxes usually exist as a mixture of 2 or more different hydrocarbon molecules. Hydrocarbon waxes include petroleum waxes, which are separated from crude petroleum. Petroleum waxes include paraffin wax, microcrystalline wax, and petrolatum. Paraffin wax has 60% or more by weight straight-chain hydrocarbons, based on the weight of the paraffin, and most of the straight-chain hydrocarbons in paraffin wax typically have 18 to 45 carbon atoms each. Microcrystalline wax has a higher proportion of branched and cyclic hydrocarbons than paraffin wax. Petrolatum is a type of microcrystalline wax that blends well with mineral oil. Among hydrocarbon waxes, preferred are microcrystalline waxes.

[0055] Olefin polymers are polymers, the repeat units of which are 60% to 100% by weight, based on the weight of the olefin polymer, residues of one or more ethylenically unsaturated hydrocarbon monomer. Any olefin polymer that meets the definition of hydrophobic substance (i) is suitable as hydrophobic substance (i). All-olefin polymers, which are olefin polymers in which the repeat units are 100% residues of one or more ethylenically unsaturated hydrocarbon monomer, are suitable as hydrophobic substance (i). Polyolefin waxes, which are all-olefin polymers that have number-average molecular weight of 20,000 or lower, are also suitable as hydrophobic substance (i).

[0056] Olefin polymers also include olefin copolymers, which are olefin polymers in which one or more repeat unit is a residue of a monomer that is not a hydrocarbon. A monomer that is not a hydrocarbon and that is capable of copolymerizing with one or more ethylenically unsaturated hydrocarbon monomer is known herein as an "olefin-compatible comonomer." Suitable olefin-compatible comonomers include, for example, acrylic acid, methacrylic acid, alkyl esters of acrylic acid or methacrylic acid, and vinyl acetate. Among olefin copolymers, preferred as hydrophobic substance (i) are copolymers of ethylene and vinyl acetate ("EVA copolymers") that meet the criteria for hydrophobicity as defined herein. Some preferred olefin copolymers for use as hydrophobic substance (i) are EVA copolymers in which the amount of residues of vinyl acetate is, by weight based on the weight of the EVA copolymer, 21% to 40%.


[0057] In preferred embodiments, the composition of the present invention contains one or more hydrophobic substance (i) that is a meltable solid. Among meltable solid hydrophobic substances, preferred are those with a melting point or a softening point that is 50°C or higher; more preferred is 60°C or higher. Among meltable solid hydrophobic substances, preferred are those with a melting point or a softening point that is 110°C or lower; more preferred is 90°C or lower; more preferred is 80°C or lower.

[0058] Preferred hydrophobic substances (i) contain, optionally among other ingredients, fatty compounds and hydrocarbon waxes and mixtures thereof. More preferred hydrophobic substances (i) contain, optionally among other ingredients, fatty acids, fatty oils, hydrocarbon waxes, and mixtures thereof. More preferred hydrophobic substances (i) contain, optionally among other ingredients, double pressed stearic acid, hydrogenated vegetable oils, microcrystalline waxes, and mixtures thereof.

[0059] The present invention involves the use of one or more hydrophilic substance (ii) (herein referred to synonymously as "hydrophilic substance (ii)" or "substance (ii)"). Preferred hydrophilic substances (ii) are polymers. Preferred polymers for hydrophilic substance (ii) include cellulose, polyethylene glycol, hydrophilic ethylene vinyl acetate copolymers, and pendant-amine polymers.

[0060] Cellulose is a polymer that made of repeat units of D-glucose. Among celluloses, preferred are natural cellulose, microcrystalline cellulose, and mixtures thereof.

[0061] Polyethylene glycol is a polymer made of repeat units of ethylene oxide:



Among polyethylene glycols, preferred for use as hydrophilic substance (ii) are those with number-average molecular weight that is 20,000 or less; more preferred is 10,000 or less. Among polyethylene glycols, preferred for use as hydrophilic substance (ii) are those with number-average molecular weight that is more than 3,000.; more preferred is 5,000 or more.

[0062] A pendant-amide polymer is a polymer in which 50% or more of the residues, by weight, based on the weight of the pendant-amide polymer, has a chemical group that is pendant from the polymer backbone, where that pendant chemical group is attached to the polymer backbone by one or more covalent bond, and where that pendant chemical group has an amide group (which may be all or part of the pendant chemical group). The amide group may be primary, secondary, or tertiary. Among pendant chemical groups, preferred is a 2-pyrrolidone group, preferably with the nitrogen atom attached by a covalent bond to a carbon atom on the polymer backbone. Among preferred pendant amide polymers, preferred

are PVP polymers, which are polymers, the polymerized residues of which are 35% or more, by weight based on the weight of the PVP polymer, residues of N-vinyl-2-pyrrolidone. Among PVP polymers, preferred are crosslinked PVP polymers.

[0063] Preferred hydrophilic substances (ii) contain one of the following species, optionally with other ingredients: (A) one or more polyethylene glycol having number average molecular weight of more than 3,000, (B) one or more mixture of one or more polyethylene glycol having number average molecular weight of more than 3,000 with one or more cellulose, (C) one or more hydrophilic ethylene vinyl acetate copolymer, (D) one or more mixture of one or more hydrophilic ethylene vinyl acetate copolymer with one or more crosslinked PVP, or (E) one or more mixture of one or more hydrophilic ethylene vinyl acetate copolymer with one or more cellulose.

[0064] Some hydrophilic substances (ii) used in the present invention are hydrophilic substances that are also meltable solids. Among hydrophilic substances that are meltable solids, preferred are those with a melting point or a softening point that is 50°C or higher; more preferred is 60°C or higher. Preferred are hydrophilic substances with a melting point or a softening point that is 110°C or lower; more preferred is 90°C or lower; more preferred is 80°C or lower.

[0065] The composition of the present invention contains a meltable matrix that contains one or more hydrophobic substance (i) and one or more hydrophilic substance (ii). In some embodiments, the matrix is a solution of all of the hydrophobic substance(s) (i) and all of the hydrophilic substance(s) (ii). That is, all of the substance(s) (i) and (ii) are sufficiently soluble in each other that the mixture is a solution.

[0066] In preferred embodiments, the meltable matrix has a melting point higher than 40°C and lower than 120°C. Preferred is matrix melting point of 50°C or higher; more preferred is 60°C or higher. Preferred is matrix melting point of 110°C or lower; more preferred is 90°C or lower; more preferred is 80°C or lower. It is useful to characterize the viscosity (at shear rate of 1 sec⁻¹) of the matrix in the "pour range," which is the temperature range from 3°C above the melting point to the lower of 125°C and 25°C above the melting point. Preferably, the viscosity of the matrix in the pour range is 3,000 milliPascal*sec (3,000 centipoise) or lower; more preferably 1,000 milliPascal*sec (1,000 centipoise) or lower; more preferably 500 milliPascal*sec (500 centipoise) or lower.

[0067] In some embodiments ("dispersion embodiments"), in the matrix, one or more of the substance(s) (i) or one or more of the substance(s) (ii) is present as particles in a

dispersion in the continuous phase of the matrix. In dispersion embodiments, the continuous phase of the matrix contains one or more hydrophobic substance (i). The amount of hydrophobic substance (i) found in the continuous phase of the matrix is characterized by the quotient ("Q2") found by dividing the sum of the weights of all the hydrophobic substances (i) contained in the continuous phase of the matrix by the total weight of the continuous phase of the matrix. Preferably, Q2 is 0.2 or higher; more preferably 0.3 or higher.

[0068] Preferred compositions of the present invention contain one or more humectant. Preferred humectants are potassium acetate and polyethylene glycols. Polyethylene glycols that are preferred for use as a humectant have number-average molecular weight that is 3,000 or less; more preferred is 2,000 or less. Polyethylene glycols that are preferred for use as a humectant have number-average molecular weight that is 500 or more. A polyethylene glycol is considered herein to be used as a humectant when at least one meltable solid hydrophilic substance (ii) that is not a polyethylene glycol is present in the composition.

[0069] In some embodiments, one or more other substances may be present in the composition. Such other substances do not qualify as either hydrophobic substance (i) or hydrophilic substance (ii) or as volatile cyclopropene compound encapsulated in a molecular encapsulation agent. Some other substances may be either hydrophobic or hydrophilic but are not meltable solids. Suitable other substances include, for example, dispersants, humectants, deliquescent salts, other salts, water-adsorptive materials, and mixtures thereof.

[0070] Preferred compositions of the present invention contain one or more other substance that is a water-adsorptive material. Preferred water-adsorptive materials are molecular sieves. Molecular sieves have open structures with uniform-size pores into which water molecules may enter and, possibly, remain. Molecular sieves may be made of aluminosilicates, clays, glasses, charcoals, or carbon. Preferred molecular sieves have pore size of 3 Angstrom or 4 Angstrom. Molecular sieves are supplied in the form of beads, pellets, or powder. In a sample of molecular sieves, average particle diameter of beads or pellets is normally 1mm to 5mm, and average particle diameter of powder is smaller than 1 mm. Molecular sieves are considered herein to be non-meltable solids. It is considered that molecular sieves, when present, are dispersed in the matrix.

[0071] Dispersants are amphiphilic compounds. One portion of the dispersant molecule is more stable when in contact with hydrophobic substance than it is when in contact with hydrophilic substance, and a different portion of the dispersant molecule is more stable when in contact with hydrophilic substance than it is when in contact with hydrophobic substance.

For example, it may be desirable to use one or more dispersant when it is desired to disperse one or more hydrophilic substance (ii) in a continuous phase of one or more hydrophobic substance (i). For another example, it may be desirable to use one or more dispersant when it is desired to disperse powder particles of an encapsulated complex in a matrix, for example when one portion of the dispersant molecule is more stable when in contact with the powder particles than it is when in contact with the matrix, and a different portion of the dispersant molecule is more stable when in contact with the matrix than it is when in contact with the powder particles.

[0072] Among embodiments in which one or more wax is used, it is preferred to also use one or more dispersant.

[0073] Preferred are compositions that contain one or more high-melting humectants (i.e., humectants that have melting point higher than 120°C). Preferred high-melting humectants are inorganic salts. More preferred is potassium acetate.

[0074] Some suitable high-melting humectants are inorganic salts that are also deliquescent.

[0075] The matrix of the present invention may be characterized by the hydrophilic index ("HI"), which is defined as follows:

$$HI = 20 \times (H / T)$$

where H is the total weight of all hydrophilic substances (ii) plus the total weight of all humectants and excluding the weight of all volatile cyclopropene compounds and excluding the weights of all molecular encapsulation agents, and T is the sum of H plus the total weight of all hydrophobic substances (i). In preferred embodiments, powder particles of volatile cyclopropene compound encapsulated in a molecular encapsulation agent meets one or more of the criteria for a hydrophilic substance, but the quantity H does not include the weight of any volatile cyclopropene compound, and the quantity H does not include the weight of any molecular encapsulation agent. Preferably, HI is 0.35 or greater; more preferably 1 or greater; more preferably 3 or greater; more preferably 7 or greater. Preferably, HI is 16 or smaller; more preferably 13 or smaller.

[0076] Preferred compositions of the present invention contain one or more of the following combinations, in each case optionally with additional ingredients:

polyethylene glycol having number average molecular weight of more than 3,000 with potassium acetate and with microcrystalline wax;

hydrophilic copolymer of ethylene and vinyl acetate with polyethylene glycol having number average molecular weight of 3,000 or less and with stearic acid;

hydrophilic copolymer of ethylene and vinyl acetate with polyvinyl pyrrolidone and with polyethylene glycol having number average molecular weight of 3,000 or less and with stearic acid;

hydrophilic copolymer of ethylene and vinyl acetate with cellulose and with polyethylene glycol having number average molecular weight of 3,000 or less and with stearic acid;

polyethylene glycol having number average molecular weight of 3,000 or less with microcrystalline wax and with stearic acid; and

polyethylene glycol having number average molecular weight of more than 3,000 with cellulose and with potassium acetate and with microcrystalline wax.

[0077] The composition of the present invention may be made by any method. A preferred method is melt mixing. An example of a procedure for melt mixing is the following: some or all of the ingredients are placed in a vessel and heated to TMIX, which is a temperature that is above room temperature and that is above 25°C. TMIX is chosen so that one or more of the ingredients in the vessel is a liquid. The mixture of ingredients is stirred, additional ingredients (if any) are added, the mixture of ingredients is further stirred, and then the mixture of ingredients is allowed to cool to room temperature, which will be between 0°C and 30°C. Two or more of the ingredients may be combined with each other prior to being combined with other ingredients during a melt-mixing process. It is contemplated that as the mixture of ingredients cools from TMIX to room temperature, the matrix as described herein will form a continuous phase and that any ingredients that are not dissolved in the matrix will be dispersed therein.

[0078] Preferably, every hydrophilic substance (ii) is either dissolved in the matrix or is dispersed in the matrix. Preferably, no hydrophilic substance or any mixture of hydrophilic substances forms a separated phase with any dimension of 0.5 mm or larger. Preferably, no hydrophilic substance or any mixture of hydrophilic substances forms a channel through the matrix. Preferably, the composition of the present invention does not have the form of two co-continuous phases in which one of the phases is a hydrophobic substance and the other phase is a hydrophilic substance.

[0079] One ingredient in the composition of the present invention is one or more encapsulation complex of a volatile cyclopropene compound encapsulated in a molecular

encapsulation complex. Such an encapsulation complex is often supplied as a powder, known herein as an "EC" powder. EC powders may optionally contain additional compounds (i.e., in addition to the volatile cyclopropene compound and the molecular encapsulation complex), such as, for example, one or more of the following: water, one or more monosaccharide (such as, for example, dextrose), one or more disaccharide, one or more amino acid salt, or one or more adjuvant selected from vegetable oils, waxes, cellulose derivatives, carbohydrates, plasticizers, or surfactants. Preferably the amount of volatile cyclopropene in the EC powder, by weight based on the weight of the ED powder, is 0.01% or more; more preferably 0.03% or more; more preferably 0.1% or more. Preferably the amount of volatile cyclopropene in the EC powder, by weight based on the weight of the ED powder, is 10% or less; more preferably 6% or less.

[0080] Preferably the amount of cyclopropene compound in the composition of the present invention is, by weight based on the weight of the composition, 0.01% or more; more preferably 0.03% or more; more preferably 0.1% or more. Preferably the amount of cyclopropene compound in the composition of the present invention is, by weight based on the weight of the composition, 1% or less; more preferably 0.5% or less; more preferably 0.3% or less.

[0081] The composition of the present invention may be used in any of a wide variety of ways. In preferred embodiments, a solid object is made that contains the composition of the present invention. For example, a portion of the composition may be formed into solid mass. Some convenient shapes for such a solid mass include, for example, disks, pellets, films, rectangular solids, and other shapes.

[0082] For another example, a layer of the composition may be formed on a substrate. That layer may be applied to the substrate by applying a liquid as a coating by any coating method, such as, for example, brushing, spreading, spraying, metering, or other method. In some embodiments, the liquid that is applied to the substrate may have the composition of the present invention dissolved or dispersed in a liquid solvent or other liquid carrier; the solvent or other liquid carrier evaporates, leaving behind the composition of the present invention. In preferred embodiments, the liquid that is applied to the substrate is the fluid formed by heating the composition of the present invention. It is contemplated that the layer will be solidified or allowed to solidify by cooling or by removal of solvent or other liquid carrier or both.

[0083] In embodiments in which a layer of the composition of the present invention is formed on a substrate, regardless of the method by which that layer is formed, the composition may be put to use either by removing the layer from the substrate or by leaving the layer adhered to the substrate.

[0084] In preferred embodiments, the solids content of the composition of the present invention is 80% or higher; more preferred is 90% or higher.

[0085] In preferred uses of the present invention, a solid object that contains the composition of the present invention is inside a container. That solid object may be part of, or may be adhered or attached to an inside surface of a container, or that solid object may be present unattached inside the container. Preferably the container contains one or more plant or plant part; more preferably the container contains one or more fruit or vegetable after it has been harvested. It is contemplated that the plants or plant parts, through evaporation or metabolic processes or both, will provide water vapor to the atmosphere inside the container. It is contemplated that such water vapor will promote the release of volatile cyclopropene compound from the composition of the present invention.

[0086] Among embodiments that are inside a container that also contains one or more plant or plant part, it is useful to characterize the amount of cyclopropene compound (in micrograms) per liter of volume of the container. Preferably, that amount is 1 microgram/l or more; more preferably 2 micrograms/l or more; more preferably 5 micrograms/l or more; more preferably 10 micrograms/l or more. Preferably, that amount is 500 microgram/l or less; more preferably 250 micrograms/l or less; more preferably 100 micrograms/l or less; more preferably 50 micrograms/l or less.

[0087] In preferred embodiments, the container is not sealed and it is possible for gases to move in and out of the container. The container, the composition of the present invention, and the plants or plant parts may all be chosen so that a desired concentration of volatile cyclopropene is maintained in the atmosphere of the container, as volatile cyclopropene leaves the composition of the present invention to enter the atmosphere inside the container and as volatile cyclopropene then move out of the container into the atmosphere outside the container. The preferred concentration of volatile cyclopropene compound in the atmosphere of the container is 50 ppb (parts per billion, volume of volatile cyclopropene gas on volume of atmosphere) or more; more preferred is 100 ppb or more; more preferred is 200 ppb or more. The preferred concentration of volatile cyclopropene compound in the atmosphere of

the container is 5,000 ppb or less; more preferred is 2,000 ppb or less; more preferred is 1,000 ppb or less.

[0088] Exposing plants or plant parts to cyclopropene compound may be beneficial. Cyclopropene compounds may block the effects of ethylene on plants or plant parts. Many of the processes that are triggered by ethylene are not beneficial to harvested plants or plant parts that are in storage. In some embodiments, for example, exposure to cyclopropene may lengthen the useful life of harvested fruits or vegetables.

[0089] Preferably, a container that contains one or more fruit or vegetable and that contains the composition of the present invention will be placed in an environment in which the container and its contents will be kept at a temperature higher than 0°C and lower than 25°C. More preferably, the temperature will be 1°C or higher, more preferably 2°C or higher. More preferably, the temperature will be 10°C or lower; more preferably 5°C or lower.

[0090] Preferably, the composition of the present invention will remain inside a container together with one or more plant or plant part for 1 day or more; more preferably 2 days or more; more preferably 4 days or more. Preferably, the composition of the present invention will remain inside a container together with one or more plant or plant part for 30 days or less; more preferably 14 days or less.

[0091] The following are examples of the present invention.

[0092] The following abbreviations are used herein:

<u>Abbreviation</u>	<u>Meaning</u>
aCD	alpha-cyclodextrin
1-MCP	1-methylcyclopropene

[0093] These materials were used in the following Examples:

<u>Material</u>	<u>Description</u>	<u>Supplier</u>
PEG 8000	polyethylene glycol, molecular weight of 8,000	
XL-PVP	crosslinked poly(vinyl pyrrolidone)	
cellulose		
PEG 1000	polyethylene glycol, molecular weight of 1,000	
wax	microcrystalline wax	
Ethylene/vinyl acetate polymer	Elvax™ 250, ethylene/vinyl acetate copolymer, 28% vinyl acetate by weight	du Pont, Inc.
stearic acid	double pressed stearic acid	
KOAc	potassium acetate	
Mol. Sieve	Molecular Sieve	
CaCO ₃		
Dispersant		
Powder1	Powder containing an encapsulation complex of 1-MCP in aCD. Concentration of 1-MCP was about 5% by weight based on the weight of Powder1.	

[0094] In the Examples below, "molten mixtures" were prepared as follows. The materials listed were mixed by mechanical stirring at about 80°C

[0095] Release of 1-MCP was measured as follows.

[0096] Experiments were performed in bottles that were sealed with a septum. Periodically, a sample of air was removed from the space inside the bottle by a needle pushed through the septum. That sample of air was analyzed for concentration of 1-MCP by gas chromatography. The amount of 1-MCP in the air could then be characterized as a percentage of the 1-MCP that had been placed into the bottle ("%release"). The %release was monitored as a function of time ("# days" means herein "number of days").

[0097] Comparative Example A:

[0098] 20 mg of Powder1 and 3 ml of water were mixed in a bottle with a septum cap at 22 °C. All of the 1-MCP was released quickly.

Results	
<u>time</u>	<u>% release</u>
30 min.	100%

[0099] Comparative Example B

[0100] 20 mg of Powder1 was suspended in a paper mesh over 3 ml of water in a bottle with a septum cap at 22 °C. All of the 1-MCP was released relatively quickly.

Results	
<u># days</u>	<u>% release</u>
1	95%

[0101] Comparative Example CA

Materials		
<u>wt %</u>	<u>Material</u>	<u>Function</u>
1.0%	dispersant	
60.0%	wax	meltable hydrophobic
15.0%	potassium acetate	
6.3%	molecular sieves	
11.5%	calcium carbonate	
6.3%	Powder1	

[0102] The mixture of materials was coated onto a paper in a 0.5 mm thick layer and cooled. A piece of the cooled material was removed and suspended in the neck of a bottle with a septum cap at 22 °C. Three ml of water was placed in the bottom of the bottle. No meltable hydrophilic compound was included. Release of 1-MCP was undesirably slow.

Results at 22°C	
<u># days</u>	<u>% release</u>
1	2%
3.5	9%

[0103] Comparative Example CB

[0104] The experiment of Comparative Example CA was repeated, except that the temperature of the bottle during the experiment was 4°C. Release of 1-MCP was undesirably slow.

Results at 4°C	
<u># days</u>	<u>% release</u>
1	1%
3.5	2%

[0105] Comparative Example D

Materials		
<u>wt %</u>	<u>Material</u>	<u>Function</u>
34.0%	potassium acetate	humectant
33.0%	molecular sieves	water adsorptive
33.0%	Powder1	

[0106] About 300 mg of the mixture of materials was placed in an open plastic weigh boat and suspended in the neck of a 2200 ml bottle containing 30 ml of water and equipped with a septum cap at 22 °C. No solid hydrophobic substance was used. Release of 1-MCP was undesirably fast.

Results	
<u># days</u>	<u>% release</u>
0.05	50%
0.11	61%
0.22	78%

[0107] Comparative Example E

Materials		
<u>wt %</u>	<u>Material</u>	<u>Function</u>
90.0%	PEG 1000	humectant
10.0%	Powder1	

[0108] A molten mixture of the materials was prepared and cooled. About 500 mg of the mixture was placed in an open plastic weigh boat and suspended in the neck of a 2200 ml

bottle containing 30 ml of water and equipped with a septum cap at 22 °C. No meltable hydrophobic substance was used. Release of 1-MCP was undesirably fast.

Results	
# days	% release
0.04	7%
0.15	20%
1.01	64%

[0109] Example 1A

Materials		
wt %	Material	Function
23.4%	PEG 8000	meltable hydrophilic
2.3%	dispersant	
39.1%	wax	meltable hydrophobic
15.6%	potassium acetate	humectant
11.7%	molecular sieves	water-adsorptive
7.8%	Powder1	

[0110] A molten mixture of the materials was coated in a 0.5 mm thick layer and cooled. A piece of the cooled substrate was removed from the substrate and suspended in the neck of a bottle with a septum cap at 22 °C. Three ml of water was placed in the bottom of the bottle. Release was desirably gradual.

Results	
# days	% release
1	33%
3.5	92%

[0111] Example 1B

[0112] The experiment of Example 1A was repeated, except that the temperature of the bottle during the experiment was 4°C. Release was desirably gradual.

Results	
# days	% release
# days	% release
1	14%
3.5	47%
6	54%

[0113] Example 2

Materials		
wt %	Material	Function
15.0%	polyethylene glycol 1000	meltable hydrophilic and humectant
10.0%	ethylene-vinyl acetate polymer	hydrophobic
40.0%	double pressed stearic acid	meltable hydrophobic
5.0%	molecular sieves	water-adsorptive
25.0%	calcium carbonate	thickener
5.0%	Powder1	

[0114] A molten mixture of the materials was melted, mixed, cooled, and 200 mg was pressed into a disk 12.7 mm in diameter. The disk was suspended in the neck of a bottle with a septum cap at 5 °C. Three ml of water was placed in the bottom of the bottle. Release was desirably gradual.

Results	
# days	% release
1	20%
4	60%
8	70%

[0115] Example 3

Materials		
wt %	Material	Function
	PEG 1000	humectant
11.1%	ethylene-vinyl acetate polymer	meltable hydrophilic
44.4%	double pressed stearic acid	meltable hydrophobic
22.2%	molecular sieves	water-adsorptive
5.6%	Powder1	

[0116] A molten mixture of the materials was melted, mixed, cooled, and 200 mg was pressed into a disk 12.7 mm in diameter. The disk was suspended in the neck of a bottle with a septum cap at 5 °C. Three ml of water was placed in the bottom of the bottle. Release was desirably gradual.

Results	
# days	% release
1	15%
4	35%
8	60%

[0118] Example 4

Materials		
wt %	Material	Function
18.1%	polyethylene glycol 1000	meltable hydrophilic and humectant
12.0%	ethylene-vinyl acetate polymer	meltable hydrophilic
12.0%	crosslinked polyvinyl pyrrolidone	hydrophilic
48.2%	double pressed stearic acid	meltable hydrophobic
4.8%	molecular sieves	water-adsorptive
4.8%	Powder 1	

[0119] A mixture of the materials was melted, mixed, cooled, and 200 mg was pressed into a disk 12.7 mm in diameter. The disk was suspended in the neck of a bottle with a septum cap at 5 °C. Three ml of water was placed in the bottom of the bottle. Release was desirably gradual.

Results	
# days	% release
1	10%
4	40%
8	72%

[0120] Example 5

Materials		
wt %	Material	Function
18.1%	polyethylene glycol 1000	meltable hydrophilic and humectant
12.0%	ethylene-vinyl acetate polymer	meltable hydrophobic
12.0%	cellulose	non-meltable hydrophilic
48.2%	double pressed stearic acid	hydrophobic
4.8%	molecular sieves	water-adsorptive
4.8%	Powder1	

[0121] A mixture of the materials was melted, mixed, cooled, and 200 mg was pressed into a disk 12.7 mm in diameter. The disk was suspended in the neck of a bottle with a septum cap at 5 °C. Three ml of water was placed in the bottom of the bottle. Release was desirably gradual.

Results	
# days	% release
1	10%
4	30%
8	59%

[0122] Example 6

Materials		
wt %	Material	Function
11.7%	polyethylene glycol 1000	meltable hydrophilic and humectant
0.8%	dispersant	
35.2%	wax	meltable hydrophobic
27.3%	double pressed stearic acid	meltable hydrophobic
19.5%	molecular sieves	water-adsorptive
3.9%	Powder1	

[0123] A mixture of the materials was melted, and the molten mixture was coated in a 0.5 mm thick layer onto paper, cooled, and a piece was suspended in the neck of a bottle with a septum cap at 4 °C. Three ml of water was placed in the bottom of the bottle. Release was desirably gradual.

Results

time (days)	% release
1	18%
4	36%
8	65%

[0124] Example 7

Materials:

wt %	Material	Function
33.5%	PEG 8000	meltable hydrophilic
2.5%	dispersant	
34.6%	wax	meltable hydrophobic
5.6%	molecular sieves	water-adsorptive
11.2%	potassium acetate	humectant
5.6%	cellulose	thickener and non-meltable hydrophilic
5.6%	Powder1	

[0125] Mixture was melted, mixed, cooled, and a 0.5 mm thick layer was coated onto paper. A portion was suspended in the neck of a bottle with a septum cap at 4 °C. Three ml of water was placed in the bottom of the bottle. Release was desirably gradual.

Results:

time (days)	% release
0.75	10%
1.75	20%
2.75	30%
5.75	40%

CLAIMS

1. A composition comprising
 - (a) a meltable solid matrix comprising
 - (i) one or more hydrophobic substance, and
 - (ii) one or more hydrophilic substance, and
 - (b) distributed in said matrix, one or more encapsulation complex of a volatile cyclopropene compound encapsulated in a molecular encapsulation agent.
2. The composition of claim 1, wherein there is distributed in said matrix one or more water-adsorptive substance.
3. The composition of claim 1, wherein there is distributed in said matrix one or more humectant, one or more deliquescent substance, or a mixture thereof.
4. The composition of claim 1, wherein said matrix additionally comprises one or more dispersant.
5. The composition of claim 1, wherein the volatile cyclopropene compound is 1-methylcyclopropene.
6. The composition of claim 1, wherein the molecular encapsulation agent is alpha-cyclodextrin.
7. The composition of claim 1, wherein the amount of volatile cyclopropene compound is 0.01% to 1% by weight, based on the weight of said composition.
8. A method of treating plants or plant parts comprising placing said plants or plant parts and the composition of claim 1 into a container and allowing said plants or plant parts and said composition of claim 1 to remain together in said container for 1 day or longer.
9. The method of claim 8, wherein said volatile cyclopropene compound is 1-methylcyclopropene, and wherein said molecular encapsulation agent is alpha-cyclodextrin.

10. The method of claim 9, wherein the amount of 1-methylcyclopropene placed into said container is 1 microgram per liter to 500 microgram per liter.

ABSTRACT OF THE DISCLOSURE

A composition comprising (a) a meltable solid matrix comprising (i) one or more solid hydrophobic substance, and (ii) one or more solid hydrophilic substance, and (b) distributed in said matrix, one or more encapsulation complex of a volatile cyclopropene compound encapsulated in a molecular encapsulation agent. Also provided is a method of treating plants or plant parts comprising placing said plants or plant parts and the composition of claim 1 into a container and allowing said plants or plant parts and said composition of claim 1 to remain together in said container for 1 day or longer.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	70762
		Application Number	
Title of Invention	CONTROLLED RELEASE COMPOSITIONS		
The application data sheet is part of the provisional or nonprovisional application for which it is being submitted. The following form contains the bibliographic data arranged in a format specified by the United States Patent and Trademark Office as outlined in 37 CFR 1.76. This document may be completed electronically and submitted to the Office in electronic format using the Electronic Filing System (EFS) or the document may be printed and included in a paper filed application.			

Secrecy Order 37 CFR 5.2

☐ Portions or all of the application associated with this Application Data Sheet may fall under a Secrecy Order pursuant to 37 CFR 5.2 (Paper filers only. Applications that fall under Secrecy Order may not be filed electronically.)

Applicant Information:

Applicant 1					Remove
Applicant Authority ☒ Inventor		☐ Legal Representative under 35 U.S.C. 117		☐ Party of Interest under 35 U.S.C. 118	
Prefix	Given Name	Middle Name	Family Name	Suffix	
	Richard	Martin	Jacobson		
Residence Information (Select One) ☒ US Residency ☐ Non US Residency ☐ Active US Military Service					
City	Chalfont	State/Province	PA	Country of Residence i	US
Citizenship under 37 CFR 1.41(b) i		US			
Mailing Address of Applicant:					
Address 1		11 Deerpath Road			
Address 2					
City	Chalfont	State/Province	PA		
Postal Code	18914	Country i			
All Inventors Must Be Listed - Additional Inventor Information blocks may be generated within this form by selecting the Add button.					
Add					

Correspondence Information:

Enter either Customer Number or complete the Correspondence Information section below. For further information see 37 CFR 1.33(a).			
☐ An Address is being provided for the correspondence Information of this application.			
Customer Number	21898		
Email Address	chemenway@dow.com	Add Email	Remove Email

Application Information:

Title of the Invention	CONTROLLED RELEASE COMPOSITIONS		
Attorney Docket Number	70762	Small Entity Status Claimed	☐
Application Type	Provisional		
Subject Matter	Utility		
Suggested Class (if any)		Sub Class (if any)	
Suggested Technology Center (if any)			
Total Number of Drawing Sheets (if any)		Suggested Figure for Publication (if any)	

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	70762
		Application Number	
Title of Invention	CONTROLLED RELEASE COMPOSITIONS		

Publication Information:

☐ Request Early Publication (Fee required at time of Request 37 CFR 1.219)
☐ Request Not to Publish. I hereby request that the attached application not be published under 35 U.S. C. 122(b) and certify that the invention disclosed in the attached application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.

Representative Information:

Representative information should be provided for all practitioners having a power of attorney in the application. Providing this information in the Application Data Sheet does not constitute a power of attorney in the application (see 37 CFR 1.32). Enter either Customer Number or complete the Representative Name section below. If both sections are completed the Customer Number will be used for the Representative Information during processing.			
Please Select One:	☒ Customer Number	☐ US Patent Practitioner	☐ Limited Recognition (37 CFR 11.9)
Customer Number	21898		

Domestic Benefit/National Stage Information:

This section allows for the applicant to either claim benefit under 35 U.S.C. 119(e), 120, 121, or 365(c) or indicate National Stage entry from a PCT application. Providing this information in the application data sheet constitutes the specific reference required by 35 U.S.C. 119(e) or 120, and 37 CFR 1.78(a)(2) or CFR 1.78(a)(4), and need not otherwise be made part of the specification.			
Prior Application Status		Remove	
Application Number	Continuity Type	Prior Application Number	Filing Date (YYYY-MM-DD)
Additional Domestic Benefit/National Stage Data may be generated within this form by selecting the Add button.			Add

Foreign Priority Information:

This section allows for the applicant to claim benefit of foreign priority and to identify any prior foreign application for which priority is not claimed. Providing this information in the application data sheet constitutes the claim for priority as required by 35 U.S.C. 119(b) and 37 CFR 1.55(a).			
			Remove
Application Number	Country i	Parent Filing Date (YYYY-MM-DD)	Priority Claimed
			☒ Yes ☐ No
Additional Foreign Priority Data may be generated within this form by selecting the Add button.			Add

Assignee Information:

Providing this information in the application data sheet does not substitute for compliance with any requirement of part 3 of Title 37 of the CFR to have an assignment recorded in the Office.	
Assignee 1	Remove

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

Application Data Sheet 37 CFR 1.76		Attorney Docket Number	70762
		Application Number	
Title of Invention	CONTROLLED RELEASE COMPOSITIONS		

If the Assignee is an Organization check here. ☐				
Prefix	Given Name	Middle Name	Family Name	Suffix
Mailing Address Information:				
Address 1				
Address 2				
City			State/Province	
Country i			Postal Code	
Phone Number			Fax Number	
Email Address				
Additional Assignee Data may be generated within this form by selecting the Add button. Add				

Signature:

A signature of the applicant or representative is required in accordance with 37 CFR 1.33 and 10.18. Please see 37 CFR 1.4(d) for the form of the signature.					
Signature	/Carl P. Hemenway/			Date (YYYY-MM-DD)	2011-04-05
First Name	Carl	Last Name	Hemenway	Registration Number	51798

This collection of information is required by 37 CFR 1.76. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 23 minutes to complete, including gathering, preparing, and submitting the completed application data sheet form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.**

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that: (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether the Freedom of Information Act requires disclosure of these records.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspections or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.