

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2019 年 2 月 14 日 (14.02.2019)



(10) 国际公布号
WO 2019/029502 A1

(51) 国际专利分类号:
H04L 29/06 (2006.01)

天府大道南段2039号和美海堂中心（天府创客）
16楼1609号陈达志, Sichuan 610000 (CN)。

(21) 国际申请号: PCT/CN2018/099069

(72) 发明人: 陈达志(CHEN, Dazhi); 中国四川省眉山市
东坡区富牛镇万塘村4组, Sichuan 620000 (CN)。

(22) 国际申请日: 2018 年 8 月 6 日 (06.08.2018)

(25) 申请语言: 中文

(74) 代理人: 成都厚为专利代理事务所
(普通合伙) (CHENGDU HOUWEI PATENT
AGENCY(ORDINARY PARTNERSHIP)); 中国四川
省成都市高新区天府一街369号1幢1单元20
层2008号刘应迁, Sichuan 610000 (CN)。

(26) 公布语言: 中文

(30) 优先权:
201710668229.6 2017年8月7日 (07.08.2017) CN

(71) 申请人: 成都 牵牛草 信息 技术 有 限 公 司 (CHENGDU QIANNIUCAO INFORMATION
TECHNOLOGY CO., LTD.) [CN/CN]; 中国四川省
成都市中国（四川）自由贸易试验区天府新区

(81) 指定国(除另有指明, 要求每一种可提供的国家
保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG,
BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU,
CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB,
GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS,
JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK,

(54) Title: METHOD FOR AUTHORIZING AUTHORIZATION OPERATOR IN SYSTEM

(54) 发明名称: 系统中对授权操作者进行授权的方法

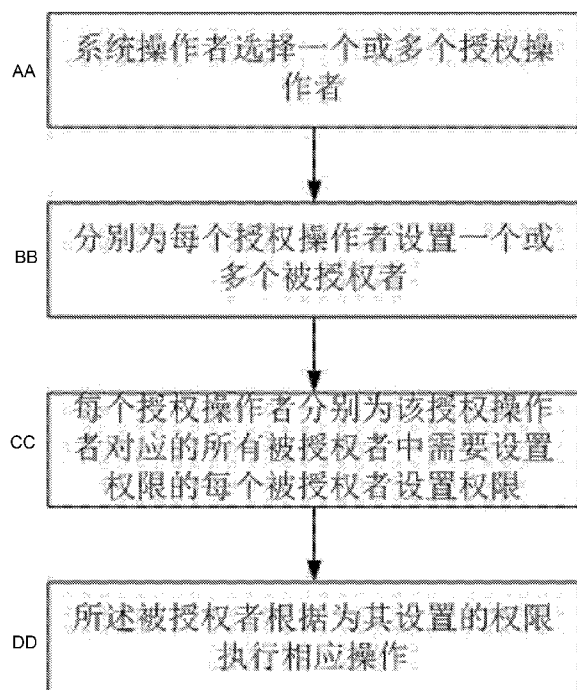


图 1

AA A system operator selects one or more authorization operators
BB One or more authorized people are configured for each authorization operator
CC Each authorization operator configures a privilege respectively for each authorized person requiring privilege configuration among all of the authorized people corresponding to said authorization operator
DD The authorized people execute corresponding operations according to the privileges configured therefor

(57) Abstract: Disclosed in the present invention is a method for authorizing an authorization operator in a system, comprising: a system operator selects one or more authorization operators; one or more authorized people are configured for each authorization operator; each authorization operator configures a privilege respectively for each authorized person requiring privilege configuration among all of the authorized people corresponding to said authorization operator; and the authorized people execute corresponding operations according to the privileges configured therefor. According to the present invention, a plurality of the authorization operators may be configured,